




Industrial Distribution

Terminal Blocks

工业配电接线端子

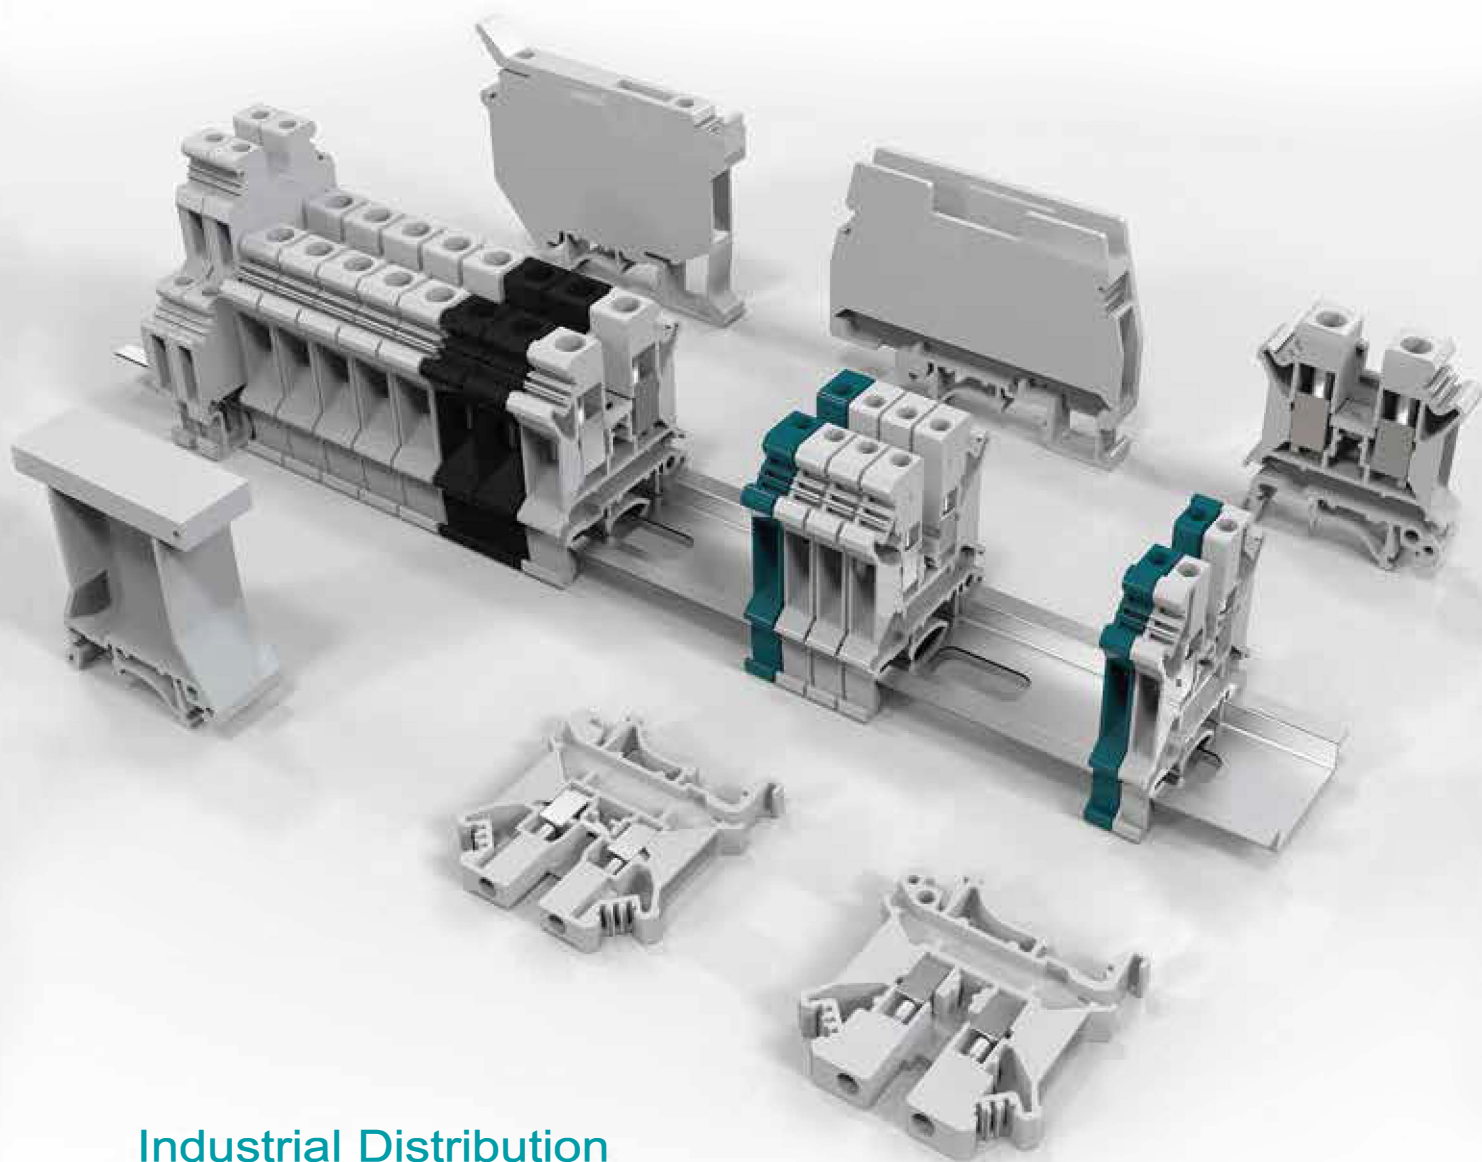

目录 Content

JUT1系列 JUT1 Series	03	JUT6系列 JUT6 Series	59	JUT14系列 JUT14 Series	64
JUT2系列 JUT2 Series	25	JUT8系列 JUT8 Series	61	JUT15系列 JUT15 Series	71
JUT3系列 JUT3 Series	37	JUT10系列 JUT10 Series	62	JUT17系列 JUT17 Series	73
JUT4系列 JUT4 Series	52	JUT12系列 JUT12 Series	63	JUT18系列 JUT18 Series	74
JUT5系列 JUT5 Series	57	JUT13系列 JUT13 Series	63	附件 Attachment	77

INDUSTRIAL DISTRIBUTION TERMINAL BLOCKS


工业配电接线端子


螺钉类

端子一般主要有外壳，螺钉，压线框和导电片 4 大部分组成，接线时通过上紧螺钉，带动压线框向上移动，从而将导线与导电片紧密压紧，是市面上最通用，应用最广泛的接线端子。外观美观大方；同时配备齐全的附件；端板，分组隔板，联络件，固定件，标记条等；可使用 U 型和 G 型两种导轨；接线可靠，安装方便，接线容量齐全。

Bolt model

This model terminal block mainly consists of 4 parts including shell, bolt, line-pressing frame, and conducting strip. When the bolt is tightened, the line-pressing frame will move upward, and the wire and conducting strip will get pressed and close contact. It is the most common and most widely used terminal block in the market. It has a nice appearance. It is also equipped with a complete set of accessory parts including the end plate, group separator, contact part, fixing part and tag etc. It fits 2 types of tracks: U type and G type. The line connecting is reliable, the installation is easy, and the connecting capacity is complete.

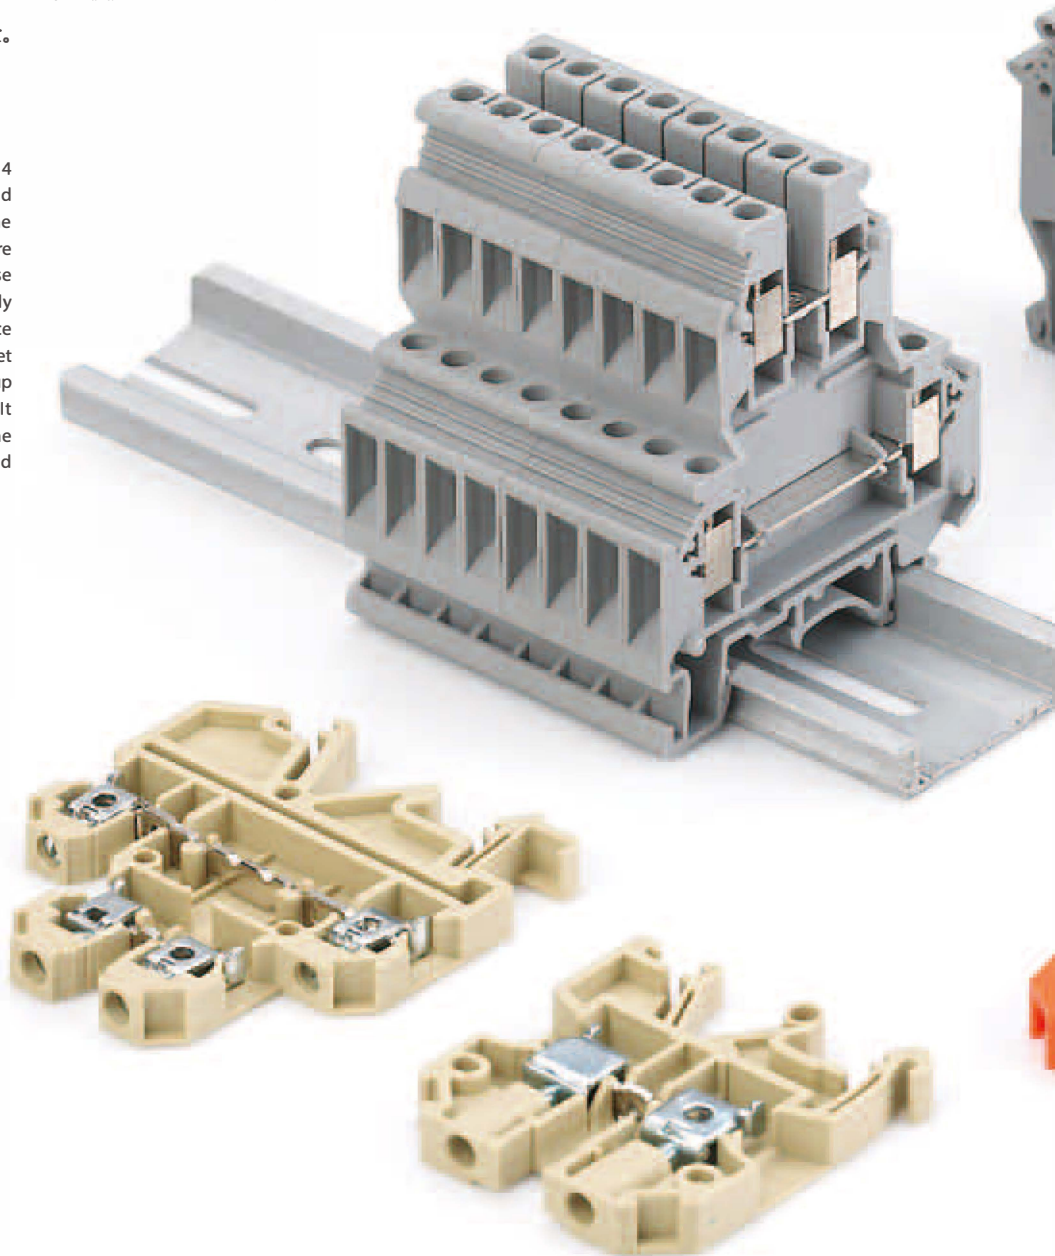

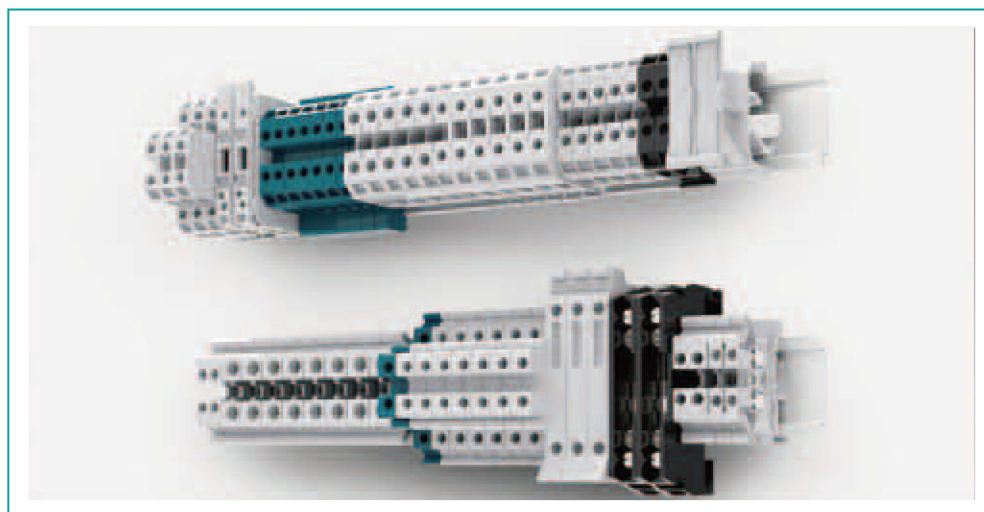


特点

- 端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上；
- 封闭型的螺钉引导孔即方便螺丝刀操作，又可防止螺丝旋松后跌落机外；
- 电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现；
- 对多个截面的端子配备了通用附件，如：端板、分组隔板、隔片等；
- 绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺（尼龙）66；
- 顶部二端采用白色标记采列，可实现统一标识。

Advantage

- Terminal with universal mounting foot can conveniently and quickly installed in the U type guide rail NS35 and G type guide rail NS32;
- Screw closed guide hole is convenient screwdriver operation, and can prevent the screw loosening after dropping machine;
- Potential distribution by an access terminal central center contact piece or inserted into a conical connecting hole edge inserted contact element to realize;
- Terminal for a plurality of section is equipped with universal accessories, such as: end plate, separating plate, septa etc;
- Insulated shell of high mechanical strength, good electrical properties, imported engineering plastics extremely flexible spear amides adopt (nylon) 66;
- The top two end with white markings Celje, can realize the unified logo.

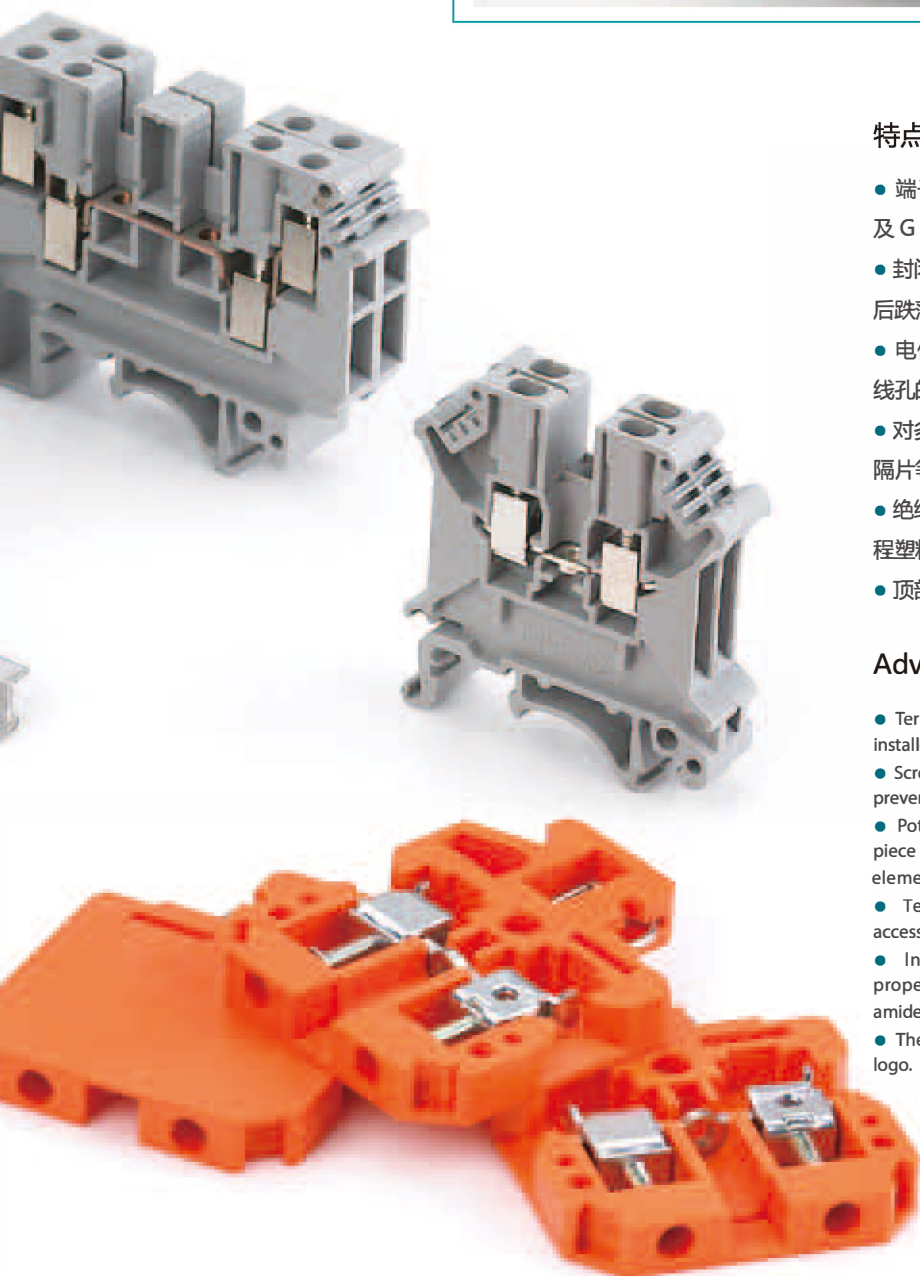



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-1.5

厚 / 宽	└┐ 高 /	└┐ 高	4.2/42.5/42/47
Thickness/Width	└┐ Height/	└┐ Height	
	刚性导线 (mm²)	柔性导线 (mm²)	I U
	Rigid cable	Soft cable	(A) (V)
AWG:26-16	0.14-1.5	0.14-1.5	17.5 500
IEC 60947-7-1			

实用特征	说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
端子具有通用安装脚能方便快速的安装在U型导轨 NS35及G型导轨NS32上;	端子：带通用安装在NS32└┐型，或NS35└┐型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32└┐ or NS35└┐	JUT1└┐1'5	5 574 101
封闭型的螺钉引导孔即方便螺丝刀操作，又可防止螺丝旋松后跌落机外;	(1)端板 End plate	G└┐JUT1└┐1'5/2'5B	8 050 101
电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现;	(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into 2-digit, 3-digit, 5-digit, and 10-digit	JFB10└┐1.5	5 585 100
对多个截面的端子配备了通用附件，如：端板、分组隔板、隔片等;	(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.		
绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺（尼龙）66;	(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 digit it, detachable, with 10 screws, for cross connection by overlapping some terminals		
顶部二端采用白色标记采列，可实现统一标识。	(5)绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		
Practical features	(6)分组隔片：用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.	JAP	8 750 101
Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;	(7)测试插座：与测试插头形成测试连接。 Test socket: to form a testing connection by using test plug.		
Terminal with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;	(8)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by using test socket.		
Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;	(9)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB4	8 868 101
Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;	(10)标记夹：用来对端子排进行标示，卡在终端固定件上，高度可调，书写面积：44×7mm²（JUT1系列通用）。 Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44 x 7 mm² (general used for JUT1 series)	KLMLA	5 574 143
General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;	(11)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定件作用（JUT1系列作用）。 Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)	E/1	5 103 001
The insulating shell is made of imported engineering plastic—polyamide (Nylon) 66, which is of high mechanical intensity, good electric property, and super flexibility;	(12)警示牌 Warning board		
Two ends on the top with white marking system to realize uniformed sign.			



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-2.5B					JUT1-2.5					JUT1-4				
厚 / 宽 ┐ 高 / ┐ 高		6,2/42,5/42/47			厚 / 宽 ┐ 高 / ┐ 高		5,2/42,5/47/52			厚 / 宽 ┐ 高 / ┐ 高		6,2/42,5/47/52		
Thickness/Width ┐ Height/ ┐ Height					Thickness/Width ┐ Height/ ┐ Height					Thickness/Width ┐ Height/ ┐ Height				
		刚性导线 (mm²) 柔性导线 (mm²) I U					刚性导线 (mm²) 柔性导线 (mm²) I U					刚性导线 (mm²) 柔性导线 (mm²) I U		
		Rigid cable Soft cable (A) (V)					Rigid cable Soft cable (A) (V)					Rigid cable Soft cable (A) (V)		
AWG:24-12		0.2-4	0.2-2.5	32 690	AWG:24-12		0.2-4	0.2-2.5	32 800	AWG:24-10		0.2-6	0.2-4	41 800
IEC 60947-7-1					IEC 60947-7-1					IEC 60947-7-1				
型号 Model	订货号 Order Number				型号 Model	订货号 Order Number				型号 Model	订货号 Order Number			
JUT1-2.5B	5 574 102				JUT1-2.5	5 574 103				JUT1-4	5 574 104			
G-JUT1-1.5/2.5B	8 050 101				G-JUT1-2.5/10	8 050 102				G-JUT1-2.5/10	8 050 102			
JFB10-4	5 585 120				JFB10-2.5	5 585 110				JFB10-4	5 585 120			
JEB2-4	5 582 112				JEB2-2.5	5 582 102				JEB2-4	5 582 112			
JEB3-4	5 582 113				JEB3-2.5	5 582 103				JEB3-4	5 582 113			
JEB10-4	5 582 110				JEB10-2.5	5 582 100				JEB10-4	5 582 110			
JB10-4	5 584 100				JB10-2.5	5 584 101				JB10-4	5 584 100			
JS-KK3	8 751 101				JS-K	8 751 102				JS-K	8 751 102			
JAP	8 750 101				JAP	8 750 101				JAP	8 750 101			
PSB3/10/4	8 573 101				PSB3/10/4	8 573 101				PSB3/10/4	8 573 101			
MPS	5 553 101				MPS	5 553 101				MPS	5 553 101			
ZB6	8 868 103				ZB5	8 868 102				ZB6	8 868 103			
KLM-A	5 574 143				KLM-A	5 574 143				KLM-A	5 574 143			
E/1	5 103 001				E/1	5 103 001				E/1	5 103 001			
JWS6	8 867 111				JW5	8 867 101				JW6	8 867 111			



Industrial Distribution Terminal Blocks

Switching terminal series

工业配电接线端子-开关型端子系列

可断电型接线端子分试验型接线端子和开关型接线端子。

Cut-off type wiring terminal is divided into test type wiring terminal and switch type wiring terminal

开关型接线端子：采用闸刀形式进行线路的通断操作，以便在线路检修和测量中迅速找故障，并在无电压的情况下检修。该端子接触电阻小，载流量达16A，闸刀钮用鲜橙标记，清晰醒目。

Switch-type wiring terminal: adopting switch-knife way to execute on-off operation of wire, which can find out obstacle fast in the process of wire impair and measurement, additionally, the examination and impair could be conducted under case of non-voltage. The contacted resistance of this terminal is small and the loadcurrent quantity can achieve 16A, the switch-knife is marked with fresh-orange and very clear.

JUT1



	JUT1-4/1-2 一进二出接线端子One-in two-out wiring terminal	JUT1-4K 开关型接线端子Switch-type wiring terminal
	厚 / 宽 高 / 高 6.2/50.5/47/52 Thickness/Width Height/ Height 刚性导线 (mm²) 柔性导线 (mm²) I U Rigid cable Soft cable (A) (V) AWG:24-12 0.2-4 0.2-4 32 500 IEC 60947-7-1	厚 / 宽 高 6.2/51/58.5/63.5 Thickness/Width Height 刚性导线 (mm²) 柔性导线 (mm²) I U Rigid cable Soft cable (A) (V) AWG:24-12 0.2-4 0.2-4 16 800 IEC 60947-7-1
说明 Specification 简图 Schematic Drawing	型号 Model 订货号 Order Number	型号 Model 订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35	JUT1-4/1-2 5 574 128	JUT1-4K 5 574 132
(1)端板 End plate	G-JUT1-4/1-2 8 050 106	
(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor:used at the center of terminal for transverse bridge connection, and screw head with insulated ring,which is dived into: 2-digit,3-digit, 5 -digit,and 10-digit	JFB10-4 5 585 120	
(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.	JEB2-4 5 582 112 JEB3-4 5 582 113 JEB10-4 5 582 110	JEB2-4 5 582 112 JEB3-4 5 582 113 JEB10-4 5 582 110
(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor:in 10 dig it, detachable, with 10 screws, for cross connection by overleaping some terminals	JBI10-4 5 584 100	
(5)绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.	JS-K 8 751 102 JS-KK3	
(6)测试插座：与测试插头形成测试连接。 Test socket: to form a testing connection by using test plug.	PSB3/10/4 8 573 101	
(7)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by using test socket.	MPS 5 553 101	MPS 5 553 101
(8)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB6 8 868 103	ZB6 8 868 103



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）

JUT1



JUT1-4/2-2
二进二出接线端子Two-in two-out wiring terminal

厚 / 宽	高	高	6.2/63.5/47/52
Thickness/Width	Height/	Height	
刚性导线 (mm ²)	柔性导线 (mm ²)	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:24-12	0.2-4	0.2-4	32 690
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

JUT1-4/2-2	5 574 127
------------	-----------

G-JUT1-4/2-2	8 050 105
--------------	-----------

JFB10-4	5 585 120
---------	-----------

JEB2-4	5 582 112
JEB3-4	5 582 113
JEB10-4	5 582 110

JBI10-4	5 584 100
---------	-----------

JS-KK3	8 751 101
--------	-----------

PSB3/10/4	8 573 101
-----------	-----------

MPS	5 553 101
-----	-----------

ZB6	8 868 103
-----	-----------

JUT1-4/2-2K 双进双出开关型接线端子
Two-in two-out Switch-type wiring terminal

厚 / 宽	高	6.2/63.5/47/52
Thickness/Width	Height	
刚性导线 (mm ²)	柔性导线 (mm ²)	I U
Rigid cable	Soft cable	(A) (V)
AWG:24-12	0.2-4	0.2-4 16 690
IEC 60947-7-1		

型号 Model	订货号 Order Number
----------	------------------

JUT1-4/2-2K	5 574 172
-------------	-----------

G-JUT1-4/2-2	8 050 105
--------------	-----------

JEB2-4	5 582 112
JEB3-4	5 582 113
JEB10-4	5 582 110

ZB6	8 868 103
-----	-----------



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-6

厚 / 宽	高 / 高	8.2/42.5/47/52	
Thickness/Width	Height/ Height		
	刚性导线 (mm ²)	柔性导线 (mm ²)	I U
	Rigid cable	Soft cable	(A) (V)
AWG:24-8	0.2-10	0.2-6	57 800
IEC 60947-7-1			

由于从JUT1-2.5到JUT1-10所有端子的外型轮廓相同，所以分組隔板或端板等附件都能通用。

For the terminals appearance out-line from JUT1-2.5 to JUT1-10 are same, so the grouping or header and other attachments could be universally used.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型，或NS35 型导轨上。
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35


(1)端板 End plate



G-JUT1-2.5/10

8 050 102

(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。
Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into 2-digit, 3-digit, 5-digit and 10-digit.



JFB10-6

5 585 130

(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-6

5 582 122


JEB3-6

5 582 123

JEB10-6

5 582 120

(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。
Cross connection adaptor in 10 digit it, detachable, with 10 screws, for cross connection by overlapping some terminals



JBI10-6

5 584 110

(5)绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JS-K

8 751 102

(6)分組隔片：用于端子组间的视角及电气隔离。
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAP

8 750 101

(7)测试插座：与测试插头形成测试连接。
Test socket: to form a testing connection by using test plug.



PSB4/7/6

8 573 102


(8)测试插头：与测试插座形成测试连接。
Test plug: to form a testing connection by using test socket.



PS

5 553 102

(9)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB8

8 868 104

(10)标记夹：用来对端子排进行标示，卡在终端固定件上，高度可调，书写面积：44x7mm² (UT1系列通用)。
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44 x 7 mm² (general used for JUT1 series)



KLM-A

5 574 143

(11)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定作用 (JUT1系列作用)。
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



E/1

5 103 001

(12)警示牌 Warning board



JW8

8 867 103



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）

JUT1



JUT1-10

JUT1-16

		10.2/42.5/47/52				12.2/42.5/54/59			
		Thickness/Width		Height/		Thickness/Width		Height/	
		刚性导线 (mm²) Rigid cable		柔性导线 (mm²) Soft cable		刚性导线 (mm²) Rigid cable		柔性导线 (mm²) Soft cable	
		AWG:20-6 IEC 60947-7-1		0.5-16 0.5-10 76 800		AWG:12-4 IEC 60947-7-1		2.5-25 4-16 101 800	
说明 Specification		简图 Schematic Drawing		型号 Model		订货号 Order Number		型号 Model	
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35				JUT1-10		5 574 106		JUT1-16	
(1)端板 End plate				G-JUT1-2.5/10		8 050 102		G-JUT1-16	
(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor:used at the center of terminal for transverse bridge connection, and screw head with insulated ring,which is dived into:2-digit,3-digit,5-digitand 10-digit				JFB10-10		5 585 140		JFB10-16	
(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.				JEB2-10 JEB3-10 JEB10-10		5 582 132 5 582 133 5 582 130		JEB10-16	
(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 dig it, detachable, with 10 screws, for cross connection by overleaping some terminals				JBI10-10		5 584 120			
(5)绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.				JS-K		8 751 102		JS-K	
(6)分组隔片：用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.				JAP		8 750 101		JAP	
(7)测试插座：与测试插头形成测试连接。 Test socket: to form a testing connection by using test plug.				PSB4/7/6		8 573 102		PSB4/7/6	
(8)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by using test socket.				PS		5 553 102		PS	
(9)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.				ZB10		8 868 105		ZB10	
(10)标记夹：用来对端子排进行标示，卡在终端固定件上，高度可调，书写面积：44×7mm² (UT1系列通用)。 Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44 x 7 mm²(general used for JUT1 series)				KLM-A		5 574 143		KLM-A	
(11)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定件作用 (JUT1系列作用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT1 series)				E/1		5 103 001		E/1	
(12)警示牌 Warning board				JW10		8 867 104		JW12	



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）








JUT1-35



JUT1-35B

JUT1

厚 / 宽 $\sqsubset$ 高 / $\sqsupset$ 高 15.2/50/62/67 Thickness/Width $\sqsubset$ Height/ $\sqsupset$ Height			厚 / 宽 $\sqsubset$ 高 / $\sqsupset$ 高 15.2/56/52/57 Thickness/Width $\sqsubset$ Height/ $\sqsupset$ Height		
刚性导线 (mm ²) 柔性导线 (mm ²) I U Rigid cable Soft cable (A) (V)			刚性导线 (mm ²) 柔性导线 (mm ²) I U Rigid cable Soft cable (A) (V)		
AWG:18-0 0.75-35 0.75-35 150 1000 IEC 60947-7-1			AWG:18-0 0.75-35 0.75-35 25 800 IEC 60947-7-1		
型号 Model	订货号 Order Number	说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	
JUT1-35	5 574 109	端子：带通用安装在NS32 $\sqsupset$ 型，或NS35 $\sqsubset$ 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 $\sqsupset$ or NS35 $\sqsubset$	JUT1-35B	5 574 110	
封闭型外壳，不用端板。 Sealed outer-case, don't need end plate					
JFB2-35 JFB3-35	5 585 162 5 585 163	(1)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，桥前须将外壳的隔片打通。 Central adaptor:used at the center of terminal to realize crosswise bridging, and the screw head has insulation circle, the outer-case isolation slice should be get through before briging 	JFB2-35 JFB3-35	5 585 162 5 585 163	
JEB10-35	5 582 150	(2)边插式联络件：全绝缘。插入压线框中，并上紧在端子绝缘外壳上。 Side adaptor: The whole-insulation is inserted into wire-pressing frame, additionally, it should be blocked onto terminal's insulation outer-case. 	JEB10-35	5 582 150	
JS-K	8 751 102	(3)分接端子：用于连接大电流的较小截面的导线，以实现额定工作电压至1000V大电流分接。 Tapping terminal: used to connect great-current lead with smaller section to realize great-current tapping with rated work voltage being 1000V. 	JS-K	8 751 102	
PSB6/5/6	8 573 103	(4)棱柱补偿块：垫平压线框棱形底面，以连接扁平导线。 Prism compensation-lump: leveling up prism bottom side of wirepressing frame to be connected with flat lead 	PSB6/5/6	8 573 103	
PS	5 553 102	(5)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定件作用（JUT1系列通用） Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT1 series) 	PS	5 553 102	
ZB10	8 868 105	(6)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced. 	ZB10	8 868 105	
E/1	5 103 001	(7)标记端子：用来对端子排进行标示，可安装在 $\sqsupset$ 型，或 $\sqsubset$ 型导轨上，端子带插入式标记条，书写面积：44×17mm ² （标记端子JUT1系列产品通用） Mark terminal: used to mark terminal row, it can be installed on the $\sqsupset$ -type and $\sqsubset$ -type track, the terminal owns inserted-type mark strip with writing area of 44×17 mm ² (universal for series product with JUT1 mark terminal) 	JW15	8 867 106	
JW15	8 867 106				



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）

JUT1



JUT1-50		JUT1-95	
厚 / 宽 / 高 / 高 20.2/71.3/77.2/82.4 Thickness/Width / Height/ Height		厚 / 宽 / 高 / 高 26/83.6/91.60/97.40 Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I U Rigid cable Self cable (A) (V)		刚性导线 (mm ²) 柔性导线 (mm ²) I Rigid cable Self cable (A)	
AWG:6-0 16-50 25-50 150 1000 IEC 60947-7-1		AWG:4-000 25-95 35-95 232 IEC 60947-7-1	
说明 Specification 简图 Schematic Drawing	型号 Model 订货号 Order Number	型号 Model 订货号 Order Number	型号 Model 订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35	JUT1-50 5 574 111	JUT1-95 5 574 112	
(1)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，桥前须将外壳的隔片打通。 Central adaptor: used at the center of terminal to realize crosswise bridging, and the screw head has insulation circle, the outer-case isolation slice should be get through before bridging	JFB2-50 5 585 172 JFB3-50 5 585 173		
(2)边插式联络件：全绝缘。插入压线框中，并安装在端子绝缘外壳上。 Side adaptor: The whole-insulation is inserted into wire-pressing frame, additionally, it should be blocked onto terminal's insulation outer-case.		JEB2-95 5 582 162 JEB3-95 5 582 163	
(3)分接端子：用于连接大电流的较小截面的导线，以实现额定工作电压至1000V大电流分接。 Tapping terminal used to connect great-current lead with smaller section to realize great-current tapping with rated work voltage being 1000V.	JUT1-50FJ 5 574 139	JUT1-95FJ 5 574 140	
(4)棱柱补偿块：垫平压线框棱形底面，以连接扁平导线。 Prism compensation-lump: leveling up prism bottom side of wirepressing frame to be connected with flat lead	JUT1-50EP 8 053 111	JUT1-95EP 8 053 112	
(5)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定件作用（JUT1系列通用） Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT1 series)	EPS 5 103 001	E/1 5 103 001	
(6)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB10 8 868 105	ZB10 8 868 105	
(7)标记端子：用来对端子排进行标示，可安装在 型，或 型导轨上，端子带插入式标记条，书写面积：44×17mm ² （标记端子JUT1系列产品通用） Mark terminal used to mark terminal row, it can be installed on the type and type track, the terminal owns inserted-type mark strip with writing area of 44×17 mm ² (universal for series product with JUT1 mark terminal)	JUT1-B 5 574 142	JUT1-B 5 574 142	



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-150

JUT1-240

(V) 1000	厚 / 宽 ┐ 高 / ┐ 高		31.6/101/112.5/118	
	Thickness/Width ┐ Height/ ┐ Height			
	刚性导线 (mm²) 柔性导线 (mm²) I U			
	Rigid cable Soft cable (A) (V)			
	AWG:2-300 35-150 50-150 309 1000			

(V) 1000	厚 / 宽 ┐ 高 / ┐ 高		36.6/102/126.4/131.9	
	Thickness/Width ┐ Height/ ┐ Height			
	刚性导线 (mm²) 柔性导线 (mm²) I U			
	Rigid cable Soft cable (A) (V)			
	AWG:00-500 70-240 70-240 415 1000			

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

JUT1-150 5 574 113

JUT1-240 5 574 161

JEB2-150 5 582 172
JEB3-150 5 582 173

JEB2-240 5 582 182
JEB3-240 5 582 183

JUT1-150FJ 5 574 141

JUT1-240FJ 5 574 141

JUT1-150/240EP 8 053 113

JUT1-150/240EP 8 053 113

E/1 5 103 001

E/1 5 103 001

ZB10 8 868 105

ZB10 8 868 105

JUT1-B 5 574 142

JUT1-B 5 574 142



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-2.5/2

双层接线端子Double-layer type wiring terminal

厚 / 宽	高 / 高	5.2/56/62/67			
Thickness/Width	Height/ Height				
		刚性导线 (mm ²) Rigid cable		柔性导线 (mm ²) Soft cable	
				I (A)	U (V)
AWG:24-12	0.2-4	0.2-2.5		32	500
IEC 60947-7-1					

JUT1双层接线端子：具有通用端子在相同的空间位置上两倍的接线容量，其上下两层在位置上错开了2.5 mm的空间，不仅在视角上条理分明，同时在上层接线的情况下，螺丝刀能在下层区域内很方便的完成接线作业。

JUT1 double-layer wiring terminal: it owns twice wiring capacity of universal terminal at the same space position, its upper-lower two storey has 2.5 mm space staggered, therefore, not only is the visual angle clear, but also the screwdriver can simply finish wiring operation at lower space in case of being connected in upper levels.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型，或NS35 型导轨上。
Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35

型号 Model 订货号 Order Number


JUT1-2.5/2 5 574 125

(1)端板 End plate



G-JUT1-2.5/4 8 050 104

(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。
Central adaptor:used at the center of terminal for transverse bridge connection, and screw head with insulated ring,which is dived into:2-digit,3-digit, 5 -digit,and 10-digit




JFBN10-2.5 5 585 180

(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。
Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-2.5 5 582 102
JEB3-2.5 5 582 103
JEB10-2.5 5 582 100

(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。
Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals




JB110-2.5 5 584 101

(5)绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JS-KK3 8 751 101

(6)补偿端板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm



DG-JUT1-2.5/4 8 053 101

(7)补偿端板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm



DP-JUT1-2.5/4 8 053 102

(8)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB5 8 868 102

(9)警示牌 Warning board



JWS5 8 867 110



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-2.5/2L					JUT1-4/2					JUT1-4/2L				
双层互连接线端子Double-layer interconnection terminal					双层接线端子Double-layer type wiring terminal					双层互连接线端子Double-layer interconnection terminal				
厚 / 宽 $\searrow$ 高 / $\swarrow$ 高		5.2/56/62/67			厚 / 宽 $\searrow$ 高 / $\swarrow$ 高		6.2/56/62/67			厚 / 宽 $\searrow$ 高 / $\swarrow$ 高		6.2/56/62/67		
Thickness/Width $\searrow$ Height/ $\swarrow$ Height					Thickness/Width $\searrow$ Height/ $\swarrow$ Height					Thickness/Width $\searrow$ Height/ $\swarrow$ Height				
		刚性导线 (mm ²) Rigid cable		柔性导线 (mm ²) Soft cable			刚性导线 (mm ²) Rigid cable		柔性导线 (mm ²) Soft cable			刚性导线 (mm ²) Rigid cable		柔性导线 (mm ²) Soft cable
				I (A)					U (V)					U (V)
AWG:24-12		0.2-4		32	500		AWG:24-12		0.2-4	32		500		
IEC 60947-7-1					IEC 60947-7-1					IEC 60947-7-1				
型号 Model	订货号 Order Number				型号 Model	订货号 Order Number				型号 Model	订货号 Order Number			
JUT1-2.5/2L	5 574 161				JUT1-4/2	5 574 126				JUT1-4/2L	5 574 126L			
G-JUT1-2.5/4	8 050 104				G-JUT1-2.5/4	8 050 104				G-JUT1-2.5/4	8 050 104			
JFBN10-2.5	5 585 180				JFB10-4	5 585 120				JFB10-4	5 585 120			
JEB2-2.5	5 582 102				JEB2-4	5 582 112				JEB2-4	5 582 112			
JEB3-2.5	5 582 103				JEB3-4	5 582 113				JEB3-4	5 582 113			
JEB10-2.5	5 582 100				JEB10-4	5 582 110				JEB10-4	5 582 110			
JB10-2.5	5 584 101				JB10-4	5 584 100				JB10-4	5 584 100			
JS-KK3	8 751 101				JS-KK3	8 751 101				JS-KK3	8 751 101			
DG-JUT1-2.5/4	8 053 101				DG-JUT1-2.5/4	8 053 101				DG-JUT1-2.5/4	8 053 101			
DP-JUT1-2.5/4	8 053 102				DP-JUT1-2.5/4	8 053 102				DP-JUT1-2.5/4	8 053 102			
ZB5	8 868 102				ZB6	8 868 103				ZB6	8 868 103			
JWS5	8 867 110				JWS6	8 867 111				JWS6	8 867 111			



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）

JUT1



JUT1-2.5/2Q

上下层均可桥接Could bridge-connected at upper or lower layer

JUT1-4/2Q

上下层均可桥接Could bridge-connected at upper or lower layer

厚 / 宽	高 / 高	5.2/67/62/67
Thickness/Width	Height/ Height	
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Solf cable
	0.2-4	0.2-2.5
AWG:24-12		
IEC 60947-7-1		

厚 / 宽	高 / 高	6.2/67/62/67
Thickness/Width	Height/ Height	
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Solf cable
	0.2-4	0.2-4
AWG:24-12		
IEC 60947-7-1		

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35		JUT1-2.5/2Q	5 574 163	JUT1-4/2Q	5 574 165
(1)端板 End plate		G-JUT1-2.5/4Q	8 050 163	G-JUT1-2.5/4Q	8 050 163
(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor:used at the center of terminal for transverse bridge connection, and screw head with insulated ring,which is dived into: 2-digit,3-digit, 5 -digit,and 10-digit		JFBN10-2.5	5 585 180	JFB10-4	5 585 120
(3)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.		JEB2-2.5 JEB3-2.5 JEB10-2.5	5 582 102 5 582 103 5 582 100	JEB2-4 JEB3-4 JEB10-4	5 582 112 5 582 113 5 582 110
(4)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals		JB10-2.5	5 584 101	JB10-4	5 584 100
(5)绝缘隔片：用于相邻联络件的电气隔离，可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		JS-KK3	8 751 101	JS-KK3	8 751 101
(6)补偿端板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm					
(7)补偿端板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm		DP-JUT1-2.5/4Q	8 053 165	DP-JUT1-2.5/4Q	8 053 165
(8)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB5	8 868 102	ZB6	8 868 103
(9)警示牌 Warning board		JWS5	8 867 110	JWS6	8 867 111



应用领域广泛... 应用经验丰富...



汽车制造业

汽车工业中连续生产线上所使用的生产设备都很重要。UTL产品为设备提供了可靠性。无螺钉连接技术可以应付特殊车辆所提出的苛刻要求。如轨装式接线端子、端子排、MCS多用途连接器系列在汽车制造行业中具有非常高的可应用性：如用在冲压、车架、制造、组装以及喷漆车间的开关控制柜中。抗振动、免维护的笼式弹簧连接技术可节省双倍费用；布线时节约大量时间；同时免去定时的维护工作。

机械设备

制造机械设备常常是用于出口，并且在设备到达后短期内就要运行起来。经过长时间的运输过程后，这些机械设备必须能马上投入使用而不必花费时间和精力去检查接线是否松动。

楼宇自动化

现代和创新的楼宇技术要求在费用、灵活性以及拓展方面能够有更多的空间。快速、灵活、免维修等特性是一个项目成功实施和运转的关键。

- UTL适用于楼宇自动化中的接插式连接。是专业安装过程中的即插即用式解决方案。
- UTL用于建筑物布线的紧凑型轨装式接线端子。
- UTL建筑物电气安装用连接器，是建筑物布线领域的经典产品。接线盒用导线连接器和照明器具用连接器保证了快速、可靠的连接。

过程控制

过程和工程设备需要具备极高的灵活性、实用性及安全可靠。组件若在爆炸危险领域应用就必须通过相关认证。设备的安置也要灵活，这样才能满足不同的应用要求。使用UTL产品可以确保系统的安全可靠。

电力应用

发电行业的主要目的就是对企业和个人家庭进行可靠、稳定的供电。而UTL产品可以为此提供非常高的质量保证和安全保障。在日趋激烈的行业竞争中，经济因素在决策过程中扮演着日益重要的角色。快速安装、免维护和可靠性，UTL都可以做到。在数十年的设备运行过程中都能维持绝对的可靠性、耐久性、且便于维护、这是在各种应用环境中对连接器产品的最高要求，此外，在户外环境中通过配电柜可以抵御气候带来的影响。

交通

各种领域的交通设备都有着共同的特点：极端的环境影响着元器件的应用。对于客车车辆应用，元件使用环境温度一般都在-40℃到+85℃；对于船舶应用，元件要承受强烈的震动；而在电梯应用中，大量的承载也对元件产生强烈的震动冲击。在很多情况下，这些不良影响会一起发生。但交通设备不能因为接线端子松动这样的小问题而给乘客造成不便，如导致延误或被困电梯等事故。



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类 (通用型)



JUT1

JUT1-2.5E

厚 / 宽 / 高	5.2/28/32			
Thickness/Width / Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I	U
	Rigid cable	Soft cable	(A)	(V)
AWG:24-12	0.2-4	0.2-2.5	32	500
IEC 60947-7-1				

实现小型化是端子发展的必然趋势, MBK小型端子的特点是结构紧凑, 可以很方便地实现空间, 电流与截面的最优组合。

The miniaturization is doomed to be the development trend of terminal, MBK miniature terminal owns characteristics of compact structure, which would realize simply the best combination of space, current and section.

说明 Specification 简图 Schematic Drawing

端子: 可安装在NS15 型导轨上。
Terminal: can be installed on tracks NS15 type

型号 Model 订货号 Order Number

JUT1-2.5E 5 574 151

(1)端板 End plate



G-JUT1-2.5/4E 8 050 151

(2)中心联结件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘圈, 可分: 2-位, 3-位, 5-位, 10-位。
Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into: 2-digit, 3-digit, 5-digit and 10-digit



JFB10-2.5 5 585 110

(3)边插式联结件: 全绝缘2位; 全绝缘3位; 全绝缘10位。
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-2.5 5 582 102
JEB3-2.5 5 582 103
JEB10-2.5 5 582 100

(4)跨接联结件: 10位, 可分, 带10枚螺钉; 可形成跳过某些端子的跨接。
Cross connection adaptor in 10 digit it, detachable, with 10 screws, for cross connection by overleaping some terminals



JB10-2.5 5 584 101

(5)绝缘隔片: 用于相邻联结件的电气隔离; 可事后插入; 不占导轨任何空间。
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JS-KK3 8 751 101

(6)分组隔片: 用于端子组间的视角及电气隔离。
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAP-E 8 750 151

(7)测试插座: 与测试插头形成测试连接。
Test socket: to form a testing connection by using test plug.



PSB3/10/14 8 573 101

(8)标记条: 有横向和竖向两种字体, 10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.




ZB5 8 868 102

(9)终端固定件: 标记夹和标记条可卡在它上面进行标识。另对端子排终端起固定件作用(JUT2系列通用)
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)



E/1E 5 103 007

(10)安装轨(NS15/5.5)
Installation track(NS15/5.5)



NS15/5.5 8 024 003



Industrial Distribution Terminal Blocks

Screw type(Universal)

工业配电接线端子-螺钉类（通用型）



JUT1

JUT1-4E

JUT1-6E(开发中)

厚 / 宽 / 高 6.2/28/32
Thickness/Width / Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:24-10 0.2-6 0.2-4 41 500
IEC 60947-7-1

厚 / 宽 / 高 8.2/32/36
Thickness/Width / Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:24-10 0.5-10 0.5-6 57 500
IEC 60947-7-1

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

JUT1-4E 5 574 152

JUT1-6E 5 574 153

G-JUT1-2.5/4E 8 050 151

G-JUT1-6E 8 050 153

JFB10-4 5 585 120

JFB10-6 5 585 130

JEB2-4 5 582 112

JEB2-6 5 582 122

JEB3-4 5 582 113

JEB3-6 5 582 123

JEB10-4 5 582 110

JEB10-6 5 582 120

JB110-4 5 584 100

JB110-6 5 584 110

JS-KK3 8 751 101

JS-KK3 8 751 101

JAP-E 8 750 151

JAP-E 8 750 151

PSB3/10/14 8 573 101

PSB4/7/6 8 573 102

ZB6 8 868 103

ZB8 8 868 104

E/1E 5 103 007

E/1E 5 103 007

NS15/5.5 8 024 003

NS15/5.5 8 024 003



Screw type Ground terminal(Universal)

螺钉类-接地端子 (通用型)

JUT1



JUT1-1.5PE

厚 / 宽 / 高 / 高	4.2/42.5/42/47
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:26-16	0.14-1.5 0.14-1.5 17.5
IEC 60947-7-1	

JUT1通用型接地端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。其低接触电阻，防腐蚀连接点，黄绿标志均能满足有关技术标准的规定。

JUT1 universal landing terminal serminal series product is mainly for landing or connecting to neutral, it possesses current load capabilitu of corresponding specification wiring terminal. Its low-connection resistance,anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

说明 Specification 简图 Schematic Drawing

接地端子：带黄绿绝缘外壳可安装在NS32 型，或NS35 型导轨上。
Landing terminal:with yellow/green insulation outer-case, it can be installed in the NS32 type or NS32 type track.

(1)边插式联络件：全绝缘2位；
全绝缘3位；全绝缘10位。
Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.




(2)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



型号 Model 订货号 Order Number

JUT1-1.5PE 5 574 114

ZB4 8 868 101



JUT1-2.5B/PE

厚 / 宽 / 高 / 高	6.2/42.5/42/47
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-12	0.2-4 0.2-2.5 32
IEC 60947-7-1	

型号 Model 订货号 Order Number

JUT1-2.5B/PE 5 574 115

JEB2-4 5 582 112
JEB3-4 5 582 113
JEB10-4 5 582 110

ZB6 8 868 103



JUT1-2.5PE

厚 / 宽 / 高 / 高	5.2/42.5/47/52
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-12	0.2-4 0.2-2.5 32
IEC 60947-7-1	

型号 Model 订货号 Order Number

JUT1-2.5PE 5 574 116

JEB2-2.5 5 582 102
JEB3-2.5 5 582 103
JEB10-2.5 5 582 100

ZB5 8 868 102



JUT1-4PE

厚 / 宽 / 高 / 高	6.2/42.5/47/52
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-10	0.2-6 0.2-4 41
IEC 60947-7-1	

型号 Model 订货号 Order Number

JUT1-4PE 5 574 117

JEB2-4 5 582 112
JEB3-4 5 582 113
JEB10-4 5 582 110

ZB6 8 868 103



Screw type Ground terminal(Universal)

螺钉类-接地端子（通用型）



JUT1

JUT1-6PE				JUT1-10PE			
厚 / 宽 / 高 / 高		8.2/42.5/47/52		厚 / 宽 / 高 / 高		10.2/42.5/47/52	
Thickness/Width / Height/ Height				Thickness/Width / Height/ Height			
		刚性导线 (mm²) 柔性导线 (mm²) I				刚性导线 (mm²) 柔性导线 (mm²) I	
		Rigid cable Soft cable (A)				Rigid cable Soft cable (A)	
AWG:24-8		0.2-10 0.2-6 57		AWG:20-6		0.5-16 0.5-10 76	
IEC 60947-7-1				IEC 60947-7-1			
说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number		型号 Model	订货号 Order Number		
接地端子：带黄绿绝缘外壳可安装在NS32 型，或NS35 型导轨上。 Landing terminal:with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.	JUT1-6PE	5 574 118		JUT1-10PE	5 574 119		
(1)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor:Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.	JEB2-6 JEB3-6 JEB10-6	5 582 122 5 582 123 5 582 120		JEB2-10 JEB3-10 JEB10-10	5 582 132 5 582 133 5 582 130		
(2)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB8	8 868 104		ZB10	8 868 105		



JUT1-16PE				JUT1-35PE				JUT1-50PE			
厚 / 宽 / 高 / 高		12.2/42.5/54/59		厚 / 宽 / 高 / 高		15.2/50/62/67		厚 / 宽 / 高 / 高		20.2/71.3/77.4/82.70	
Thickness/Width / Height/ Height				Thickness/Width / Height/ Height				Thickness/Width / Height/ Height			
		刚性导线 (mm²) 柔性导线 (mm²) I				刚性导线 (mm²) 柔性导线 (mm²) I				刚性导线 (mm²) 柔性导线 (mm²) I	
		Rigid cable Soft cable (A)				Rigid cable Soft cable (A)				Rigid cable Soft cable (A)	
AWG:12-4		2.5-25 4-16 101		AWG:18-0		0.75-50 0.75-35 150		AWG:6-0		16-50 25-50 150	
IEC 60947-7-1				IEC 60947-7-1				IEC 60947-7-1			
型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT1-16PE	5 574 120	JUT1-35PE	5 574 122	JUT1-50PE	5 574 124						
JEB10-16	5 582 140	JEB10-35	5 582 150								
ZB10	8 868 105	ZB10	8 868 105								



Screw type Ground terminal(Universal)

螺钉类-接地端子 (通用型)

JUT1



说明 Specification 简图 Schematic Drawing

JUT1-2.5E/PE

小型接地端子 Miniature landing terminal

JUT1通用型接地端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。其低接触电阻，防腐蚀连接点，黄绿标志均能满足有关技术标准的规定。

JUT1 universal landing terminal serminal series product is mainly for landing or connecting to neutral, it possesses current load capability of corresponding specification wiring terminal. Its low-connection resistance, anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

说明 Specification 简图 Schematic Drawing


接地端子：带黄绿绝缘外壳可安装在NS32 型，或NS35 型导轨上。
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS32 type track.

厚 / 宽 / 高 / 高	5.2/28/32
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-12 0.2-4 0.2-2.5 32	
IEC 60947-7-1	

型号 Model

订货号 Order Number

JUT1-2.5E/PE	5 574 154
可安装在NS15 型导轨上	
can be installed on tracks NS15 type	



JUT1-4/2-2PE

二进二出接地端子 Two-in two-out landing terminal

厚 / 宽 / 高 / 高	6.2/63.5/47/52
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-12 0.2-4 0.2-4 32	
IEC 60947-7-1	

JUT1-4/1-2PE(开发中)

一进二出接地端子 One-in two-out landing terminal

厚 / 宽 / 高 / 高	6.2/50.5/47/52
Thickness/Width / Height/ Height	
刚性导线 (mm ²) 柔性导线 (mm ²) I	
Rigid cable Soft cable (A)	
AWG:24-12 0.2-4 0.2-4 32	
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing

接地端子：带黄绿绝缘外壳可安装在NS32 型，或NS35 型导轨上。
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS32 type track.

(1)边插式联络件：全绝缘2位；
全绝缘3位；全绝缘10位。
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(2)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



型号 Model

订货号 Order Number

JUT1-4/2-2PE	5 574 173
ZB6	8 868 103
标记条	
Mark bar	
JEB2-4	5 582 112
JEB3-4	5 582 113
JEB10-4	5 582 110
边插式联络件Side adaptor	

型号 Model

订货号 Order Number

JUT1-4/2-2PE	5 574 174
ZB6	8 868 103
标记条	
Mark bar	
JEB2-4	5 582 112
JEB3-4	5 582 113
JEB10-4	5 582 110
边插式联络件Side adaptor	



Screw type Ground terminal(Universal)

螺钉类-接地端子 (通用型)



JUT1

JUT1-4E/PE(开发中)

小型接地端子Miniature landing terminal

厚 / 宽 / 高 / 高	6.2/28/32		
Thickness/Width / Height/ Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	
AWG:24-10	0.2-4	0.2-2.5	32
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

JUT1-4E/PE 5 574 155

可安装在NS15 型导轨上
can be installed on tracks NS15 type

JUT1-6E/PE(开发中)

小型接地端子Miniature landing terminal

厚 / 宽 / 高 / 高	8.2/35/36		
Thickness/Width / Height/ Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	
AWG:24-8	0.5-10	0.5-6	32
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

JUT1-6E/PE 5 574 156

可安装在NS15 型导轨上
can be installed on tracks NS15 type



JUT1-35B/PE

厚 / 宽 / 高 / 高	15.2/55/51/56		
Thickness/Width / Height/ Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	
AWG:18-0	0.75-35	0.75-35	125
IEC 60947-7-1			

说明 Specification 简图 Schematic Drawing

接地端子：带黄绿绝缘外壳可安装在NS32 型，或NS35 型导轨上。
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1)边插式联络件：全绝缘2位；
全绝缘3位；全绝缘10位。
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(2)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



型号 Model 订货号 Order Number

JUT1-35B/PE 5 574 123

JEB10-35 5 582 150

ZB10 8 868 105

封闭型外壳，不用端板。
Sealed outer-case, don't need end plate



Industrial Distribution Terminal Blocks

Pass Through Board Terminal Block Series

工业配电接线端子-穿墙式接线端子系列

JUT1

JUT1-50T该端子结构独特，两接线端的绝缘件采用了分体独立结构，直角型的导电片将端子两接线端连成一体，使端子即可用于N线连接，也可用于进出线端要求空间位置呈直角的特殊连接。



The structure of this terminal is special, the insulation component of two wiring terminal adopts separate-body independent structure, right-angle electrical conduction slice connects two-wiring terminal directly able to be used for being N wire connection and special link in special case of wiring-in/out terminal needing right-angle for space position.

JUT1-10T

直角型接线端子 Right-angle wiring terminal

厚 / 宽 / 高	10.1/46.6/31			
Thickness/Width/Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
AWG: 24-6	0.5-16	0.5-10	57	400
IEC 60947-7-1				

JUT1-50T

直角型接线端子 Right-angle wiring terminal

厚 / 宽 / 高	18.8/66/91.5			
Thickness/Width/Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
AWG: 6-0	16-50	25-50	150	1000
IEC 60947-7-1				

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 □型，或NS35 □型导轨上。 Terminal: with general-purpose mounting feet, can be installed on tracks NS32 □ or NS35 □		JUT1-10T	5 574 186	JUT1-50T	5 574 185
(1) 端板 End plate		封闭型外壳，不用端板。 Sealed outer-case, don't need end plate		封闭型外壳，不用端板。 Sealed outer-case, don't need end plate	
(2) 中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit					
(3) 边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor: Full insulation in 2digit, Full insulation in 3digit, Full insulation in 10 digit		ZB10 标记条 Mark bar	8 868 105	ZB10 标记条 Mark bar	8 868 105



Industrial Distribution Terminal Blocks

Fuse type terminal series

工业配电接线端子-保险丝型端子系列

JUT1-4RD保险丝形接线端子：采用分断悬臂来接入G型保险丝，操作十分方便，外壳采用全封闭，安全可靠，带发光显示的端子会给出保险丝的通断信号。该类端子的电流由安装的保险丝决定，电压由选择的发光显示决定。



JUT1

JUT1-4RD Fuse-type wiring terminal series: adopting broken bracket to connect into G type fuse without any difficulty, and the outer-case adopts whole-seal structure with security and reliability properties, the luminous terminal would give on-off signal of fuse. The current of this type terminal is determined by Installed fuse, and the voltage is determined by selected luminous display.

JUT1-4RD 保险丝型接线端子Fuse-type wiring terminal

厚 / 宽 / 高 / 高	8.2/72.5/56.5/61.5
Thickness/Width / Height/ Height	
适用于G型保险丝规格G type fuse specification	5 x 25
刚性导线(mm²) Rigid cable	0.2-4
柔性导线(mm²) Soft cable	0.2-4
AWG::24-12	(V) AC 800
IEC 60947-7-1	

JUT1-10RD 螺帽式保险丝端子Nur fuse-type terminal

厚 / 宽 / 高 / 高	12/62/59/64
Thickness/Width / Height/ Height	
适用于G型保险丝规格G type fuse specification	5 x 20
刚性导线(mm²) Rigid cable	0.5-16
柔性导线(mm²) Soft cable	0.5-10
AWG:20-6	(V) AC 800
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35	JUT1-4RD	5 574 133	JUT1-10RD	5 574 136
	JUT1-4RD/LED24 带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC: 15-30V 电流current:3.5-8.1mA	5 574 134	JUT1-10RD/LED24 带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC: 15-30V 电流current: 1-2.5mA	5 574 137
	JUT1-4RD/LA250 带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC: 110-250V 电流current:0.5-1mA	5 574 135	JUT1-10RD/LA250 带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC: 110-250V 电流current:0.5-1mA	5 574 138
(2)边插式联络件：全绝缘2位； 全绝缘3位；全绝缘10位。 Side adaptor: Full insulation in 2digit, Full insulation in 3digit, Full insulation in 10 digit	JEB10-6	5 582 120	JEBS10-16	5 582 140
(3)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor:used at the center of terminal for transverse bridge connection, and screw head with insulated ring,which is dived into: 2-digit,3-digit, 5-digit,and 10-digit			JFB10-16	5 585 150
(4)测试插座：与测量插头形成测试连接。 Test socket:to form testing connection by using test plug.			PSB4/4/7/6	8 573 102
(5)测试插头：与测试插座形成测试连接。 Test plug:to form a testing connection by sing test socket.			PS	5 553 102
(6)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB8	8 868 104	ZB8	8 868 104



Industrial Distribution Terminal Blocks Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT2

JUT2-2.5

JUT2-4

		JUT2-2.5		JUT2-4	
		厚 / 宽 ▽ 高 / ▽ 高 Thickness/Width ▽ Height/ ▽ Height	6.2/41.5/42.5/47 I U (A) (V) 24 800	厚 / 宽 ▽ 高 / ▽ 高 Thickness/Width ▽ Height/ ▽ Height	6.5/42/47.5/52 I U (A) (V) 32 800
		额定截面Rated section:2.5mm² AWG:24-12 IEC 60947-7-1		额定截面Rated section: 4mm² AWG:24-14 IEC 60947-7-1	
说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 ▽型，或NS35 ▽型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 ▽ or NS35 ▽		JUT2-2.5	5 574 202	JUT2-4	5 574 203
(1)端板 End plate		G-JUT2-2.5	8 050 202	G-JUT2-4/10	8 050 203
(2)分组隔板：用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neighboring terminal groups.		TW2.5	8 750 202	TW4/10	8 750 203
(3)绝缘隔板：用于相邻格件的电气隔离，可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		TS2.5/35	8 751 202	TS2.5/35	8 751 202
(4)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit		JQ2-2.5 JQ3-2.5 JQ10-2.5	5 585 212 5 585 213 5 585 210	JQ2-4 JQ3-4 JQ10-4	5 585 222 5 585 223 5 585 220
(5)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals		JSQ10-2.5	5 584 202	JSQ10-4	5 584 203
(6)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		DEK5	8 868 201	DEK5	8 868 201
(7)终端固定件：对端子排终端起固定件作用（JUT2系列通用） Terminal fixed component: mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)		E/2	5 103 003	E/2	5 103 003
(8)安装轨(NS35/7.5) Installment track(NS35/7.5)		NS35/7.5	8 024 001	NS35/7.5	8 024 001
(9)终端固定件 Terminal fixed component		E/4	5 103 005	E/4	5 103 005
(10)安装轨(NS35/7.5) Installment track(NS35/7.5)		NS32/15	8 025 002	NS32/15	8 025 002



Industrial Distribution Terminal Blocks

Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）





JUT2

JUT2-4K

开关型接线端子Switch type terminal

厚 / 宽 / 高 Thickness/Width / Height	6.5/46/38
额定截面Rated section: 4mm ²	I U (A) (V)
AWG:24-10	10 250
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
端子：带通用安装在NS32 型， 或NS35 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35	JUT2-4K	5 574 223
(1)端板 End plate 	G-JUT2-4K	8 050 210
(2)分组隔板：用于端子组间的 视角及电气隔离。 Segment spacer: for visual and electric separation between neigh- boring terminal groups. 	TW-4K	8 750 208
(3)绝缘隔片：用于相邻联格件的电气隔离； 可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track. 		
(4)中心联络件：用于端子中央，实现横向桥接，螺钉头带 绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is dived into: 2-digit, 3-digit, 5-digit and 10-digit 	JEQ2-4K JEQ3-4K JEQ10-4K	5 582 232 5 582 233 5 582 230
(5)中心联络件：用于端子中央，实现 横向桥接，螺钉头带绝缘圈，可分： 2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is dived into: 2-digit, 3-digit, 5-digit and 10-digit 		
(6)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by sing test socket. 	PS2.3	5 553 201
(7)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced. 	DEK5	8 868 201
(8)终端固定件：对端子排终端起固定 件作用。(JUT2系列通用)Terminal fixed component: mark it could be used as fixed component to terminal row's termination(universal for JUT2 series) 	E/2	5 103 003
(9)安装轨(NS35/7.5) Installment track(NS35/7.5) 	NS35/7.5	8 024 001
(10)终端固定件 Terminal fixed component 	E/4	5 103 005
(11)安装轨(NS35/7.5) Installment track(NS35/7.5) 	NS32/15	8 025 002



Industrial Distribution Terminal Blocks

Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT2

JUT2-6

JUT2-6S1

试验型接线端子 Test type terminal

		JUT2-6		JUT2-6S1	
		厚 / 宽 厚 / 高 高 Thickness/Width 高 / 高 Height/ Height	8/42/47.5/52	厚 / 宽 厚 / 高 Thickness/Width 高 / 高 Height/ Height	8/65/48.2
		额定截面 Rated section: 6mm ²	I U (A) (V) 41 800	额定截面 Rated section: 6mm ²	I U (A) (V) 41 500
		AWG: 24-10 IEC 60947-7-1		AWG: 24-8 IEC 60947-7-1	
说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在 NS32 型，或 NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35		JUT2-6	5 574 204	JUT2-6S1	5 574 217
(1) 端板 End plate		G-JUT2-4/10	8 050 203	G-JUT2_6S1	8 050 211
(2) 分组隔板：用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neighboring terminal groups.		TW4/10	8 750 203	TW_6S1	8 750 207
(3) 绝缘隔片：用于相邻联格件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		TS2.5/35	8 751 202	TS-6S1	8 751 204
(4) 边插式联格件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor: Full insulation in 2digit, Full insulation in 3digit, Full insulation in 10 digit		JQ2-6 JQ3-6 JQ10-6	5 585 232 5 585 233 5 585 230	JEB2-6 JEB3-6 JEB10-6	5 582 122 5 582 123 5 582 120
(5) 跨接联格件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals		JSQ10-6	5 584 204	JQ10_6	5 585 230
(6) 测试插头：与测试插座形成测试连接。 Test plug to form a testing connection by sing test socket				PS4	5 553 102
(7) 标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		DEK5	8 868 201	DEK5	8 868 201
(8) 终端固定件：对端子排终端起固定件作用（JUT2系列通用） Terminal fixed component: mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)		E/2	5 103 003	E/2	5 103 003
(9) 安装轨(NS35/7.5) Installment track(NS35/7.5)		NS35/7.5	8 024 001	NS35/7.5	8 024 001
(10) 终端固定件 Terminal fixed component		E/4	5 103 005	E/4	5 103 005
(11) 安装轨(NS35/7.5) Installment track(NS35/7.5)		NS32/15	8 025 002	NS32/15	8 025 002



Industrial Distribution Terminal Blocks

Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT2

JUT2-10		JUT2-16		JUT2-35	
厚 / 宽 / 高 / 总高 Thickness/Width / Height/ Total Height		厚 / 宽 / 高 / 总高 Thickness/Width / Height/ Total Height		厚 / 宽 / 高 / 总高 Thickness/Width / Height/ Total Height	
10/42/47.5/52		12/50/53.5/58		18/58/63.5/68	
额定截面Rated section: 10mm ²		额定截面Rated section: 16mm ²		额定截面Rated section: 35mm ²	
AWG:20-6		AWG:12-4		AWG:18-0	
IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
I U (A) (V)		I U (A) (V)		I U (A) (V)	
57 800		76 800		125 800	
型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT2-10	5 574 205	JUT2-16	5 574 206	JUT2-35	5 574 207
G-JUT2-4/10	8 050 203	G-JUT2-16	8 050 204	G-JUT2-35	8 050 205
TW4/10	8 750 203	TW16	8 750 204	TW35	8 750 205
TS2.5/35	8 751 202	TS2.5/35	8 751 202	TS2.5/35	8 751 202
JQ2-10	5 585 242	JQ2-16	5 585 252	JQ2-35	5 585 262
JQ3-10	5 585 243	JQ3-16	5 585 253	JQ3-35	5 585 263
JQ10-10	5 585 240	JQ10-16	5 585 250		
JSQ10-10	5 584 205	JSQ10-16	5 584 206	JSQ3-35	5 584 207
DEK5	8 868 201	DEK5	8 868 201	DEK5	8 868 201
E/2	5 103 003	E/2	5 103 003	E/2	5 103 003
NS35/7.5	8 024 001	NS35/7.5	8 024 001	NS35/7.5	8 024 001
E/4	5 103 005	E/4	5 103 005	E/4	5 103 005
NS32/15	8 025 002	NS32/15	8 025 002	NS32/15	8 025 002



Industrial Distribution Terminal Blocks

Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT2

JUT2-70

JUT2-4/2

双层接线端子 Double-layer wiring terminal

		JUT2-70		JUT2-4/2	
		厚 / 宽 / 高 / 高 Thickness/Width / Height/ / Height	22/75/80	厚 / 宽 / 高 Thickness/Width/Height	6/54/60
		额定截面 Rated section: 70mm ²	I U (A) (V) 192 800	额定截面 Rated section: 4mm ²	I U (A) (V) 32 500
		AWG:2-0 IEC 60947-7-1		AWG:24-10 IEC 60947-7-1	
说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35		JUT2-70	5 574 208	JUT2-4/2	5 574 215
(1)端板 End plate		G-JUT2-70	8 050 206	G-JUT2-4/2	8 050 207
(2)分组隔板：用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neighboring terminal groups.					
(3)绝缘隔片：用于相邻联格件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.					
(4)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit and 10-digit				JQ2-4/2 JQ3-4/2 JQ10-4/2	5 585 282 5 585 283 5 585 280
(5)跨接联络件：10位，可分，带10枚螺钉；可形成跳过某些端子的跨接。 Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals					
(6)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		DEK5	8 868 201	DEK5	8 868 201
(7)终端固定件：对端子排终端起固定件作用（JUT2系列通用） Terminal fixed component: mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)		E/2	5 103 003	E/2	5 103 003
(8)安装轨(NS35/7.5) Installment track(NS35/7.5)		NS35/7.5	8 024 001	NS35/7.5	8 024 001
(9)终端固定件 Terminal fixed component		E/4	5 103 005		5 103 005
(10)安装轨(NS35/7.5) Installment track(NS35/7.5)		NS32/15	8 025 002	NS32/15	8 025 002



Industrial Distribution Terminal Blocks

Screw type(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT2-4/2L

双层互连接线端子 Double-layer interconnection terminal

厚 / 宽 / 高	6/54/60
Thickness/Width/Height	
额定截面 Rated section: 4mm ²	I U (A) (V)
AWG: 24-10	32 500
IEC 60947-7-1	

型号 Model	订货号 Order Number	说明 Specification 简图 Schematic Drawing
JUT2-4/2L	5 574 216	端子: JUT2-2.5E 无需导轨安装, JUT12-2.5 可安装在 NS35 型导轨上。 Terminal: JUT2-2.5E no rail mounting required, JUT12-2.5 can be installed on tracks NS35 type.
G-JUT2-4/2	8 050 207	(1) 端板 End plate
		(2) 标记条: 有横向和竖向两种字体, 10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.

JQ2-4/2	5 585 282
JQ3-4/2	5 585 283
JQ10-4/2	5 585 280

DEK5	8 868 201
------	-----------

E/2	5 103 003
-----	-----------

NS35/7.5	8 024 001
----------	-----------

E/4	5 103 005
-----	-----------

NS32/15	8 025 002
---------	-----------



JUT2-2.5E


小型接线端子 Miniature wiring terminal series

厚 / 宽 / 高	5/22.5/25
Thickness/Width/Height	
额定截面 Rated section: 2.5mm ²	I U (A) (V)
AWG: 24-12	24 380
IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT2-2.5E	5 574 224

说明: 该端子由端子和固定件两部分组成, 结构紧凑, 无须安装轨, 螺栓穿过固定件可直接安装在电气柜的壁上, 而且固定件位置可根据需要放在前后任意位置, 所占空间小, 标记清晰。

Instruction: this terminal is composed of terminal and fixed component, with compact structure and without installment track, the screw bolt could be directly installed onto electrical cupboard's wall through fixed component, moreover, the position of fixed component can be laid anywhere according to demand, and it takes up small space and the mark is clear.




G-JUT2-2.5E (固定件型号) fixed component type	5 103 224 (订货号) order number
--	------------------------------------



Screw type Ground terminal(Combination type)

螺钉类-接地端子（组合型）

JUT2



JUT2-2.5PE

JUT2接地型接线端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。

JUT2 landing-type wiring terminal series product is mainly used for landing or connecting to neutral, it owns the same current load capability of the same specification wiring terminal.

说明 Specification 简图 Schematic Drawing

接地端子：可安装在NS35 型导轨上。
Terminal: can be installed on tracks NS35 type

(2)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



型号 Model 订货号 Order Number

JUT2-2.5PE 5 574 209

DEK5 8 868 201



JUT2-4PE



JUT2-6PE



JUT2-10PE

厚 / 宽 / 高 6.8/40.3/47.7
Thickness/Width / Height
额定截面Rated section: 4mm² I (A) 32
AWG:24-8
IEC 60947-7-1

厚 / 宽 / 高 8/40.7/47.7
Thickness/Width / Height
额定截面Rated section: 6mm² I (A) 41
AWG:24-8
IEC 60947-7-1

厚 / 宽 / 高 10/40.3/47.7
Thickness/Width / Height
额定截面Rated section: 10mm² I (A) 57
AWG:20-6
IEC 60947-7-1

型号 Model 订货号 Order Number

JUT2-4PE 5 574 210

DEK5 8 868 201

型号 Model 订货号 Order Number

JUT2-6PE 5 574 211

DEK5 8 868 201

型号 Model 订货号 Order Number

JUT2-10PE 5 574 212

DEK5 8 868 201



Screw type Ground terminal(Combination type)

螺钉类-接地端子（组合型）



JUT2

JUT2-16PE			JUT2-35PE		
厚 / 宽 / 高 Thickness/Width / Height		12.2/50.3/54	厚 / 宽 / 高 Thickness/Width / Height		18/58/63.5
额定截面 Rated section: 16mm ²		I (A) 76	额定截面 Rated section: 35mm ²		I (A) 125
AWG: 12-4 IEC 60947-7-1			AWG: 18-0 IEC 60947-7-1		
说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	
接地端子：可安装在NS35 型导轨上。 Terminal: can be installed on tracks NS35 type	JUT2-16PE	5 574 213	JUT2-35PE	5 574 214	
(2)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	DEK5	8 868 201	DEK5	8 868 201	



JUT2-70PE		
厚 / 宽 / 高 Thickness/Width / Height		22/75.5/80
额定截面 Rated section: 70mm ²		I (A) 192
AWG: 2-0 IEC 60947-7-1		
说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
接地端子：可安装在NS35 型导轨上。 Terminal: can be installed on tracks NS35 type	JUT2-70PE	5 574 215
(2)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	DEK5	8 868 201

JUT2接线端子系列采用框式接线系统，该系统由压线框、螺钉、导电片组成。压线框是用淬火硬化并经镀锌纯化的优质钢板制成，能和谐的配合钢制螺钉将导线牢固的压紧。在拧紧螺钉的过程中，压线框上部带螺纹的舌片上弹起，产生一个对螺钉的反作用，实现自锁功能。通电后由于温升造成的导线直径的改变则由压线框本身的弹性来抵消，因此无需再次拧紧螺钉。

JUT2 wiring terminal series adopts frame-type wiring system, which is composed of wire-pressing frame, screw and electrical conduction slice, of which the wire-pressing frame made of super-quality steel through quenching hardening and galvanization deactivation, so it could be cooperated harmoniously with steel screw to press lead tightly. In the process of tightening screw, the tongue piece with screw line on top of wire-pressing frame would bounce upwards and produce reaction force on screw to realize self-lock function. After being electrified, the lead diameter's change resulting from temperature rising would be offset by wire-pressing frame's elasticity, which doesn't need to tighten screw again.



Industrial Distribution Terminal Blocks

Fuse type terminal series

工业配电接线端子-保险丝型端子系列

保险丝型接线端子

保险丝型接线端子的电流由所安装的保险丝决定，电压由所选择的发光显示器决定。带发光显示的型号全在保险丝熔断时发出显示信号。



JUT2

Fuse-type wiring terminal

The current of fuse terminal is determined by selected luminous displayer. The type with luminous indication would have indication signal when the fuse is broken down.


JUT2-4RD 悬臂分断式保险丝型接线端子 bracket broken fuse type of wiring terminal

厚 / 宽 / 高 / 高	8/58/44/45.5
Thickness/Width / Height/ Height	
适用于G型保险丝规格G type fuse specification	5 x 25
额定截面Rated section: 4mm ²	U
AWG::24-10	(V)
IEC 60947-7-1	AC 500

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
端子：带通用安装在NS32 型，或NS35 型导轨上。 Terminal: with general-purpose mounting feet, can be installed on tracks NS32 or NS35	JUT2-4RD	5 574 220
(1)端板 End plate	G-JUT2-4RD	8 050 208
(4)边插式联络件：全绝缘2位；全绝缘3位；全绝缘10位。 Side adaptor: Full insulation in 2digit. Full insulation in 3digit. Full insulation in 10 digit	JUT2-4RD/LED24 电压/Voltage AC/DC:15-30V 电流/Current: 3.5-8.1mA	5 574 221
(5)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit	JUT2-4RO/LA250 电压/Voltage AC/DC:110-250V 电流/Current: 0.5-1mA	5 574 231
(6)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by sing test socket.		
(7)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	DEK5	8 868 201
(8)终端固定件：对端子排终端起固定件作用（JUT2系列通用） Terminal fixed component: mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)	E/2	5 103 003
(9)安装轨(NS35/7.5) Installment track(NS35/7.5)	NS35/7.5	8 024 001
(10)终端固定件 Terminal fixed component	E/4	5 103 005
(11)安装轨(NS35/7.5) Installment track(NS35/7.5)	NS32/15	8 025 002



应用领域广泛... 应用经验丰富...

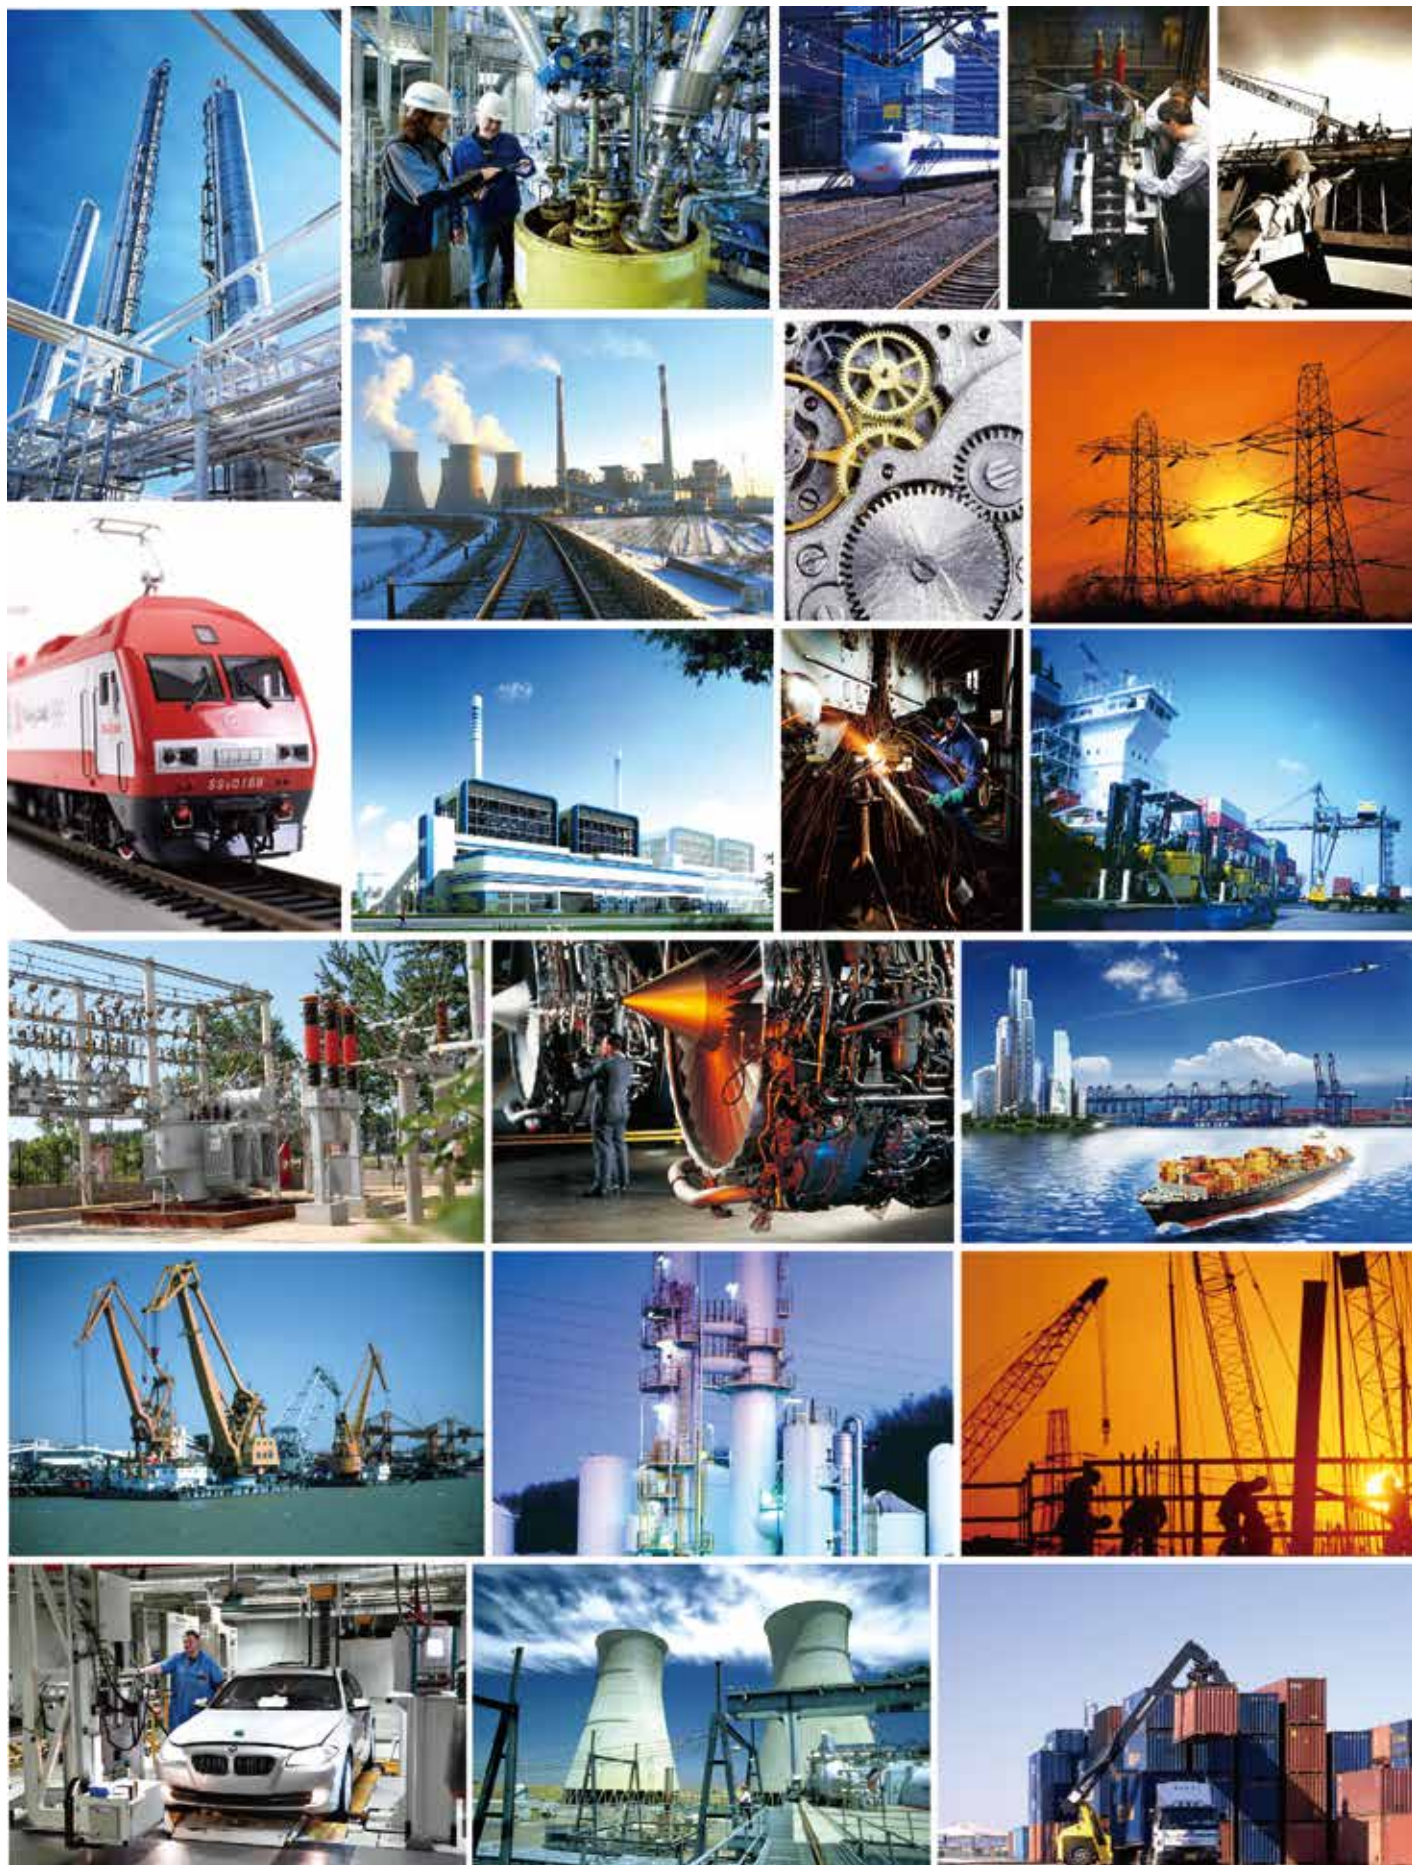

INDUSTRIAL DISTRIBUTION TERMINAL BLOCKS


工业配电接线端子


弹簧类

端子一般主要有外壳，笼式弹簧和导电片 3 大部分组成，接线时，通过螺丝刀按压笼式弹簧，使弹簧接线口张开，插入导线松开螺丝刀即可。接线方便快捷，省时省力，免维护；具有优异的抗振动能力；同时最大化的接线空间，有效地节约了空间：左右中三侧均可放置标记条，标识清晰醒目，插拔式的桥接件装卸方便快速，可轻松实现跨接，有效的节约了产品安装的时间。

Spring model

This model terminal block mainly consists 3 parts including shell, cage-style spring and conducting strip. During the line connecting, the screwdriver will be used for pressing the cage-style spring so that the spring connecting portion will open, insert the wire. Loose the screw driver, and then the whole processes are completed. This line connecting is quick, easy, time and efforts saving, and free of maintenance; it has a good anti-vibration property; meanwhile, its largest line-connecting space effectively saves the space; the tag can be put at the left side, right side or middle area, and the mark is noticeable and striking. The plug-in style bridge part is easily assembled and dissembled, the connecting can be easily done, and the installation time can be effectively saved.

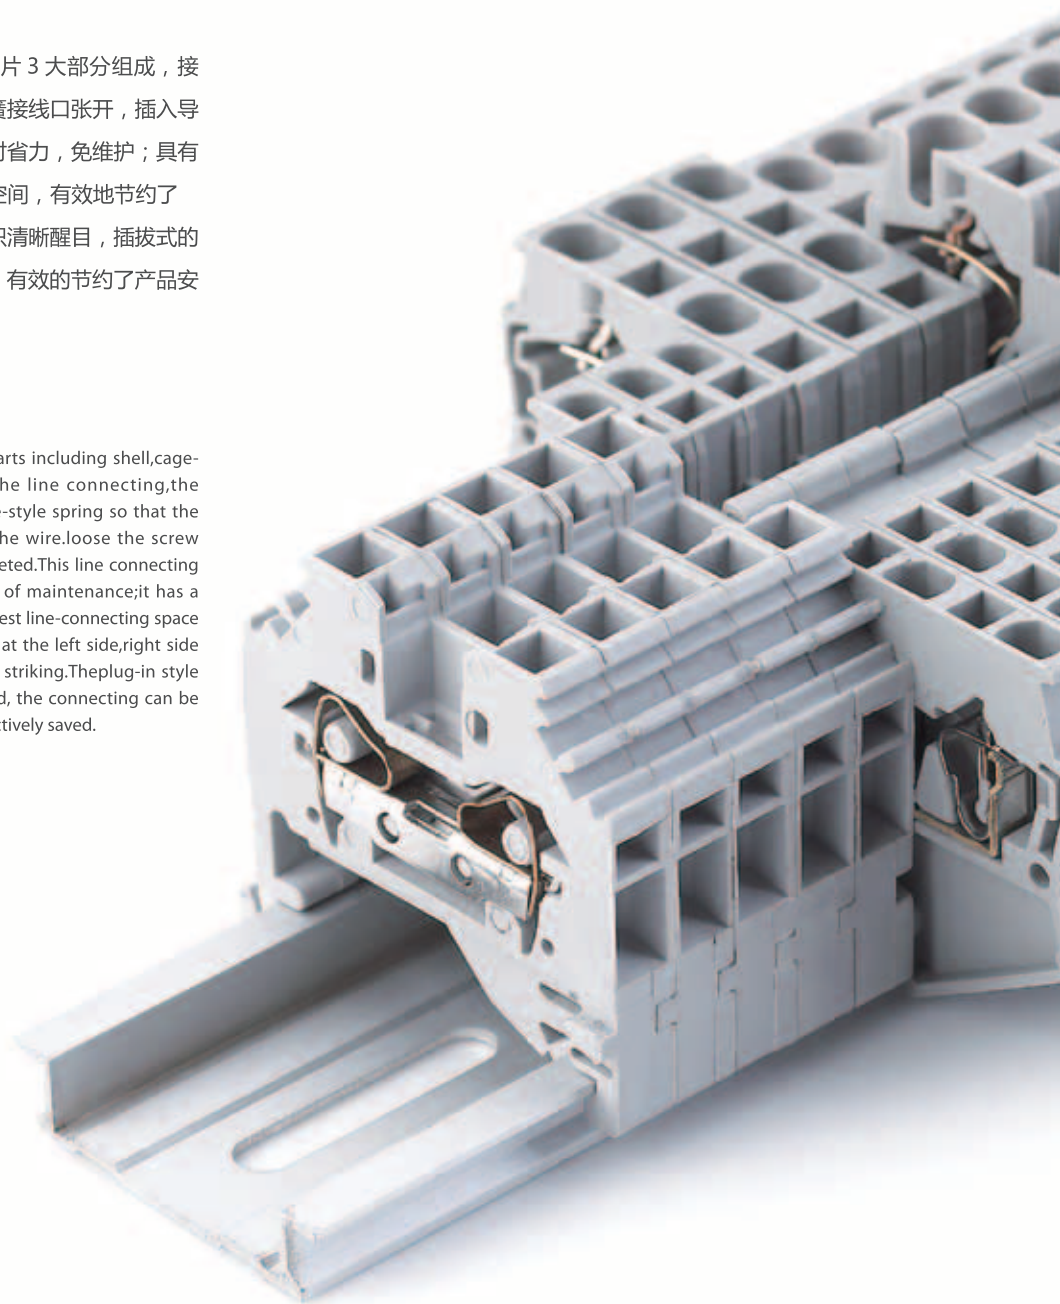

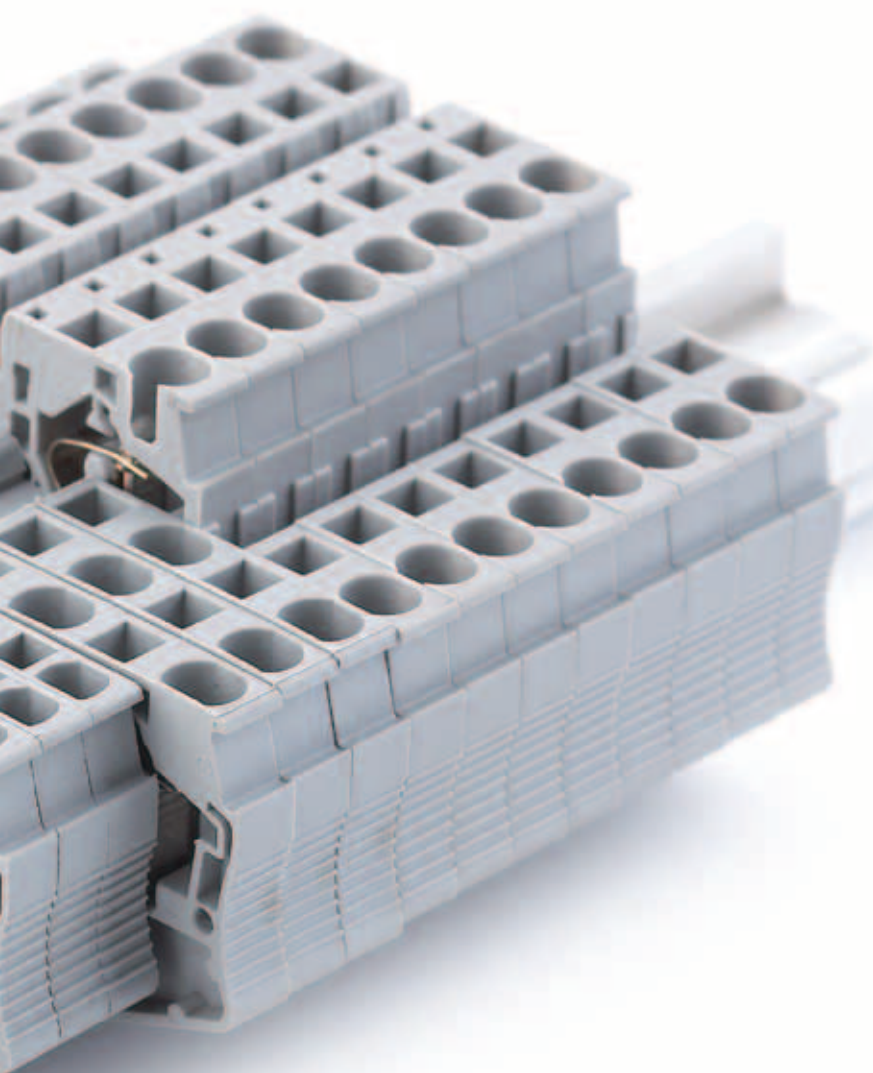

回拉式弹簧端子

回拉式弹簧端子两侧各有两个的接线位，可解决电位分配问题

使用回拉式弹簧端子可避免使用过多的桥接件，这样既可减短端子排的长度，使端子排结构布局清晰，又可节省接线费用。

Return-pulling spring terminal

Return-pulling spring terminal has two wiring position in both sides, which could resolve potential distribution question. Using return-pulling type spring terminal could avoid using too many bridging components, which can shorten the length of terminal row, make terminal row's structure clearer and reduce wiring cost.



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-1.5 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 Thickness/Width / Height	4.2/48.5/36.5
刚性导线 (mm ²) Rigid cable	0.14-2.5
柔性导线 (mm ²) Soft cable	0.14-1.5
I (A)	17.5
U (V)	500
AWG:26-16	
IEC 60947-7-1	

回拉式弹簧是从上面入线连结，导线的入线口设在端子顶端，其优点：行线槽可靠近端子排安装，能充分利用电气柜的空间，提高了接线密度，同时提供了观察接线位的良好角度，方便接线。除此之外，回拉式弹簧端子还具有如下特征：

清晰的标记系统：

最大的接线容量：

灵活的插拔式桥接件系统。

Return-pulling type spring terminal connects wire from upside, and the wire-in mouth of lead is set at the top of terminal, whose advantage is as follows: wire-crossing groove is installed adjacently to terminal row, which can make full use of space of electric cupboard, heighten wiring density, provide good angle for watching wiring position and simplify wiring operation.

Additionally, the return-pulling spring terminal owns following characteristics: clear mark system, maximum wiring capacity and flexible in sert-pull type bridging component system.

说明 Specification 简图 Schematic Drawing

回拉式弹簧：可安装在NS35型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35 type

(1)端板 End plate



(2)插拔式桥接件：用于端子中央实现横向桥接，齿背绝缘处可标示可分：2-位，3-位，10-位。
Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into 2-bit, 3-bit, 10-bit.



(3)跨接取件：可形成跳过某些端子需要位置的跨接。
Bridging leison component:
could form bridging by jumping
some terminal position.



(4)分组隔板：用于端子组间的视角及电气隔离。
Segment spacer: for visual and electric separation between neighboring terminal groups.



(5)测试插头：形成测试连接。
Test plug: forming test connection.



(6)螺丝刀
Screwdriver



(7)操作工具：用于开启回拉式弹簧
Operation tool: used to open
returnpulling type spring



(8)扁平标记条：共10条，每条10位可堪入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



(9)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles,
with horizontal and vertical
arrangements, ten spaced.



(10)终端固定件：对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标识。
Terminal fixed component: Imposing
fixed function on terminal row's
termination, the mark clamp and mark
strip can be blocked onto it for marking



型号 Model

订货号 Order Number

JUT3-1.5

5 574 301

G-JUT3-1.5/2.5

8 050 301

JFBS2-1.5

8 585 302

JFBS3-1.5

8 585 303

JFBS10-1.5

8 585 310

JSBS3-1.5

8 584 303

JSBS4-1.5

8 584 304

JSBS10-1.5

8 584 310

PAL4

5 553 301

STF0-0.4 x 2.5

5 484 301

STF-BW2-4

8 483 302

ZBFM4

8 868 301

ZB4

8 868 101

E/3

5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-2.5 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	5.2/48.5/36.5				
Thickness/Width / Height					
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
	Rigid cable	Soft cable			
AWG:24-12	0.2-4	0.2-2.5	31	800	
IEC 60947-7-1					

型号 Model	订货号 Order Number
----------	------------------

JUT3-2.5	5 574 303
----------	-----------

G-JUT3-1.5/2.5	8 050 301
----------------	-----------

JFBS2-2.5	8 585 312
JFBS3-2.5	8 585 313
JFBS10-2.5	8 585 320

JSBS2-2.5	5 584 313
JSBS3-2.5	5 584 314
JSBS10-2.5	5 584 320

PAL4	5 553 301
------	-----------

STF0-0.4 x 2.5	5 484 301
----------------	-----------

STF-BW2-4	8 483 302
-----------	-----------

ZBFM5	8 868 302
-------	-----------

ZB5	8 868 102
-----	-----------

E/3	5 103 003
-----	-----------

JUT3-4 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	6.2/56/36.5				
Thickness/Width / Height					
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
	Rigid cable	Soft cable			
AWG:24-10	0.5-6	0.5-4	41	800	
IEC 60947-7-1					

型号 Model	订货号 Order Number
----------	------------------

JUT3-4	5 574 305
--------	-----------

G-JUT3-4	8 050 305
----------	-----------

JFBS2-4	8 585 322
JFBS3-4	8 585 323
JFBS10-4	8 585 330

JSBS2-4	5 584 323
JSBS3-4	5 584 324
JSBS10-4	5 584 330

PAL4	5 553 301
------	-----------

STF2-0.8 x 4	5 484 303
--------------	-----------

STF-BW2-6	8 483 322
-----------	-----------

ZBFM6	8 868 303
-------	-----------

ZB6	8 868 103
-----	-----------

E/3	5 103 003
-----	-----------

JUT3-6 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	8.2/65.5/43.5				
Thickness/Width / Height					
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
	Rigid cable	Soft cable			
AWG:24-8	0.5-10	0.5-6	57	800	
IEC 60947-7-1					

型号 Model	订货号 Order Number
----------	------------------

JUT3-6	5 574 307
--------	-----------

G-JUT3-6	8 050 309
----------	-----------

JFBS2-6	8 585 332
JFBS 3-6	8 585 333
JFBS 10-6	8 585 340

PAL4	5 553 301
------	-----------

STF2-0.8 x 4	5 484 303
--------------	-----------

ZBFM8	8 868 304
-------	-----------

ZB8	8 868 104
-----	-----------


E/3	5 103 003
-----	-----------



Industrial Distribution Terminal Blocks

Fuse type terminal series

工业配电接线端子-保险丝型端子系列



JUT3

JUT3-10 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 Thickness/Width / Height	10.2/71.4/50.25
刚性导线 (mm ²) Rigid cable	16-6
柔性导线 (mm ²) Soft cable	16-6
I (A)	65
U (V)	600
IEC 60947-7-1	

JUT3-16 二导线贯通型接线端子 Two-lead through-type wiring terminal


厚 / 宽 / 高 Thickness/Width / Height	12.2/80.4/51.1
刚性导线 (mm ²) Rigid cable	16-4
柔性导线 (mm ²) Soft cable	16-4
I (A)	85
U (V)	600
IEC 60947-7-1	

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
回拉式弹簧子：可安装在NS35┐型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35┐type		JUT3-10		JUT3-16	
(1)端板 End plate		G-JUT3-10		G-JUT3-16	
(2)插拨式桥接件：用于端子中央实现横向桥接， 齿背绝缘处可标示可分：2-位、3-位、10-位。 Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into 2-bit, 3-bit, 10-bit.		JFBS2-10		JFBS2-16	
(3)跨接联线件：可形成跳过某些端子需要位置的跨接。 Bridging liaison component: could form bridging by jumping some terminal position.					
(4)分组隔板：用于端子组间的视角 及电气隔离。 Segment spacer: for visual and electric separation between neigh-boring terminal groups.					
(5)测试插头：形成测试连接。 Test plug: forming test connection.					
(6)螺丝刀 Screwdriver					
(7)操作工具：用于开启会拉式弹簧 Operation tool: used to open return pulling type spring					
(8)扁平标记条：共10条，每条10位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.					
(9)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB10		ZB12	
(10)终端固定件：对端子排终端起固定件作 用。标记夹和标记条可卡在它上进行标 记。 Terminal fixed component: imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking		E/1		E/1	

Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-35 二导线贯通型接线端子

Two-lead through-type wiring terminal

厚 / 宽	高	16.2/99.8/59.1			
Thickness/Width	Height				
		刚性导线 (mm ²)	柔性导线 (mm ²)	I	U
		Rigid cable	Soft cable	(A)	(V)
		14-2	14-2	115	600
IEC 60947-7-1					

型号 Model	订货号 Order Number
JUT3-35	
JFBS2-16	
ZB16	
E/1	



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT3



JUT3-1.5/1-2 三导线贯通接线端子
Three-lead through-type wiring terminal

JUT3-2.5/1-2 三导线贯通型接线端子
Three-lead through-type wiring terminal

厚 / 宽 / 高 4.2/60.5/36.5
Thickness/Width / Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:26-16 0.14-2.5 0.14-1.5 17.5 500
IEC 60947-7-1

厚 / 宽 / 高 5.2/60.5/36.5
Thickness/Width / Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:24-12 0.2-4 0.2-2.5 24 800
IEC 60947-7-1

说明 Specification 简图 Schematic Drawing

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

回拉式弹簧：可安装在NS35型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35 type

JUT3-1.5/1-2

5 574 315

JUT3-2.5/1-2

5 574 317

(1)端板 End plate



G-JUT3-2.5/1-2

8 050 302

G-JUT3-2.5/1-2

8 050 302

(2)插拔式桥接件：用于端子中央实现横向桥接，
齿背绝缘处可标示可分：2-位，3-位，10-位。
Insert-pull type bridging component used
to realize crosswise bridging at center of
terminal, the mark of rail insulation can be
divided into 2-bit, 3-bit, 10-bit.



JFBS2-1.5

8 585 302

JFBS3-1.5

8 585 303

JFBS10-1.5

8 585 310

JFBS2-2.5

8 585 312

JFBS3-2.5

8 585 313

JFBS10-2.5

8 585 320

(3)跨接联络件：可形成跳过某些端子需要位置的跨接。
Bridging liaison component:
could form bridging by jumping
some terminal position.



JSBS3-1.5

8 584 303

JSBS4-1.5

8 584 304

JSBS10-1.5

8 584 310

JSBS3-2.5

5 584 313

JSBS4-2.5

5 584 314

JSBS10-2.5

5 584 320

(4)分组隔板：用于端子组间的视角
及电气隔离。
Segment spacer: for visual and electric
separation between neighboring
terminal groups.



(5)测试插头：形成测试连接。
Test plug: forming test connection.




PAL4

5 553 301

PAL4

5 553 301

(6)螺丝刀
Screwdriver



STF0-0.4 x 2.5

5 484 301

STF1-0.6 x 3.5

5 484 301

(7)操作工具：用于开启回拉式弹簧
Operation tool: used to open
return pulling type spring



STF-BW2-4

8 483 302

STF-BW2-5

8 483 312

(8)扁平标记条：共10条，每条10位
可插入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits
per strip, it could be plugged in mark
groove of terminal outer side for marking.



ZBFM4

8 868 301

ZBFM5

8 868 302

(9)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles,
with horizontal and vertical
arrangements, ten spaced.



ZB4

8 868 101

ZB5

8 868 102

(10)终端固定件：对端子排终端起固定件作
用。标记夹和标记条可卡在它上进行标
记。
Terminal fixed component imposing
fixed function on terminal row's
termination, the mark clamp and mark
strip can be blocked onto it for marking



E/3

5 103 003

E/3

5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-4/1-2(开发中) 三导线贯通型接线端子

Three-lead through-type wiring terminal

厚 / 宽	└┐	高	6.2/71.5/36.5
Thickness/Width	└┐	Height	
	刚性导线 (mm ²)	柔性导线 (mm ²)	I U
	Rigid cable	Soft cable	(A) (V)
AWG:24-10	0.5-6	0.5-4	41 800
IEC 60947-7-1			

型号 Model	订货号 Order Number
JUT3-4/1-2	5 574 319
G-JUT3-4/1-2	8 050 306
JFBS2-4	8 585 322
JFBS3-4	8 585 323
JFBS10-4	8 585 330
JSBS3-4	5 584 323
JSBS4-4	5 584 324
JSBS10-4	5 584 330
PAL4	5 553 301
STF1-0.6 x 3.5	5 484 302
STF-BW2-6	8 483 322
ZBFM6	8 868 303
ZB6	8 868 103
E/3	5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-1.5/2-2 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高 Thickness/Width / Height	4.2/72/36.5
刚性导线 (mm ²) / 柔性导线 (mm ²) Rigid cable / Soft cable	I U (A) (V)
AWG:26-16	0.14-2.5 0.14-1.5 17.5 500
IEC 60947-7-1	

四线回拉式弹簧端子

四线回拉式弹簧端子有三个电位相同的接线位，用JUT3的组合端子可对电位或才输入信号直行完美的分配。三线回拉式弹簧端子在中部设有两个桥接孔，通过它们可与相邻端子组成任意形成的跨接。

Four-lead return-pulling terminal

Four-lead return-pulling type spring terminal owns three wiring potentials with the same electrical potential, using JUT3 combination terminal could conduct perfect distribution of electrical potentials or input signals. Three-lead return-pulling type terminal owns two bridging hole in center section, through which bridging could of any form be realized with adjacent terminal.

说明 Specification 简图 Schematic Drawing

回拉式弹簧子：可安装在NS35L型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35L-type

型号 Model

订货号 Order Number

JUT3-1.5/2-2

5 574 321

(1)端板 End plate



G-JUT3-2.5/2-2

8 050 303

(2)插拔式桥接件：用于端子中央实现横向桥接，因背绝缘处可标示可分：2-位，3-位，10-位。
Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



JFBS2-1.5

8 585 302

JFBS3-1.5

8 585 303

JFBS10-1.5

8 585 310

(3)跨接联线件：可形成跳过某些端子需要位置的跨接。
Bridging liaison component: could form bridging by jumping some terminal position.



JSBS2-1.5

8 584 303

JSBS3-1.5

8 584 304

JSBS10-1.5

8 584 310

四线回拉式弹簧接地端子

四线回拉式弹簧接地端子与等额定截面积的贯通端子的轮廓与厚度相同。黄绿色的标志使之更清晰易辨。

端板、标记条等与同类贯通端子使用。

(4)分组隔板：用于端子组间的视角及电气隔离。

Segment spacer: for visual and electric separation between neighboring terminal groups.



PAL4

5 553 301

Four-lead return-pulling type spring landing terminal

Four-lead return-pulling type spring landing terminal owns the same outline and thickness as through terminal with same rated section area, the yellow/green mark makes it clearer for being distinguished.

The end plate mark strip and the similar through terminal are universally used.


(5)测试插头：形成测试连接。
Test plug: forming test connection.



PAL4

5 553 301

(6)螺丝刀
Screwdriver



STF0-0.4 x 2.5

5 484 301

(7)操作工具：用于开启回拉式弹簧
Operation tool: used to open returnpulling type spring



STF-BW3-4

8 483 303

(8)扁平标记条：共10条，每条10位可堪入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



ZBFM4

8 868 301

(9)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB4

8 868 101

(10)终端固定件：对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component: Imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking



E/3

5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-2.5/2-2 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	5.2/72/36.5				
Thickness/Width / Height					
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
	Rigid cable	Soft cable			
AWG:24-12	0.2-4	0.2-2.5	24	800	
IEC 60947-7-1					

型号 Model	订货号 Order Number
----------	------------------

JUT3-2.5/2-2 5 574 323

G-JUT3-2.5/2-2 8 050 306

JFBS2-2.5 8 585 312
JFBS3-2.5 8 585 313
JFBS10-2.5 8 585 320

JSBS3-2.5 5 584 313
JSBS4-2.5 5 584 314
JSBS10-2.5 5 584 320

PAL4 5 553 301

STF1-0.6 x 3.5 5 484 301

STF-BW3-5 8 483 313

ZBFM5 8 868 302

ZB5 8 868 102

E/3 5 103 003

JUT3-4/2-2 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	6.2/87/36.5				
Thickness/Width / Height					
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
	Rigid cable	Soft cable			
AWG:24-10	0.5-6	0.5-4	40	800	
IEC 60947-7-1					

型号 Model	订货号 Order Number
----------	------------------

JUT3-4/2-2 5 574 325

G-JUT3-4/2-2 8 050 307

JFBS2-4 8 585 322
JFBS3-4 8 585 323
JFBS10-4 8 585 330

JSBS3-4 5 584 323
JSBS4-4 5 584 324
JSBS10-4 5 584 330

PAL4 5 553 301

STF1-0.8 x 4 5 484 303

STF-BW3-6 8 483 323

ZBFM6 8 868 303

ZB6 8 868 103

E/3 5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-1.5/2

双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高	4.2/67.5/49		
Thickness/Width / Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I U
	Rigid cable	Soft cable	(A) (V)
AWG:26-16	0.14-2.5	0.14-1.5	17.5 500
IEC 60947-7-1			

双层回拉式弹簧子

双层回拉式弹簧子可在一个端子上接两个不同的电位，相对于额定截面和厚度相同的单层端子而言，双层接线节约了50%的导轨长度，双层端子的上下层均可桥接和标识，以完成不同的接线任务，并使导线回路归属关系清晰易辨。

说明 Specification 简图 Schematic Drawing

回拉式弹簧子：可安装在NS35┐型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35┐type

型号 Model

订货号 Order Number

JUT3-1.5/2

5 574 327

Double-layer return-pulling spring terminal

Double-layer return-pulling spring terminal can be connected with two different potentials on one terminal, compared with single-layer terminal with the same rated section and thickness, the double-layer wiring could save 50% of track length, the upper/lower layer of double-layer terminal both can be bridge-connected and marked in order to finish different wiring duty, making lead circuit ownership relationship clearer for being distinguished.

(1)端板 End plate



G-JUT3-2.5/2

8 050 304

(2)插接式桥接件：用于端子中央实现横向桥接，
齿有绝缘处可标示可分：2-位，3-位，10-位。
Insert-pull type bridging component used
to realize crosswise bridging at center of
terminal, the mark of rail insulation can be
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-1.5

8 585 302

JFBS3-1.5

8 585 303

JFBS10-1.5

8 585 310

(3)跨接联接件：可形成跳过某些端子需要位置的跨接。
Bridging liaison component:
could form bridging by jumping
some terminal position.



JSBS3-1.5

8 584 303

JSBS4-1.5

8 584 304

JSBS10-1.5

8 584 310

(4)分组隔板：用于端子组间的视角
及电气隔离。
Segment spacer: for visual and electric
separation between neigh-boring
terminal groups.



(5)测试插头：形成测试连接。
Test plug: forming test connection.



PAL4

5 553 301

(6)螺丝刀
Screwdriver



STF0-0.4 x 2.5

5 484 301

(7)操作工具：用于开启回拉式弹簧
Operation tool: used to open
return pulling type spring



(8)扁平标记条：共10条，每条10位
可插入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits
per strip, it could be plugged in mark
groove of terminal outer side for marking.



ZBFM4

8 868 301

(9)标记条：有横向和竖向两种字体，10位。
Mark bar: two character styles,
with horizontal and vertical
arrangements, ten spaced.



ZB4

8 868 101

(10)终端固定件：对端子排终端起固定件作
用。标记夹和标记条可卡在它上进行标
记。
Terminal fixed component: imposing
fixed function on terminal row's
termination, the mark clamp and mark
strip can be blocked onto it for marking



E/3

5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-2.5/2

双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高	5.2/67.5/49			
Thickness/Width / Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
AWG:24-12	0.2-4	0.2-2.5	24	500
IEC 60947-7-1				

JUT3-4/2

双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高	6.2/83.5/49			
Thickness/Width / Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
AWG:24-10	0.5-6	0.5-4	32	500
IEC 60947-7-1				

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT3-2.5/2	5 574 329	JUT3-4/2	5 574 325
G-JUT3-2.5/2	8 050 308	G-JUT3-4/2	8 050 307
JFBS2-2.5	8 585 312	JFBS2-4	8 585 322
JFBS3-2.5	8 585 313	JFBS3-4	8 585 323
JFBS10-2.5	8 585 320	JFBS10-4	8 585 330
JSBS3-2.5	5 584 313	JSBS3-4	5 584 323
JSBS4-2.5	5 584 314	JSBS4-4	5 584 324
JSBS10-2.5	5 584 320	JSBS10-4	5 584 330
PAL4	5 553 301	PAL4	5 553 301
STF1-0.6 x 3.5	5 484 301	STF2-0.8 x 4	5 484 303
ZBFM5	8 868 302	ZBFM6	8 868 303
ZB5	8 868 102	ZB6	8 868 103
E/3	5 103 003	E/3	5 103 003




Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT3

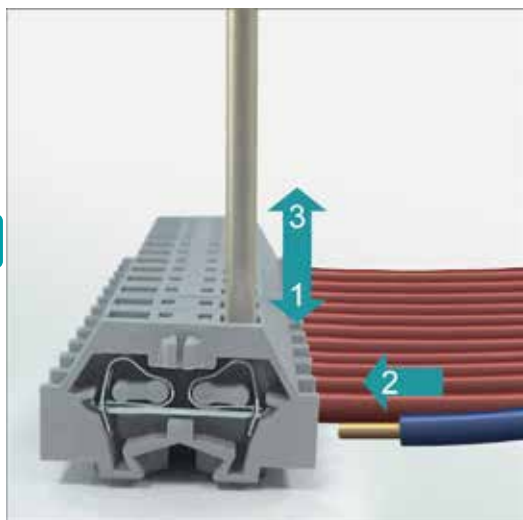

接线方法三步骤
Three-step of wiring method



端板安装
End plate installment



用不干胶标记条做标记
Marked with non-dry glue
identification strip



用跨接器进行跨接
Cross connection adaptor



边插安装
Side-inserted installment



测试插头及其适配器的应用
The application of test plug
and its adaptor

厚 / 宽 高
Thickness/Width/Height






型号 Model	JUT3-1.5F	JUT3-1.5F/2	JUT3-2.5F	JUT3-2.5F/2	JUT3-4F	JUT3-4F/2
订货号 Order Number	5 574 361	5 574 362	5 574 363	5 574 364	5 574 365	5 574 366
厚 / 宽 高 Thickness/Width/Height	5/25/17.2	8/25/17.2	6/28.4/18.2	10/28.4/18.2	7/33.5/23.2	12/33.5/23.2
额定截面 rated section(mm ²)	0.8-1.5	AWG:18-16	0.8-2.5	AWG:18-12	0.8-4	AWG:18-10
额定电压 rated voltage(V)	400		500		690	
额定电流 rated current(A)	18		24		24	
剥线长度 Line-shelling length(mm)	8-9		8-9		9-10	
型号 Model 订货号 Order Number	型号 Model 订货号 Order Number		型号 Model 订货号 Order Number		型号 Model 订货号 Order Number	
(1)端板 End plate		G-JUT3-1.5F 8 050 261		G-JUT3-2.5F 8 050 262		G-JUT3-4F 8 050 263
(2)边插 Side adaptor		JEB-1.5F 5 582 261		JEB-2.5F 5 582 262		JEB-4F 5 582 263
(3)跨接器 Cross connec- tion adaptor		KJQ-1.5F 5 086 261		KJQ-1.5F 5 086 261		KJQ-1.5F 5 086 261




Industrial Distribution Terminal Blocks Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

型号Model	JUT3-1.5W	JUT3-2.5W	JUT3-4W
订货号Order Number			
厚 / 宽 □ 高 Thickness/Width/Height	30.5/4/42.5mm	30.5/5/42.5mm	32.5/6/42.5mm
额定截面 rated section(mm ²)	0.08-1.5mm ²	0.08-2.5mm ²	0.08-4mm ²
额定电压 rated voltage(V)	800V	800V	800V
额定电流 rated current(A)	18A	24A	32A
剥线长度 Line-shelling length(mm)	8-9	8-9	9-10
安装 Installation	TS 35	TS 35	TS 35
中心联络件 Central adaptor	BW-1.5W	BW-2.5W	BW-4W
跨接联络件 Jumper connection	JC-1.5W	JC-2.5W	JC-4W



型号Model	JUT3-6W	JUT3-10W
订货号Order Number		
厚 / 宽 □ 高 Thickness/Width/Height	37/8/46.5mm	41.5/10/52mm
额定截面 rated section(mm ²)	0.08-6mm ²	0.08-10mm ²
额定电压 rated voltage(V)	800V	800V
额定电流 rated current(A)	41A	57A
剥线长度 Line-shelling length(mm)	12-13	12-13
安装 Installation	TS 35	TS 35
中心联络件 Central adaptor	BW-6W	BW-10W
跨接联络件 Jumper connection	JC-6W	JC-10W



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT3



JUT3-1.5PE 二导线贯通型接地端子
Two-lead through landing terminal

JUT3-2.5PE 二导线贯通型接地端子
Two-lead through landing terminal

特征

与额定截面相同的贯通端子的轮廓与厚度相一致；

接地端子可直接与贯通端子相邻排列。当接地端子卡入导轨时就会自动与导轨电气相连，导轨即为接地总线；

可标识，保证了导线与回路的归属关系清晰易辨。

厚 / 宽 / 高	4.2/48.5/36.5		
Thickness/Width / Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	(A)
AWG:26-16	0.14-2.5	0.14-1.5	17.5
IEC 60947-7-1			

厚 / 宽 / 高	5.2/48.5/36.5		
Thickness/Width / Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	(A)
AWG:24-12	0.2-4	0.2-2.5	31
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

JUT3-1.5PE 5 574 302

型号 Model	订货号 Order Number
----------	------------------

JUT3-2.5PE 5 574 304

Return-pulling type spring landing terminal owns following properties: its outline and thickness is the same as through terminal with the same rated section area, the landing terminal could be laid clesnext to through terminal directly, when the landing terminal is plugged into track, it would be electrically connected with guide track auto matically, and the track is landing bus.The identification property ensures that the owner-ship relationship of lead and circuit is clear to distinguish.

端板: 标记条等与同类贯通端子通用。(见31页)
End plate:and mark bar can be qrivrslyly connected with the similar through terminal(see page 31)

端板: 标记条等与同类贯通端子通用。(见32页)
End plate:and mark bar can be qrivrslyly connected with the similar through terminal(see page 32)



JUT3-1.5/1-2PE 三导线贯通型接线端子
Three-lead through-type wiring terminal

JUT3-2.5/1-2PE 三导线贯通型接线端子
Three-lead through-type wiring terminal

厚 / 宽 / 高	4.2/60.5/36.5		
Thickness/Width / Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	(A)
AWG:26-16	0.14-2.5	0.14-1.5	17.5
IEC 60947-7-1			

厚 / 宽 / 高	5.2/60.5/36.5		
Thickness/Width / Height			
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)
	Rigid cable	Soft cable	(A)
AWG:24-12	0.2-4	0.2-2.5	31
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

JUT3-1.5/1-2PE 5 574 316

型号 Model	订货号 Order Number
----------	------------------

JUT3-2.5/1-2PE 5 574 318



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-2.5/2-2PE 四导线贯通型接地端子 Four-lead through-type landing terminal

特征

与额定截面积相同的贯通端子的轮廓与厚度相一致;

接地端子可直接与贯通端子相邻排列。当接地端子卡入导轨时就会自动与导轨电气相连, 导轨即为接地总线;

可标识, 保证了导线与回路的归属关系清晰易辨。

说明 Specification 简图 Schematic Drawing

厚 / 宽 / 高 Thickness/Width / Height	5.2/72/36.5		
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)
AWG:24-12 IEC 60947-7-1	0.2-4	0.2-2.5	30

型号 Model

订货号 Order Number

回拉式弹簧子: 可安装在NS35 型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35 type

JUT3-2.5/2-2PE

5 574 324

Return-pulling type spring landing terminal owns following properties: its outline and thickness is the same as through terminal with the same rated section area, the landing terminal could be laid closnext to through terminal directly, when the landing terminal is plugged into track, it would be electrically connected with guide track automatically, and the track is landing bus. The identification property ensures that the ownership relationship of lead and circuit is clear to distinguish.



JUT3-4PE 二导线贯通型接地端子 Two-lead through landing terminal

JUT3-6PE 二导线贯通型接地端子 Two-lead through landing terminal

厚 / 宽 / 高 Thickness/Width / Height	6.2/56/36.5		
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)
AWG:24-10 IEC 60947-7-1	0.5-6	0.5-4	41

厚 / 宽 / 高 Thickness/Width / Height	8.2/65.5/43.5		
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)
AWG:24-8 IEC 60947-7-1	0.5-10	0.5-6	57

说明 Specification 简图 Schematic Drawing

型号 Model

订货号 Order Number

型号 Model

订货号 Order Number

回拉式弹簧子: 可安装在NS35 型导轨上。
Return-pulling type spring terminal
can be installed on tracks NS35 type

JUT3-4PE

5 574 306

JUT3-6PE

5 574 308

(1)端板 End plate



端板: 标记条等与同类贯通端子通用。(见32页)
End plate: and mark bar can be qiversly connected
with the similar through terminal(see page 32)

端板: 标记条等与同类贯通端子通用。(见32页)
End plate: and mark bar can be qiversly connected
with the similar through terminal(see page 32)



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT3

JUT3-10PE 二导线贯通型接地端子 Two-lead through landing terminal

JUT3-16PE 二导线贯通型接地端子 Two-lead through landing terminal

厚 / 宽 / 高 Thickness/Width / Height	10.2/71.4/50.25
刚性导线 (mm ²) Rigid cable	16-6
柔性导线 (mm ²) Soft cable	16-6
I (A)	65
IEC 60947-7-1	

厚 / 宽 / 高 Thickness/Width / Height	12.2/80.4/51.1
刚性导线 (mm ²) Rigid cable	16-4
柔性导线 (mm ²) Soft cable	16-4
I (A)	85
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
回拉式弹簧子：可安装在NS35┐型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35┐type	JUT3-10PE		JUT3-16PE	
(1)端板 End plate	G-JUT3-10		G-JUT3-16	
(2)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB10			
(3)终端固定件：对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking	E/1		E/1	



JUT3-35PE 二导线贯通型接地端子 Two-lead through landing terminal

厚 / 宽 / 高 Thickness/Width / Height	16.2/99.8/59.1
刚性导线 (mm ²) Rigid cable	14-2
柔性导线 (mm ²) Soft cable	14-2
I (A)	115
AWG: 16-6	
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
回拉式弹簧子：可安装在NS35┐型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35┐type	JUT3-35PE	
(1)端板 End plate		
(2)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB16	
(3)终端固定件：对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking	E/1	



Screw type Ground terminal(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT4

JUT4-2.5 通用型接线端子universal wiring terminal			JUT4-4 通用型接线端子universal wiring terminal		
	厚 / 宽□高 Thickness/Width□Height	7/33.6/44.3		厚 / 宽□高 Thickness/Width□Height	6.8/40.5/51.5
	额定截面Rated section: 0.5-4mm²	I (A) U (V) 25 600		额定截面Rated section: 0.5-6mm²	I (A) U (V) 36 600
	AWG:20-12 IEC 60947-7-1			AWG:20-8 IEC 60947-7-1	
说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	
接地端子：可安装在NS32□型导轨上。 Terminal: can be installed on tracks NS32□ type	JUT4-2.5	5 574 401	JUT4-4	5 574 403	
(1)端板 End plate 	G-JUT4-2.5	8 050 401	G-JUT4-4/10	8 050 402	
(2)分組隔板：用于端子組間的視角及電氣隔離。 Segment spacer: for visual and electric separation between neighboring terminal groups. 					
(3)中心联络件：用于端子中央，实现横向桥接，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into 2-digit, 3-digit, 5-digit, and 10-digit 					
(4)测试插座：与测试插头形成测试连接。 Test socket: to form a testing connection by using test plug. 	PSB3/10/4	8 573 101	PSB3/10/4	8 573 101	
(5)测试插头：形成测试连接。 Test plug: to forming test connection. 	MPS	5 553 101	MPS	5 553 101	
(6)标记牌 Mark bar 	HZB5	8 868 401	HZB5	8 868 401	
(7)终端固定件：对端子排终端起固定件作用。 Terminal fixed component: Imposing fixed function on terminal row's termination 	E/4	5 103 005	E/4	5 103 005	
(8)安装轨(NS32/15-AL) Installment track(NS32/15-AL) 	NS32/15-AL	8 025 002	NS32/15-AL	8 025 002	

JUT4-T增强型接线端子

JUT4-T增强型接线端子是在JUT4通用型接线端子的压线框下部增加了一对弹簧，使端子的防震性能增强，接线更牢固。其技术参数和附件与对应的通用型接线端子完全一致。

JUT4-4 strengthened-type wiring terminal has been added one pair of spring at bottom of wire-pressing frame of JUT4 universal wiring terminal, which could strengthen shockproof performance of terminal and make wiring solidier. Its technical parameter and attachment are in accordance to corresponding universal wiring terminal.



JUT4-2.5T 增强型接线端子Strengthened-type wiring terminal		JUT4-4T 增强型接线端子Strengthened-type wiring terminal	
型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT4-2.5T	5 574 402	JUT4-4T	5 574 404
注：附件及参数对应查上表 Remarks: attachment and parameter please refer to above form.		注：附件及参数对应查上表 Remarks: attachment and parameter please refer to above form.	



Screw type Ground terminal(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT4

JUT4-10
通用型接线端子universal wiring terminal

JUT4-10S
试验型接线端子

		JUT4-10		JUT4-10S	
		厚 / 宽 □ 高 Thickness/Width □ Height	10.5/40.5/51.8	厚 / 宽 □ 高 Thickness/Width □ Height	12/66/54
		额定截面 Rated section: 0.5~10mm ²	I U (A) (V) 48 600	接线容量 Wiring capacity: 0.5~10mm ²	I U (A) (V) 25 600
		AWG:20~8 IEC 60947-7-1		AWG:20~8 IEC 60947-7-1	
说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子：带通用安装在NS32 □ 型， 或NS35 □ 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 □ or NS35 □		JUT4_10	5 574 405	JUT4-10S	5 574 411
(1)端板 End plate		G-JUT4_4/10	8 050 402	G-JUT4-10S	8 050 406
(2)分组隔板：用于端子组间的 视角及电气隔离。 Segment spacer: for visual and electric separation between neigh- boring terminal groups.				JAH-10S	8 750 406
(3)绝缘隔片：用于相邻联格件的电气隔离， 可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.				JFH-10S	5 585 406
(4)中心联络件：用于端子中央，实现横向桥接，螺钉头带 绝缘圈，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit and 10-digit					
(5)中心联络件：用于端子中央，实现 横向桥接，螺钉头带绝缘圈，可分： 2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit and 10-digit		MPS	5 553 10 ¹		
(6)测试插头：与测试插座形成测试连接。 Test plug: to form a testing connection by sing test socket.		PSB3/10/4	8 573 101	PSB4/7/6	8 573 102
(7)标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.					
(8)终端固定件：对端子排终端起固定 件作用。(JUT2系列通用)Terminal fixed component: mark it could be used as fixed component to terminal row's termination(universal for JUT2 series)				PS	5 553 102
(9)安装轨(NS35/7.5) Installment track(NS35/7.5)		HZB9	8 868 402	HZB9	8 868 402
(10)终端固定件 Terminal fixed component		E/4	5 103 005	E/4	5 103 005
(11)安装轨(NS35/7.5) Installment track(NS35/7.5)		NS32/15-AL	8 025 002	NS32/15-AL	8 025 002



Screw type Ground terminal(Combination type)

工业配电接线端子-螺钉类（组合型）



JUT4

JUT4-35

通用型接线端子universal wiring terminal

JUT4-10C

增强型接线端子Strengthened-type wiring terminal

	厚 / 宽□高 Thickness/Width□Height	18/55/63	厚 / 宽□高 Thickness/Width□Height	10/52.7/57.7
	额定截面Rated section: 16~35mm²	I (A) U (V) 115 600	额定截面Rated section: 0.5~10mm²	I (A) U (V) 65 600
	AWG:4~2 IEC 60947-7-1		AWG:20~8 IEC 60947-7-1	
说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
接地端子：可安装在NS32□型导轨上。 Terminal: can be installed on tracks NS32□type	JUT4-35	5 574 408	JUT4-10C	5 574 407
(1)端板 End plate 	G-JUT4-35	8 050 404	G-JUT4-10C	8 050 403
(2)分组隔板：用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups. 				
(3)中心联络件：用于端子中央，实现横向桥接，可分：2-位，3-位，5-位，10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit 				
(4)测试插座：与测试插头形成测试连接。 Test socket: to form a testing connection by using test plug. 	PSB3/10/4	8 573 101	PSB3/10/4	8 573 101
(5)测试插头：形成测试连接。 Test plug: to forming test connection. 	MPS	5 553 101	MPS	5 553 101
(6)标记牌 Mark bar 	HZB11	8 868 403	HZB9	8 868 402
(7)终端固定件：对端子排终端起固定件作用。 Terminal fixed component: Imposing fixed function on terminal row's termination 	E/4	5 103 005	E/4	5 103 005
(8)安装轨(NS32/15-AL) Installment track(NS32/15-AL) 	NS32/15-AL	8 025 002	NS32/15-AL	8 025 002



JUT4-10T

增强型接线端子Strengthened-type wiring terminal

型号 Model	订货号 Order Number
JUT4-10T	5 574 406

注：附件及参数对应查上表
Remarks: attachment and parameter please refer to above form.

JUT4B-4W

微型接线端子mini wiring terminal

厚 / 宽 / 高 Thickness/Width/Height	6.8/26.3/32	
接线容量 Wiring capacity: 0.5-6mm²	I (A)	U (V)
AWG:20-8 IEC 60947-7-1	36	600
说明 Specification	型号 Model	订货号 Order Number
端子 Terminal	JUT4B-4W	5 574 413
(1)端板 End plate	G-JUT4-4W	8 050 407
(2)分組隔板 Segment spacer	JAH-4W	8 750 407
(3)标记牌 Mark bar	HZB5	8 868 401
(4)终端固定件 Terminal fixed component	E/4W	5 103 006
(5)安装轨 Installment track	NS15	8 024 003



Industrial Distribution Terminal Blocks

Fuse type terminal series

工业配电接线端子-保险丝型端子系列



JUT4

JUT4-10RD

熔断器型接线端子

厚 / 宽 / 高	13/54/53		
Thickness/Width / Height			
适用于G型保险丝规格 G type fuse specification	5 x 20		
	刚性导线 (mm ²)	柔性导线 (mm ²)	I U
AWG:24-10	Rigid cable	Soft cable	(A) (V)
IEC 60947-7-1	0.5-6	0.5-4	41 800

说明 Specification 简图 Schematic Drawing


型号 Model 订货号 Order Number

端子：可安装在NS32/15-AL C型导轨上。
Terminal can be installed on tracks NS32/15-1L C type

JUT4-10RD 5 574 409

JUT4-10RD/LED 5 574 410
带发光显示适用于电压
The product with luminous display is applied to voltage being AC/DC:10-250V
电流current:0.5-1mA

(1)端板 End plate



G-JUT4-10RD 8 750 405

(2)分组隔板：用于端子组间的视角及电气隔离。
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAH-10RD 8 750 405

(3)中心联络件：用于端子中央，实现横向桥接，可分：2-位，3-位，5-位，10-位。
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



JFH-10RD 5 584 405

(4)测试插座：与测试插头形成测试连接。
Test socket: to form a testing connection by using test plug.



PSB4/7/6 8 573 102

(5)测试插头：形成测试连接。
Test plug: forming test connection.



PS 5 553 102

(6)标记牌 Mark bar



HZB9 8 868 402

(7)终端固定件：对端子排终端起固定件作用。
Terminal fixed component: Imposing fixed function on terminal row's termination



E/4 5 103 005

(8)安装轨(NS32/15-AL)
Installation track(NS32/15-AL)



NS32/15-AL 8 025 002



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列

**JUT4**

JUT4B-4/2

基座型二位接线端子base-type two-bit terminal

厚 / 宽 / 高	22/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

JUT4B-4/3

基座型三位接线端子base-type three-bit terminal

厚 / 宽 / 高	33/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

JUT4B-4/5

基座型五位接线端子base-type five-bit terminal

厚 / 宽 / 高	55/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

型号 Model	订货号 Order Number
----------	------------------

JUT4B-4/2	5 574 421
-----------	-----------

型号 Model	订货号 Order Number
----------	------------------

JUT4B-4/3	5 574 422
-----------	-----------

型号 Model	订货号 Order Number
----------	------------------

JUT4B-4/5	5 574 423
-----------	-----------



JUT4B-4/12 基座型十二位接线端子 base-type two-bit terminal

厚 / 宽 / 高	132/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

型号 Model	订货号 Order Number
----------	------------------

JUT4B-4/12	5 574 424
------------	-----------

JUT4BP-4/6 六位接线端子SIX-bit wiring terminal

厚 / 宽 / 高	57/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

型号 Model	订货号 Order Number
----------	------------------

JUT4BP-4/6	5 574 431
------------	-----------

JUT4BP-4/10 十位接线端子ten-bit wiring terminal

厚 / 宽 / 高	81/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

型号 Model	订货号 Order Number
----------	------------------

JUT4BP-4/10	5 574 432
-------------	-----------



JUT4BP-4/12 十二位接线端子twelve-bit wiring terminal

厚 / 宽 / 高	93/21/21
Thickness/Width/Height	
接线容量Wiring capacity:0.5-6mm ²	I U (A) (V)
AWG:20-8	36 600
IEC 60947-7-1	

型号 Model	订货号 Order Number
----------	------------------

JUT4BP-4/12	5 574 433
-------------	-----------



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列

结构特征

JUT5系列大电流接线分接端子由绝缘基座、接线框、防护罩三部分组成。接线框由导电夹、螺钉、螺母和支承框组成。导电夹与导线接触面呈包容型的犬牙交错结构，具有接触面大，压接可靠的特点。通过不同形状的导电夹的相互组合，使其不仅具有通用型接线端子的一般功能，还可派生出大电流分接端子和母线排接线端子。能满足所有电控配电、成套装置中的大截面导线连接和导线的分接等各种用途。

Structure's properties

JUT5 series of great-current wiring/tapping terminal is composed of insulation base, wiring frame, protection cover. The wiring frame is composed of electrical conduction clamp, screw, nut and support frame, the conduction-clamp and lead contacted-face and reliable pressing/connection. With mutual combination of different-shape conduction clamp, this terminal not only owns common function of universal wiring terminal and bus row wiring terminal, which could realize big section lead connection in all electric-construction, complete sets appliance, tapping operation of lead etc.

JUT5

型号 Mode	形式 Mould	压线范围 (mm ²) Wire-pressing scope (mm ²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)	订货号 Order Number
JUT5-95	一路进 (电缆) 一路出 (电缆) 图1 1 st circuit in (cable) 1 st circuit out (cable)	16-95	31 x N+9/115/76(93)	5 574 501
JUT5-95B	一路进 (铜排) 一路出 (铜排) 图2 1 st circuit in (copper row) 1 st circuit out (copper row)	铜排宽 ≤ 18 copper-plate's width ≤ 18	31 x N+9/115/76(93)	5 574 502
JUT5-95C	一路进 (铜排) 一路出 (电缆) 图2.图1 1 st circuit in (copper row) 1 st circuit out (cable)	进 (宽 ≤ 18) 出 16-95 in (width ≤ 18) out 16-95	31 x N+9/115/76(93)	5 574 503
JUT5-95D	一路进 (电缆) 二路出 (电缆) 图1.图3 1 st circuit in (cable) 2 nd circuit out (cable)	进 16-95 出 16-50 In 16-95 out 16-50	31 x N+9/140/88(105)	5 574 504
JUT5-95E	一路进 (铜排) 二路出 (电缆) 图2.图3 1 st circuit in (copper row) 2 nd circuit out (cable)	进 (宽 ≤ 18) 出 16-50 In (width ≤ 18) out 16-50	31 x N+9/140/88(105)	5 574 505
JUT5-95F	一路进 (电缆) 四路出 (电缆) 图1.图5 1 st circuit in (cable) 4 th circuit out (cable)	进 16-95 出 10-25 In 16-95 out 10-25	31 x N+9/140/88(105)	5 574 506
JUT5-95G	一路进 (铜排) 四路出 (电缆) 图2.图5 1 st circuit in (copper row) 4 th circuit out (cable)	进 (宽 ≤ 18) 出 10-25 In (width ≤ 18) out 10-25	31 x N+9/140/88(105)	5 574 507
JUT5-95H	一路进 (电缆) 六路出 (电缆) 图4.图5 1 st circuit in (cable) 6 th circuit out (cable)	进 16-95 出 10-25 In 16-95 out 20-25	31 x N+9/140/88(105)	5 574 508
JUT5-95J	一路进 (电缆) 二路出 (电缆) 图3 2 nd circuit in (cable) 2 nd circuit out (cable)	进 16-95 出 16-95 In 16-95 out 16-95	31 x N+9/140/88(105)	5 574 509
JUT5-95K	二路进 (电缆) 四路出 (电缆) 图3.图5 2 nd circuit in (cable) 4 th circuit out (cable)	进 16-95 出 10-25 In 16-95 out 10-25	31 x N+9/140/88(105)	5 574 510

JUT5-95

额定参数
rated parameter
电流/电压 160/1000 (A/V)
current/voltage
接线容量 16-95 (mm²)
Wiring capacity
A.W.G 4-000
安装螺钉
installment screw M5 (mm)

型号 Mode	形式 Mould	压线范围 (mm ²) Wire-pressing scope (mm ²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/with/high)	订货号 Order Number
JUT5-150	一路进 (电缆) 一路出 (电缆) 图1 1 st circuit in (cable) 1 st circuit out (cable)	25-150	31 x N+9/115/88(105)	5 574 511
JUT5-150B	一路进 (铜排) 一路出 (铜排) 图2 1 st circuit in (copper row) 1 st circuit out (copper row)	铜排宽 ≤ 18 copper-plate's width ≤ 18	31 x N+9/115/88(105)	5 574 512
JUT5-150C	一路进 (铜排) 一路出 (电缆) 图2.图1 1 st circuit in (copper row) 1 st circuit out (cable)	进 (宽 ≤ 18) 出 25-150 In (width ≤ 18) out 25-150	31 x N+9/115/88(105)	5 574 513
JUT5-150D	一路进 (电缆) 二路出 (电缆) 图1.图3 1 st circuit in (cable) 2 nd circuit out (cable)	进 25-150 出 16-70 In 16-95 out 16-70	46 x N+9/115/103(120)	5 574 514
JUT5-150E	一路进 (铜排) 二路出 (电缆) 图2.图3 1 st circuit in (copper row) 2 nd circuit out (cable)	进 (宽 ≤ 25) 出 16-70 In (width ≤ 18) out 16-70	46 x N+9/115/103(120)	5 574 515
JUT5-150F	一路进 (电缆) 四路出 (电缆) 图1.图5 1 st circuit in (cable) 4 th circuit out (cable)	进 25-150 出 10-35 In 25-150 out 10-35	46 x N+9/115/103(120)	5 574 516
JUT5-150G	一路进 (铜排) 四路出 (电缆) 图2.图5 1 st circuit in (copper row) 4 th circuit out (cable)	进 (宽 ≤ 25) 出 10-35 In (width ≤ 18) out 10-35	46 x N+9/115/103(120)	5 574 517
JUT5-150H	一路进 (电缆) 六路出 (电缆) 图4.图5 1 st circuit in (cable) 6 th circuit out (cable)	进 25-150 出 10-35 In 25-150 out 10-35	46 x N+9/115/103(120)	5 574 518
JUT5-150J	一路进 (电缆) 二路出 (电缆) 图3 2 nd circuit in (cable) 2 nd circuit out (cable)	进 25-150 出 25-150 In 25-150 out 25-150	46 x N+9/115/103(120)	5 574 519
JUT5-150K	二路进 (电缆) 四路出 (电缆) 图3.图5 2 nd circuit in (cable) 4 th circuit out (cable)	进 25-150 出 10-35 In 25-150 out 10-35	46 x N+9/115/103(120)	5 574 520

JUT5-150

额定参数
rated parameter
电流/电压 250/1000 (A/V)
current/voltage
接线容量 25-150 (mm²)
Wiring capacity
A.W.G 2-300MCM
安装螺钉
installment screw M5 (mm)



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列

图1




图2




图3



图4





图5



一路电缆连接进线端或出线端
1st circuit cable connecting with
wire-in or wire-out terminal

一路铜排连接进线端或出线端
1st circuit cable copper-row
connecting with wire-in or wire-
out terminal

二路电缆连接进线端或出线端
2nd circuit cable connecting with
wire-in or wire-out terminal

三路电缆连接一路进线二路出线
3rd circuit cable connecting with
1st circuit wire-in/2nd circuit wire-out

四路电缆连接出线端
4th circuit cable connecting with
wire-out terminal

JUT5

型号 Mode	形式 Mould	压线范围 (mm ²) Wire-pressing scope (mm ²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/width/high)	订货号 Order Number
JUT5-240	一路进 (电缆) 一路出 (电缆) 图1 1 st circuit in (cable) 1 st circuit out (cable)	35-240	46 x N+9/115/103(120)	5 574 521
JUT5-240B	一路进 (铜排) 一路出 (铜排) 图2 1 st circuit in (copper row) 1 st circuit out (copper row)	铜排宽 ≤ 25 copper-plate's width ≤ 18	46 x N+9/115/103(120)	5 574 522
JUT5-240C	一路进 (铜排) 一路出 (电缆) 图2.图1 1 st circuit in (copper row) 1 st circuit out (cable)	进 (宽 ≤ 25) 出 35-240 in (width ≤ 25) out 35-240	46 x N+9/115/103(120)	5 574 523
JUT5-240D	一路进 (电缆) 二路出 (电缆) 图1.图3 1 st circuit in (cable) 2 nd circuit out (cable)	进 35-240 出 35-240 In 35-240 out 25-120	62 x N+9/140/110(127)	5 574 524
JUT5-240E	一路进 (铜排) 二路出 (电缆) 图2.图3 1 st circuit in (copper row) 2 nd circuit out (cable)	进 (宽 ≤ 25) 出 25-120 In (width ≤ 25) out 25-120	62 x N+9/140/110(127)	5 574 525
JUT5-240F	一路进 (电缆) 四路出 (电缆) 图1.图5 1 st circuit in (cable) 4 th circuit out (cable)	进 35-240 出 16-70 In 35-240 out 16-70	62 x N+9/140/110(127)	5 574 526
JUT5-240G	一路进 (铜排) 四路出 (电缆) 图2.图5 1 st circuit in (copper row) 4 th circuit out (cable)	进 (宽 ≤ 25) 出 16-70 In (width ≤ 25) out 16-70	62 x N+9/140/110(127)	5 574 527
JUT5-240H	一路进 (电缆) 六路出 (电缆) 图4.图5 1 st circuit in (cable) 6 th circuit out (cable)	进 35-240 出 16-70 In 35-240 out 16-70	62 x N+9/140/110(127)	5 574 528
JUT5-240J	一路进 (电缆) 二路出 (电缆) 图3 2 nd circuit in (cable) 2 nd circuit out (cable)	进 35-240 出 35-240 In 35-240 out 35-240	62 x N+9/140/110(127)	5 574 529
JUT5-240K	二路进 (电缆) 四路出 (电缆) 图3.图5 2 nd circuit in (cable) 4 th circuit out (cable)	进 35-240 出 60-70 In 35-240 out 60-70	62 x N+9/140/110(127)	5 574 530

JUT5-240

额定参数
rated parameter
电流/电压 400/1000 (A/V)
current/voltage
接线容量 35-240 (mm²)
Wiring capacity
A.W.G 2-400MCM
安装螺钉 M6 (mm)
installment screw

型号 Mode	形式 Mould	压线范围 (mm ²) Wire-pressing scope (mm ²)	外形尺寸 (厚/宽/高mm) Appearance dimension (deep/width/high)	订货号 Order Number
JUT5-300	一路进 (电缆) 一路出 (电缆) 图1 1 st circuit in (cable) 1 st circuit out (cable)	50-300	62 x N+10/140/110(127)	5 574 531
JUT5-300B	一路进 (铜排) 一路出 (铜排) 图2 1 st circuit in (copper row) 1 st circuit out (copper row)	铜排宽 ≤ 30 copper-plate's width ≤ 30	62 x N+10/140/110(127)	5 574 532
JUT5-300C	一路进 (铜排) 一路出 (电缆) 图2.图1 1 st circuit in (copper row) 1 st circuit out (cable)	进 (宽 ≤ 30) 出 50-300 In (width ≤ 30) out 50-300	62 x N+10/140/110(127)	5 574 533
JUT5-300D	一路进 (电缆) 二路出 (电缆) 图1.图3 1 st circuit in (cable) 2 nd circuit out (cable)	进 50-300 出 25-150 In 50-300 out 25-150	72 x N+10/140/137(166)	5 574 534
JUT5-300E	一路进 (铜排) 二路出 (电缆) 图2.图3 1 st circuit in (copper row) 2 nd circuit out (cable)	进 (宽 ≤ 30) 出 25-150 In (width ≤ 30) out 25-150	72 x N+10/140/137(166)	5 574 535
JUT5-300F	一路进 (电缆) 四路出 (电缆) 图1.图5 1 st circuit in (cable) 4 th circuit out (cable)	进 50-300 出 16-95 In 50-300 out 16-95	72 x N+10/140/137(166)	5 574 536
JUT5-300G	一路进 (铜排) 四路出 (电缆) 图2.图5 1 st circuit in (copper row) 4 th circuit out (cable)	进 (宽 ≤ 30) 出 16-95 In (width ≤ 30) out 16-95	72 x N+10/140/137(166)	5 574 537
JUT5-300H	一路进 (电缆) 六路出 (电缆) 图4.图5 1 st circuit in (cable) 6 th circuit out (cable)	进 50-300 出 16-95 In 50-300 out 16-95	72 x N+10/140/137(166)	5 574 538
JUT5-300J	一路进 (电缆) 二路出 (电缆) 图3 2 nd circuit in (cable) 2 nd circuit out (cable)	进 50-300 出 50-300 In 50-300 out 20-300	72 x N+10/140/137(166)	5 574 539
JUT5-300K	二路进 (电缆) 四路出 (电缆) 图3.图5 2 nd circuit in (cable) 4 th circuit out (cable)	进 50-300 出 16-95 In 50-300 out 16-95	72 x N+10/140/137(166)	5 574 540

JUT5-300



额定参数
rated parameter
电流/电压 630/1000 (A/V)
current/voltage
接线容量 50-300 (mm²)
Wiring capacity
A.W.G 1-500MCM
安装螺钉 M6 (mm)
installment screw



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列



JUT6端子外形尺寸
JUT6 terminal appearance dimension

JUT6

三位大电流接线端子 3-bit great current wiring terminal

JUT6-603

JUT6-1003



订货号Order Number

5 574 601

5 574 603

电流 / 电压 (A/V)
current/voltage

76/690

101/690

极数 / 导线截面 (极/mm²)
pole quantity lead section

3/16 AWG:6

3/25 AWG:4

安装螺钉 (mm)
installment screw

M6

M6



四位大电流接线端子 4-bit great current wiring terminal

JUT6-604

JUT6-1004

5 574 602

5 574 604

电流 / 电压 (A/V)
current/voltage

76/690

101/690

极数 / 导线截面 (极/mm²)
pole quantity lead section

4/16 AWG:6

4/25 AWG:4

安装螺钉 (mm)
installment screw

M6

M8

JUT7螺钉式组合型接线端子排系列

JUT7 Screw combination-type wiring terminal row series

螺钉式多极接线端子 screw-type many-pole wiring terminal

JUT7-2.5/2C

JUT7-2.5/3C



订货号Order Number

5 574 701

5 574 702

L / W / 宽 □ 高 + 盖高 (mm)
thickness/W/width □ height+cover height

20/8/40/34+2

25/6.7/40/34+2

电流/电压 (A/V)
current/voltage

24/690

24/690

极数/导线截面 (极/mm²)
pole quantity lead section

2/2.5 AWG:14

3/2.5 AWG:14

安装螺钉 (mm)
installment screw

M3

M3

螺钉式单极接线端子 screw-type single-pole wiring terminal

JUT7-10C

JUT7-16C



订货号Order Number

5 574 711

5 574 712

L / W / 宽 □ 高 + 盖高 (mm)
thickness/W/width □ height+cover height

15.5/13.5/45/38+2

22/18/56/38+2

电流/电压 (A/V)
current/voltage

57/690

76/690

极数 / 导线截面 (极/mm²)
pole quantity lead section

-/10 AWG:8

-/16 AWG:6

安装螺钉 (mm)
installment screw

M4

M6

*JUT7-2.5/2C 表示带盖罩, JUT7-2.5/2表示不带盖罩。
JUT7-2.5/2C means with-cover, JUT7-2.5/2 means without-cover



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列

JUT6-1503	JUT6-2003	JUT6-3003	JUT6-4003
5 574 605	5 574 607	5 574 609	5 574 611
150/690	232/690	309/690	101/690
3/50 AWG:0	3/120 AWG:250MCM	3/150 AWG:300MCM	3/240 AWG:500MCM
M8	M8	M10	M12



JUT6

JUT6-1504	JUT6-2004	JUT6-3004	JUT6-4004
5 574 606	5 574 608	5 574 610	5 574 612
150/690	232/690	309/690	415/690
4/50 AWG:0	4/120 AWG:250	4/150 AWG:300MCM	4/240 AWG:500MAM
M8	M8	M10	M12

型号 Model	尺寸 Dimension				
	L	B	H	A	W
JUT6-603	86.5	42.7	31	25.5	17
JUT6-1003	113.5	55.2	36.3	28.0	22.5
JUT6-1503	115	67	40	30.5	25.3
JUT6-2003	133	72.1	44.4	34	28.3
JUT6-3003	164	89.4	50.6	47.5	30
JUT6-4003	164	89.4	50.6	47.5	36

型号 Model	尺寸 Dimension				
	L	B	H	A	W
JUT6-604	115	42.7	31	25.5	17
JUT6-1004	137.5	55.2	36.3	28.0	22.5
JUT6-1504	153	67	40	30.5	25.3
JUT6-2004	177	72.1	44.4	34	28.3
JUT6-3004	218	89.4	50.6	47.5	30
JUT6-4004	218	89.4	50.6	47.5	36

JUT7-4/3C	JUT7-6/3C
5 574 703	5 574 704
35/9.7/40/34+2	43/9.7/45/38+2
32/690	41/690
3/4 AWG:12	3/6 AWG:10
M3.5	M4

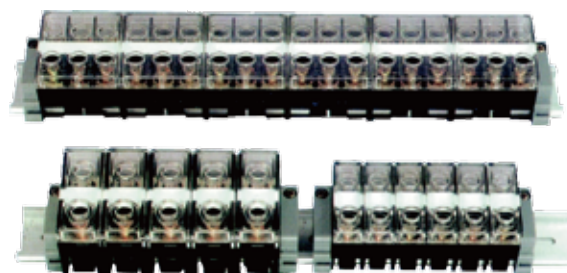

JUT7-35C	JUT7-95C	JUT7-150C
5 574 713	5 574 714	5 574 715
32/24/75/49+2.5	39/31/86/61+2.5	62/52.3/125/77+3.5
125/690	232/690	309/690
-/35 AWG:2	-/95 AWG:000	-/150 AWG:300MCM
M6	M8	M10

固定件/安装轨 Fixed component/installment track



名称appellation	型号Mode	订货号Order Number
固定件Fixed component	E7	5 103 008
安装轨installment track	NS35/7.5-AL	8 024 002



Industrial Distribution Terminal Blocks

Base type terminal series

工业配电接线端子-基座型接线端子系列

在电气设备的电气线路中，经常会将中线（N线）、地线（PE线）或相线（L线）接到中央汇流条上。因此必须对导线及端子与相应回的所属关系作出明确标识。

JUT8系列能从两个方面满足上述要求。


可对每个端子分别进行标识；

端子具有蓝色（N线）、黄绿线（PE线）、黑色（L线）三种标识。

In the electrical wire of electrical equipment, operator often connects neutral line(N), earth line(PE) or looks-line (L) onto center junction strip, so operator should clearly mark the ownership relationship of lead, terminal and corresponding circuit. JUT8 series could meet above demand from two aspects:

could mark separately every terminal;

terminal has blue(neutral line), yellow/green (earth line), black(looks-line) three identifications.

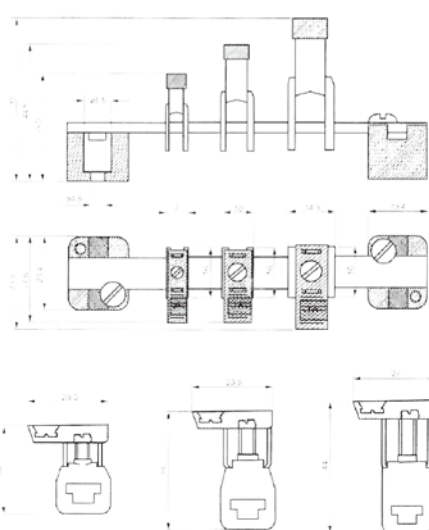

L/N/PE接线端子 L/N/PE wiring terminal

JUT8-4

JUT8-16

JUT8-35

刚性导线 (mm²) 柔性导线 (mm²) I
Rigid cable Soft cable (A)
0.5-6 0.5-4 41
AWG:20-10
IEC 60947-7-1

刚性导线 (mm²) 柔性导线 (mm²) I
Rigid cable Soft cable (A)
1.5-16 1.5-16 76
AWG:16-4
IEC 60947-7-1

刚性导线 (mm²) 柔性导线 (mm²) I
Rigid cable Soft cable (A)
2.5-35 2.5-35 125
AWG:14-2
IEC 60947-7-1

说明 Specification 简图 Schematic Drawing	型号 Model 订货号 OrderNumber	型号 Model 订货号 OrderNumber	型号 Model 订货号 OrderNumber
端子：铜制件、镀锡、挂接在N线汇流条上。 Terminal:made of copper,nickel plating suspend- connected on N line's junction strip.	JUT8-4 5 574 801	JUT8-16 5 574 802	JUT8-35 5 574 803
(1)N线汇流条：铜制件、镀锡。3 x 10mm, 1m长。 N line's junction strip,made of copper, nickel plating,3*10mm,with 1m length	NUT3/10 8 513 001	NUT3/10 8 513 001	NUT3/10 8 513 001
(2)双垫块：由绝缘材料制成。 Double-heel:made of insulation material	DKS-2 8 153 001	DKS-2 8 153 001	DKS-2 8 153 001
(3)垫块：由绝缘材料制成。 Heel:made of insulation material	DKS 8 153 002	DKS 8 153 002	DKS 8 153 002
(4)支架：带通用安装脚可安装在C型，或L型导轨上。 Support:with universal installment foot, it could be in-stalled on C-type or L-type track.	UTB1 8 754 001	UTB1 8 754 001	UTB1 8 754 001
(5)标记条：10位 Mark strip:10bits	ZB6 8 868 103	ZB8 8 868 104	ZB8 8 868 104



Industrial Distribution Terminal Blocks

Thread type terminal series

工业配电接线端子-螺纹型接线端子系列

导体截面 (mm²): Cu 2.5~50mm² Al 6~50mm²

导体尺寸 (AWG): 1/0~6

材质: 聚酰胺

安装类型: 导轨安装

螺丝类型: 内六角 Hexagon, 5mm

工作温度 (°C): -40 - +105°C

标准: EN61238-1、EN60947-7-2

Conductor Cross-section(mm²):Cu 2.5~50mm²
Al 6~50mm²

Conductor Size(AWG):1/0~6

Housing: Polyamide

Mounting: DIN rail

Screw:Hexagon, 5mm

Operating Temperature(°C): -40 - +105°C

Standard: EN61238-1、EN60947-7-2



JUT10

JUT10-50

厚 / 宽 / 高 Thickness/Width / Height	17.7/51.2/45.3
接线容量 (mm ²) Connection capacity	16-50
I (A)	160
U (V)	1000

JUT10-50/2

厚 / 宽 / 高 Thickness/Width / Height	29.8/49.2/45.3
接线容量 (mm ²) Connection capacity	16-50
I (A)	160
U (V)	1000

JUT10-95

厚 / 宽 / 高 Thickness/Width / Height	42/89/51.5
接线容量 (mm ²) Connection capacity	50-95
I (A)	245
U (V)	1000

说明 Specification 简图 Schematic Drawing

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number


端子: 铜制件、镀锡、挂接在N线汇流条上。
Terminal: made of copper, nickel plating suspend-
connected on N line's junction strip.

JUT10-50

JUT10-50/2

JUT10-95

(1) 操作工具: 内六角扳手(mm)
Operation tool: Allen wrench



5#

5#

6#

(2) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component: Imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking



E/3

E/3

E/3



JUT10-95/2

厚 / 宽 / 高 Thickness/Width / Height	42/89/51.5
接线容量 (mm ²) Connection capacity	50-95
I (A)	245
U (V)	1000

JUT10-150

厚 / 宽 / 高 Thickness/Width / Height	28.6/98/60.5
接线容量 (mm ²) Connection capacity	50-150
I (A)	320
U (V)	1000

JUT10-240

厚 / 宽 / 高 Thickness/Width / Height	37/130/66
接线容量 (mm ²) Connection capacity	95-240
I (A)	425
U (V)	1000

说明 Specification 简图 Schematic Drawing

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number


端子: 铜制件、镀锡、挂接在N线汇流条上。
Terminal: made of copper, nickel plating suspend-
connected on N line's junction strip.

JUT10-50

JUT10-50/2

JUT10-95

(1) 操作工具: 内六角扳手(mm)
Operation tool: Allen wrench



6#

8#

10#

(2) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component: Imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking



E/3



E/3

E/3



Spring classes Screw type

螺钉类-接线端子

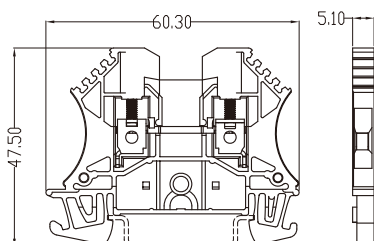

JUT12-2.5

小型接线端子 Miniature wiring terminal series

厚 / 宽 / 高	5.1/60.3/47.4	
Thickness/Width/Height		
额定截面Rated section: 2.5mm ²	I (A)	U (V)
AWG:24—12	24	800
IEC 60947—7-1		

JUT12-2.5K

厚 / 宽 / 高 Thickness/Width/Height	5.1/60.3/48.9			
刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)	U (V)	
0.5-4	0.5-2.5	24	800	
AWG: 24-12				
IEC 60947-7-1				

说明 Specification 简图 Schematic Drawing

端子: JUT12-2.5可安装在 NS35 型导轨上。

Terminal: JUT12-2.5 can be installed on tracks NS35 type.

型号 Model

订货号 Order Number

JUT12-2.5

5 574 225

型号 Model

订货号 Order Number

JUT12-2.5K

5 574 226

(1) 端板 End plate

G-JUT12-2.5

5 103 225

G-JUT12-2.5

5 103 225



JUT13-35 一进四出分线端子 One into four out of the terminal

厚 / 宽 / 高 Thickness/Width / Height	43/60/41			
刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)	U (V)	
12-2	12-2	125	800	
IEC 60947-7-1				



JUT13-95 一进四出分线端子 One into four out of the terminal

厚 / 宽 ▮ 高	56.3/80.5/60		
Thickness/Width ▮ Height			
柔性导线 (mm ²) ▮ U			
Soft cable	(A)	(V)	
10-000	230	800	
IEC 60947-7-1			

说明 Specification 简图 Schematic Drawing

可安装在 NS35 型导轨上
can be installed on tracks NS35 type

型号 Model

订货号 Order Number


JUT13-35

型号 Model

订货号 Order Number

JUT3-35PE

(1) 螺丝刀 (mm)
Screwdriver



十字: 2#
cross
一字: 0.8×5.5
A word

十字: 2#
cross
一字: 1×6.5
A word

(2) 操作工具: 套筒
Operation tool: The sleeve



s=14

(3) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component: Imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking



E/3

E/3



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT14

特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
 - 2.较螺钉端子接线时间节省70%；
 - 3.震动环境防松脱
- Advantage:
- 1.Solid wire plug-in connection.
 - 2.Save 70% operation time than screw type connector.
 - 3.Anti-vibration shock, anti loosening.

JUT14-1.5 二导线贯通接线端子 Two -lead through-type wiring terminal

厚 / 宽 / 高	4.2/53.5/35.6		
Thickness/Width / Height			
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
Rigid cable	Soft cable		
24-14	24-16	17.5	800
IEC 60947-7-1			

JUT14-2.5 二导线贯通接线端子 Two -lead through-type wiring terminal

厚 / 宽 / 高	5.2/53.5/35.6		
Thickness/Width / Height			
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
Rigid cable	Soft cable		
24-12	24-14	24	800
IEC 60947-7-1			

说明 Specification 简图 Schematic Draw	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
弹簧型接线端子: 可安装在NS35型导轨上。 Spring clip type terminal block can be installed on tracks NS35 type	JUT14-1.5	5 574 321	JUT14-2.5	5 574 321
(1) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标示可分: 2-位, 3-位, 10-位。 Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.	JFBS2-1.5 JFBS3-1.5 JFBS10-1.5	8 585 302 8 585 303 8 585 310	JFBS2-2.5 JFBS3-2.5 JFBS10-2.5	8 585 302 8 585 303 8 585 310
(2) 分隔隔板: 用于端子组间的视觉及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.	JAP14-2.5		JAP14-2.5	
(3) 扁平标记条: 共10条, 每条10位可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.			ZBFM5	8 868 301
(4) 标记条: 有横向和竖向两种字体, 10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB4	8 868 101	ZB5	8 868 101
(5) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking	E/3	5 103 003	E/3	5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT14



特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
- 2.较螺钉端子接线时间节省70%；
- 3.震动环境防松脱

Advantage:

- 1.Solid wire plug-in connection.
- 2.Save 70% operation time than screw type connector.
- 3.Anti-vibration shock,anti loosening.

JUT14-2.5/2 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	5.2/78.3/47.5			
Thickness/Width / Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
	24-12	24-14	24	800
IEC 60947-7-1				

JUT14-4 二导线贯通接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	6.2/53.5/35.6			
Thickness/Width / Height				
	刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)
	Rigid cable	Soft cable		
	24-10	24-12	32	800
IEC 60947-7-1				

说明 Specification	简图 Schematic Draw	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
弹簧型接线端子: 可安装在NS35型导轨上。 Spring clip type terminal block can be installed on tracks NS35 type		JUT14-4	5 574 321	JUT14-4	5 574 321
(1) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标示可分: 2-位, 3-位, 10-位。 Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into 2-bit, 3-bit, 10-bit.		JFBS2-2.5 JFBS3-2.5 JFBS10-2.5	8 585 302 8 585 303 8 585 310	JFBS2-4 JFBS3-4 JFBS10-4	8 585 302 8 585 303 8 585 310
(2) 分组隔板: 用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.		JAP14-2.5/2		JAP14-2.5	
(3) 扁平标记条: 共10条, 每条10位可堪入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.		ZBFM5	8 868 301	ZBFM6	8 868 301
(4) 标记条: 有横向和竖向两种字体, 10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.				ZB6	8 868 101
(5) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component: imposing fixed function on terminal rows termination, the mark clamp and mark strip can be blocked onto it for marking		E/3	5 103 003	E/3	5 103 003

(6) 外形尺寸
External dimension



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT14

特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
- 2.较螺钉端子接线时间节省70%；
- 3.震动环境防松脱

Advantage:

- 1.Solid wire plug-in connection.
- 2.Save 70% operation time than screw type connector.
- 3.Anti-vibration shock,anti loosening.

JUT14-4/2 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	6.2/78.3/47.5			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-10	24-12	32	800	
IEC60947-7-1				

JUT14-4/2-2 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	6.2/81.5/35.6			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-10	24-12	32	800	
IEC 60947-7-1				

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
弹簧型接线端子: 可安装在NS35L型导轨上。 Spring clip type terminal block can be installed on tracks NS35L-type	JUT14-4/2	5 574 321	JUT14-4/2-2	5 574 326
(1) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标示可分: 2-位, 3-位, 10-位。 Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit. 	JFBS2-4 JFBS3-4 JFBS10-4	8 585 302 8 585 303 8 585 310	JFBS2-4 JFBS3-4 JFBS10-4	8 585 302 8 585 303 8 585 310
(2) 分隔板: 用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups. 	JAP14-2.5		JAP14-2.5/2-2	
(3) 扁平标记条: 共10条, 每条10位可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking. 	ZBFM6	8 868 301	ZBFM6	8 868 301
(4) 标记条: 有横向和竖向两种字体, 10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced. 		8 868 101	ZB6	8 868 101
(5) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking. 	E/3	5 103 003	E/3	5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT14



特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
- 2.较螺钉端子接线时间节省70%；
- 3.震动环境防松脱

Advantage:

- 1.Solid wire plug-in connection.
- 2.Save 70% operation time than screw type connector.
- 3.Anti-vibration shock,anti loosening.

JUT14-6 二导线贯通接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	8.2/61.2/41.2			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
Rigid cable	Soft cable			
24-8	24-10	40	800	
IEC 60947-7-1				

JUT14-6/1-2 三导线贯通型接线端子 Three-lead through-type wiring terminal

厚 / 宽 / 高	8.2/78/41.7			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
Rigid cable	Soft cable			
24-8	24-10	40	800	
IEC 60947-7-1				

说明 Specification 简图 Schematic Draw

弹簧型接线端子: 可安装在NS35型导轨上。

Spring clip type terminal block
can be installed on tracks NS35 type

型号 Model

订货号 Order Number

JUT14-6

5 574 321

型号 Model

订货号 Order Number

JUT14-6/1-2

5 574 321

(1)插拨式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标示可分: 2-位, 3-位, 10-位。
Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



JFBS2-6
JFBS3-6
JFBS10-6

8 585 302
8 585 303
8 585 310

(2)分组隔板: 用于端子组间的视角及电气隔离。
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAP14-2.5

JAP14-2.5/2-2

(3)扁平标记条: 共10条, 每条10位可插入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



ZBFM8

8 868 301

ZBFM8

8 868 301

(4)标记条: 有横向和竖向两种字体, 10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB8

8 868 101

ZB8

8 868 101

(5)终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标示。
Terminal fixed component: imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking



E/3

5 103 003

E/3

5 103 003





Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT14



特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
- 2.较螺钉端子接线时间节省70%；
- 3.震动环境防松脱

Advantage:

- 1.Solid wire plug-in connection.
- 2.Save 70% operation time than screw type connector.
- 3.Anti-vibration shock, anti loosening.

JUT14-2.5PE 二导线贯通接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	5.2/53.5/35.6			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
Rigid cable	Soft cable			
24-12	24-14	24	800	
IEC 60947-7-1				

JUT14-4PE 二导线贯通接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	6.2/53.5/35.6			
Thickness/Width / Height				
刚性导线 (mm ²)	柔性导线 (mm ²)	I (A)	U (V)	
Rigid cable	Soft cable			
24-10	24-12	32	800	
IEC 60947-7-1				

说明 Specification 简图 Schematic Drawing

型号 Model 订货号 Order Number

型号 Model 订货号 Order Number

弹簧型接线端子: 可安装在NS35┐型导轨上。

Spring clip type terminal block
can be installed on tracks NS35┐type

JUT14-2.5PE

JUT14-4PE

5 574 321

(1)分组隔板: 用于端子组间的视角
及电气隔离。
Segment spacer: for visual and electric
separation between neighboring
terminal groups.



JAP14-2.5

JAP14-2.5

8 585 302
8 585 303
8 585 310

(2)扁平标记条: 共10条, 每条10位
可嵌入端子外侧标识槽进行标示。
Flat mark strip: 10 strips totally, 10 bits
per strip, it could be plugged in mark
groove of terminal outer side for marking.



ZBFM5

8 868 301

ZBFM6

8 868 301

(3)标记条: 有横向和竖向两种字体, 10位。
Mark bar: two character styles,
with horizontal and vertical
arrangements, ten spaced.



ZB5

8 868 101

ZB6

8 868 101

(4)终端固定件: 对端子排终端起固定件作
用。标记夹和标记条可卡在它上进行标
记。
Terminal fixed component imposing
fixed function on terminal row's
termination, the mark clamp and mark
strip can be blocked onto it for marking



E/3

5 103 003

E/3

5 103 003




Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列

JUT14



特点

- 1.单股导线(多股导线沾锡或加冷压头)直接插入；
- 2.较螺钉端子接线时间节省70%；
- 3.震动环境防松脱

Advantage:

- 1.Solid wire plug-in connection.
- 2.Save 70% operation time than screw type connector.
- 3.Anti-vibration shock,anti loosening.

JUT14-4/2-2PE 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高 Thickness/Width / Height	6.2/81.5/35.6		
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)
	24-10	24-12	32
IEC 60947-7-1			

JUT14-6PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 Thickness/Width / Height	8.2/61.2/41.2		
	刚性导线 (mm ²) Rigid cable	柔性导线 (mm ²) Soft cable	I (A)
	24-8	24-10	40
IEC 60947-7-1			

说明 Specification 简图 Schematic Draw	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
弹簧型接线端子: 可安装在NS35型导轨上。 Spring clip type terminal block can be installed on tracks NS35 type	JUT14-6	5 574 321	JUT14-6PE	5 574 321
(1) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标示可分: 2-位, 3-位, 10-位。 Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.	JAP14-2.5/2-2		JAP14-2.5	8 585 302 8 585 303 8 585 310
(2) 扁平标记条: 共10条, 每条10位可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.	ZBFM6	8 868 301	ZBFM8	8 868 301
(3) 标记条: 有横向和竖向两种字体, 10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB6	8 868 101	ZB8	8 868 101
(4) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。 Terminal fixed component: imposing termination, the mark clamp and mark strip can be blocked onto it for marking	E/3	5 103 003	E/3	5 103 003



Industrial Distribution Terminal Blocks

Spring type terminal series

工业配电接线端子-弹簧类接线端子系列



JUT14

JUT14-6/1-2PE 三导线贯通接线端子

Three-lead through-type wiring terminal

厚 / 宽	8.2/73/41.7	
Thickness/Width	Height	
刚性导线 (mm ²)	柔性导线 (mm ²)	I
Rigid cable	Soft cable	(A)
24-8	24-10	40
IEC 60947-7-1		

型号 Model	订货号 Order Number
----------	------------------

JUT14-6/1-2PE	5 574 321
---------------	-----------

ZBFM8	8 868 301
-------	-----------

ZB8	8 868 101
-----	-----------

E/3	5 103 003
-----	-----------



Industrial Distribution Terminal Blocks

Screw type terminal series

工业配电接线端子-螺钉类接线端子系列



JUT15

JUT15-500C 集线盒接线端子(电缆型) Junction box terminal block(Cable type)

集线盒接线端子:

产品设有16个接线孔位, 主要应用于多根导线的汇流集中连接, 可用于多根接地线的电流汇总。

产品应用领域:

防雷设备的导线连接; 通讯、工业配电设备主线支线连接; 一般民用入户线的分线连接等。电缆型仅适用于连接圆形电缆线。

Set box terminals:

The number of the product is equipped with 16 wiring, mainly used in wire junction.

Concentrated connection, can be used for many other one ground current summary.

Product application:

Lightning protection equipment wiring connection; Communications, industrial distribution equipment thread feeder, The connection; General civil RuHuXian line connection, etc. Cable type is only at the connection round cable.

厚 / 宽 / 高 49.5/100/55.2


Thickness/Width / Height

接线容量 1x185 mm²; 4x10 mm²; I(A) U(V)
Connection capacity 8x16 mm²; 3x35 mm² 500 1000

IEC 60947-7-1

说明 Specification 简图 Schematic Drawing

(1) 操作工具 : 内六角扳手(mm)
Operation tool : Allen wrench



(2) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component: Imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking








型号 Model 订货号 Order Number

3#
4#
5#
10#
8 483 303

E/3 5 103 003

(3) 外形尺寸
External dimension

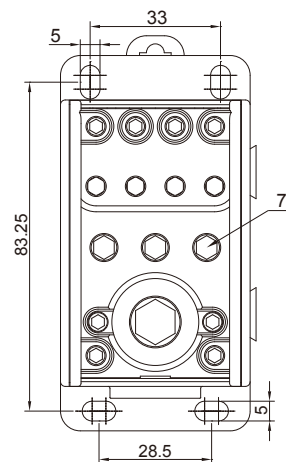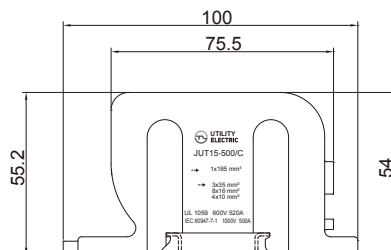



Industrial Distribution Terminal Blocks

Screw type terminal series

工业配电接线端子-螺钉类接线端子系列



JUT15

JUT15-500F 集线盒接线端子(柔性母排型) Junction box terminal (Flexible bus bar)

集线盒接线端子:

产品设有16个接线孔位, 主要应用于多根导线的汇流集中连接, 可用于多根接地线的电流汇总。

产品应用领域:

防雷设备的导线连接; 通讯、工业配电设备主线支线连接; 一般民用入户线的分线连接等。电缆型仅适用于连接圆形电缆线。

Set box terminals:

The number of the product is equipped with 16 wiring, mainly used in wire junction.

Concentrated connection, can be used for many other one ground current summary.

Product application:

Lightning protection equipment wiring connection; Communications, industrial distribution equipment thread feeder, The connection; General civil RuHuXian line connection, etc. Cable type is only at the connection round cable.

厚 / 宽 / 高 49.5/100/55.2

Thickness/Width / Height

接线容量 50~150mm²(Cable)

Connection capacity 8x24x1 (Flexible busbars); I(A) U(V) 500 1000


4x10mm²; 6x16mm²; 3x35mm² 5x(6x15.5x0.8)

Flexible busbars

IEC 60947-7-1

说明 Specification 简图 Schematic Drawing

(1) 操作工具: 内六角扳手(mm)
Operation tool :Allen wrench



(2) 终端固定件: 对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标记。
Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking








型号 Model 订货号 Order Number

3#
4#
5#
10#
8 483 303

E/3
5 103 003

(3) 外形尺寸
External dimension

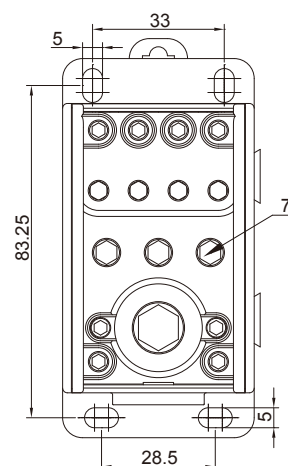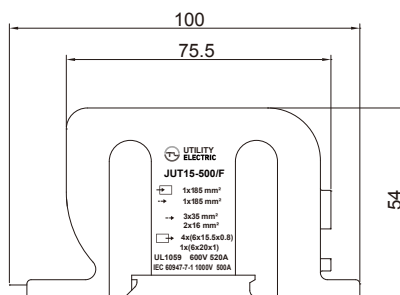



Industrial Distribution Terminal Blocks

Screw type terminal series

工业配电接线端子-螺钉类接线端子系列







JUT17

导轨安装型OT端子连接器：
该系列产品采用螺纹压接OT端子的方式完成导线之间的连接，应用于大电缆高电流之间的互联。可应用于低压电力输送、工业配电、建筑配线等领域。

Guide installation type OT terminal connector:
This series of products is used to connect the wire between the wires and the connection between the wires, which is applied to the connection between high current and high current. It can be used in low-voltage power transmission, industrial distribution, construction wiring and other fields.

型号 Model	JUT17-25	JUT17-50	JUT17-95	JUT17-150	JUT17-240
端子类型 Terminal type	OT端头连接器 OT end connector				
订货型号 Order Number					
厚 (W)/宽 (L)/高 (H1) :mm Thick (W)/width (L)/height (H1)	26/88/48	32/94/50	41/110/52	46.5/110/52	53.5/125/54
接线容量 Connection capacity	10-25mm ²	20-50mm ²	50-95mm ²	95-150mm ²	150-240mm ²
OT端子孔径(mm) Terminal aperture(mm)	6	8	10	10	12
操作工具：扳手开口 (mm) Operation tool: wrench opening	10	13	17	17	19
I (A)	100	150	200	275	400
U (V)	1000	1000	1000	1000	1000

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
(1) 螺丝刀 刀厚 × 刀宽(mm) Screwdriver Knife × width	1.2×10 2.0×12 2.5×14 2.5×14 2.5×14	5 484 301
(2) 标记条：有横向和竖向两种字体，10位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB10	8 868 101

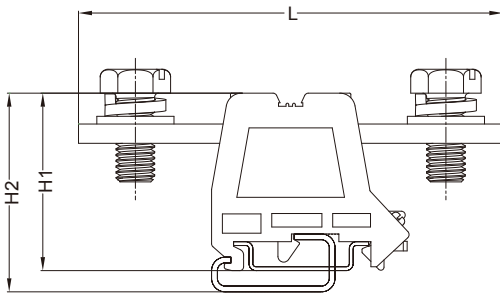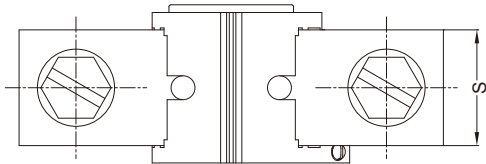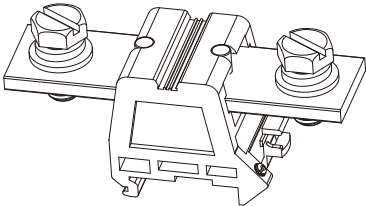



Industrial Distribution Terminal Blocks

Screw type terminal series

工业配电接线端子-螺钉类接线端子系列




JUT18

	型号 Model	JUT18-731	JUT18-733	JUT18-734	JUT18-739
端子类型 Terminal type	四导线贯通 Four wires through				
订货型号 Order Number					
厚/宽 高 Thickness/Width Height	32/44/44				
接线容量(mm) Connection capacity	主线 Main line	4-10	16-35	16-35	4-10
	支线 Regional	1.5-10	1.5-10	16-25	1.5-2.5
I (A)		76	76	100	24
U (V)		1000	1000	1000	1000
说明 Specification 简图 Schematic Drawing			型号 Model	订货号 Order Number	

分线盒接线端子：
该系列产品用于主线路的分支连接，可在不切断主线的前提下完成支线的连接。
产品应用领域：
低压电力输送的支路分接；通讯、工业配电设备主支线连接；一般民用入户线的分线连接等。

Wire box terminal:
this series of products is used for the branch connection of the main line, which can connect the branch line without cutting off the main line. Product application: low voltage power transmission branch; Communication, industrial power distribution equipment mainline branch connection; The dividing line of general civilian door is connected and so on.

(1)螺丝刀
Screwdriver








十字：2#

一字：0.6×4.5(mm)

5 484 301

(2)外形尺寸
External dimension

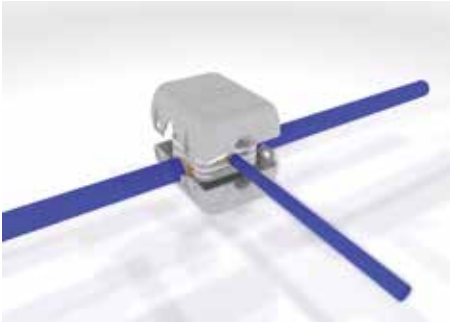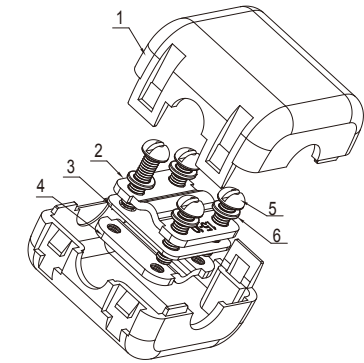



Industrial Distribution Terminal Blocks

Screw type terminal series

工业配电接线端子-螺钉类接线端子系列







JUT18

型号 Model		JUT18-859	
端子类型 Terminal type		四导线贯通 Four wires through	
订货型号 Order Number			
厚/宽 高 Thickness/Width Height		44/62/80	
接线容量(mm) Connection capacity	主线 Main line	50-70	
	支线 Regional	4-35	
I (A)		125	
U (V)		1000	
说明 Specification 简图 Schematic Drawing		型号 Model	订货号 Order Number
(1) 操作工具: Operation tool: 扳手开口尺寸(mm)		 10	5 484 301

Wire box terminal:
This series of products is used for the branch connection of the main line, which can connect the branch line without cutting off the main line. Product application: low voltage power transmission branch; Communication, industrial power distribution equipment mainline branch connection; The dividing line of general civilian door is connected and so on.

(2)外形尺寸
External dimension

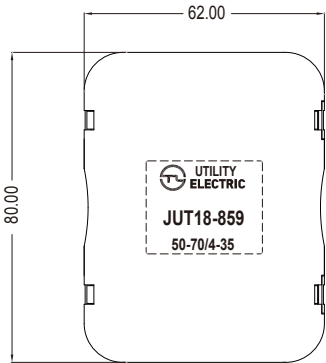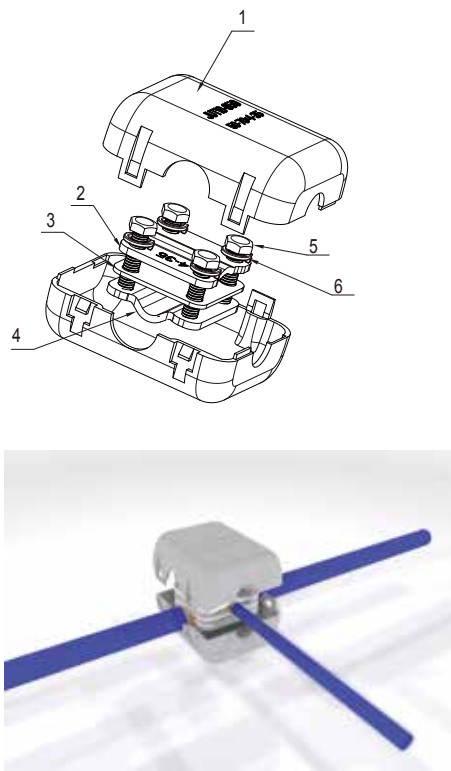



Industrial Distribution Terminal Blocks

Screw terminal series

工业配电接线端子-螺钉类接线端子系列



JUT18

型号 Model		JUT18-870	JUT18-871	JUT18-872
端子类型 Terminal type		四导线贯通 Four wires through		
订货型号 Order Number				
厚/宽 高 Thickness/Width Height		62/82/95		
接线容量(mm) Connection capacity	主线 Main line	95-150	95-150	95-150
	支线 Regional	16-50	50-95	95-120
I (A)		150	230	300
U (V)		1000	1000	1000
说明 Specification 简图 Schematic Drawing			型号 Model	订货号 Order Number
(1) 操作工具: Operation tool: 扳手开口尺寸(mm)			14	5 484 301





分线盒接线端子：

该系列产品用于主线路的分支连接，可在不切断主线的前提下完成支线的连接。产品应用领域：低压电力输送的支路分接；通讯、工业配电设备主线支线连接；一般民用户线的分线连接等。

Wire box terminal:

This series of products is used for the branch connection of the main line, which can connect the branch line without cutting off the main line. Product application: low voltage power transmission branch; Communication, industrial power distribution equipment mainline branch connection; The dividing line of general civilian door is connected and so on.

(2)外形尺寸
External dimension



Fixed Attachments

导轨用终端固定件

附件



E/1



E/1A



E/1B



E/1E



E/2



E/3



E/4

End Plate

产品端盖



G-JUT1-2.5S



G-JUT1-2.5/4



G-JUT1-2.5/10



G-JUT1-2.5/4Q



DP-JUT1-2.5/4Q

附件



G-JUT1-4/1-2



G-JUT1-4/2-2



G-JUT1-6S



G-JUT2-2.5



G-JUT2-4/2



G-JUT2-4/10



G-JUT2-4RD



G-JUT2-6S1



G-JUT2-16



G-JUT2-35



TW2.5



TW4/10



G-JUT3-1.5/2.5



G-JUT3-2.5/2



G-JUT3-2.5/1-2



G-JUT3-2.5/2-2



G-JUT3-4



G-JUT3-4 /2-2



JAP-6S



JAP

Quick Tag bar

快速标记条



ZB4




ZB5




ZB6

附 件

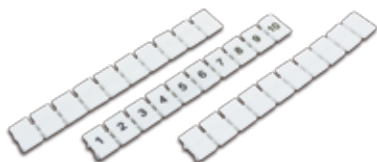

ZB8

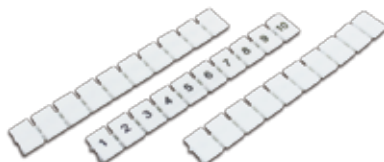

ZB10



DEK5



ZBFM4



ZBFM5



ZBFM6



ZBFM8



JUT4-B



JUT2-3B

JUT2-5B



附件



NS35/7.5



NS35/7.5



NS32/15



NS32/15



NS15/5.5

导轨切割机

Installment track cutting machine



型号 Model

订货号 Order Number

JUTDR2
JUTDR4

8 026 001
8 026 002

导轨切割机的特点：设计新颖，结构合理、省力、特殊设计的刀模，使切断面平整、无毛刺。

用途：适用于钢或铝合金材质导轨的切断作业。

The properties of guide-track cut-off machine: creatable/new design, rational structure, economizing labor, the knife-model of special design can mak cutting surface and non-rag.

Usage: used for cutting operation of steel or Al alloy guide track.