

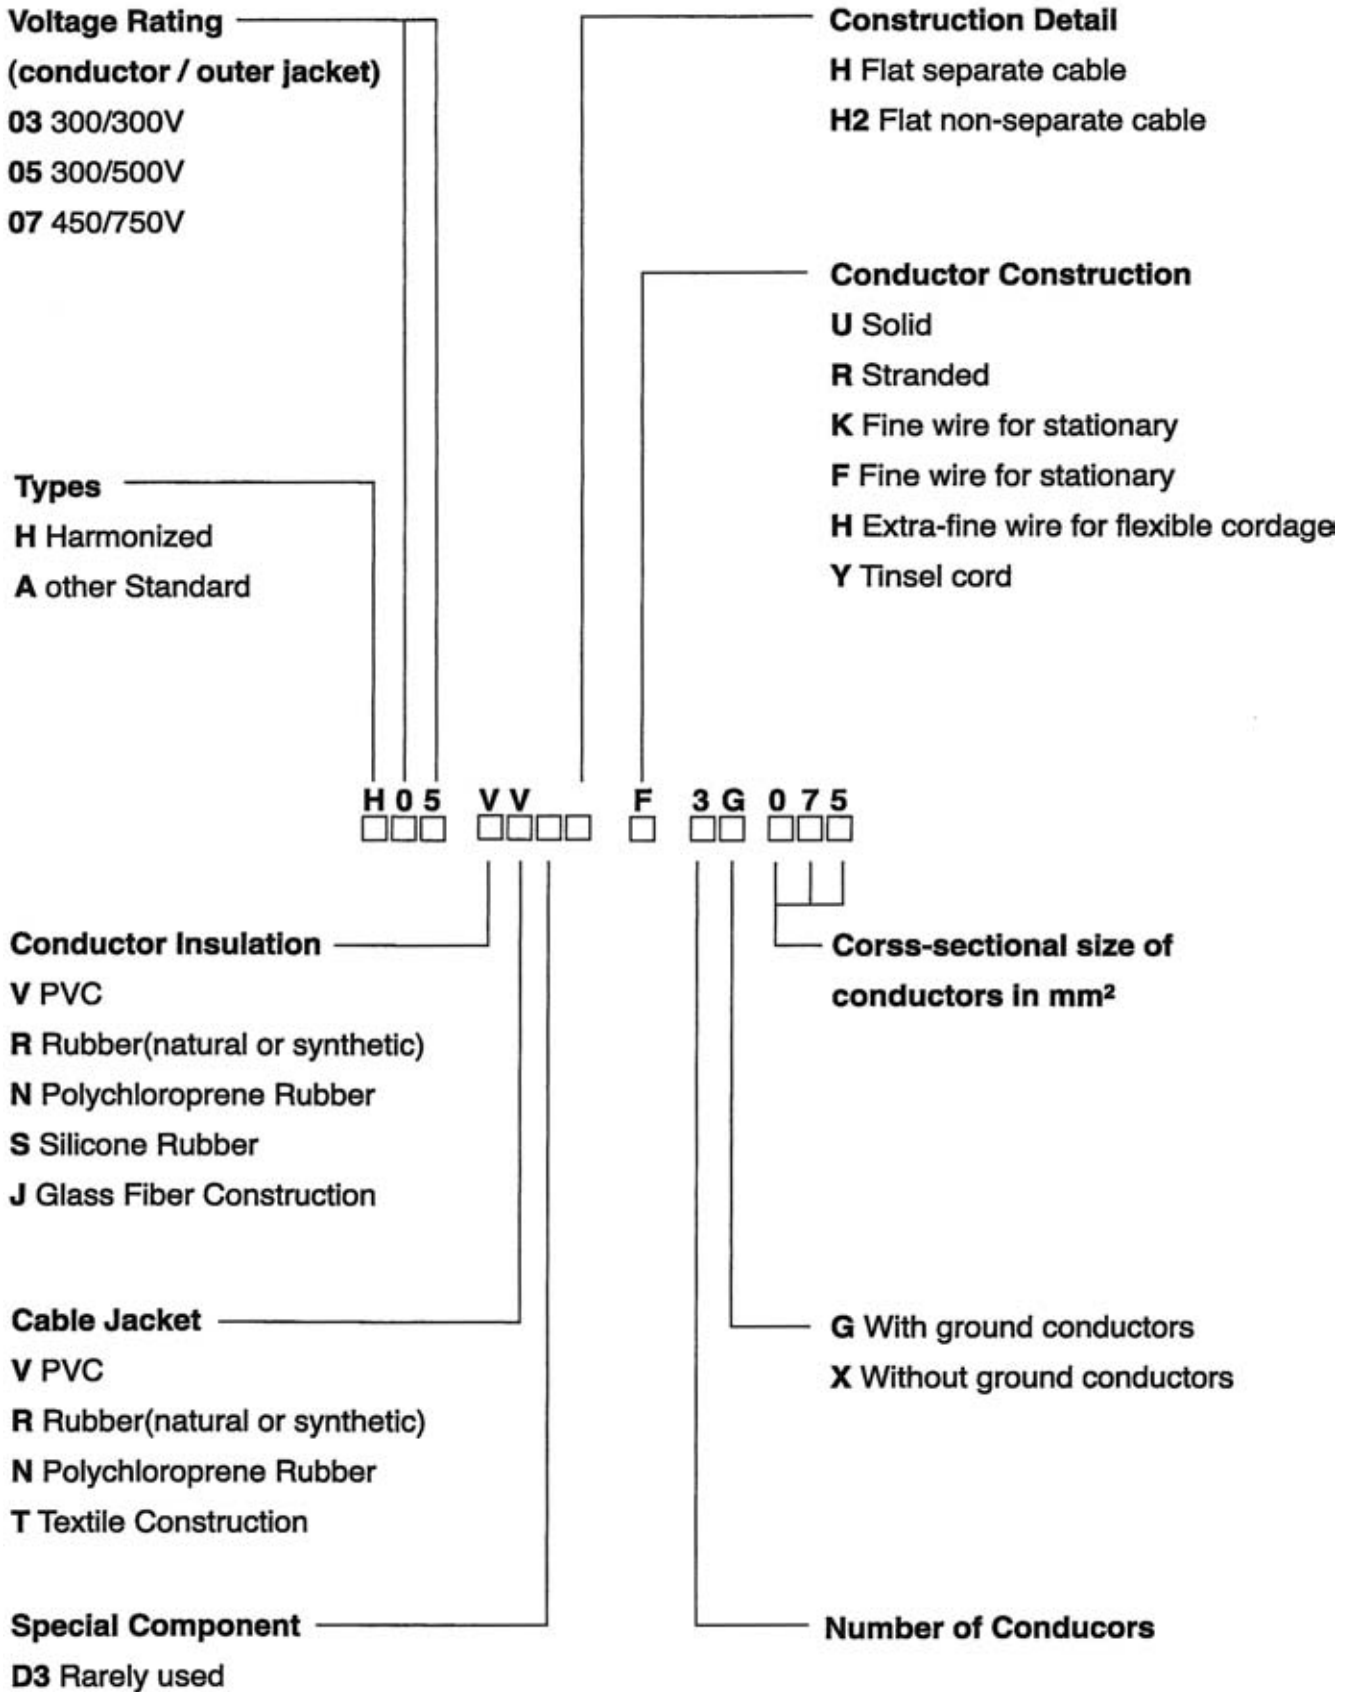


## INFORMATION FOR APPROVALS

Austria		OVE	Austrian Electrotechnical Association
Argentina		IRAM	Instituto Argentino DE Normalizacion
Australia		SAA	Department of Energy
Belgium		CEBEC	Comite Electrotechnique Belge Belgisch Electrotechnisch Comite
Brasil		Brasil	Instituto Nacional de Metrologia
Canada		CSA	Canadian Standard Association
China		CCC	Certificate For China Compulsory Product Certification
Danmark		D	Danmarks Elektriske Materielkontrol
Finland		FI	SGS FIMKO
France		NF	Union Technique de l'Electricite
Germany		VDE	Verband Deutscher elektrotechniker e. V.
Italy		IMQ	Marchio Italiano di Qualita
Japan		<PS>E	MITI Ministry of Economy Trade and Industry
Korea		KTL	Korea Testing Laboratory
Norway		N	Norges Elektriske Materialkontroll
Sweden		S	Svenska Elektriska Materialkontrollanstalten
Switzerland		+S	Swiss Electrotechnical Association
Taiwan		BSMI	Bureau of Standards Metrology and Inspection
The Netherlands		KEMA	N.V. Tot Keuring van Electrotechnische Materialen
United Kingdom		BSI	BSI
United States		UL	Cord Sets and Power Supply Cords Listed by Underwriters Laboratories Inc.

# HARMONIZED WIRE CODING SYSTEM

This chart illustrates the HAR code for cordage "H05VV-F 3G 0.75"



## UL CORDS

Code	Description	AWG Size	Connectors	Insulation	Jacket	Voltage Rating
XT	Christmas Tree Thermoplastic	20	2	Plastic	No Jacket	125
SPE-1	Service Elastomer Thermo Plastic - 1/64" Insulation	18	2 or 3	Elastomer	No Jacket	300
SPE-2	Service Elastomer Thermo Plastic - 2/64" Insulation	18-16	2 or 3	Elastomer	No Jacket	300
SPE-3	Service Elastomer Thermo Plastic - 3/64" Insulation	18-10	2 or 3	Elastomer	No Jacket	300
SPT-1	Service Parallel Thermo Plastic - 1/64" Insulation	18	2 or 3	Plastic	No Jacket	300
SPT-2	Service Parallel Thermo Plastic - 2/64" Insulation	18-16	2 or 3	Plastic	No Jacket	300
SPT-3	Service Parallel Thermo Plastic - 3/64" Insulation	18-10	2 or 3	Plastic	No Jacket	300
SV	Service Vaccum	18	2 or 3	Rubber	Rubber	300
SVE	Service Vaccum Elastomer	18-17	2 or 3	Elastomer	Elastomer	300
SVEO	SVE with Oil-Resistant Jacket	18-17	2 or 3	Elastomer	Elastomer	300
SVEOO	SVE with Oil-Resistant Insulation & Jacket	18-17	2 or 3	Elastomer	Elastomer	300
SVO	Service Vaccum Oil-Resistant Jacket	18	2 or 3	Rubber	Rubber	300
SVOO	SV with Oil-Resistant Insulation & Jacket	18	2 or 3	Rubber	Rubber	300
SVT	Service Vaccum Thermoplastic	18-17	2 or 3	Plastic	Plastic	300
SVTO	SVT with Oil-Resistant Jacket	18-17	2 or 3	Plastic	Plastic	300
SVTOO	SVT with Oil-Resistant Insulation & Jacket	18-17	2 or 3	Plastic	Plastic	300
SJ	Service Junior	18-10	2,3,4	Rubber	Rubber	300
SJE	Service Junior Elastomer	18-10	2,3,4,5	Elastomer	Elastomer	300
SJEO	SJE with Oil-Resistant Jacket	18-10	2,3,4,5	Elastomer	Elastomer	300
SJEOW	SJEO with Outdoor Jacket	18-10	2,3,4,5	Elastomer	Elastomer	300
SJEOO	SJE with Oil-Resistant Insulation and Jacket	18-10	2,3,4,5	Elastomer	Elastomer	300
SJO	SJ with Oil-Resistant Jacket	18-10	2,3,4	Rubber	Rubber	300
SJOO	SJ with Oil-Resistant Insulation and Jacket	18-10	2,3,4	Rubber	Rubber	300
SJT	Service Junior Thermoplastic	18-10	2,3,4	Plastic	Plastic	300
SJTW	SJT with Outdoor Jacket	18-10	2,3,4	Plastic	Plastic	300
SJTO	SJT with Oil-Resistant Jacket	18-10	2,3,4	Plastic	Plastic	300
SJTOO	SJT with Oil-Resistant Insulation and Jacket	18-10	2,3,4	Plastic	Plastic	300
S	Service	18-2	2 or more	Rubber	Rubber	600
SE	Service Elastomer	18-2	2 or more	Elastomer	Elastomer	600
SEO	SE with Oil-Resistant Jacket	18-2	2 or more	Elastomer	Elastomer	600
SEOW	SEO with Outdoor Jacket	18-2	2 or more	Elastomer	Elastomer	600
SEOO	SE with Oil-Resistant Insulation & Jacket	18-2	2 or more	Elastomer	Elastomer	600
SO	Service with Oil-Resistant Jacket	18-2	2 or more	Rubber	Rubber	600
SOO	SO with Oil-Resistant Insulation and Jacket	18-2	2 or more	Rubber	Rubber	600
ST	Service Thermoplastic	18-2	2 or more	Plastic	Plastic	600
STW	ST with Outdoor Jacket	18-2	2 or more	Plastic	Plastic	600
STO	ST with Oil-Resistant Jacket	18-2	2 or more	Plastic	Plastic	600
STOO	ST with Oil-Resistant Insulation & Jacket	18-2	2 or more	Plastic	Plastic	600
HPN	Heater Parallel Neoprene	18-12	2 or 3	Rubber	No Jacket	300
HSJ	Heater Service Junior	18-12	2,3,4	Rubber	Rubber	300
HSJO	HSJ with Oil-Resistant Jacket	18-12	2,3,4	Rubber	Rubber	300
HS	Heater Service	14-12	2,3,4	Rubber	Rubber	300
HSO	HS with Oil-Resistant Jacket	14-12	2,3,4	Rubber	Rubber	300



































## BSMI, JIS CORDS & CHINA CORDS

<b>BSMI, JIS CORDS</b>	
<b>Code</b>	<b>Description</b>
VSF	PVC Insulated single-core cord
HVSF	Heat-resistant PVC Insulated single-core cord
VTF	PVC Insulated twin-twisted cord
HVTF	Heat-resistant PVC Insulated twin-twisted cord
VFF	PVC Insulated flat cord
HVFF	Heat-resistant PVC Insulated flat cord
HHFF	Heat-resistant Rubber Insulated flat flexible cord
VCT	PVC Insulated cabtyre round cord (thicker than VCTF in PVC jacket)
VCTF	PVC Insulated cabtyre round cord
HVCTF	Heat-resistant PVC Insulated cabtyre round cord
VCTFK	PVC Insulated cabtyre oval cord
HVCTFK	Heat-resistant PVC Insulated cabtyre oval cord
2PNCT	EPDM Rubber, Neoprene Rubber Flexible cable

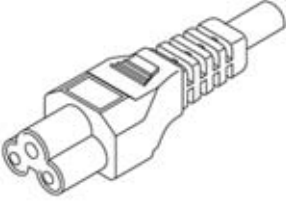



<b>Code designation</b>	
V	Polyvinyl chloride
SF	Single core flexible cord
TF	Twin-twisted flexible cord
FF	Flat flexible cord
CTF	Cabtyre cord
K	Oval
H	Heat-resistant insulation
P	EPDM Rubber
N	Neoprene Rubber
CT	Flexible cable

<b>China Cords</b>	
<b>Code</b>	<b>Description</b>
RVV	R: Flexible Type
	V: PVC Conductor Insulation
	V: PVC Cable Jacket
RX	R: Flexible Type
	X: Textile Braiding Construction
YQ	Y: Rubber Type
	Q: Light Duty
YZ, YZW	Z: Ordinary Duty
YC, YCW	C: Heavy Duty
	W: Polychloroprene Rubber Cable Jacket

# IEC 60320-1 & 60320-2 INTERNATIONAL STANDARD

IEC 60320-1 Appliance Couplers		IEC 60320-2-2 Interconnection Couplers		
Connectors	Inlets	Plug Connectors	Outlets	
 <b>C1</b> Class II Cold	 <b>C2</b>	0.2A Household	These couplers are not in the IEC 60320 standard.	
 <b>C5</b> Class I Cold	 <b>C6</b>	2.5A Household	 <b>SHEET A</b> Class I	 <b>SHEET B</b>
 <b>C7</b> Class II Cold	 <b>C8</b>		 <b>SHEET C</b> Class II	 <b>SHEET D</b>
 <b>C9</b> Class II Cold	 <b>C10</b>	6A Household	These couplers are not in the IEC 60320 standard.	
 <b>C13</b> Class I Cold	 <b>C14</b>	10A International/ 15A North American Household	 <b>SHEET E</b> Class I	 <b>SHEET F</b>
 <b>C15</b> Class I Hot	 <b>C16</b>		These couplers are not in the IEC 60320 standard.	
 <b>C15A</b> Class I Very Hot	 <b>C16A</b>		These couplers are not in the IEC 60320 standard.	
 <b>C17</b> Class II Cold	 <b>C18</b>		 <b>SHEET G</b> Class II	 <b>SHEET H</b>
 <b>C19</b> Class I Cold	 <b>C20</b>	16A International/ 20A North American Household	 <b>SHEET I</b> Class I	 <b>SHEET J</b>
 <b>C21</b> Class I Very Hot	 <b>C22</b>		These couplers are not in the IEC 60320 standard.	
 <b>C23</b> Class II Cold	 <b>C24</b>		 <b>SHEET K</b> Class II	 <b>SHEET L</b>

## AC POWER CORDS WITH IEC-320 C5 FEMALE CONNECTORS (1)

	<p>CA: APPROVAL UL, CUL (10A/125V/250V)            CB: APPROVAL INMETRO, UL (2.5A/250V)            CC: APPROVAL VDE (2.5A/250V)            CD: APPROVAL PSE (3~7A/125V)            DZ: APPROVAL BSI (2.5A/250V)            JM: APPROVAL IMQ (2.5A/250V)</p>
	<p>BA: APPROVAL UL, CUL (10A/125V/250V)            BB: APPROVAL TÜV (2.5A/250V)</p>
	<p>BC: APPROVAL UL, CUL (10A/125V/250V)            BD: APPROVAL VDE (2.5A/250V)</p>
	<p>BE: APPROVAL UL, CUL (10A/125V/250V)            BY: APPROVAL VDE (2.5A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

FOR CA, BA, BC, BE: 301, 302, 313, 314, 341  
 FOR CB: 104, 110, 111, 112  
 FOR CC, BD, BY, DZ, JM: 104, 110, 111  
 FOR CD: 133  
 FOR BB: 110

**2. CONNECTOR AT THIS END:**

CA, CB, CC, CD, DZ, JM, BA, BB, BC, BD, BE, BY

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)




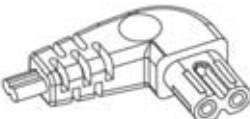
**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH IEC-320 C7 FEMALE CONNECTORS (2)

	<p>F1: NO APPROVAL</p> <p>DE: APPROVAL UL, CUL (10A/13A/125V/250V)</p> <p>DF: APPROVAL INMETRO, UL (2.5A/250V)</p> <p>DG: APPROVAL PSE (3~7A/125V)</p> <p>DH: APPROVAL EUROPEAN (2.5A/250V)</p> <p>DY: APPROVAL SAA (2.5A/250V)</p> <p>FZ: APPROVAL BSI (2.5A/250V)</p>
	<p>GD: APPROVAL EUROPEAN (2.5A/250V)</p>
	<p>GE: APPROVAL EUROPEAN (2.5A/250V)</p>
	<p>GF: APPROVAL EUROPEAN (2.5A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 2} / \frac{x x}{3} - \frac{x x M x}{4 5}$**

**1. CORD TYPE:**

FOR DE: 253, 254

FOR DF, DH, DY, FZ: 106, 113

FOR DG: 138

FOR GD, GE, GF: 102, 106, 113

**2. CONNECTOR AT THIS END:**

DE, DF, DG, DH, GD, GE, GF, F1, DY, FZ

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC,....., ZY, ZZ (OPTIONAL)


**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5,...etc

**5. CORD COLOR:**

"B" BLACK


## AC POWER CORDS WITH IEC-320 C7 FEMALE POLARIZED CONNECTORS (3)



DA: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
WITH POLARITY, INNER HOUSING



DC: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
WITH POLARITY, OUTSIDE HOUSING



GG: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
WITH POLARITY

### ORDERING INFORMATION:


**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
FOR DA: 253, 254  
FOR DC: 253, 254  
FOR GG: 102, 106, 113
2. CONNECTOR AT THIS END:  
DA, DC, GG
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH IEC-320 C9 & C11 SOCKETS (4)



FY: IEC-320 C9 SOCKET W/O APPROVAL (6A/250V)



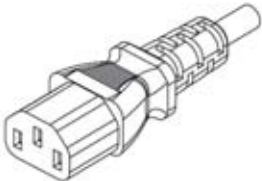



GU: IEC-320 C11 SOCKET W/O APPROVAL (10A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

1. CORD TYPE:  
FY, GU: 102, 105, 107, 108, 109, 113,  
115, 116, 117, 121, 123
2. CONNECTOR AT THIS END:  
FY, GU
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH IEC-320 C13 FEMALE CONNECTORS (5)

	<p>BZ: APPROVAL IMQ (10A/250V)                  CE: APPROVAL UL, CUL (10A/13A/15A/125V/250V)                  CL: APPROVAL INMETRO, UL (10A/250V)                  CM: APPROVAL PSE (3~7A/10~15A/250V)                  CN: APPROVAL EUROPEAN (10A/250V)                  CF: APPROVAL BSI (10A/250V)                  DW: APPROVAL VDE (10A/250V)                  DX: APPROVAL SAA (10A/250V)                  YK: W/O APPROVAL (10A/250V)</p>
	<p>BF: APPROVAL UL, CUL (10A/13A/125V)                  BG: APPROVAL TÜV (10A/250V)</p>
	<p>BH: APPROVAL UL, CUL (10A/125V/250V)                  BJ: APPROVAL VDE (10A/250V)                  BK: APPROVAL IRAM (10A/250V)</p>
	<p>BL: APPROVAL UL, CUL (10A/13A/125V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

FOR CE: 313, 314, 354, 375  
 FOR CL, CN, CF, DW, YK: 110, 111, 112  
 FOR CM: 133, 134, 135  
 FOR BF: 421 (SVT 18AWG + 1672 18AWG), 423  
 FOR BG: 422 (1015 18AWG),  
 423 (1015 16AWG),  
 424 (1015 14AWG)  
 FOR BH: 313  
 FOR BJ: 110  
 FOR BZ, BK: 110, 111  
 FOR DX: 111

**2. CONNECTOR AT THIS END:**

CE, CL, CM, CN, CF, BF, BG, BH, BJ,  
 BK, BL, DW, DX, BZ

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)

**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK


## AC POWER CORDS WITH IEC-320 C13 FEMALE CONNECTORS (6)



CV: APPROVAL INMETRO, UL (10A/250V)  
 CW: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
 CX: APPROVAL EUROPEAN (10A/250V)



BS: APPROVAL INMETRO, UL (10A/250V)  
 BT: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
 BU: APPROVAL EUROPEAN (10A/250V)



BV: APPROVAL INMETRO, UL (10A/250V)  
 BW: APPROVAL UL, CUL (10A/13A/15A/125V/250V)  
 BX: APPROVAL EUROPEAN (10A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

1. CORD TYPE:  
 FOR CV, BS, BV: 110, 111, 112  
 FOR CW, BT, BW: 313, 314, 354, 375  
 FOR CX, BU, BX: 110, 111, 112
2. CONNECTOR AT THIS END:  
 CV, CW, CX, BS, BT, BU, BV, BW, BX
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK

## AC POWER CORDS WITH IEC-320 C13 FEMALE CONNECTORS (7)




CK: APPROVAL UL, CUL (10A/13A/15A/125V/250V)

BM: APPROVAL EUROPEAN (10A/250V)



BN: APPROVAL UL, CUL (10A/13A/15A/125V/250V)

BP: APPROVAL EUROPEAN (10A/250V)



BQ: APPROVAL UL, CUL (10A/13A/15A/125V/250V)

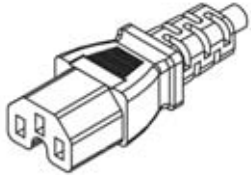



BR: APPROVAL EUROPEAN (10A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x} \frac{2}{x} \frac{3}{x} \frac{4}{x} \frac{5}{x} / \frac{3}{x} - \frac{4}{x} \frac{5}{x} M x$**

1. CORD TYPE:  
FOR CK, BN, BQ: 313, 314, 354, 375  
FOR BM, BP, BR: 110, 111, 112
2. CONNECTOR AT THIS END:  
CK, BM, BN, BP, BQ, BR
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH IEC-320 C15 FEMALE CONNECTORS (8)

	<p>CG: APPROVAL UL, CUL (10A/13A/15A/125V/250V) CH: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GA: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GB: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GC: APPROVAL EUROPEAN (10A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

**1. CORD TYPE:**

FOR CG: 313, 314, 354, 375, 391  
FOR CH, GA, GB, GC: 119, 120

**2. CONNECTOR AT THIS END:**

CG, CH, GA, GB, GC

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)






**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH IEC-320 C17 FEMALE CONNECTORS (9)

	<p>HP: APPROVAL UL, CUL (10A/13A/15A/125V/250V)            HQ: APPROVAL VDE (10A/250V)            HR: APPROVAL BSI (10A/250V)            HS: APPROVAL IMQ (10A/250V)            HT: APPROVAL SAA (10A/250V)            HU: APPROVAL CNS (TAIWAN 7A/10A/125V)</p>
	<p>HV: APPROVAL UL, CUL (10A/13A/15A/125V/250V)            HW: APPROVAL VDE (10A/250V)            HX: APPROVAL SAA (10A/250V)</p>
	<p>KS: APPROVAL UL, CUL (10A/13A/15A/125V/250V)            KT: APPROVAL VDE (10A/250V)            KU: APPROVAL SAA (10A/250V)</p>
	<p>KV: APPROVAL UL, CUL (10A/13A/15A/125V/250V)            KW: APPROVAL VDE (10A/250V)            KX: APPROVAL SAA (10A/250V)</p>
	<p>LA: APPROVAL UL, CUL (10A/13A/15A/125V/250V)            LB: APPROVAL VDE (10A/250V)            LC: APPROVAL SAA (10A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 \ 2} / \frac{x x}{3} - \frac{x x}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

HP, HV, KS, KV, LA: 202, 203, 219, 222, 225, 241, 252  
 HQ, HW, KT, KW, LB: 107, 108, 109, 113  
 HT, HX, KU, KX, LC: 107, 108, 109, 113  
 HR: 107, 108  
 HS, HT: 107, 108, 109, 113  
 HU: 136, 137, 396, 397, 398, 399

**2. CONNECTOR AT THIS END:**

HP, HQ, HR, HS, HT, HU, HV, HW, HX,  
 KS, KT, KU, KV, KW, KX, LA, LB, LC

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC,...., ZY, ZZ (OPTIONAL)





**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5,...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH IEC-320 C19 FEMALE CONNECTORS (10)

	<p>DK: APPROVAL UL, CUL (10A/13A/15A/20A/125V/250V)  DM: APPROVAL VDE (16A/250V)  DT: APPROVAL SAA (16A/250V)  YL: W/O APPROVAL (16A/250V)</p>
	<p>DL: APPROVAL UL, CUL (10A/13A/15A/20A/125V/250V)  DN: APPROVAL VDE (16A/250V)</p>
	<p>GH: APPROVAL UL, CUL (10A/13A/15A/20A/125V/250V)  GJ: APPROVAL VDE (16A/250V)</p>
	<p>GK: APPROVAL VDE (16A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

**1. CORD TYPE:**

FOR DK: 314, 315, 354, 355, 373,  
376, 391, 392

FOR DM, DN, GJ, GK: 111, 112, 119, 120, 126

FOR DT, YL: 111, 112

FOR DL, GH: 314, 345, 373

**2. CONNECTOR AT THIS END:**

DK, DM, DT, DL, DN, GH, GJ, GK

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)






**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH IEC-320 C21 FEMALE CONNECTORS (11)





	<p>GV: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GW: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GX: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GY: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GZ: APPROVAL EUROPEAN (16A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} M \frac{4}{x} \frac{5}{x}$**

1. CORD TYPE:  
FOR GV, GW, GX, GY, GZ: 119, 120, 126, 132
2. CONNECTOR AT THIS END:  
GV, GW, GX, GY, GZ
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH IEC-320 C23 FEMALE CONNECTORS (12)

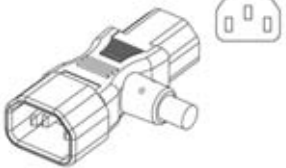
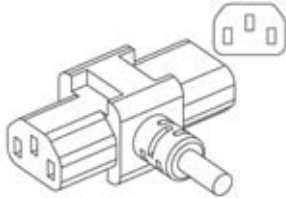

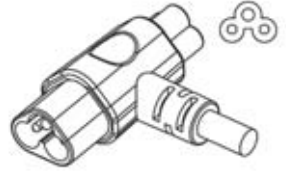
	<p>LH: APPROVAL UL, CUL (10A/13A/15A/16A/125V/250V)  LJ: APPROVAL CCC (16A/250V)  LK: APPROVAL VDE (16A/125V)</p>
	<p>LL: W/O APPROVAL (16A/125V)</p>
	<p>LR: W/O APPROVAL (16A/125V)</p>
	<p>LM: W/O APPROVAL (16A/125V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 \ 2} / \frac{x x}{3} - \frac{x x M x}{4 \ 5}$**

1. CORD TYPE:  
LH: 203, 225, 252  
LJ: 157  
LK: 108, 109, 116, 117, 123  
LL, LR, LM: 108, 109, 116, 117, 123
2. CONNECTOR AT THIS END:  
LH, LJ, LK, LL, LR, LM
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH IEC-320 T-SHAPE CONNECTORS (13)

	<p>WA: IEC-320 C13 SOCKET TO C14 PLUG WITH UL, CUL APPROVAL (10A/13A/125V/250V)</p> <p>WB: DITTO, WITH TÜV APPROVAL (10A/250V)</p> <p>WL: DITTO, BUT WITHOUT APPROVAL</p>
	<p>WK: IEC-320 C13 SOCKET TO C13 SOCKET W/O APPROVAL (10A/250V)</p>
	<p>WH: IEC-320 C7 SOCKET TO C8 PLUG WITH UL, CUL APPROVAL (10A/125V/250V)</p> <p>WM: DITTO, BUT WITHOUT APPROVAL</p>
	<p>WJ: IEC-320 C5 SOCKET TO C6 PLUG WITH UL, CUL APPROVAL (10A/125V/250V)</p> <p>WN: DITTO, BUT WITHOUT APPROVAL</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

**1. CORD TYPE:**

WA: UPON REQUEST!  
WB: UPON REQUEST!  
WK: UPON REQUEST!  
WH: UPON REQUEST!  
WJ: UPON REQUEST!  
WL: UPON REQUEST!  
WM: UPON REQUEST!  
WN: UPON REQUEST!

**2. CONNECTOR AT THIS END:**

WA, WB, WK, WH, WJ

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)


**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH IEC-320 SHEET A (C6) PLUGS (1)



WG: IEC-320 SHEET A PLUG WITH VDE APPROVAL (2.5A)

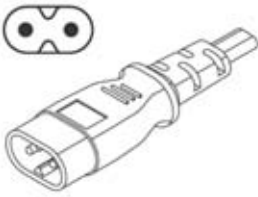


### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
WG: 104, 110, 111
2. CONNECTOR AT THIS END:  
WG
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

NOTE: MATES WITH IEC-320 C5 SOCKETS

## AC POWER CORDS WITH IEC-320 SHEET C (C8) PLUGS (2)

	<p>FU: APPROVAL UL, CUL (10A/13A/250V)            FV: APPROVAL VDE (2.5A/250V)            FW: APPROVAL EUROPEAN (2.5A/250V)            FX: APPROVAL SAA (2.5A/250V)</p>
	<p>FR: APPROVAL VDE (2.5A/250V)</p>
	<p>FS: W/O APPROVAL (2.5A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

FOR FU: 253, 254  
 FOR FV: 102, 105, 106, 107, 108, 113  
 FOR FW: 102, 106, 107, 113  
 FOR FX: 101, 102, 107, 108, 113  
 FOR FR, FS: 102, 106, 107, 113

**2. CONNECTOR AT THIS END:**

FU, FV, FW, FX, FR, FS

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)

**4. LENGTH IN METERS:**






1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

NOTE: MATES WITH IEC-320 C7 SOCKETS

## AC POWER CORDS WITH IEC-320 SHEET E (C14) PLUG (3)

	<p>CQ: APPROVAL UL, CUL (10A/13A/15A/125V/250V)                  CR: APPROVAL CSA (10A)                  CS: APPROVAL INMETRO, UL (10A/250V)                  CT: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GS: APPROVAL EUROPEAN (10A/250V)</p>
	<p>CU: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GQ: APPROVAL EUROPEAN (10A/250V)</p>
	<p>GR: APPROVAL EUROPEAN (10A/250V)</p>

### ORDERING INFORMATION:

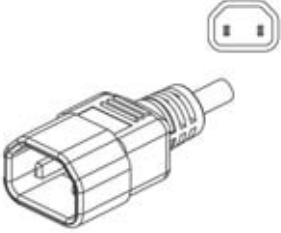
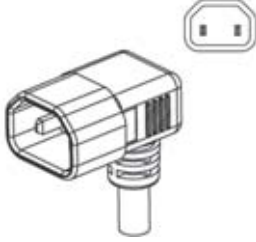
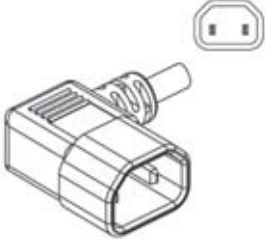
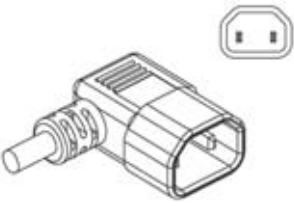
**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

1. CORD TYPE:  
 FOR CQ: 314, 354, 375  
 FOR CR: 314  
 FOR CS, CT, GS, CU, GQ, GR: 110, 111, 112
2. CONNECTOR AT THIS END:  
 CQ, CR, CS, CT, GS, CU, GQ, GR
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc

5. CORD COLOR:  
 "B" BLACK

NOTE: MATE WITH IEC-320 C13 SOCKETS

## AC POWER CORDS WITH IEC-320 SHEET G (C18) PLUGS (4)

	<p>LD: APPROVAL UL, CUL (13A/15A/125V/250V)</p>
	<p>LE: APPROVAL VDE (10A/250V)</p>
	<p>LF: APPROVAL EUROPEAN (10A/250V)</p>
	<p>LG: APPROVAL EUROPEAN (10A/250V)</p>






### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

1. CORD TYPE:  
LD: 219, 222, 241  
LE, LF, LG: 107, 108, 109
2. CONNECTOR AT THIS END:  
LD, LE, LF, LG
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

NOTE: MATE WITH IEC-320 C17 SOCKETS

## AC POWER CORDS WITH IEC-320 SHEET I (C20) PLUGS (5)

	<p>DP: APPROVAL UL, CUL (13A/18A/20A/125V/250V)            DV: APPROVAL EUROPEAN (16A/250V)            DS: APPROVAL VDE (16A/250V)</p>
	<p>DQ: APPROVAL UL, CUL (13A/18A/20A/125V/250V)            DR: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GL: APPROVAL UL, CUL (13A/18A/20A/125V/250V)            GM: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GN: APPROVAL EUROPEAN (16A/250V)</p>
	<p>GP: APPROVAL EUROPEAN (16A/250V)</p>

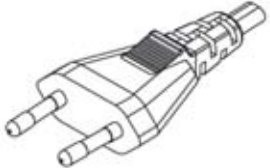
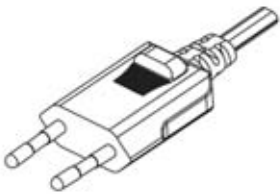
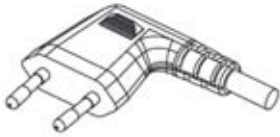
### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
 FOR DP, DQ, GL: 345, 346, 354, 372, 373, 375, 391  
 FOR DS, DV, DR, GM, GN, GP: 111, 112, 119, 120
2. CONNECTOR AT THIS END:  
 DP, DS, DQ, DR, GL, GM, GN, GP, DV
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK

NOTE: MATES WITH IEC-320 C19 SOCKETS

## AC POWER CORDS WITH 2 PIN EUROPEAN & KOREAN TYPE PLUGS (1)


	<p>EA: APPROVAL EUROPEAN (2.5A/250V)            KA: APPROVAL KTL (KOREA) (3A/250V)</p>
	<p>EB: APPROVAL EUROPEAN (2.5A/250V)            WITH EMI SHIELDING</p>
	<p>EY: APPROVAL EUROPEAN (2.5A/250V)</p>

### ORDERING INFORMATION:


**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} / \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

1. CORD TYPE:  
 FOR EA: 101, 102, 106, 107, 108,  
 113, 115, 116, 121, 123  
 FOR EB, EY: 106, 113  
 FOR KA: 138
2. CONNECTOR AT THIS END:  
 EA, KA, EB, EY
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK


## AC POWER CORDS WITH 2 PIN EUROPEAN & KOREAN TYPE PLUGS (2)



EC: APPROVAL EUROPEAN (2.5A/250V)  
KB: APPROVAL KTL (KOREA) (3A/250V)



EX: APPROVAL EUROPEAN (2.5A/250V)



EH: APPROVAL EUROPEAN (2.5A/250V)  
WATERPROOF IP44 RATED

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 \ 2} / \frac{x x}{3} - \frac{x x M x}{4 \ 5}$**

**1. CORD TYPE:**

FOR EC, EX: 102, 106, 107, 108, 109, 113,  
115, 116, 117, 121, 123, 124

FOR EH: 107, 108, 119, 115, 116, 117,  
121, 123, 128, 129

FOR KB: 138

**2. CONNECTOR AT THIS END:**

EC, KB, EX, EH

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)


**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK


## AC POWER CORDS WITH 3 PIN EUROPEAN & KOREAN TYPE PLUGS (3)



EE: APPROVAL EUROPEAN (16A/250V)  
 KC: APPROVAL KTL (KOREA) (16A/250V)



EF: APPROVAL EUROPEAN (16A/250V)  
 KD: APPROVAL KTL (KOREA) (16A/250V)



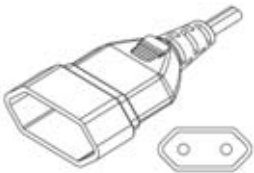
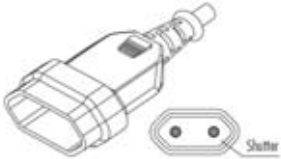

EK: APPROVAL VDE (16A/250V)  
 WATERPROOF IP44 RATED

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} / \frac{xx}{4} - \frac{xx}{5} M x$**

1. CORD TYPE:  
 FOR EE, EF, EK, KC, KD: 110, 111, 112, 118, 119,  
 120, 125, 126, 131, 132
2. CONNECTOR AT THIS END:  
 EE, KC, EF, KD, EK, KC, KD
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK

## AC POWER CORDS WITH EUROPEAN TYPE FEMALE CONNECTORS (4)


	<p>ET: APPROVAL TÜV (2.5A/250V) EUROPEAN TYPE 2 PIN FEMALE CONNECTOR</p>
	<p>FN: APPROVAL TÜV (2.5A/250V) EUROPEAN TYPE 2 PIN FEMALE CONNECTOR</p>
	<p>EU: W/O APPROVAL (10A/250V) SWISS TYPE 3 PIN FEMALE CONNECTOR</p>

### ORDERING INFORMATION:


**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
FOR ET, FN: 106, 107, 108, 113  
FOR EU: UPON REQUEST
2. CONNECTOR AT THIS END:  
ET, FN, EU
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH EUROPEAN TYPE FEMALE CONNECTORS (5)



EV: APPROVAL (10A/16A/250V)  
FRANCE TYPE 3 PIN FEMALE CONNECTOR



EW: APPROVAL CE (10A/16A/250V)  
GERMANY TYPE 3 PIN FEMALE CONNECTOR







FT: APPROVAL VDE (16A/250V)  
GERMANY T TYPE 3 PIN FEMALE CONNECTOR

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

1. CORD TYPE:  
FOR EV, EW: 111, 112, 119, 120, 126  
FOR FT: 112
2. CONNECTOR AT THIS END:  
EV, EW, FT
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (1)

	<p>AK: APPROVAL UL, CUL (10A/13A/125V) NEMA 1-15P, CONNECTING TO FLAT CABLE</p>
	<p>AT: APPROVAL UL, CUL (10A/12A/13A/15A/125V) NEMA 1-15P, EASY PULL SMART PLUG</p>
	<p>AQ: APPROVAL UL, CUL (7A/125V) NEMA 1-15P, WITH EMI SUPPRESSOR</p>
	<p>AS: APPROVAL UL, CUL (7A/125V) NEMA 1-15P, WITH EMI SUPPRESSOR</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CODE TYPE:**

FOR AK: 253, 254, 255, 256

FOR AT: 202, 203, 205, 207, 209, 216,

220, 224, 225, 228, 236, 238,

241, 244, 246, 248, 250, 252

FOR AQ, AS: 256

**2. CONNECTOR AT THIS END:**

AK, AT, AQ, AS

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)





**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (2)





	<p>AL: APPROVAL UL, CUL (10A/12A/13A/15A/125V) NEMA 1-15P, CONNECTING TO ROUND CABLE</p>
	<p>AN: APPROVAL UL, CUL (10A/12A/13A/15A/125V) NEMA 1-15P, WITH CABLE GRIP</p>
	<p>AP: APPROVAL UL, CUL (10A/12A/13A/15A/125V) NEMA 1-15P, WITH CABLE GRIP</p>
	<p>AR: W/O APPROVAL (10A/12A/13A/15A/125V) NEMA 1-15P</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 2} / \frac{x x}{3} - \frac{x x M x}{4 5}$**

1. CORD TYPE:  
FOR AL, AN, AP, AR:  
202, 203, 205, 207, 209, 216, 219, 220,  
222, 224, 225, 227, 228, 236, 234, 238,  
241, 244, 246, 242, 252, 250
2. CONNECTOR AT THIS END:  
AL, AN, AP, AR
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (3)

	<p>AA: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P, WITH NEON LAMP</p>
	<p>AM: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P</p> <p>ME: APPROVAL NOM (MEXICO 10A/125V)</p>
	<p>AH: APPROVAL UL (10A/13A/15A/125V) NEMA 5-15P, WITH CABLE GRIP</p>
	<p>AJ: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P, EASY PULL SMART PLUG</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CODE TYPE:**

FOR AA, AM, AH, AJ, ME:

301, 303, 304, 307, 308, 309, 310,  
311, 312, 316, 317, 318, 319, 321,  
322, 323, 324, 325, 326, 331, 332,  
333, 334, 335, 336, 341, 343, 344,  
347, 348, 349, 350, 351, 352, 353,  
356, 357, 358, 359, 361, 362, 363,  
364, 365, 366, 371, 374, 377, 378,  
379, 380, 382, 383, 391, 392, 393,  
394, 395

**2. CONNECTOR AT THIS END:**

AA, AM, AH, AJ, ME

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)





**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK (STANDARD)

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (4)

	<p>AU: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P</p>
	<p>AV: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P</p>
	<p>AW: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P</p>
	<p>AX: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 5-15P</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

FOR AU: 302, 313, 314, 327, 342, 354, 367, 375  
FOR AV: 425 (SPT-2 14AWG x 2C +1015 14AWG)  
426 (SPT-3 16AWG x 2C +1015 16AWG)  
FOR AW, AX: 305, 314, 315, 320, 371, 372,  
376, 377, 381, 391, 392, 393

**2. CONNECTOR AT THIS END:**

AU, AV, AW, AX

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)


**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc


**5. CORD COLOR:**

"B" BLACK


## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (5)



KE: APPROVAL UL, CUL (18A/20A/125V)  
NEMA 5-20P



KF: APPROVAL UL, CUL (10A/18A/20A/125V)  
NEMA 5-20P








KG: APPROVAL UL, CUL (10A/18A/20A/125V)  
NEMA 5-20P

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} M \frac{4}{x} \frac{5}{x}$**

1. CORD TYPE:  
FOR KE: 372, 373, 375, 376, 391, 392, 393  
FOR KF, KG: 301, 305, 314, 315, 320, 371,  
372, 375, 376, 381, 391, 392,  
393
2. CONNECTOR AT THIS END:  
KE, KF, KG
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC,...., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5,...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (6)

	<p>KH: APPROVAL UL, CUL (15A/250V) NEMA 6-15P</p>
	<p>KJ: APPROVAL UL, CUL (10A/15A/250V) NEMA 6-15P</p>
	<p>KK: APPROVAL UL, CUL (10A/18A/20A/250V) NEMA 6-15P</p>
	<p>KL: APPROVAL UL, CUL (10A/13A/15A/250V) NEMA 6-15P</p>
	<p>KR: APPROVAL UL, CUL (10A/13A/15A/250V) NEMA 6-15P, 8 POSITION R/A TYPE</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 \ 2} / \frac{x x}{3} - \frac{x x M x}{4 \ 5}$**

**1. CORD TYPE:**

FOR KH: 371, 372, 373, 375, 377, 381, 391, 393

FOR KJ, KK: 301, 305, 314, 315, 320, 371, 372,  
375, 376, 377, 381, 391, 392, 393

FOR KL: 301, 314, 341, 354, 375

FOR KR: 301, 313, 314, 315, 316, 317, 319, 320,  
341, 353, 354, 355, 357, 360, 361, 371,  
375, 376, 377, 378, 380, 381, 382

**2. CONNECTOR AT THIS END:**

KH, KJ, KK, KL, KR

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)





**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH NORTH AMERICAN TYPE PLUGS (7)

	<p>KM: APPROVAL UL, CUL (10A/18A/20A/250V) NEMA 6-20P</p>
	<p>KN: APPROVAL UL, CUL (10A/18A/20A/250V) NEMA 6-20P</p>
	<p>KP: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 6-20P, 8 POSITION R/A TYPE</p>
	<p>KQ: APPROVAL UL, CUL (10A/13A/15A/125V) NEMA 6-20P, 8 POSITION R/A TYPE</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

**1. CORD TYPE:**

FOR KM, KN: 301, 305, 314, 315, 320, 371, 372,  
375, 376, 377, 381, 391, 392, 393

FOR KP, KQ: 301, 313, 314, 315, 316, 317, 319,  
320, 341, 353, 354, 355, 357, 360,  
361, 371, 375, 376, 377, 378, 380,  
381, 382

**2. CONNECTOR AT THIS END:**

KM, KN, KP, KQ

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)

**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH UK TYPE PLUGS



FF: APPROVAL BSI (6A/250V) WITH FUSE  
 FG: APPROVAL BSI (10A/250V) WITH FUSE  
 ES: APPROVAL BSI (5A/13A/250V) WITH FUSE




FH: SMALL, APPROVAL BSI (6A/250V) WITH FUSE  
 FJ: SMALL, APPROVAL BSI (10A/250V) WITH FUSE  
 FK: SMALL, APPROVAL BSI (13A/250V) WITH FUSE

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

1. CORD TYPE:  
 FOR FF, FH: 115(2C), 118(3C), 130(3C)  
 FOR FG, FJ: 116(2C), 123(2C), 111(3C), 119(3C), 131(3C)  
 FOR ES, FK: 117(2C), 124(2C), 120(3C), 110, 111, 112(3C)
2. CONNECTOR AT THIS END:  
 FF, FG, ES, FH, FJ, FK
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK

## AC POWER CORDS WITH ITALY TYPE PLUGS



GT: APPROVAL IMQ (10A/250V)



EQ: APPROVAL IMQ (10A/250V)



ER: APPROVAL IMQ (16A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
FOR GT: 107, 115, 116  
FOR EQ: 104, 110, 111, 112  
FOR ER: 112, 120
2. CONNECTOR AT THIS END:  
GT, EQ, ER
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH SWITZERLAND TYPE PLUGS



EP: APPROVAL +S (10A/250V)



EN: APPROVAL +S (10A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} \frac{M}{5} \frac{x}{5}$**

1. CORD TYPE:  
FOR EP: 102, 106, 107, 108, 113,  
115, 116, 121, 123  
FOR EN: 104, 110, 111, 112, 118,  
119, 120, 125, 126
2. CONNECTOR AT THIS END:  
EP, EN
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH DENMARK TYPE PLUGS



EL: APPROVAL D (10A/250V)  
WITH ROUND PINS



EM: APPROVAL D (10A/250V)  
WITH ROUND & FLAT PINS







EZ: APPROVAL D (10A/250V)  
WITH ROUND PINS

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

1. CORD TYPE:  
FOR EL, EM, EZ: 110, 111, 118, 119, 125, 126
2. CONNECTOR AT THIS END:  
EL, EM, EZ
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH AUSTRALIAN TYPE PLUGS

	<p>HE: APPROVAL UL, CUL (10A/250V) 2 PINS WITH INSULATION</p>
	<p>HG: APPROVAL SAA (10A/250V) 3 PINS WITH INSULATION HF: APPROVAL SAA (15A/250V) 3 PINS WITH INSULATION</p>
	<p>WF: APPROVAL SAA (10A/250V) HJ: APPROVAL SAA (15A/250V)</p>
	<p>HH: APPROVAL SAA (10A/250V) H2: NO APPROVAL (10A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

**1. CORD TYPE:**

FOR HE: 115, 116, 121, 123  
FOR HH, HG, H2: 118, 119, 125, 126  
FOR HF: 120  
FOR WF: 110, 111  
FOR HJ: 112

**2. CONNECTOR AT THIS END:**

HE, HG, HF, WF, HJ, HH, H2

**3. CONNECTOR AT ANOTHER END:**

AA, AB, AC, ..., ZY, ZZ (OPTIONAL)


**4. LENGTH IN METERS:**

1, 2, 2.5, 3, 5, ...etc

**5. CORD COLOR:**

"B" BLACK

## AC POWER CORDS WITH SOUTH AFRICAN TYPE PLUGS



FA: APPROVAL SABS (16A/250V)

FM: APPROVAL SABS (10A/250V)









FB: W/O APPROVAL (5A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{\text{xxx}}{1} \frac{\text{xxx}}{2} / \frac{\text{xx}}{3} - \frac{\text{xx}}{4} \text{M} \frac{\text{x}}{5}$**

1. CORD TYPE:  
FOR FA, FM, FB: 104, 105, 110, 111, 113
2. CONNECTOR AT THIS END:  
FA, FM, FB
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH TAIWAN & JAPAN TYPE PLUGS (1)







	TR: APPROVAL CNS (TAIWAN 7A/9A/11A/15A/125V) JA: APPROVAL PSE (JAPAN 7A/9A/11A/15A/125V)
	TS: APPROVAL CNS (TAIWAN 7A/9A/11A/15A/125V) JB: APPROVAL PSE (JAPAN 7A/9A/11A/15A/125V)
	TT: APPROVAL CNS (TAIWAN 7A/9A/11A/15A/125V) JC: APPROVAL PSE (JAPAN 7A/9A/11A/15A/125V)
	TU: APPROVAL CNS (TAIWAN 7A/125V)
	TV: APPROVAL CNS (TAIWAN 2.5A/7A/9A/11A/15A/125V)
	TW: APPROVAL CNS (TAIWAN 2.5A/7A/9A/11A/15A/125V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} M \frac{4}{x} \frac{5}{x}$**

1. CORD TYPE:  
TR, TS, TT: 136, 137, 397, 398, 399  
JA, JB, JC: 136, 137, 397, 398, 399  
TV, TW: 136, 137, 397, 398, 399  
TU: 135
2. CONNECTOR AT THIS END:  
TR, TS, TT, TU, TV, TW, JA, JB, JC
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH TAIWAN & JAPAN TYPE PLUGS (2)

	<p>TM: APPROVAL CNS (TAIWAN 7~15A/125V)</p> <p>JD: APPROVAL PSE (JAPAN 7~15A/125V)</p>
	<p>TN: APPROVAL CNS (TAIWAN 7A/11A/15A/125V)</p>
	<p>TP: APPROVAL CNS (TAIWAN 7A/11A/15A/125V)</p> <p>EASY PULL SMART TYPE</p>
	<p>TX: APPROVAL CNS (TAIWAN 7A/11A/15A/125V)</p>
	<p>TY: APPROVAL CNS (TAIWAN 9A/11A/15A/125V)</p>
	<p>JH: APPROVAL PSE (JAPAN 3~7A/125V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} / \frac{xx}{3} - \frac{xx}{4} M \frac{xx}{5}$**

1. CORD TYPE:  
 TM, TN, TP: 133, 134, 135, 403, 404, 405  
 TX, TY, JD: 133, 134, 135, 403, 404, 405  
 JH: 133, 134, 403, 404
2. CONNECTOR AT THIS END:  
 TM, TN, TP, TX, TY, JD, JH
3. CONNECTOR AT ANOTHER END:  
 AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
 1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
 "B" BLACK

## AC POWER CORDS WITH HONG KONG & MALAYSIA TYPE PLUGS




WITH FUSE

HY: APPROVAL BSI (HONG KONG 6A/250V)

HZ: APPROVAL BSI (HONG KONG 10A/250V)

H1: APPROVAL BSI (HONG KONG 13A/250V)



WITH FUSE

MA: APPROVAL BSI (MALAYSIA 6A/250V)

MB: APPROVAL BSI (MALAYSIA 10A/250V)

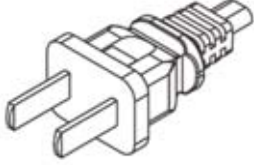



MC: APPROVAL BSI (MALAYSIA 13A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{x}{1} \frac{x}{2} \frac{x}{3} \frac{x}{4} \frac{x}{5} / \frac{x}{3} - \frac{x}{4} \frac{x}{5} M \frac{x}{5}$**

1. CORD TYPE:  
HY, MA: 118,115, 121, 125  
HZ, MB: 116, 111, 123, 119, 126  
H1, MC: 117, 120
2. CONNECTOR AT THIS END:  
HY, HZ, H1, MA, MB, MC
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH CHINA TYPE PLUGS

	<p>HC: APPROVAL CCC (10A/250V)</p>
	<p>HD: APPROVAL CCC (10A/250V) HK: APPROVAL CCC (16A/250V)</p>
	<p>HL: APPROVAL CCC (10A/250V)</p>
	<p>HM: APPROVAL CCC (10A/250V) HN: APPROVAL CCC (16A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} \frac{M}{5} \frac{x}{5}$**

1. CORD TYPE:  
FOR HC, HL: 155, 156  
FOR HD, HM: 161, 164  
FOR HK, HN: 164
2. CONNECTOR AT THIS END:  
HC, HD, HK, HL, HM, HN
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH ISRAEL TYPE PLUGS



FC: W/O APPROVAL (16A/250V)




FL: W/O APPROVAL (16A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} M \frac{x}{5}$**

1. CORD TYPE:  
FOR FC, FL: 110, 111, 112, 118, 119, 120,  
125, 126
2. CONNECTOR AT THIS END:  
FC, FL
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK


## AC POWER CORDS WITH INDIA TYPE PLUGS



JN: APPROVAL STQC (6A/10A/250V)



JP: APPROVAL STQC (6A/10A/250V)



JQ: APPROVAL STQC (6A/10A/250V)

### ORDERING INFORMATION:


**P/N K A C  $\frac{xx}{1} \frac{xx}{2} \frac{xx}{3} / \frac{xx}{4} - \frac{xx}{5} M x$**

1. CORD TYPE:  
JN, JP: 110, 111  
JQ: 111, 112
2. CONNECTOR AT THIS END:  
JN, JP, JQ
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH ARGENTINA TYPE PLUGS



HA: APPROVAL IRAM (10A/250V)







HB: APPROVAL IRAM (10A/250V)

### ORDERING INFORMATION:

**P/N K A C  $\frac{1}{x x x x x} / \frac{2}{x x} - \frac{3}{x x} \frac{4}{M} \frac{5}{x}$**

1. CORD TYPE:  
FOR HA: 104, 110, 111, 112, 118, 119, 120,  
125, 126  
FOR HB: 101, 102, 106, 107, 108, 109
2. CONNECTOR AT THIS END:  
HA, HB
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDS WITH BRAZIL TYPE PLUGS







	<p>FD: APPROVAL INMETRO + UL (2.5A/250V)</p>
	<p>FE: APPROVAL INMETRO + UL (15A/250V) NEMA 5-15P</p>
	<p>FP: APPROVAL INMETRO + UL (10A/250V)</p>
	<p>FQ: APPROVAL INMETRO + UL (15A/250V)</p>

### ORDERING INFORMATION:

**P/N K A C  $\frac{x x x x x}{1 \ 2} / \frac{x x}{3} - \frac{x x}{4} M \frac{x}{5}$**

1. CORD TYPE:  
FOR FD: 106, 113  
FOR FP: 113  
FOR FE, FQ: 110, 111, 112
2. CONNECTOR AT THIS END:  
FD, FE, FP, FQ
3. CONNECTOR AT ANOTHER END:  
AA, AB, AC, ..., ZY, ZZ (OPTIONAL)
4. LENGTH IN METERS:  
1, 2, 2.5, 3, 5, ...etc
5. CORD COLOR:  
"B" BLACK

## AC POWER CORDSET WITH END FINISH OR TERMINOLOGY (1)

CODE	ILLUSTRATION	DESCRIPTION
VH		1. ROJ 2. RETAIN STRIP INNER INSULATIONS
VD		1. ROJ 2. DOUBLE-RETAIN STRIP INNER INSULATIONS
VS		1. ROJ 2. CRIMP SPLICE TERMINAL
VA VT		1. REMOVE OUTER JACKET (ROJ) 2. STRIP INNER INSULATIONS 3. TWIST OR TIN COPPER CONDUCTORS
V0		1. OPEN END
V9		1. REMOVE OUTER JACKET (ROJ) 2. STRIP INNER INSULATIONS 3. TWIST COPPER CONDUCTORS

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xxx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{B}{5}$**

1. CORD TYPE:  
101~~999

2. CONNECTOR AT END 1:  
AA, AB, AC, ....., ZY, ZZ







3. CONNECTOR AT END 2:  
"VA" TWIST COPPER CONDUCTORS  
"VT" TINNED COPPER CONDUCTORS  
"VH" SINGLE-RETAIN STRIP INNER INSULATIONS  
"VD" DOUBLE-RETAIN STRIP INNER INSULATIONS  
"VS" CRIMP SPLICE TERMINAL  
"V0" OPEN END (CUT)  
"V9" TWIST COPPER CONDUCTORS

4. LENGTH IN METERS:  
1, 2, 3,...etc

5. CORD COLOR:  
"B" BLACK

NOTE: CUSTOMER'S DESIGNS ARE WELCOME!

## AC POWER CORDSET WITH END FINISH OR TERMINOLOGY (2)

CODE	ILLUSTRATION	DESCRIPTION
VR		1. ROJ 2. CRIMP INSULATED RING TERMINALS
VQ		1. ROJ 2. CRIMP UN-INSULATED RING TERMINALS
VY		1. ROJ 2. CRIMP INSULATED Y TYPE TERMINALS
VZ		1. ROJ 2. CRIMP Y TYPE TERMINALS
VB		1. ROJ 2. CRIMP INSULATED BULLET TERMINALS
VC		1. ROJ 2. CRIMP PCB TERMINALS

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{B}{5}$**

1. CORD TYPE:  
101~~999

2. CONNECTOR AT END 1:  
AA, AB, AC, ....., ZY, ZZ



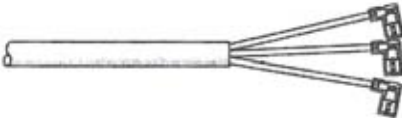


3. CONNECTOR AT END 2:  
"VR" CRIMP INSULATED RING TERMINALS  
"VQ" CRIMP UN-INSULATED RING TERMINALS  
"VY" CRIMP INSULATED Y TYPE TERMINALS  
"VZ" CRIMP UN-INSULATED Y TYPE TERMINALS  
"VB" CRIMP INSULATED BULLET TERMINALS  
"VC" CRIMP PCB TERMINALS

4. LENGTH IN METERS:  
1, 2, 3,...etc

5. CORD COLOR:  
"B" BLACK

NOTE: CUSTOMER'S DESIGNS ARE WELCOME!

## AC POWER CORDSET WITH END FINISH OR TERMINOLOGY (3)

CODE	ILLUSTRATION	DESCRIPTION
VE		1. ROJ 2. CRIMP UN-INSULATED FASTON TERMINAL (STRAIGHT, FEMALE)
VF VG		1. ROJ 2. CRIMP INSULATED OR UN-INSULATED FASTON TERMINALS (STRAIGHT, FEMALE)
VL VK		1. ROJ 2. CRIMP INSULATED OR UN-INSULATED FLAG FASTON TERMINALS (ANGLE, FEMALE)
VM		1. ROJ 2. CRIMP Y PCB TERMINAL (MALE)
VN		1. ROJ 2. CRIMP Y PCB TERMINAL (MALE)

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} / \frac{xx}{3} - \frac{xx}{4} M \frac{B}{5}$**

1. CORD TYPE:  
101~~999

2. CONNECTOR AT END 1:  
AA, AB, AC, ....., ZY, ZZ

3. CONNECTOR AT END 2:

- "VE" CRIMP UN-INSULATED FASTEN TERMINALS
- "VF" CRIMP INSULATED FASTEN TERMINALS
- "VG" CRIMP UN-INSULATED FASTEN TERMINALS
- "VL" CRIMP INSULATED FLAG FASTEN TERMINALS
- "VK" CRIMP UN-INSULATED FLAG FASTEN TERMINALS
- "VM" CRIMP MALE PCB TERMINALS
- "VN" CRIMP MALE PCB TERMINALS

4. LENGTH IN METERS:







1, 2, 3,...etc

5. CORD COLOR:

"B" BLACK

NOTE: CUSTOMER'S DESIGNS ARE WELCOME!

## AC POWER CORDSET WITH END FINISH OR TERMINOLOGY (4)

CODE	ILLUSTRATION	DESCRIPTION
VU		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. ATTACH DISCONNECTABLE CONNECTOR AND HOUSING</li> </ol>
VV		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. ATTACH DISCONNECTABLE CONNECTOR AND HOUSING</li> </ol>
VW		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. ATTACH PIN TYPE TERMINAL AND HOUSING</li> </ol>
VJ		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. CRIMP RING TERMINAL AND ATTACH DISCONNECTABLE CONNECTOR AND HOUSING</li> </ol>
VX		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. MOLD STRAIN RELIEF</li> <li>3. CRIMP RING TERMINAL AND STRIP OTHER INNER INSULATIONS</li> </ol>
V3		<ol style="list-style-type: none"> <li>1. ROJ</li> <li>2. CRIMP RING TERMINAL AND ATTACH DISCONNECTABLE CONNECTORS</li> </ol>

### ORDERING INFORMATION:

**P/N K A C  $\frac{xxx}{1} \frac{xx}{2} \frac{xx}{3} - \frac{xx}{4} \frac{M}{5} \frac{B}{5}$**

1. CORD TYPE:  
101~~999
2. CONNECTOR AT END 1:  
AA, AB, AC, ....., ZY, ZZ
3. CONNECTOR AT END 2:  
VU, VV, VW, VJ, VX, V3  
(PLEASE GIVE US THE DETAIL DESCRIPTION!)
4. LENGTH IN METERS:  
1, 2, 3,...etc
5. CORD COLOR:  
"B" BLACK

NOTE: CUSTOMER'S DESIGNS ARE WELCOME!