MOUNTING OPTION FOR D-SUB. SOLDER, CRIMP & STRAIGHT PCB MOUNT TYPE

OPTION K (H= 4.0MM)
OPTION K3 (H= 3.2MM)
OPTION K6 (H= 5.8MM)
WITH #4-40 THREADED
RIVETED CLINCH NUTS

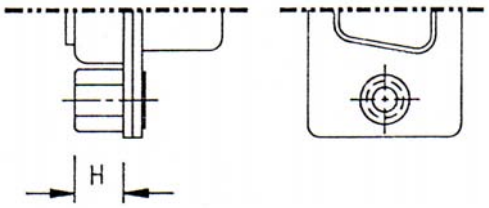

OPTION BR
WITH #4-40 THREADED
RIVETED BRACKETS

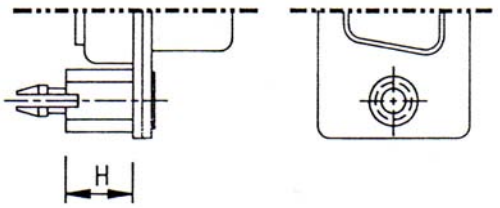

OPTION J (NON-THROUGH HOLE H= 5.8MM)
OPTION J4 (H= 4.0MM)
OPTION JT (THROUGH HOLE)
WITH #4-40
THREADED FIXED
JACK SCREWS (H= 5.8MM or 4.0MM)

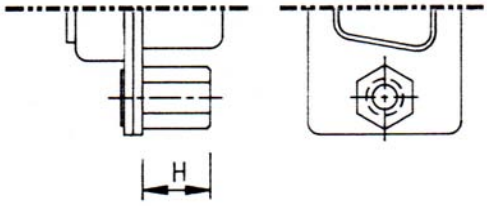

OPTION BRJ
WITH #4-40 THREADED
RIVETED BRACKET
AND JACKSCREWS
ASSEMBLED TO CONNECTOR

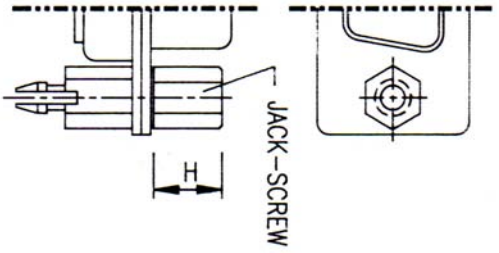

OPTION KJ
WITH #4-40 THREADED
RIVETED CLINCH NUTS
AND JACK SCREWS
ASSEMBLED TO CONNECTOR

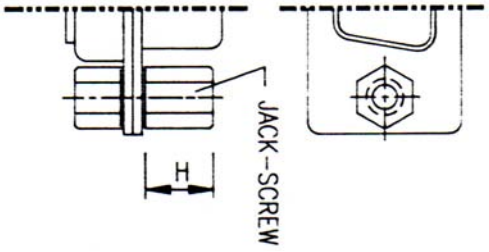

OPTION JBR
WITH #4-40 THREADED RIVETED
NUTS AND BRACKETS
ASSEMBLED TO CONNECTOR

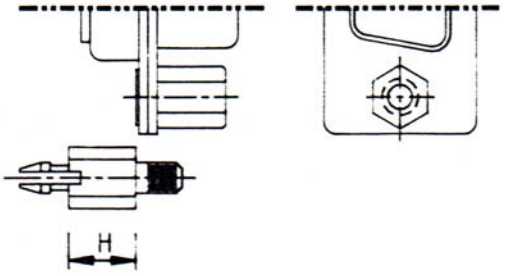

ORDERING INFORMATION:

1. FOR SOLDER TYPE: OPTION K, K3, K6, J, JT, KJ, J4
2. FOR CRIMP TYPE: OPTION J, JT, J4

3. FOR STRAIGHT PCB TYPE: ALL MOUNTING OPTIONS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

MOUNTING OPTIONS FOR D-SUB. CONNECTOR RIGHT ANGLE TYPE

STANDARD (BLANK):
Boardlocks assembled by
#4-40UNC Hex Screw Bolts

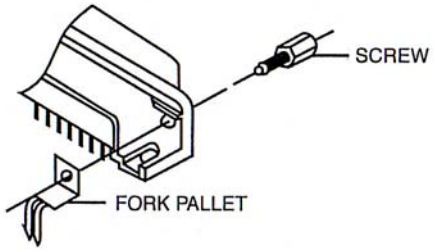

OPTION NA:
L-shape Tabs assembled by
#4-40UNC Hex Screw Bolts

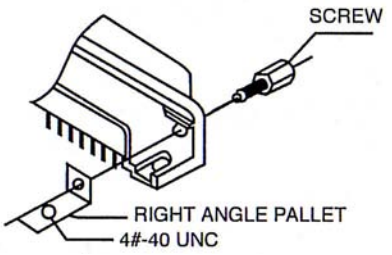

OPTION N:
Riveted Boardlocks
with #4-40UNC Open



OPTION NB:
Riveted L-shape Tabs
with #4-40UNC Open

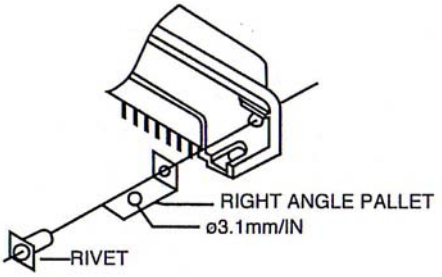

OPTION NJ:
Riveted Boarlocks with
Assembled #4-40UNC Hex Screw Bolts
OPTION NH:
Riveted Boardlocks with
Loose #4-40UNC Hex Screw Bolts

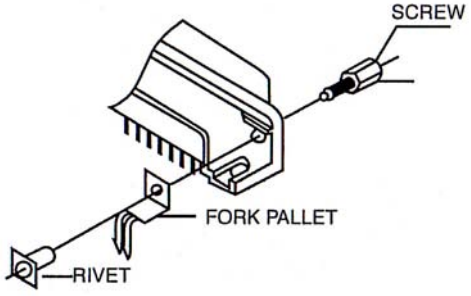

OPTION NK:
Riveted L-shape Tabs with
Assembled #4-40UNC Hex Screw Bolts
OPTION NL:
Riveted L-shape Tabs with
Loose #4-40UNC Hex Screw Bolts

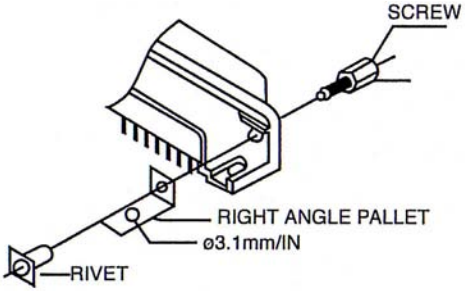

ORDERING INFORMATION:

FOR EXAMPLE:

STANDARD: 5262-25TB
OPTION N: 5262-25TB/N
OPTION NH: 5262-25TB/NH
OPTION NJ: 5262-25TB/NJ
OPTION NA: 5262-25TB/NA
OPTION NB: 5262-25TB/NB
OPTION NL: 5262-25TB/NL
OPTION NK: 5262-25TB/NK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it