REVERSE USB A TYPE FEMALE CONNECTOR
RIGHT ANGLE PCB MOUNT DIP TYPE



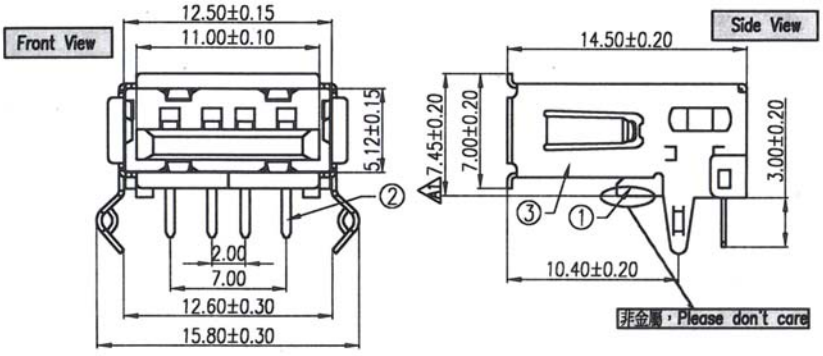

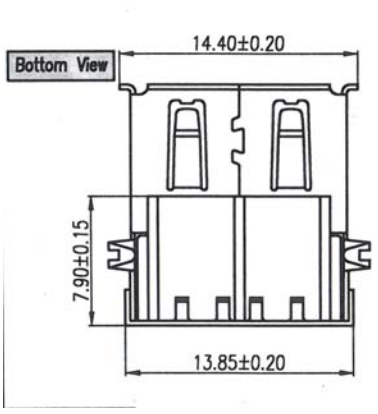

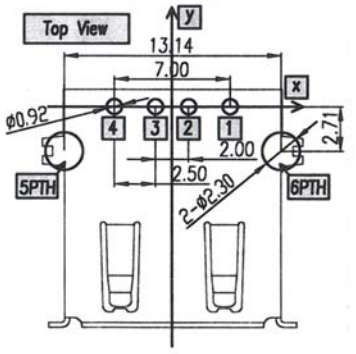

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 1 - 0 4 F B 0 1
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR
RIGHT ANGLE PCB MOUNT DIP TYPE

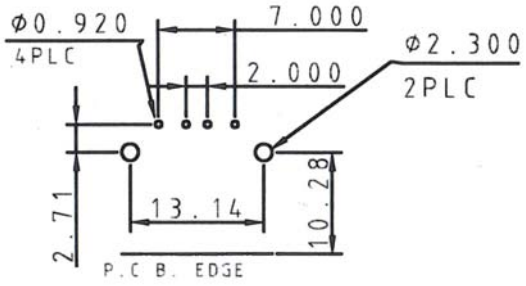

Recommended P.C.Board Layout



SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

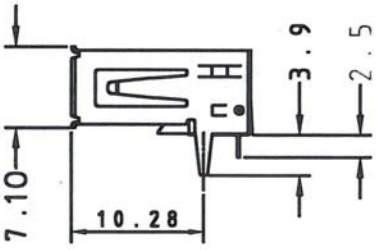







ORDERING INFORMATION:

P/N U A R 2 - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH (REV. 1.1)
   "30" 30 MICROINCH GOLD (REV. 2.0)

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR SMT TYPE

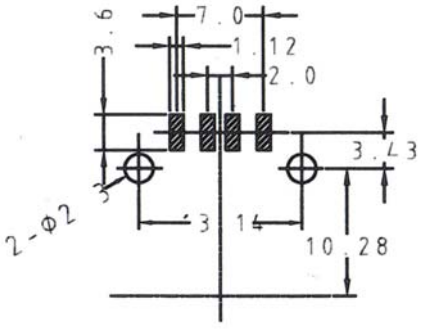

Recommended P.C.Board Layout











SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 3 - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH (REV. 1.1)
   "30" 30 MICROINCH GOLD (REV. 2.0)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR SMT TYPE





SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

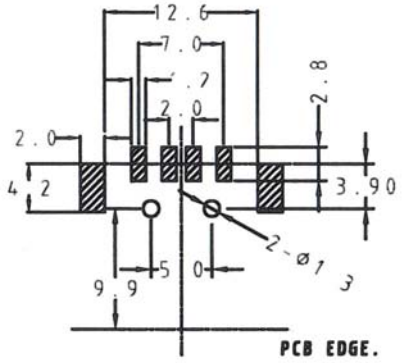

Recommended P.C.Board Layout





ORDERING INFORMATION:

P/N U A R 4 - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH (REV. 1.1)
   "30" 30 MICROINCH GOLD (REV. 2.0)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE MALE CONNECTOR SMT TYPE

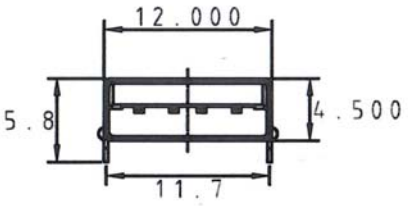

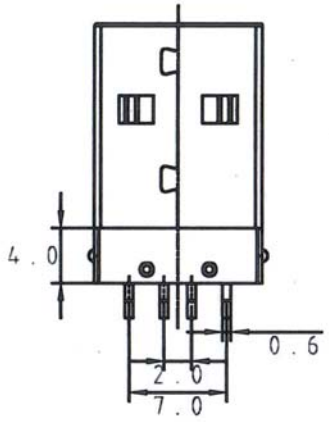







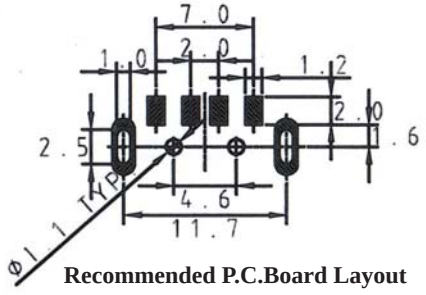

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 5 - 0 4 M B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "M" MALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH (REV. 1.1)
   "30" 30 MICROINCH GOLD (REV. 2.0)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE MALE CONNECTOR
RIGHT ANGLE PCB MOUNT DIP TYPE

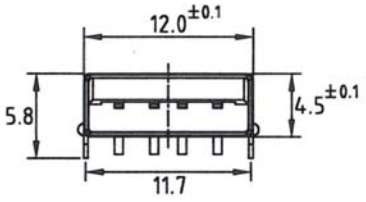

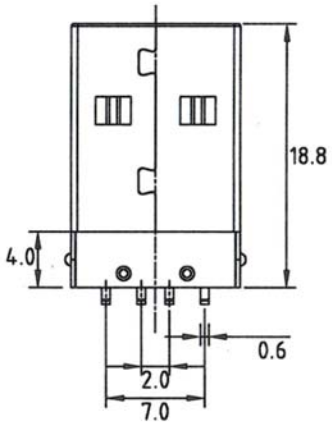









Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 6 - 0 4 M B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "M" MALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH (REV. 1.1)
   "30" 30 MICROINCH GOLD (REV. 2.0)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR RIGHT ANGLE DIP TYPE

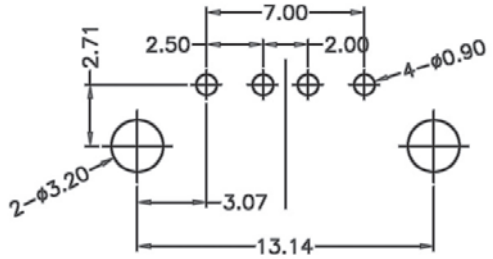

Recommended P.C.Board Layout

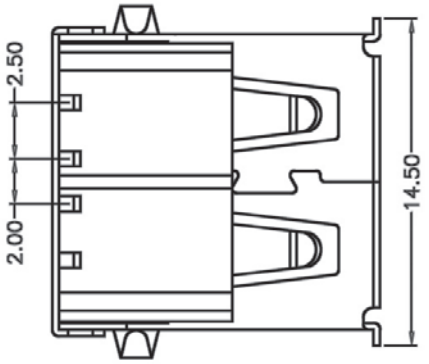

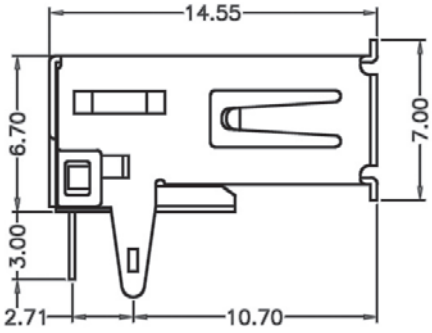

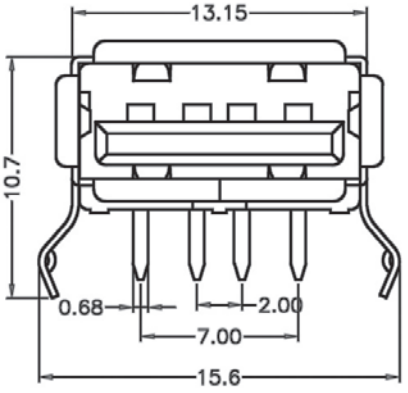

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 7 - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR SMT TYPE

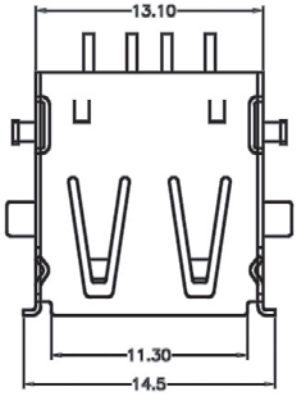



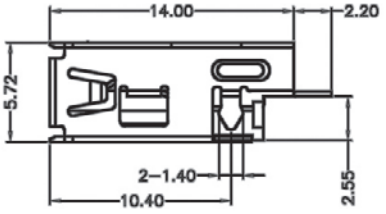

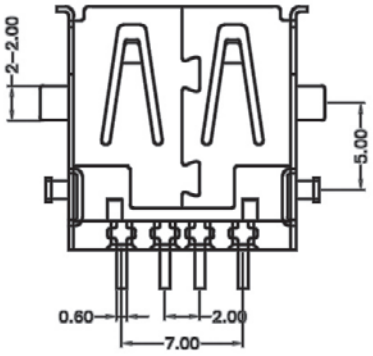

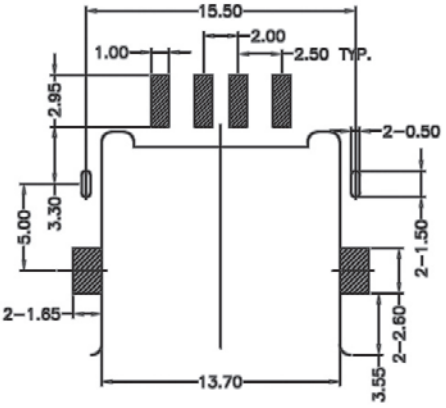

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R 8 - 0 4 F x x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
   "W" WHITE
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE MALE CONNECTOR SMT TYPE

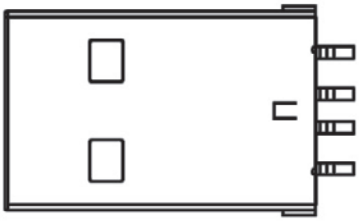

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

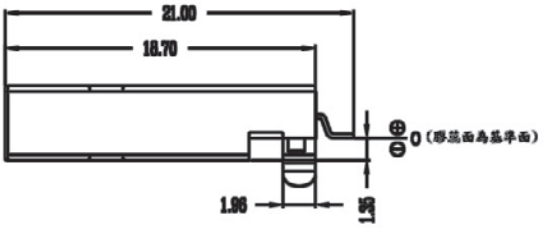



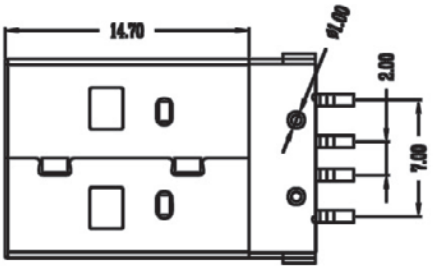



Recommended P.C.Board Layout

ORDERING INFORMATION:

P/N U A R 9 - 0 4 M x x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "M" MALE
3. INSULATOR COLOR:
   "B" BLACK
   "W" WHITE
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE MALE CONNECTOR
RIGHT ANGLE DIP TYPE FOR 1.6MM PCB









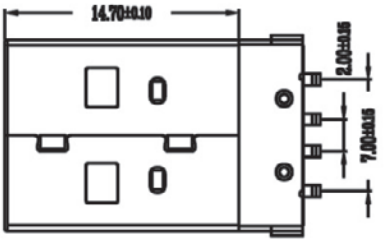



Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R A - 0 4 M B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "M" MALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR RIGHT ANGLE SMT TYPE

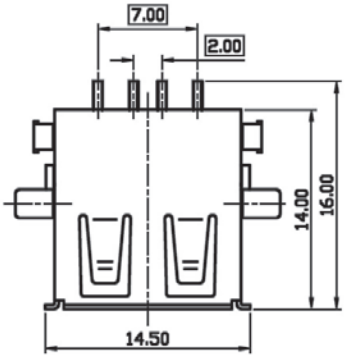

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**









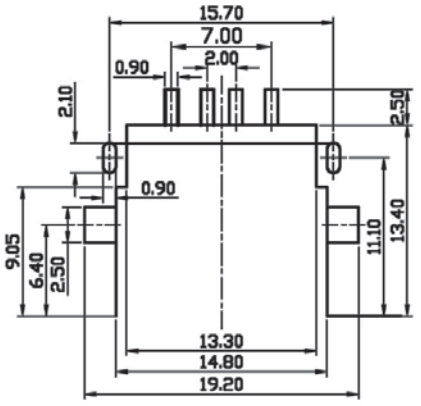

Recommended P.C.Board Layout

ORDERING INFORMATION:

P/N U A R B - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

REVERSE USB A TYPE FEMALE CONNECTOR RIGHT ANGLE SMT TYPE











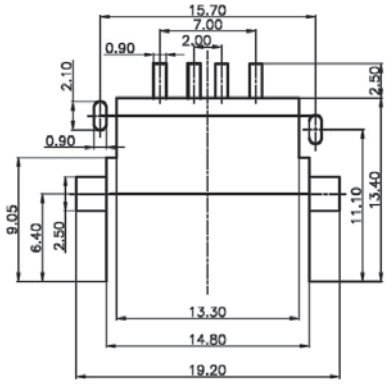

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 1.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55ºc to +105ºc

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Selective Gold Over Nickel Plated
Shell Plating: Tin Or Nickel Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N U A R C - 0 4 F B x x
1 2 3 4

1. NO. OF CONTACTS:
   04
2. CONNECTOR TYPE:
   "F" FEMALE
3. INSULATOR COLOR:
   "B" BLACK
4. CONTACT FINISH:
   "01" GOLD FLASH
   "15" 15 MICROINCH GOLD
   "30" 30 MICROINCH GOLD

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it