ELITALIA

CABLE ASSEMBLIES (1)

0.635MM PITCH FLAT CABLE ASSEMBLIES


1.00MM PITCH FLAT CABLE ASSEMBLIES

1.27MM PITCH FLAT CABLE ASSEMBLIES

2.54MM PITCH FLAT CABLE ASSEMBLIES

FLEXIBLE FLAT CABLES

ACCESSORIES

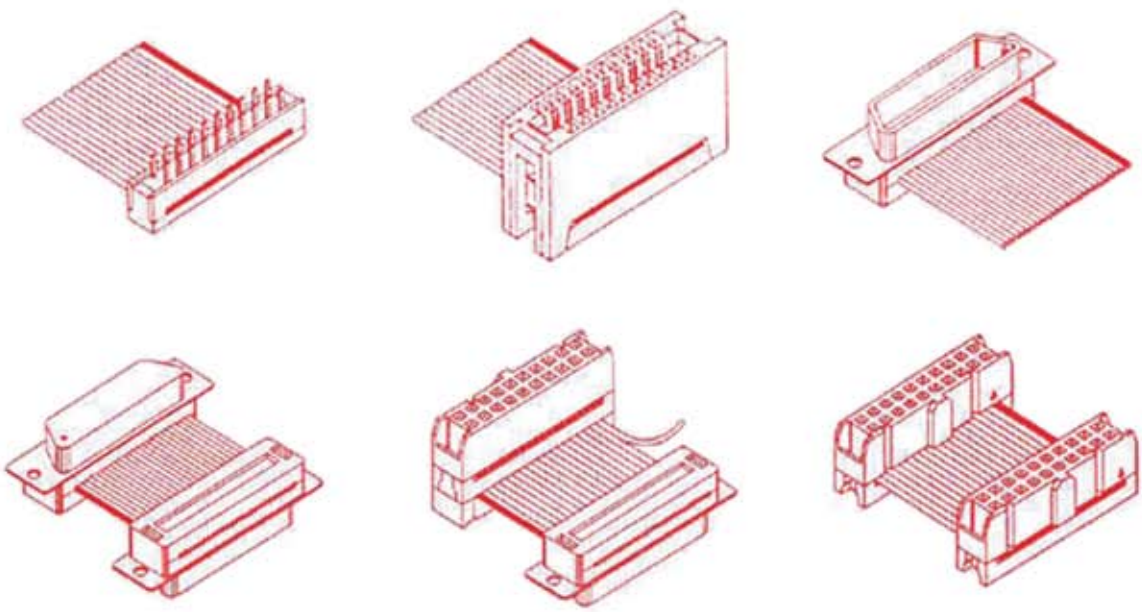

CAT. CAP-K-1

DESCRIPTION **PAGE**

0.635MM PITCH FLAT CABLE WITH 2* 1.27MM*1.27MM IDC CONNECTORS

0.635MM PITCH UL & CSA APPROVED FLAT CABLE----------K0001
FLAT CABLE WITH 2* 1.27MM*1.27MM IDC SOCKETS----------K0011~K0020
FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET TO DIP PLUG ----------K0041~K0047
FLAT CABLE WITH 2* 1.27MM*1.27MM DIP PLUGS----------K0061~K0064
FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET TO IDC PLUG WITH LEVERS----------K0081~K0083
FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET TO OPEN END----------K0091

0.635MM PITCH FLAT CABLE WITH 2* 1.27MM*2.54MM IDC CONNECTORS

FLAT CABLE WITH 2* 1.27MM*2.54MM IDC SOCKETS----------K0601~K0618
FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET TO DIP PLUG----------K0651~K0659
FLAT CABLE WITH 2*1.27MM*2.54MM DIP PLUGS----------K0681~K0682

SPECIAL FLAT CABLE WITH 2* 1.27MM*2.54MM(1.27MM) IDC SOCKETS

0.635MM FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET TO 1.27MM*1.27MM DIP PLUG--------K0801~K0808
1.27MM FLAT CABLE WITH 2* 1.27MM*2.54MM IDC SOCKETS ----------K0831

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC CONNECTORS

1.00MM PITCH UL & CSA APPROVED FLAT CABLE----------K1001
FLAT CABLE WITH 2* 2.00MM IDC SOCKETS----------K1011~K1044
FLAT CABLE WITH 2.00MM IDC SOCKET TO DIP PLUG----------K1101~K1123
FLAT CABLE WITH 2* 2.00MM DIP PLUGS----------K1151~K1154
FLAT CABLE WITH 2.00MM IDC SOCKET TO BOX HEADER----------K1171~K1180
FLAT CABLE WITH 2* 2.00MM IDC TYPE BOX HEADERS----------K1191~K1192
FLAT CABLE WITH 2.00MM IDC SOCKET TO IDC PLUG WITH SHORT LEVERS----------K1201~K1205
FLAT CABLE WITH 2.00MM IDC SOCKET TO IDC PLUG WITH LONG LEVERS----------K1211~K1215
FLAT CABLE WITH 2.00MM IDC SOCKET TO OPEN END----------K1301~K1309
FLAT CABLE WITH 2.00MM DIP PLUG TO OPEN END----------K1321~K1322
FLAT CABLE WITH 2.00MM IDC SOCKET TO TINNED END----------K1351~K1356
FLAT CABLE WITH 2.00MM DIP PLUG TO TINNED END----------K1371~K1372

1.27MM PITCH FLAT CABLE WITH 2* IDC CONNECTORS

1.27MM PITCH UL & CSA APPROVED FLAT CABLE----------K2001
FLAT CABLE WITH 2* 2.54MM IDC SOCKETS---------- K2011~K2043
FLAT CABLE WITH 2.54MM IDC SOCKET TO DIP PLUG----------K2101~K2150
FLAT CABLE WITH 2* 2.54MM DIP PLUGS----------K2161~K2170
FLAT CABLE WITH 2.54MM IDC SOCKET TO BOX HEADER----------K2201~K2208
FLAT CABLE WITH 2* 2.54MM IDC TYPE BOX HEADERS----------K2211
FLAT CABLE WITH 2.54MM IDC SOCKET TO IDC PLUG WITH SHORT LEVERS----------K2301~K2318
FLAT CABLE WITH 2.54MM IDC SOCKET TO IDC PLUG WITH LONG LEVERS----------K2351~K2368
FLAT CABLE WITH 2.54MM DIP PLUG TO IDC PLUG WITH SHORT LEVERS----------K2381~K2385
FLAT CABLE WITH 2.54MM DIP PLUG TO IDC PLUG WITH LONG LEVERS----------K2391~K2394
FLAT CABLE WITH 2.54MM IDC SOCKET TO OPEN END----------K2501~K2509
FLAT CABLE WITH 2.54MM DIP PLUG TO OPEN END----------K2531~K2532
FLAT CABLE WITH 2.54MM BOX HEADER TO OPEN END----------K2541
FLAT CABLE WITH 2.54MM IDC PLUG TO OPEN END----------K2551~K2552
FLAT CABLE WITH 2.54MM IDC SOCKET TO TINNED END----------K2601~K2606
FLAT CABLE WITH 2.54MM DIP PLUG TO TINNED END----------K2631~K2632
FLAT CABLE WITH 2.54MM BOX HEADER TO TINNED END----------K2641
FLAT CABLE WITH 2.54MM IDC PLUG TO TINNED END----------K2651~K2652
FLAT CABLE WITH 2* 2.54MM MICRO MATCH CONNECTORS----------K2701~K2709
FLAT CABLE WITH 2* 2.54MM PICOFLEX CONNECTORS----------K2731~K2732
FLAT CABLE WITH 2* 2.54MM WIRE TO BOARD HOUSINGS----------K2741
FLAT CABLE WITH 2* D-SUB. CONNECTORS----------K2801~K2818
FLAT CABLE WITH D-SUB. TO IDC SOCKET---------- K2851~K2857
OTHER CABLE ASSEMBLIES----------K2891~K2895

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

DESCRIPTION **PAGE**

2.54MM PITCH FLAT CABLE WITH 2* 2.54MM IDC CONNECTORS
FLAT CABLE WITH 2* 2.54MM SINGLE ROW IDC SOCKETS----------K2901~K2902
FLAT CABLE WITH 2.54MM SINGLE ROW IDC SOCKET TO DIP PLUG----------K2951~K2952

FLEXIBLE FLAT CABLE
0.50MM PITCH FLEXIBLE FLAT CABLE----------K2991
1.00MM PITCH FLEXIBLE FLAT CABLE----------K2991
1.25MM PITCH FLEXIBLE FLAT CABLE----------K2991
2.54MM PITCH FLEXIBLE FLAT CABLE----------K2991

BOX HEADER SALABLE WITH ORDER OF FLAT CABLE ASSEMBLY
1.27MM*1.27MM PITCH BOX HEADER & SHROUDED HEADER----------K3001~K3005
1.27MM*2.54MM PITCH BOX HEADER & SHROUDED HEADER----------K3051~K3074
2.00MM PITCH BOX HEADER & SHROUDED HEADER----------K3101~K3117
2.54MM PITCH BOX HEADER & SHROUDED HEADER----------K3151~K3168

FEMALE HEADER SALABLE WITH ORDER OF BOX HEADER
1.27MM*1.27MM PITCH FEMALE HEADER----------K3301~K3303
1.27MM*2.54MM PITCH FEMALE HEADER----------K3351
2.00MM PITCH FEMALE HEADER----------K3401~K3403

OTHER FLAT CABLE ASSEMBLIES
0.635MM PITCH FLAT CABLE WITH 2*HPDB68M CONNECTORS----------K3501
ULTRA ATA-66 FLAT CABLE ASSEMBLIES----------K3506
ULTRA ATA-100 FLAT CABLE ASSEMBLIES----------K3511~K3511
ULTRA ATA-133 FLAT CABLE ASSEMBLIES----------K3521~K3523
ULTRA320 TWIST PAIR FLAT CABLE WITH LVD/SE TERMINATOR----------K3531



ACCESSORIES
FLAT CABLE EMI FERRITTE CORES----------K3601
IDC CRIMPING FIXTURE & ATTACHMENT FOR FLAT CABLE----------K3602

QUICK REFERENCE
QUICK REFERENCE OF BOX HEADERS & FEMALE HEADERS----------K3901~K3902
QUICK REFERENCE OF FLAT CABLE ASSEMBLIES----------K3902~K3911

***TECHNICAL ALTERATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**
***ALL ARTICLES ARE RoHS & REACH/SVHC COMPLIANT.**

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH UL & CSA APPROVED FLAT CABLE

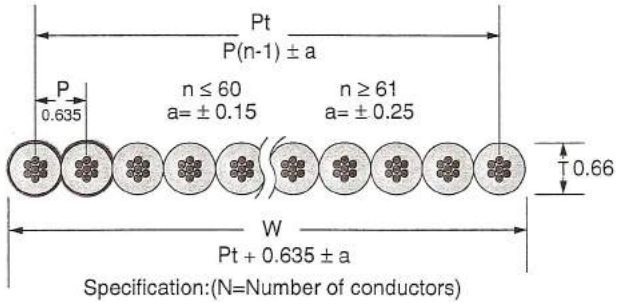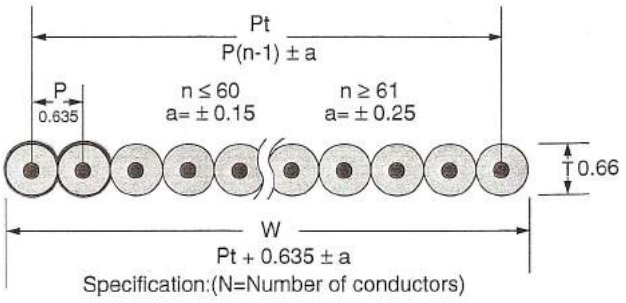• ***UL STYLE:2678*** *UL&CSA GRADE :2678* *Rate temperature : 105°C* *Rate voltage : 150V* *Flame test : VW-1*	*CSA Standard : C22.2 No. 210.2* *Rate temperature : 105°C* *Rate voltage : 150V* *Flame test : FT1,FT2*
• **CONDUCTOR : Stranded** AWG size : 30 AWG Number of strands in each conductor : 7/0.102mm. Lay of strands in each conductor : 0.5 inch at least Cross section area : 98 mil. • **INSULATION :** Material of insulation : polyvinyl chloride(PVC) deep gray and gray Insulation thickness average : 7 mil. Minimum insulation thickness : 6 mil. • **PHYSICAL PROPERTIES :** After 7 days air oven at 136°C Average tensile strength : 1500 lbs/inch² Percent of original : 70% at least Average elongation : 200% Percent of original : 65% at least	• **CONDUCTOR : Single** AWG size : 30 AWG Conductor : 0.254 mm Cross section area : 98 mil.
• **ELECTRONIC CHARACTERISTICS :** Spark test : 1500V Dielectric strength test : Minimum 1500 V in 1 minute Conductor resistance : Maximum 377Ω/km Insulation resistance : Minimum 1GΩ -m Capacity : 75pF/m(G-S-G) 49pF/m(G-S) Characteristic Impedance : 72Ω (G-S-G) 113Ω (G-S) Propagation delay time : 5.4ns/m	• **ELECTRONIC CHARACTERISTICS :** Conductor resistance : Maximum 361 Ω/km Capacity : 71pF/m(G-S-G) 47pF/m(G-S) Characteristic Impedance : 80Ω (G-S-G) 115Ω (G-S) Propagation delay time : 5.2ns/m
• **CONSTRUCTION DRAWING:**  Specification:(N=Number of conductors)	• **CONSTRUCTION DRAWING:**  Specification:(N=Number of conductors)


ORDERING INFORMATION:

P/N F C 6 3 5 x x x - 1 5 2 . 5 M
1 2

1. NO. OF CONDUCTORS:
   010, 020, 030, 040, 050, 068, 080, 100
2. LENGTH IN 152.5M/REEL

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A1)

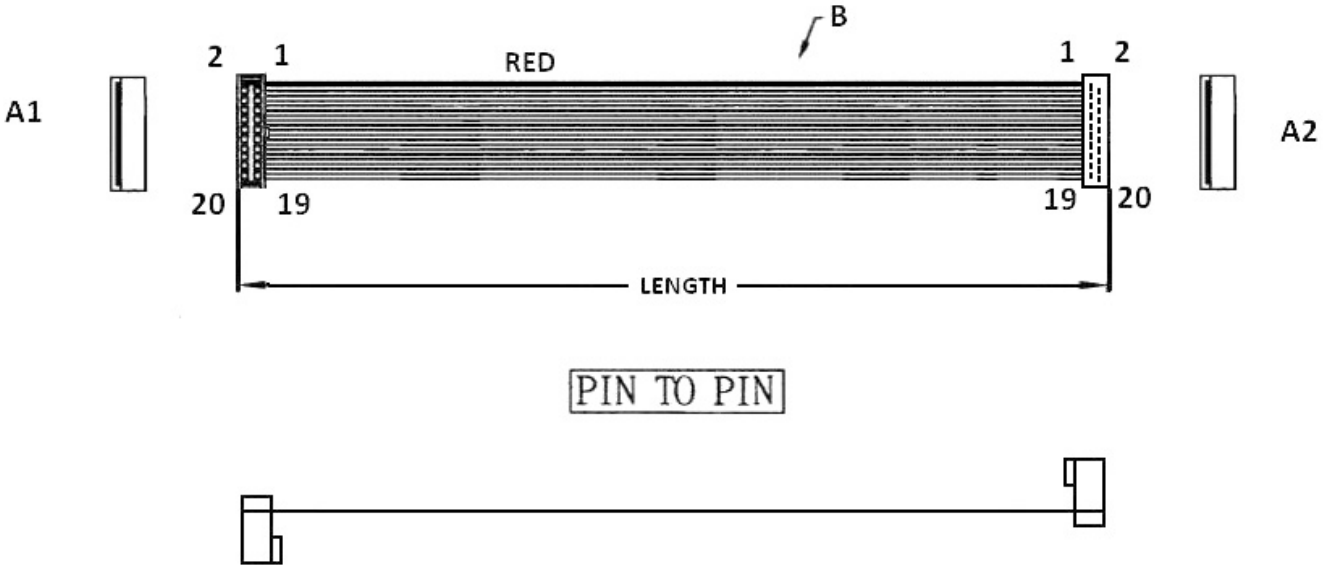


ORDERING INFORMATION:

P/N $\frac{KG}{1}\ \frac{xx}{2}\ \frac{KK}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "KK" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A2)

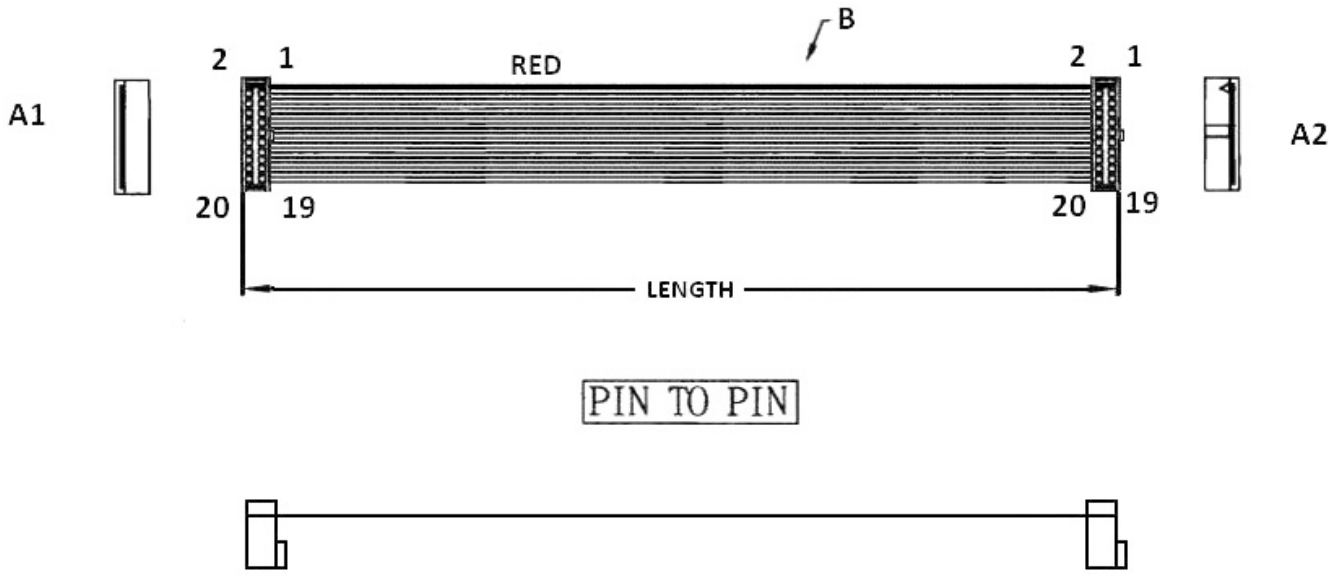

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KG}{1}\ \frac{xx}{2}\ \frac{KL}{3}$ - $\frac{xx}{4}$ **C M** $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "KL" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A3)

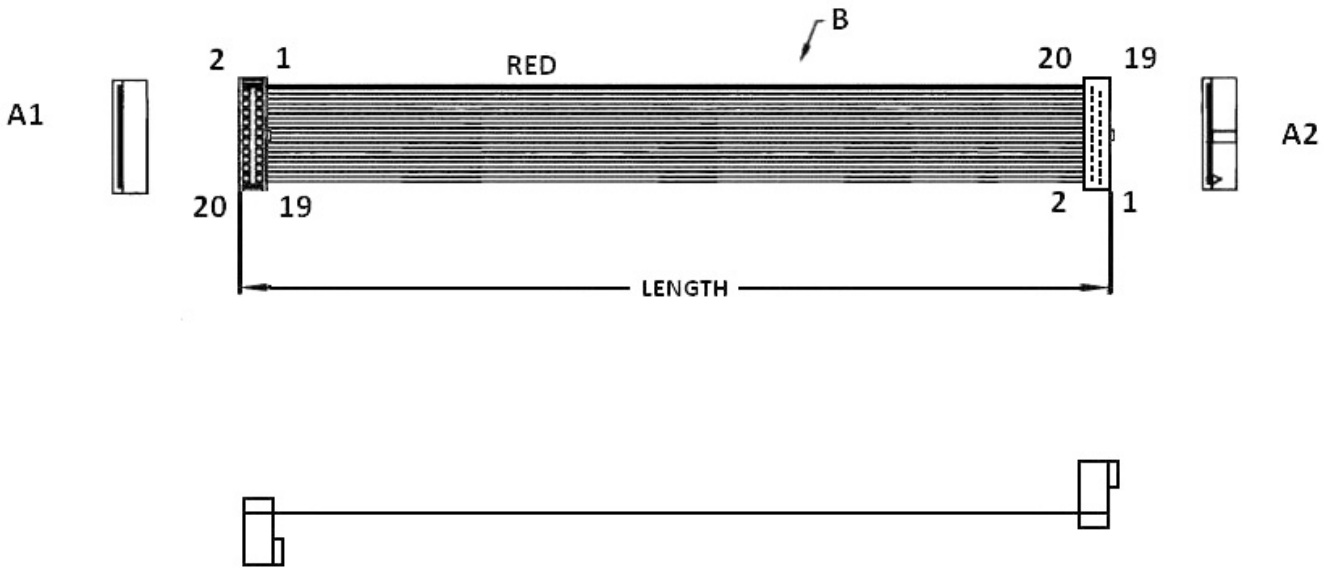


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K I}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "KI" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A4)

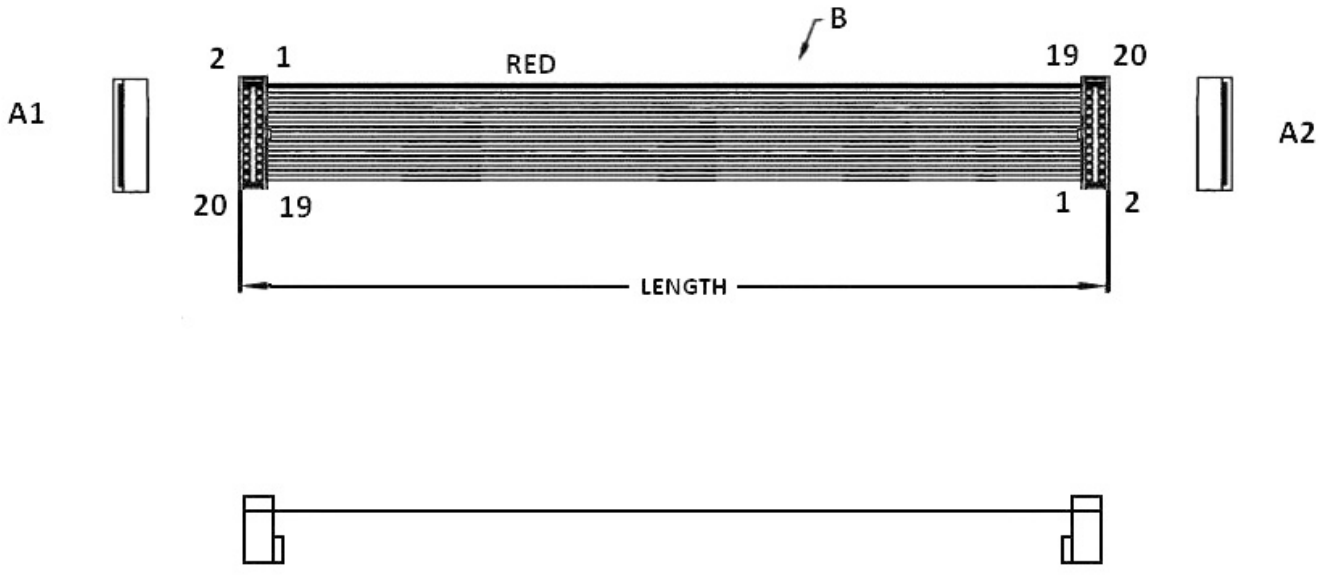


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K 8}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "K8" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A5)

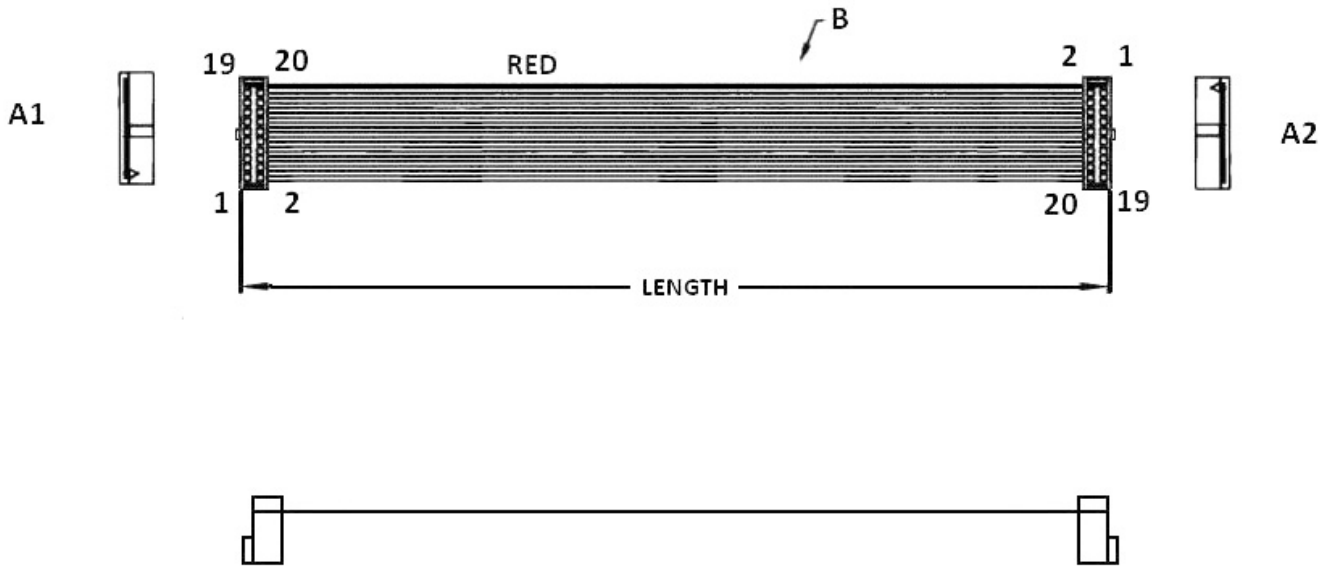


ORDERING INFORMATION:

P/N $\frac{KG}{1}\ \frac{xx}{2}\ \frac{LI}{3}$ - $\frac{xx}{4}$ **C M** $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "LI" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX1.27MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=5.0MM) (A6)

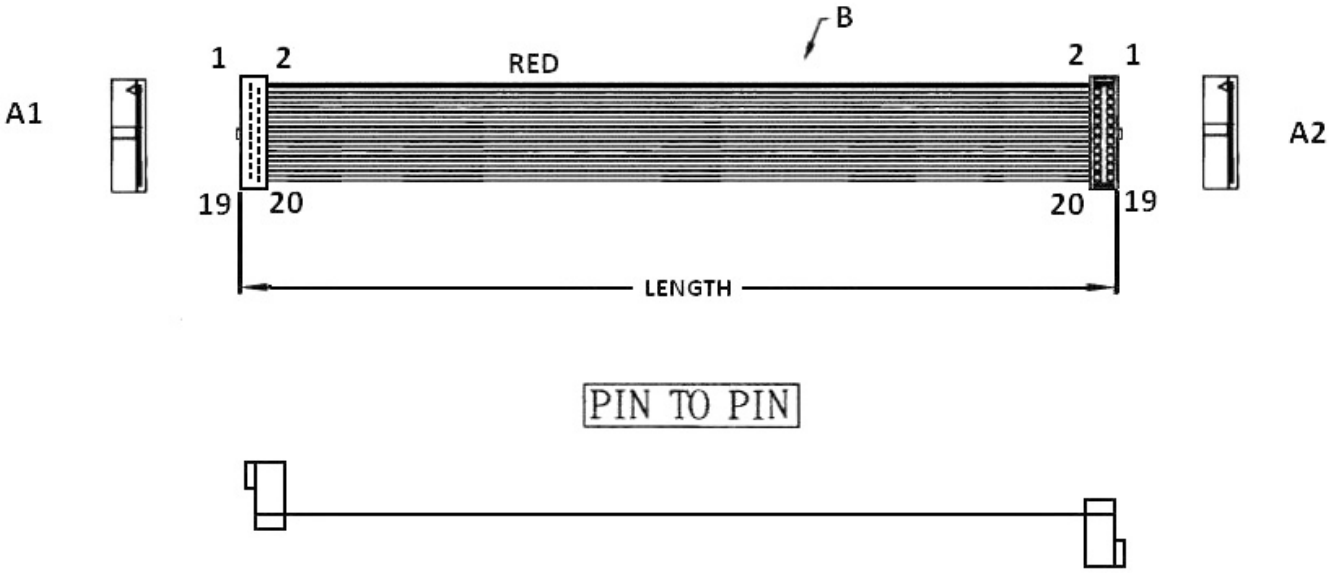


ORDERING INFORMATION:

P/N $\frac{KG}{1}\ \frac{xx}{2}\ \frac{LL}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$


1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "LL" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*1.27MM IDC SOCKETS W/O STRAIN RELIEF (H=5.1MM) (A7)

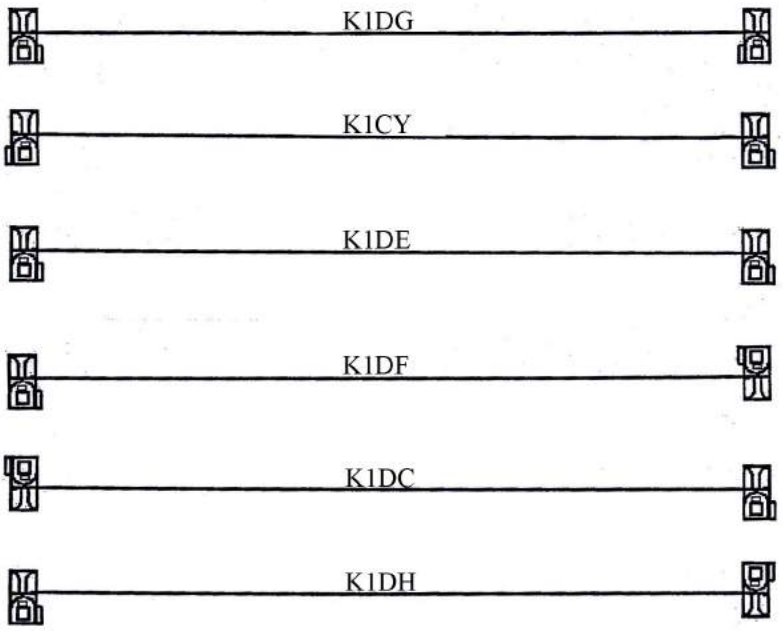

1.27MM*1.27MM IDC SOCKET W/O STRAIN RELIEF (BERYLLIUM COPPER)

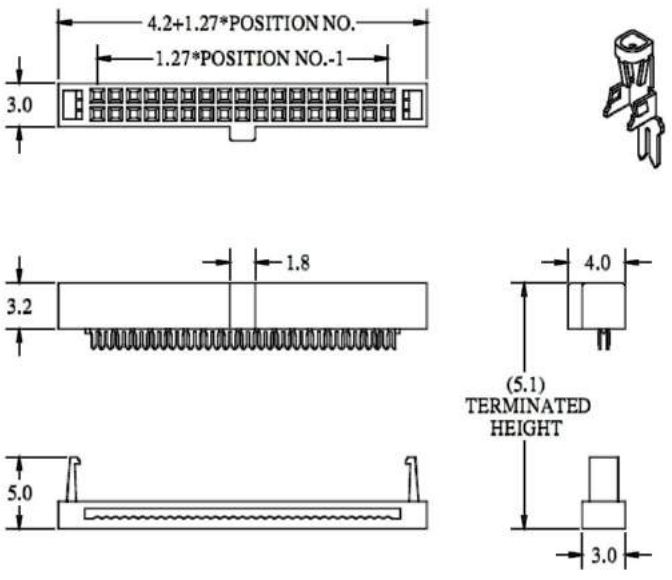

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
060, 068, 080

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   1DG, 1CY, 1DE, 1DF, 1DC, 1DH
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*1.27MM IDC SOCKETS W/O STRAIN RELIEF (H=5.1MM) (A8)

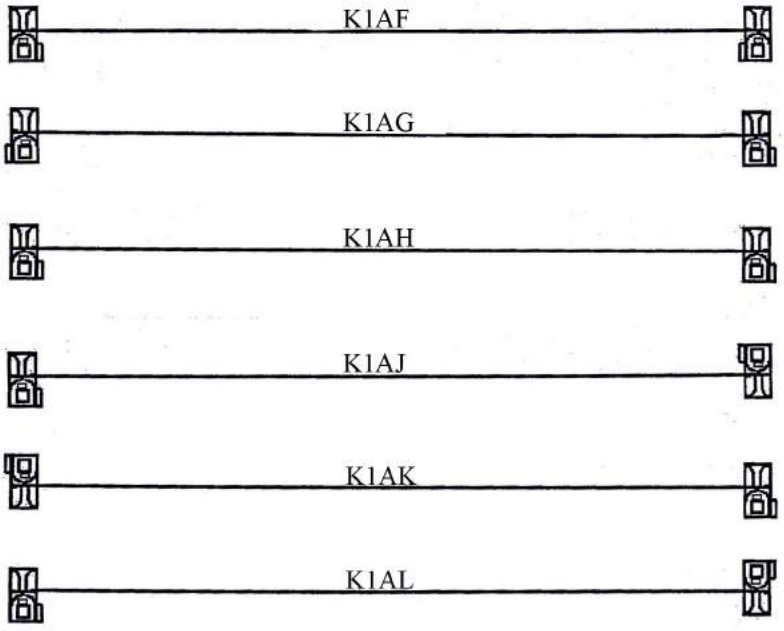



1.27MM*1.27MM IDC SOCKET W/O STRAIN RELIEF ECONOMICAL TYPE






A=B+5.47
B=1.27*POSITIONS/2-1.27







NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 026, 030,
034, 040, 044, 050, 060,
068, 080

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   1AF, 1AG, 1AH, 1AJ, 1AK, 1AL
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*1.27MM IDC SOCKETS WITH STRAIN RELIEF (H=8.5MM) (B1)

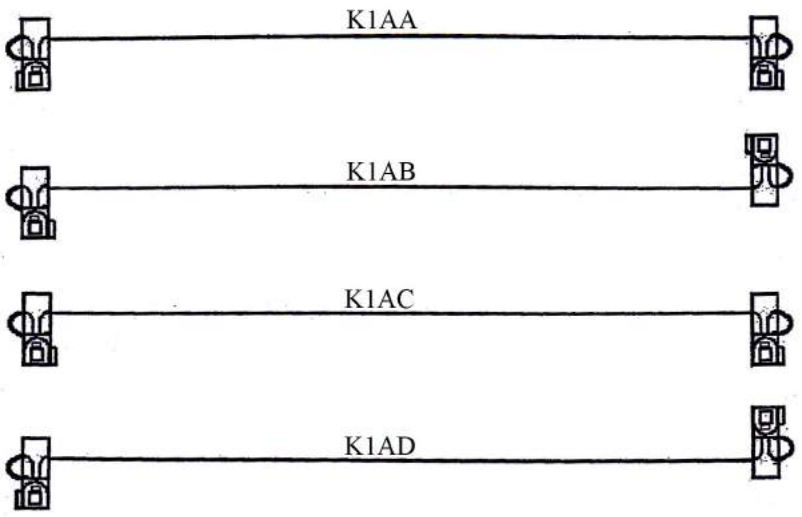

1.27MM*1.27MM IDC SOCKET WITH STRAIN RELIEF (BERYLLIUM COPPER)

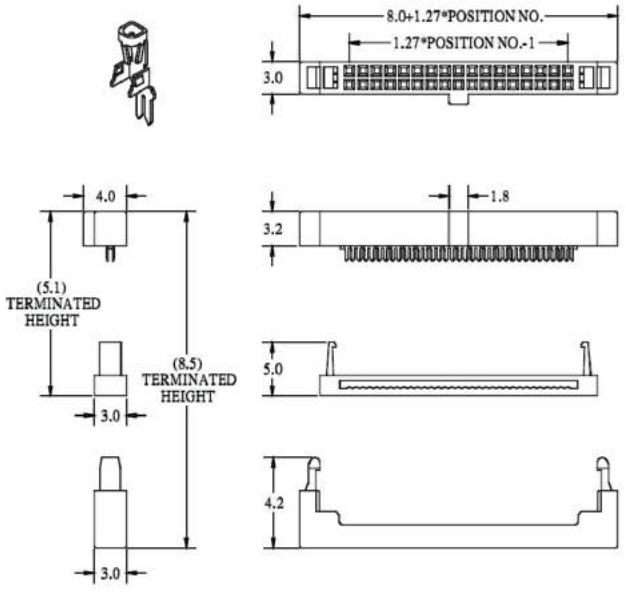

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
060, 068, 080

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$


1. CONSTRUCTION TYPE:
   1AA, 1AB, 1AC, 1AD
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*1.27MM IDC SOCKETS WITH LATCHES (H=12.3MM)

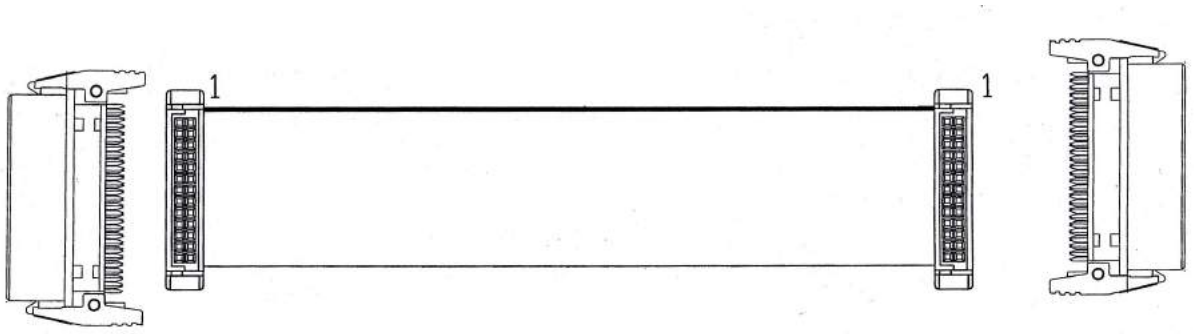


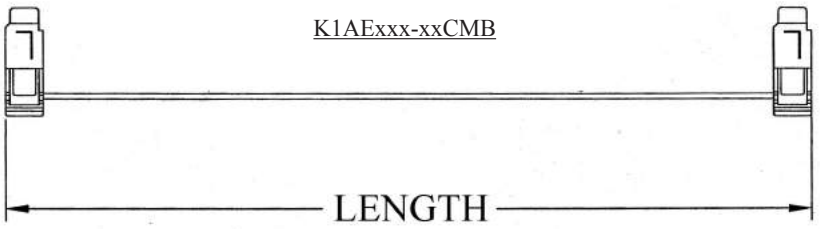



1.27MM*1.27MM IDC SOCKET WITH LATCHES

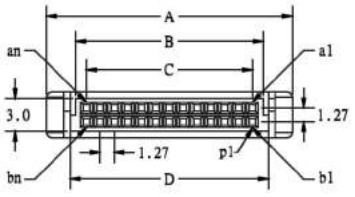

A=C+7.31
B=C+1.95
C=1.27*POSITIONS/2-1.27
D=C+2.95





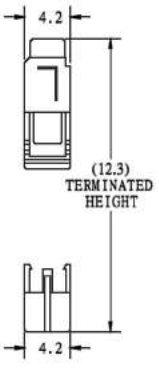

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 026, 030,
034, 040, 044, 050, 060,
068, 080

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   1AE
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM PITCH IDC SOCKET W/O S.R. (H=5.0MM) TO DIP PLUG (H=5.0MM) (D1)

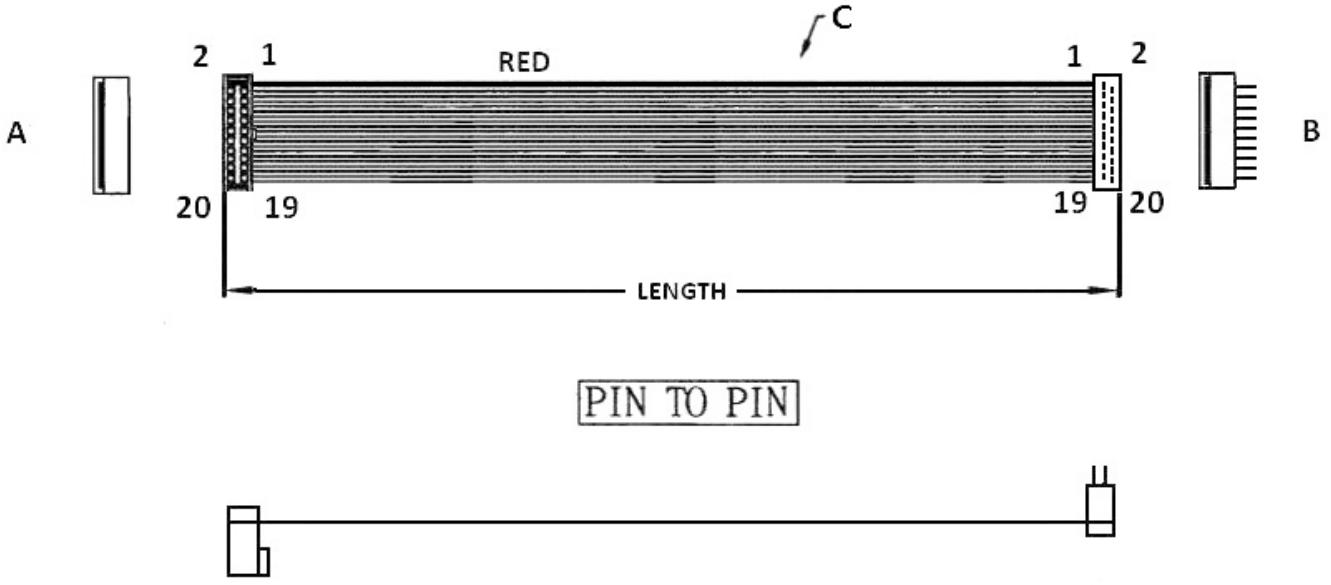

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KG}{1}\ \frac{xx}{2}\ \frac{KD}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "KD" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM PITCH IDC SOCKET W/O S.R. (H=5.0MM) TO DIP PLUG (H=5.0MM) (D2)

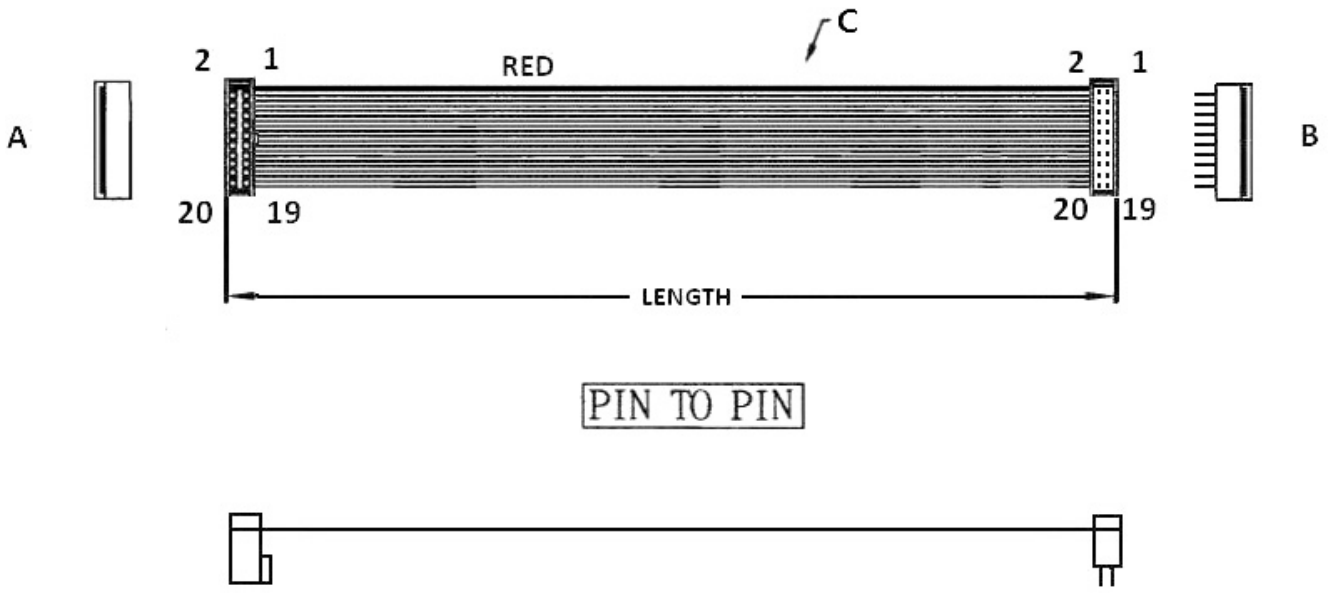


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "KP" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM PITCH IDC SOCKET W/O S.R. (H=5.0MM) TO DIP PLUG (H=5.0MM) (D3)

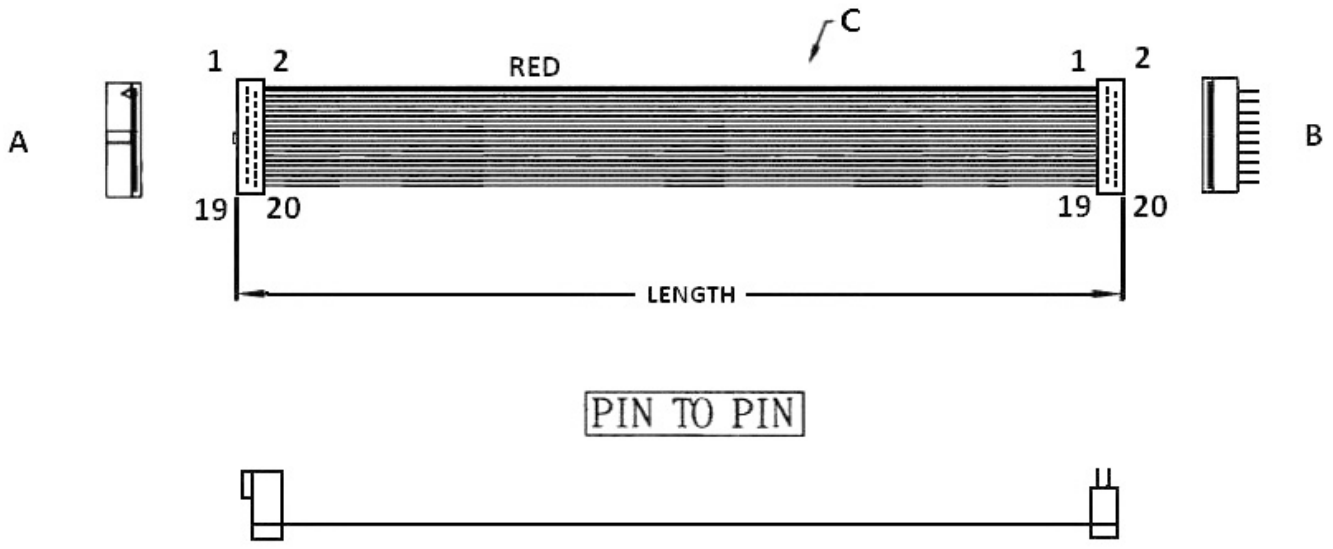


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "LD" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM PITCH IDC SOCKET W/O S.R. (H=5.0MM) TO DIP PLUG (H=5.0MM) (D4)

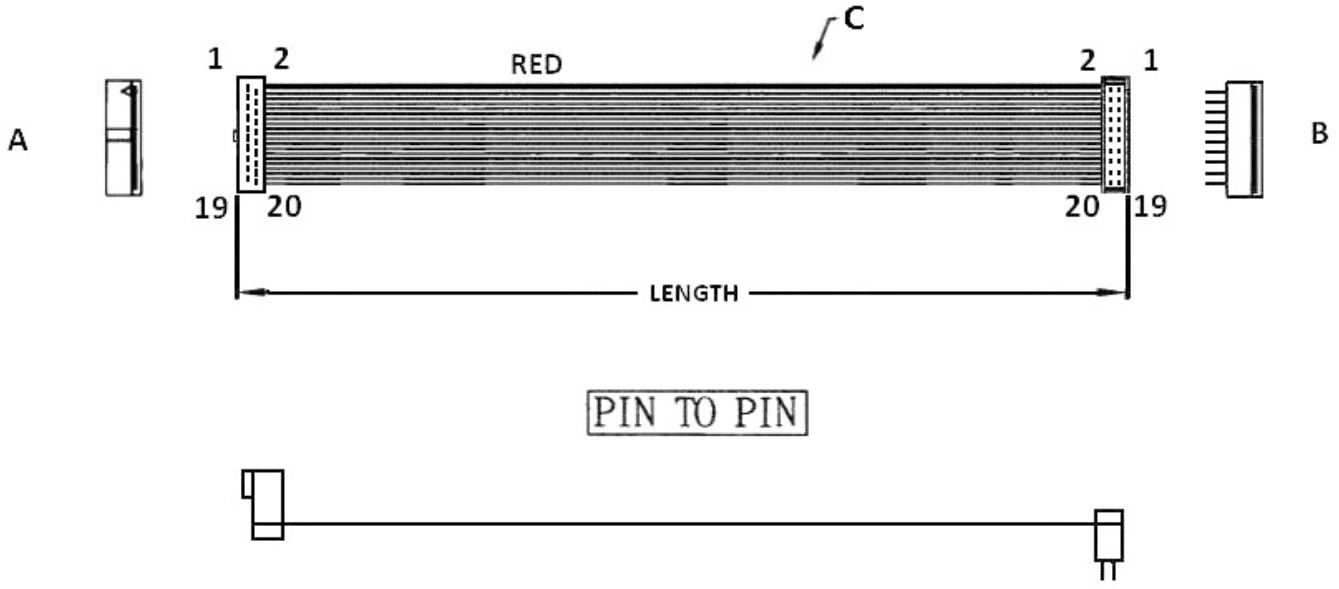


ORDERING INFORMATION:

P/N KG (1) xx (2) LP (3) - xx (4) C M B (5)


1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "LP" 1.27MMX1.27MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET (H=5.1MM) TO DIP PLUG (H=5.1MM) (D5)

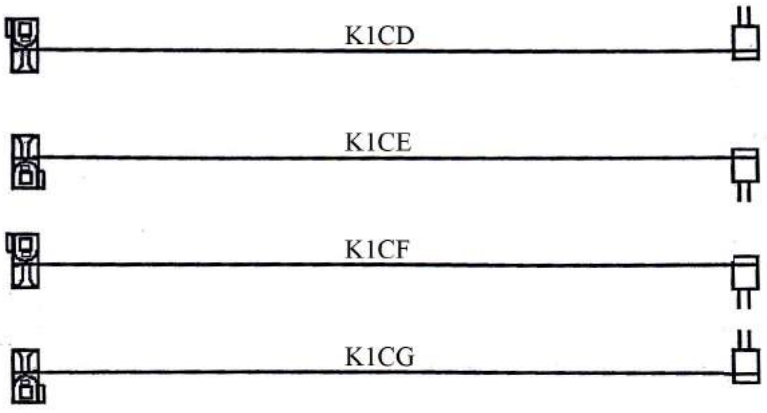


1.27MM*1.27MM IDC SOCKET W/O S.R.

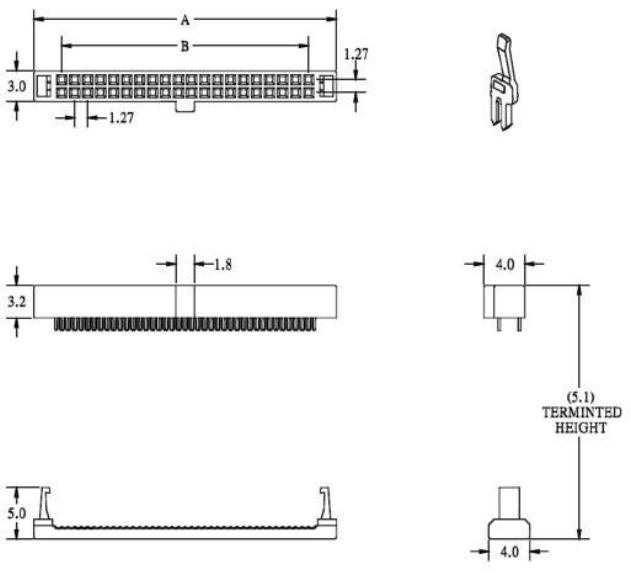

A=B+5.47
B=1.27*POSITIONS/2-1.27

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 026, 030, 034, 040, 044, 050, 060, 068, 080

1.27MM*1.27MM DIP PLUG

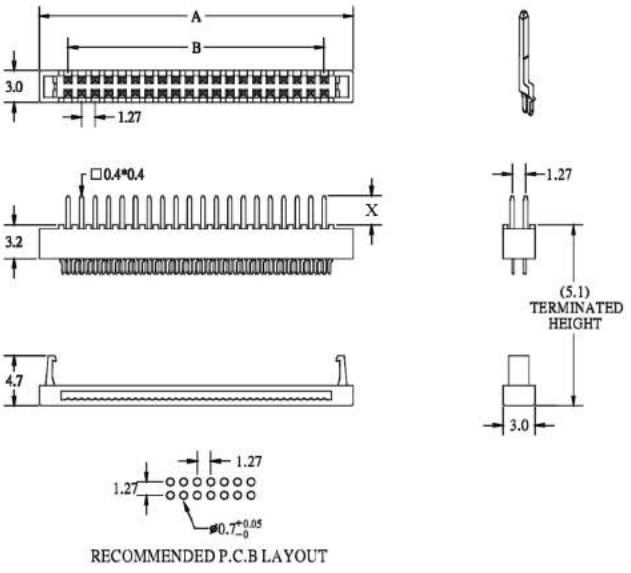

A=B+5..47
B=1.27*POSITIONS/2-1.27
X= PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 026, 030, 034, 040, 044, 050, 060, 068, 080

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B x
1 2 3 4 5

1. CONSTRUCTION TYPE:
   1CD, 1CE, 1CF, 1CG
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.1MM(STANDARD)
   "2" X=1.9MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET (H=5.1MM) TO DIP PLUG (H=5.1MM) (D6)

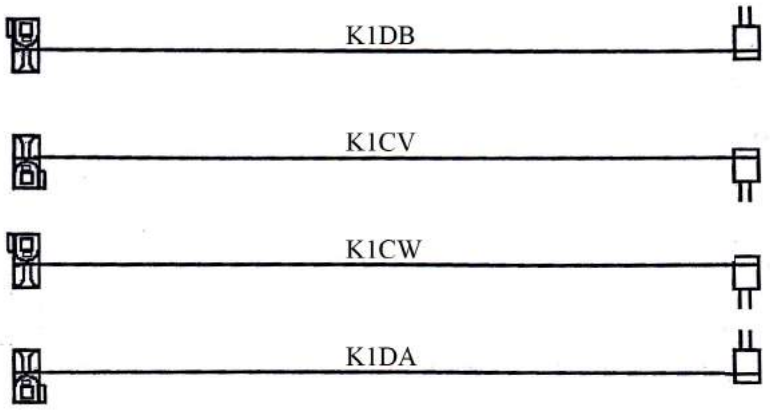


1.27MM*1.27MM IDC SOCKET W/O S.R. (BERYLLIUM COPPER)

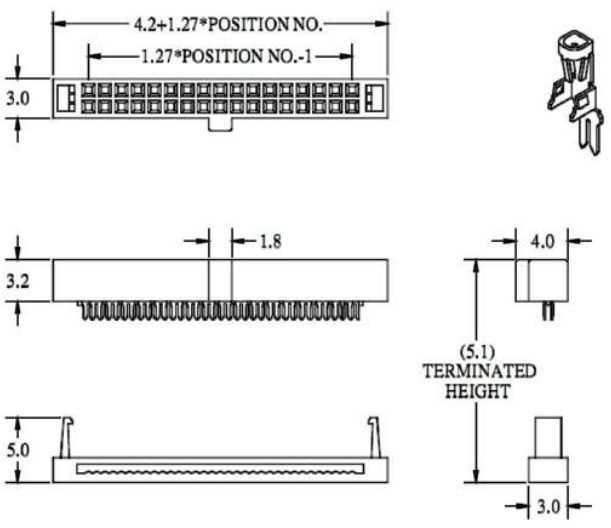

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 060, 068, 080

1.27MM*1.27MM DIP PLUG

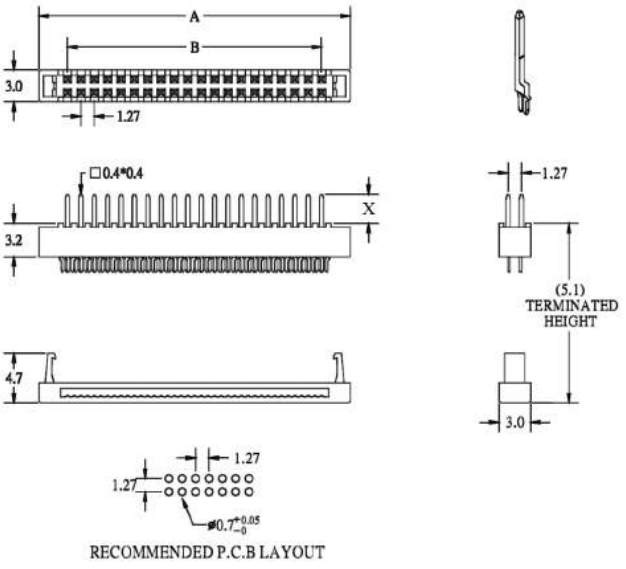

A=B+5..47
B=1.27*POSITIONS/2-1.27
X= PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 026, 030, 034, 040, 044, 050, 060, 068, 080

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B x
1 2 3 4 5

1. CONSTRUCTION TYPE:
   1DB,1CV, 1CW, 1DA
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.1MM(STANDARD)
   "2" X=1.9MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET WITH S.R. (H=8.5MM) TO DIP PLUG (H=5.1MM) (E1)

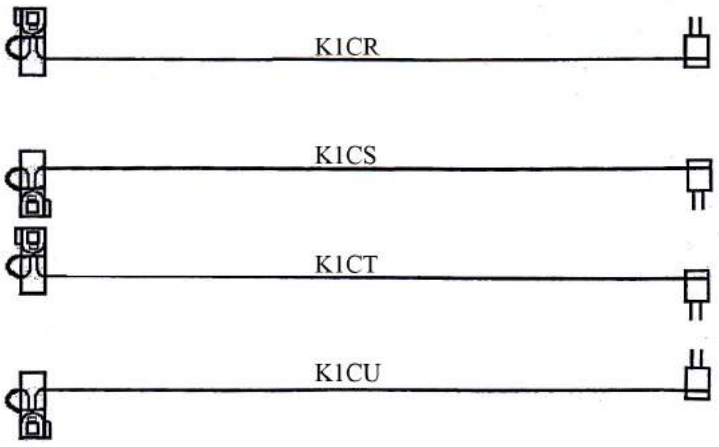


1.27MM*1.27MM IDC SOCKET WITH S.R. (BERYLLIUM COPPER)

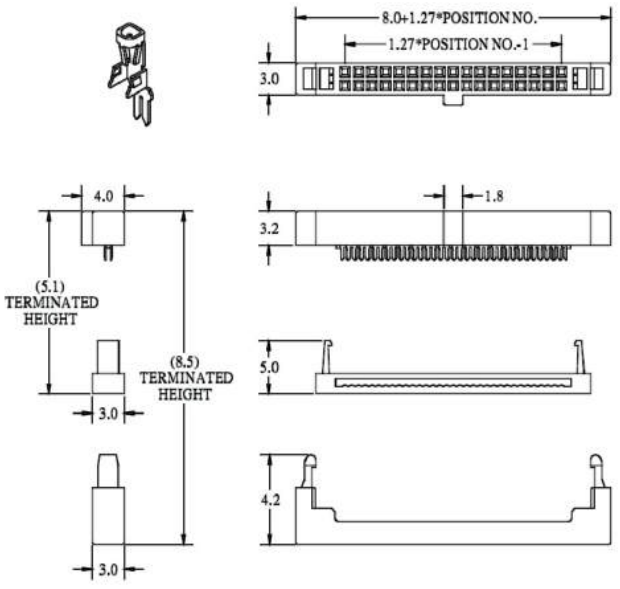

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 060, 068, 080

1.27MM*1.27MM DIP PLUG

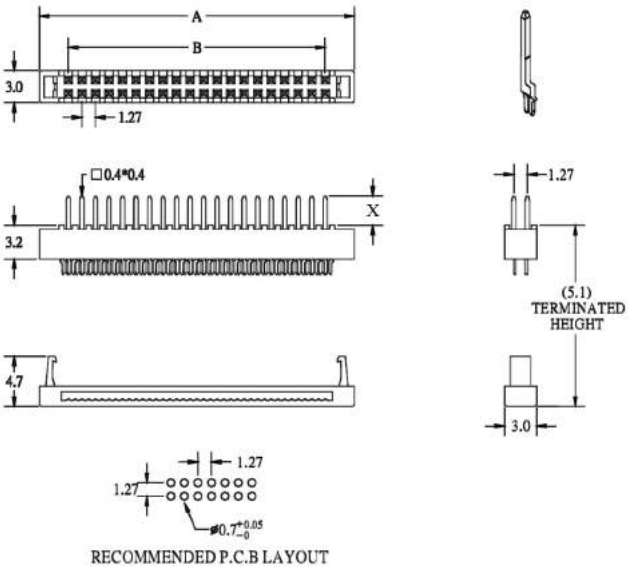

A=B+5..47
B=1.27*POSITIONS/2-1.27
X= PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 026, 030, 034, 040, 044, 050, 060, 068, 080

ORDERING INFORMATION:


P/N K x x x x x x - x x C M B x
1 2 3 4 5

1. CONSTRUCTION TYPE:
   1CR, 1CS, 1CT, 1CU
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.1MM(STANDARD)
   "2" X=1.9MM

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2* 1.27MMX1.27MM DIP PLUGS (H=5.0MM) (F1)

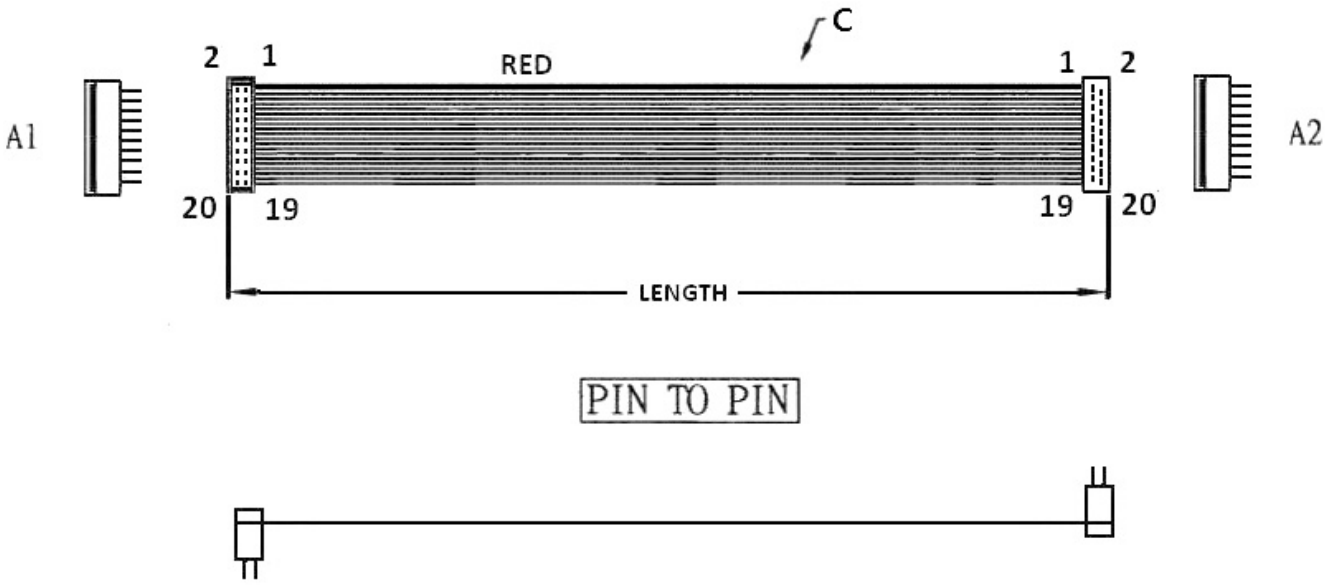


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{D D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "DD" 1.27MMX1.27MM DIP PLUG TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2* 1.27MMX1.27MM DIP PLUGS (H=5.0MM) (F2)

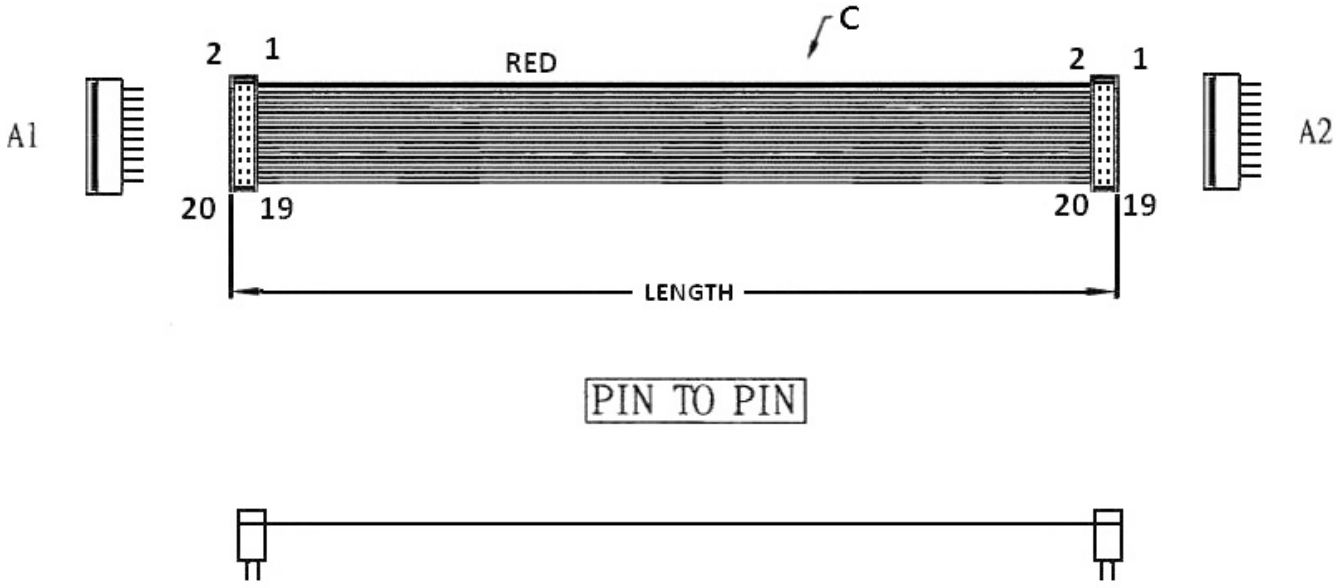


ORDERING INFORMATION:

P/N $\underset{1}{\underline{KG}}\ \underset{2}{\underline{xx}}\ \underset{3}{\underline{DP}}$ - $\underset{4}{\underline{xx}}$ C M $\underset{5}{\underline{B}}$

1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "DP" 1.27MMX1.27MM DIP PLUG TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2* 1.27MMX1.27MM DIP PLUGS (H=5.0MM) (F3)

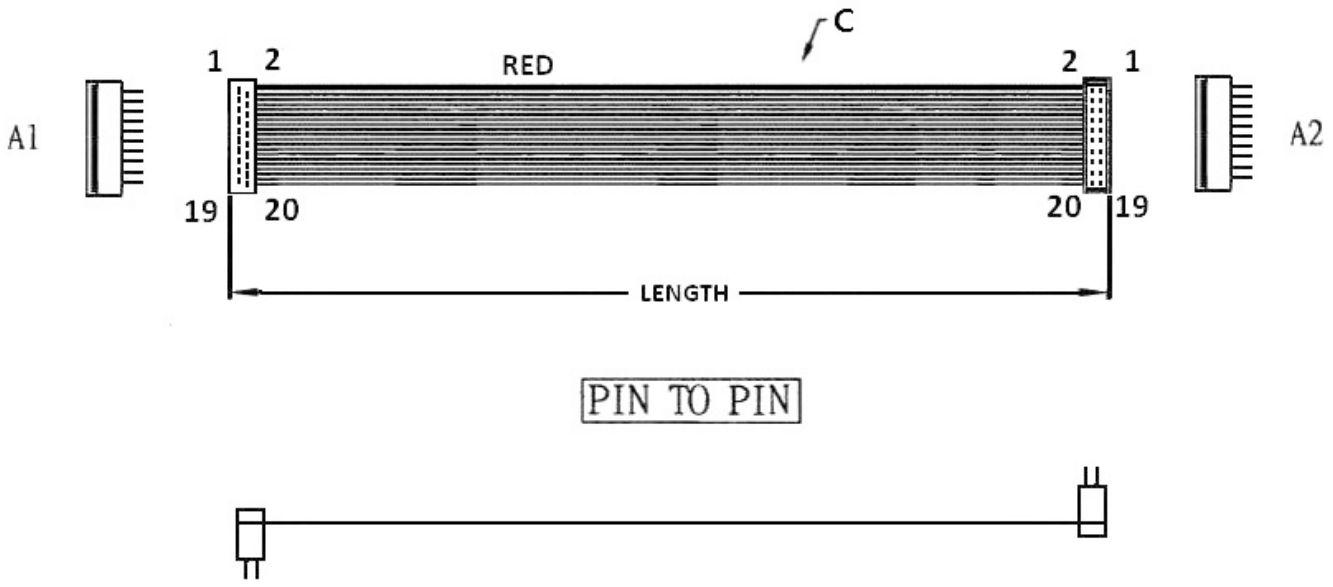

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K G}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{P P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KG" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   06~80
3. CONNECTORS AT TWO ENDS:
   "PP" 1.27MMX1.27MM DIP PLUG TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*1.27MM DIP PLUGS (H=5.1MM) (F4)

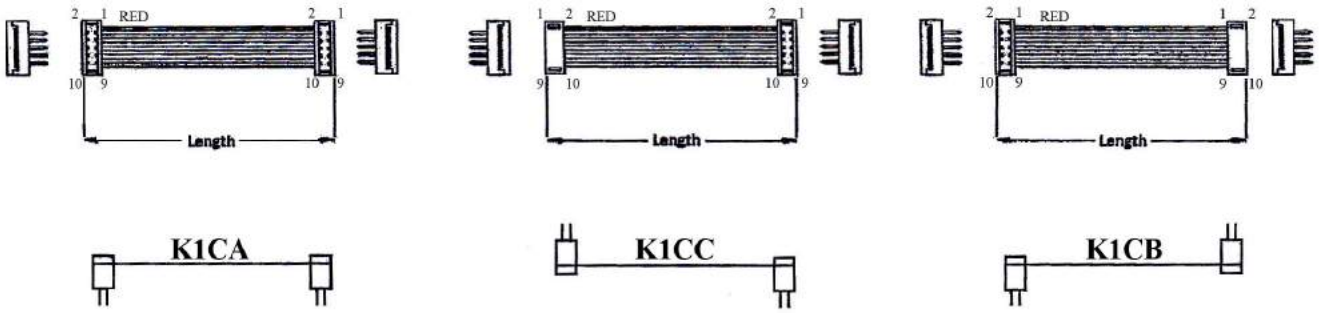

1.27MM*1.27MM PITCH DIP PLUG

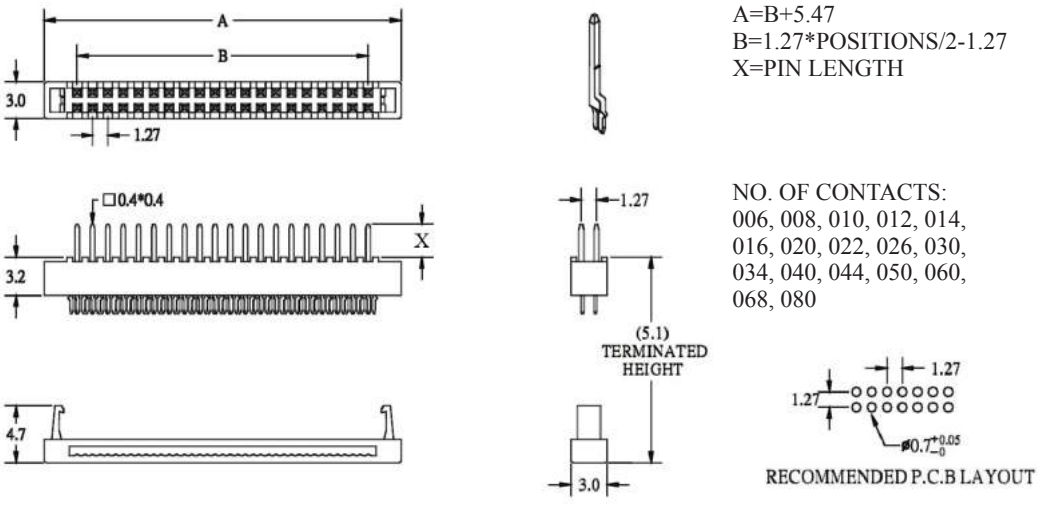

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 026, 030,
034, 040, 044, 050, 060,
068, 080

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N K x x x x x x - x x C M B x
1 2 3 4 5

1. CONSTRUCTION TYPE:
   1CA, 1CB, 1CC
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.1MM (STANDARD)
   "2" X= 1.9MM

NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET W/O S.R. ECONOMICAL TYPE (H=5.1MM) TO IDC PLUG WITH LATCHES (G1)

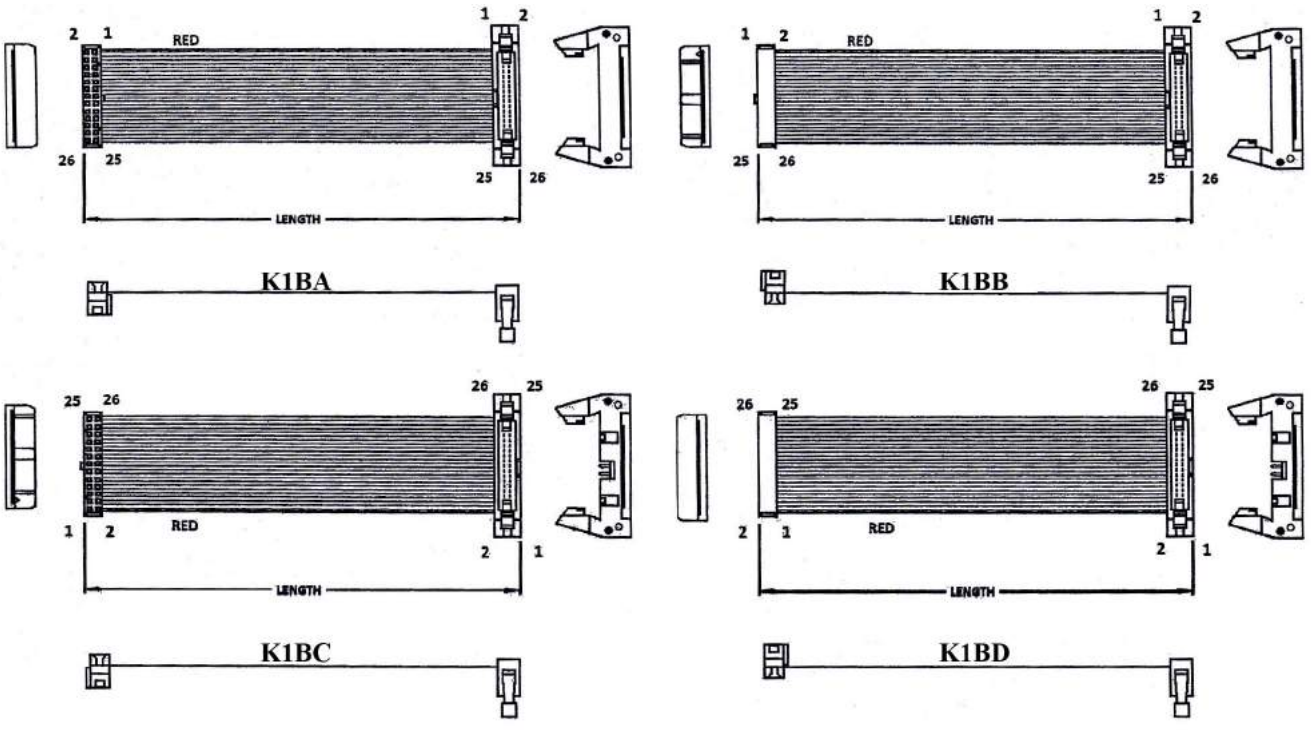


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   1BA, 1BB, 1BC, 1BD
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET W/O S.R. (BERYLLIUM COPPER, H=5.1MM) TO IDC PLUG WITH LATCHES (G2)

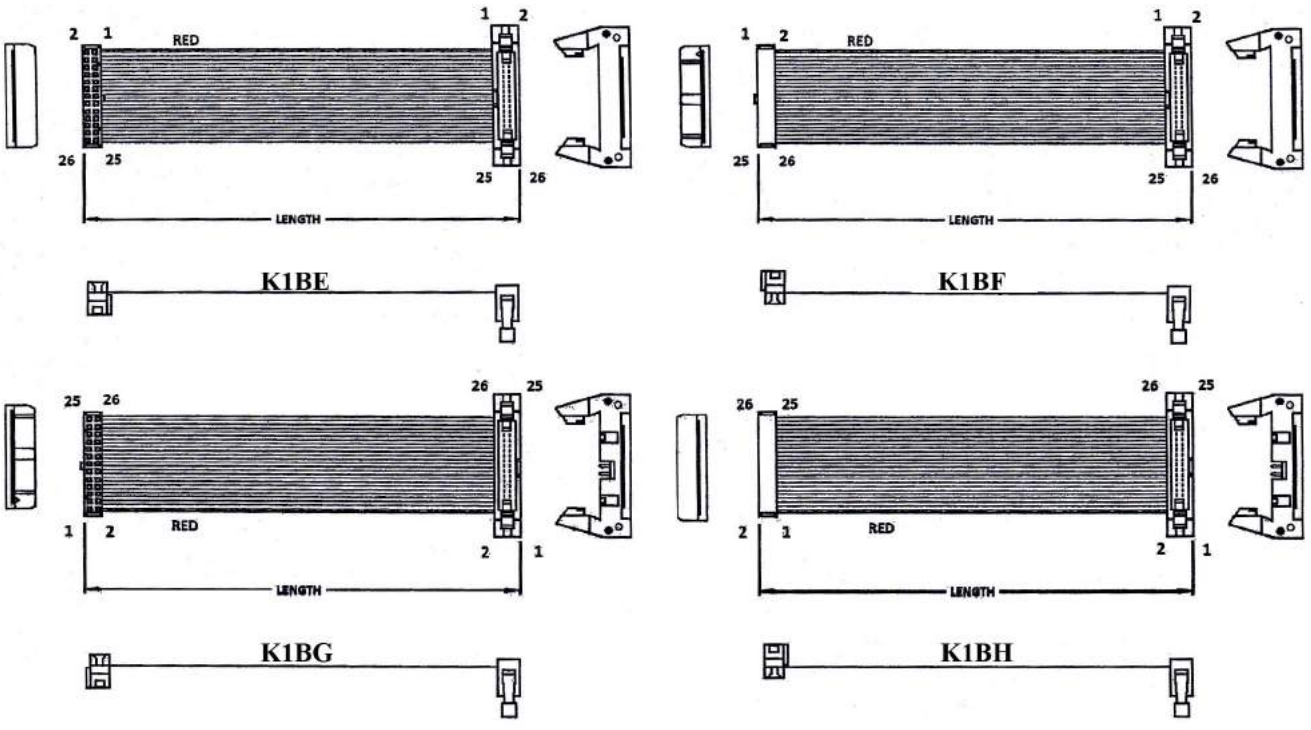


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{}\frac{B}{4}$


1. CONSTRUCTION TYPE:
   1BE, 1BF, 1BG, 1BH
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET WITH S.R. (BERYLLIUM COPPER, H=8.5MM) TO IDC PLUG WITH LATCHES (H1)

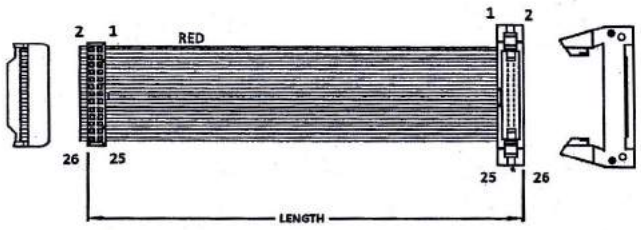


K1BJ

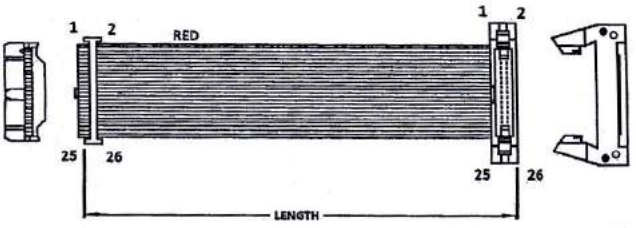

K1BK

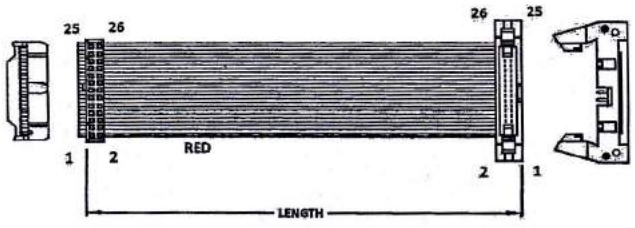

K1BL

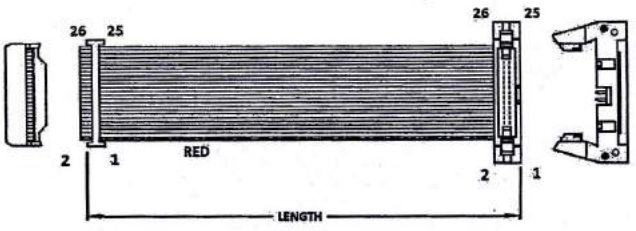

K1BM


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   1BJ, 1BK, 1BL, 1BM
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


0.635MM PITCH FLAT CABLE WITH 1.27MM*1.27MM IDC SOCKET (BERYLLIUM COPPER, H=5.1MM & 8.5MM) TO OPEN END

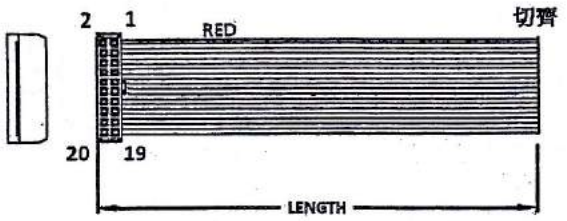




K1BN

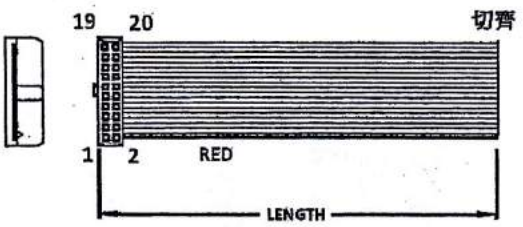





K1BP

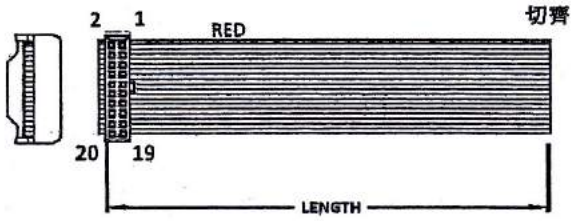



K1BQ

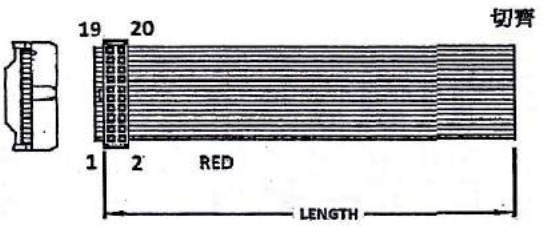



K1BR

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 1BN, 1BP (H=5.1MM)
   IDC SOCKET WITH S.R. : 1BQ, 1BR (H=8.5MM)
2. NO. OF CONTACTS:
   006~080
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=7.8MM) (A1)

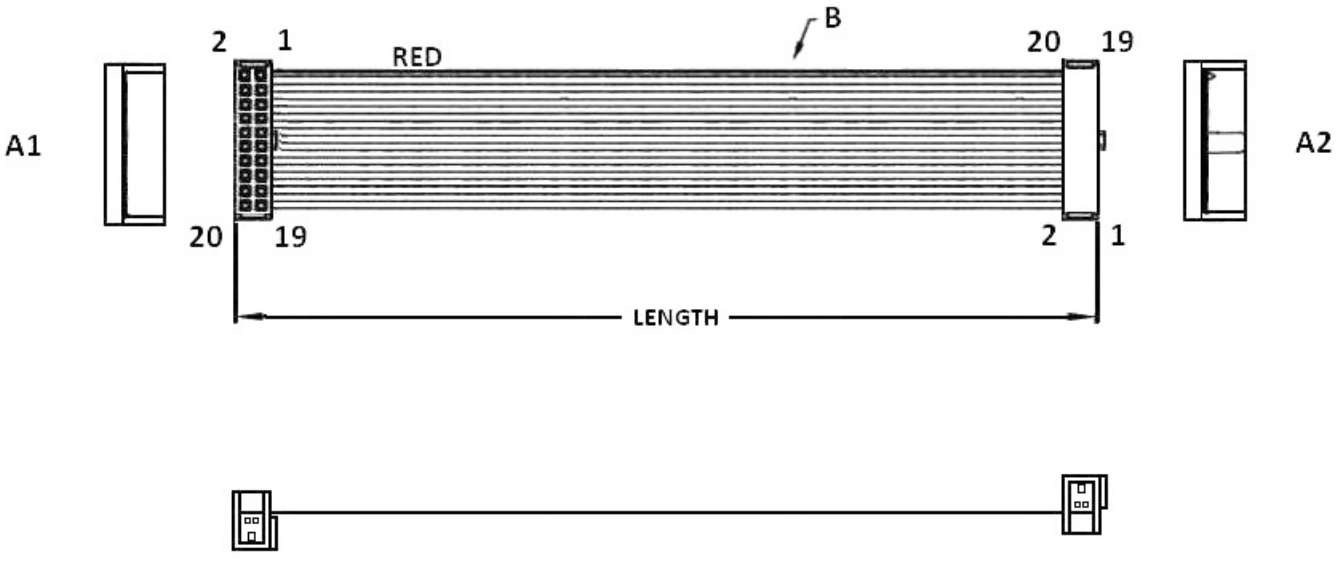


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{K I}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "KI" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=7.8MM) (A2)

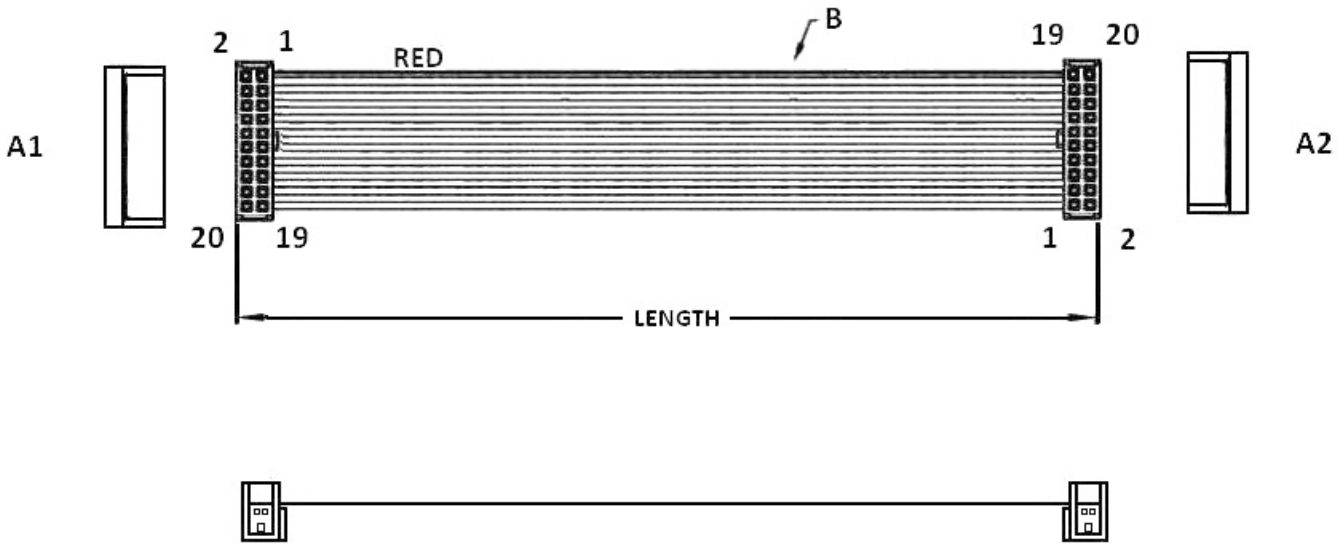


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K 8}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "K8" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=7.8MM) (A3)

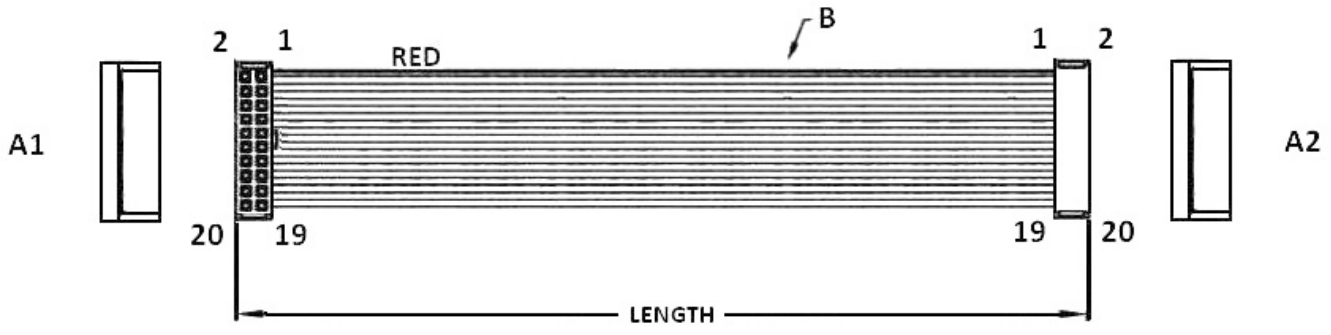

PIN TO PIN




ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{K K}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "KK" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=7.8MM) (A4)

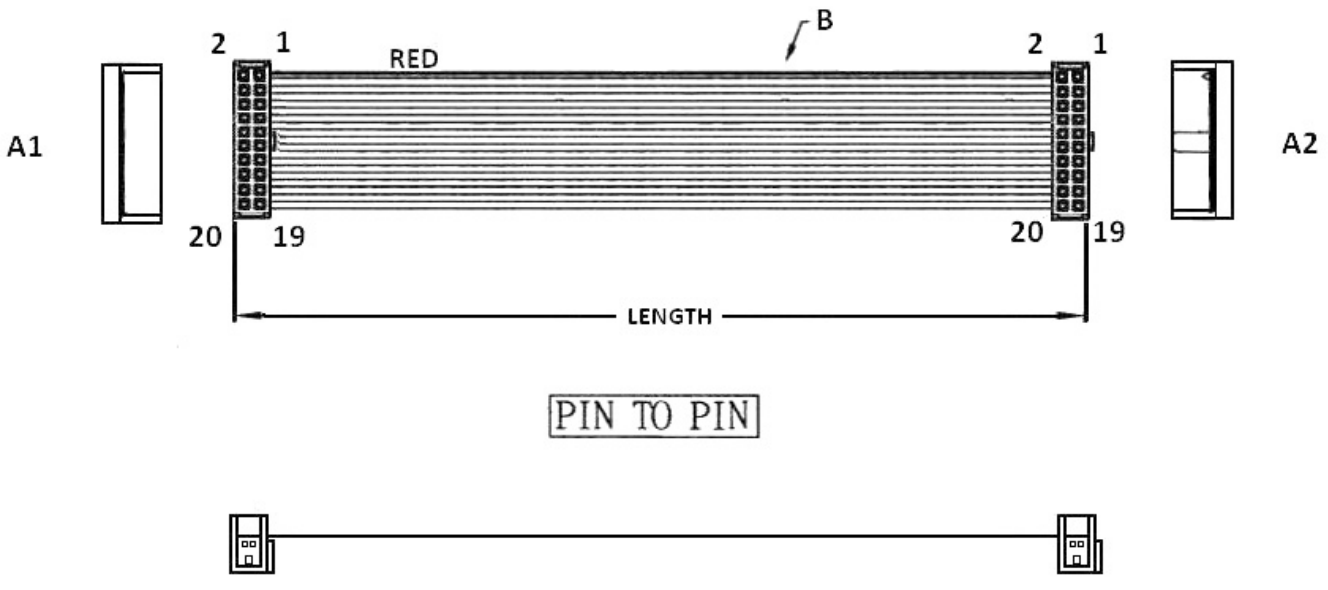


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{K L}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "KL" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=7.8MM) (A5)

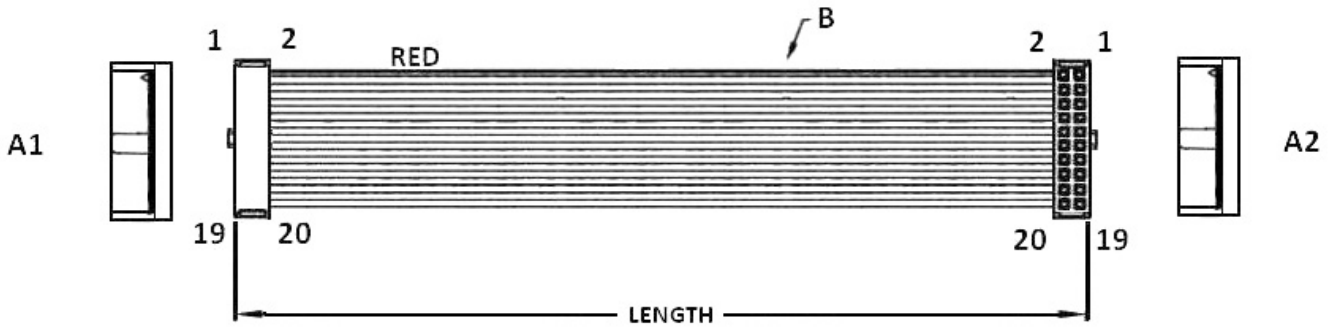

PIN TO PIN




ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L L}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "LL" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=7.8MM) (A6)

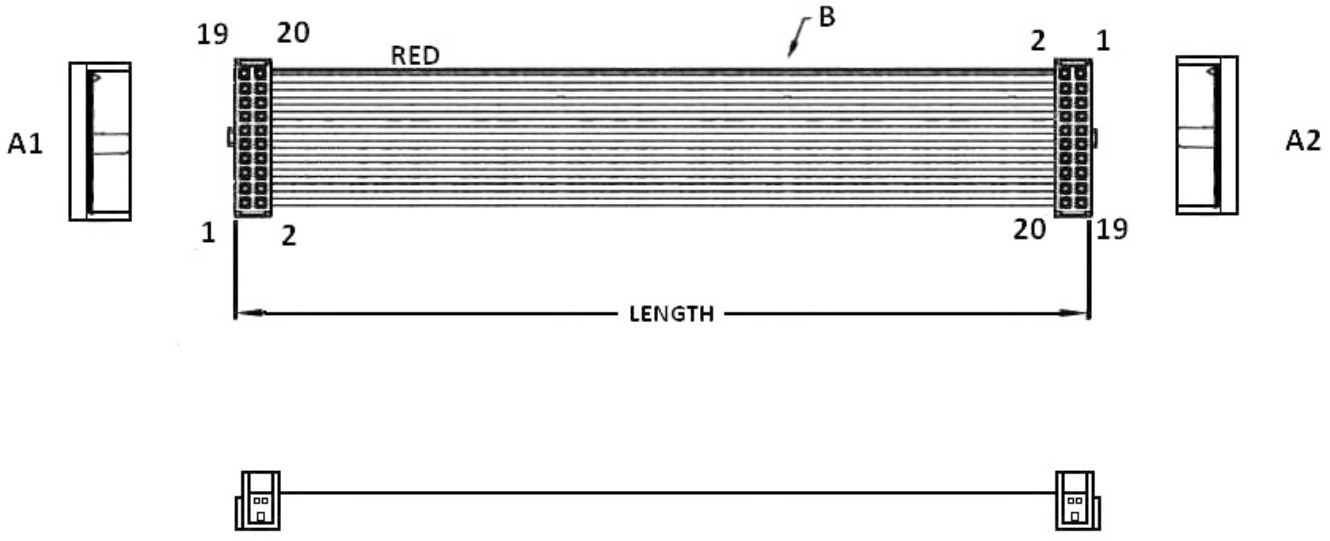


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{L I}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "LI" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*1.27MM*2.54MM IDC SOCKETS (H=8.0MM) (A7)

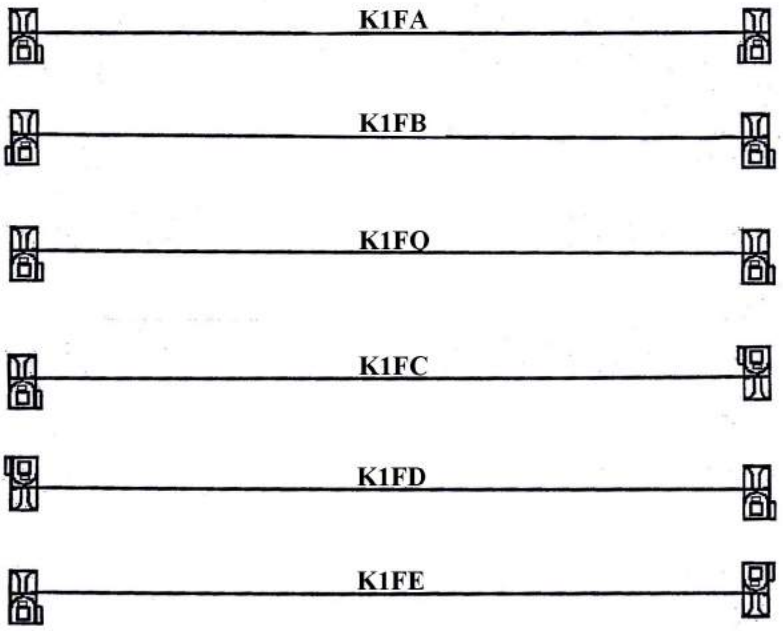



1.27MM*2.54MM IDC SOCKET W/O STRAIN RELIEF






A=1.27*POSITIONS/2-1.27
B=A+6.12







NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{B}{4}$

1. CONSTRUCTION TYPE:
   1FA, 1FB, 1FQ, 1FC, 1FD, 1FE
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*1.27MM*2.54MM IDC SOCKETS (H=13.1MM) (A8)

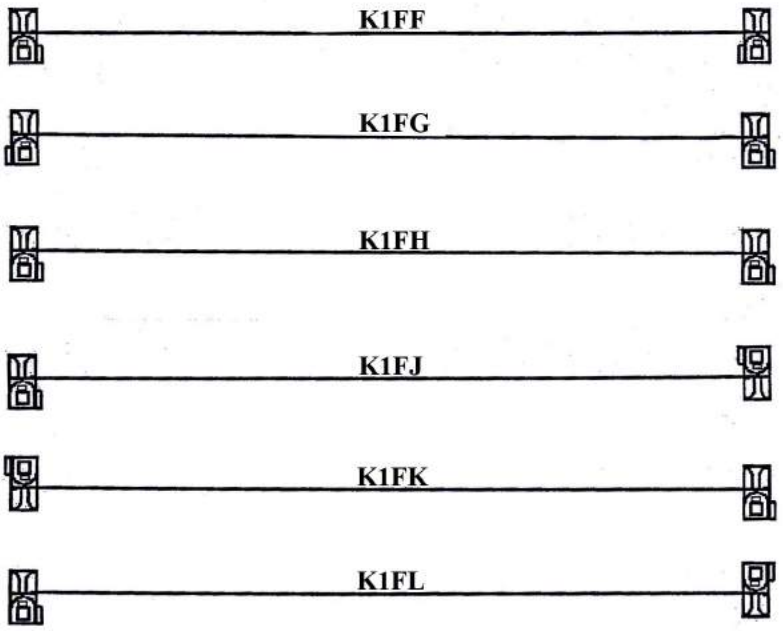

1.27MM*2.54MM PITCH IDC SOCKET W/O STRAIN RELIEF

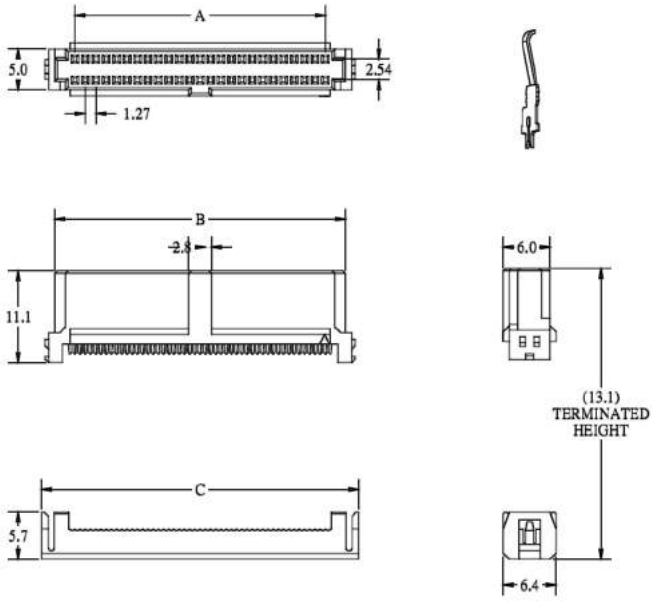

A=1.27*POSITIONS/2-1.27
B=A+4.88
C=A+8.08

NO. OF CONTACTS:
010, 020, 026, 030, 034,
040, 050, 060, 068, 080,
100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   1FF, 1FG, 1FH, 1FJ, 1FK, 1FL
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*2.54MM SHRUNK IDC SOCKETS (H=13.1MM) (A9)

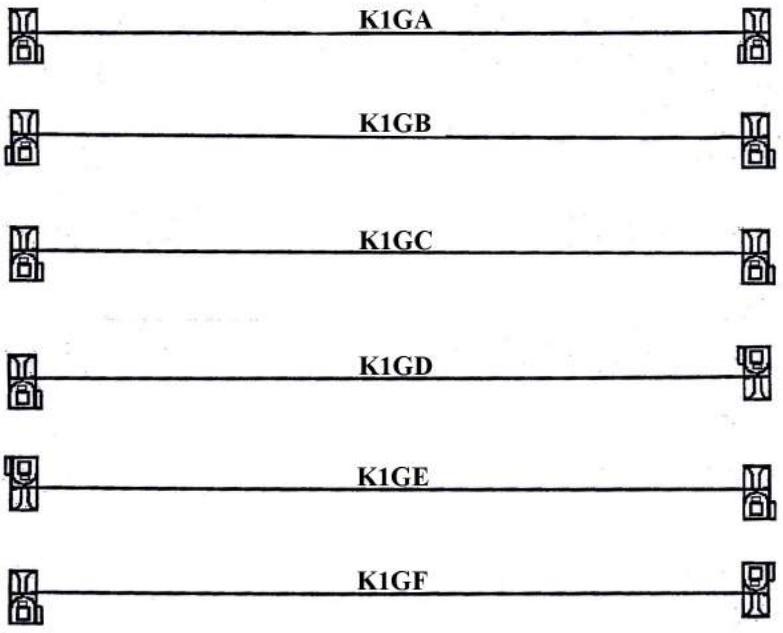

1.27MM*2.54MM PITCH SHRUNK IDC SOCKET W/O STRAIN RELIEF

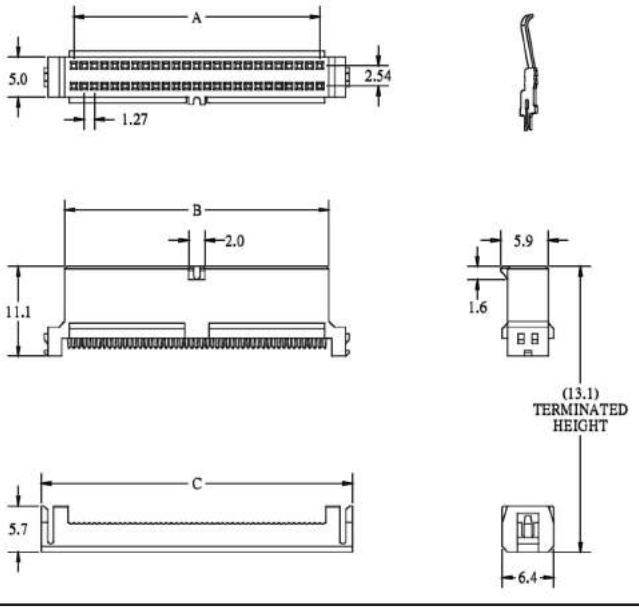

A=1.27*POSITIONS/2-1.27
B=A+2.28
C=A+8.08

NO. OF CONTACTS:
010, 020, 026, 030, 034,
040, 050, 060, 068, 080,
100

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   1GA, 1GB, 1GC, 1GD, 1GE, 1GF
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=11.0MM) (B1)

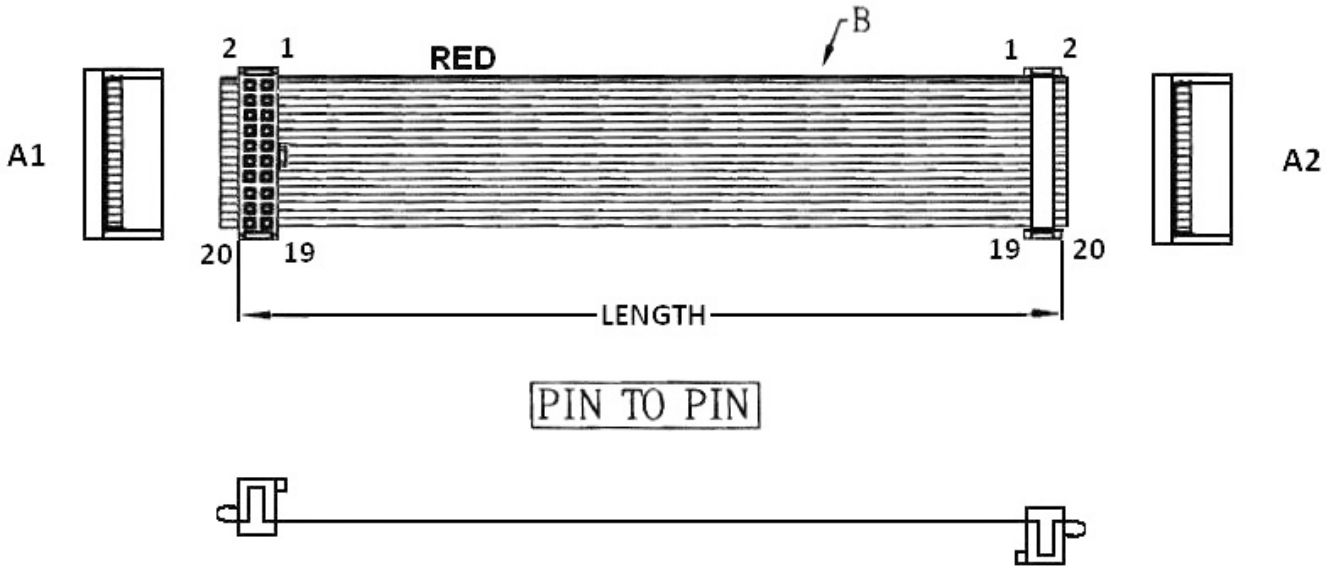

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{M M}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "MM" 1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKET WITH STRAIN RELIEFS (H=11.0MM) (B2)

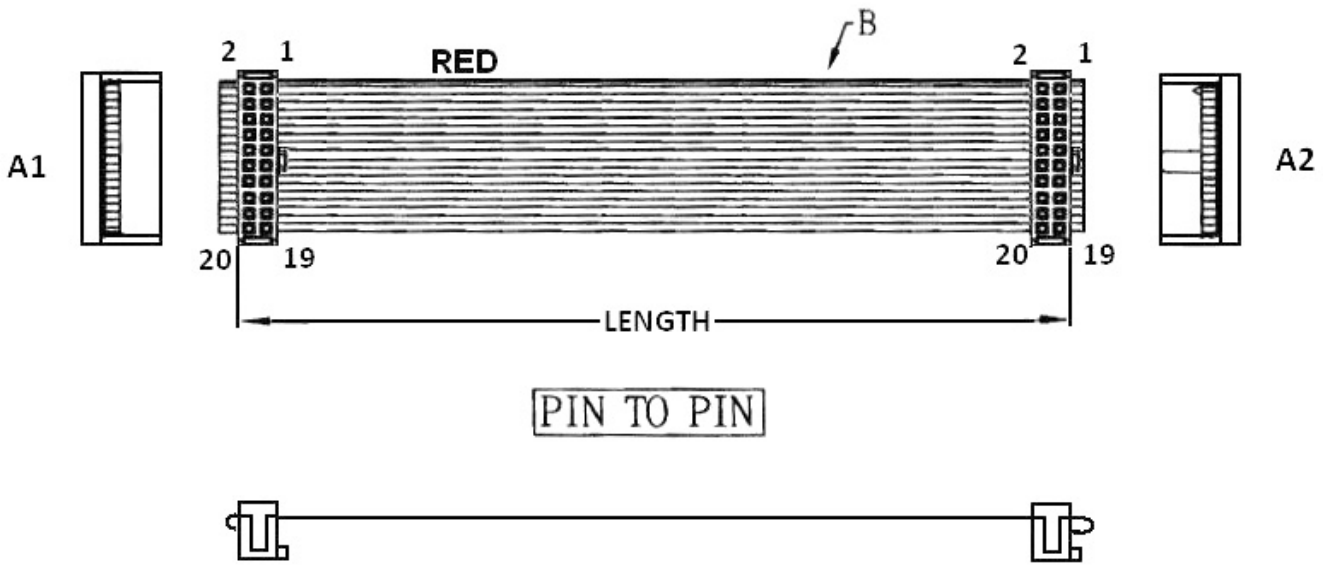

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{M N}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "MN" 1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=11.0MM) (B3)

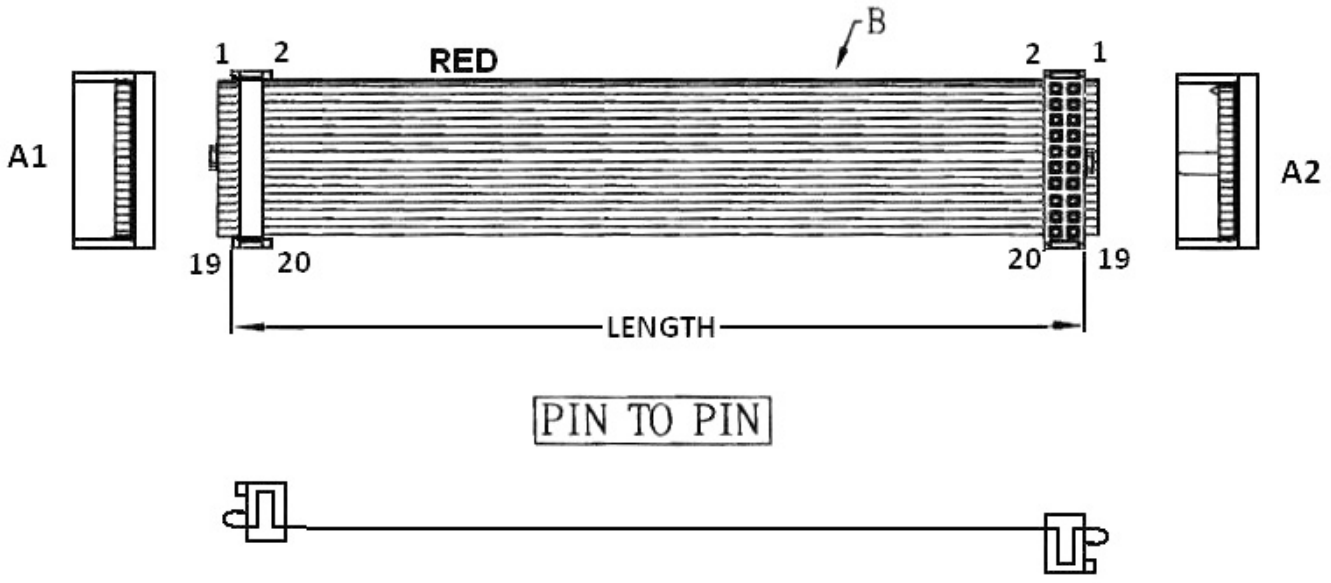


ORDERING INFORMATION:

P/N $\frac{\text{K E}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{N N}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "NN" 1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*
1.27MMX2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=11.0MM) (B4)

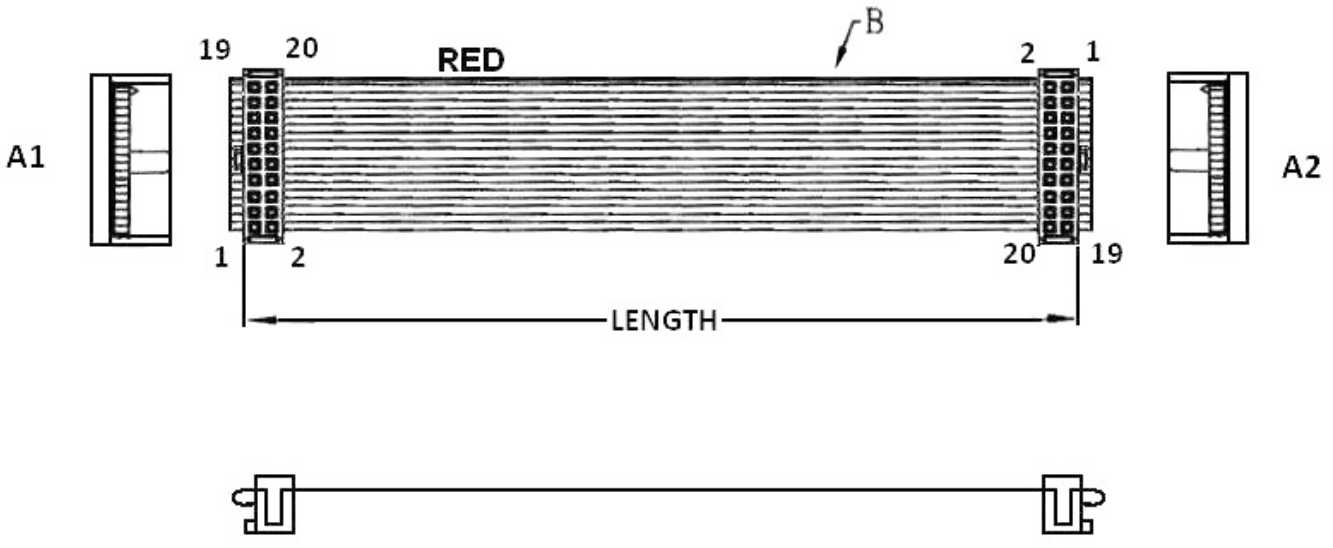


ORDERING INFORMATION:

P/N KE xx NX - xx CM B
1 2 3 4 5


1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "NX" 1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MMX2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*2.54MM IDC SOCKETS WITH S.R. (H=10.75MM) (B5)

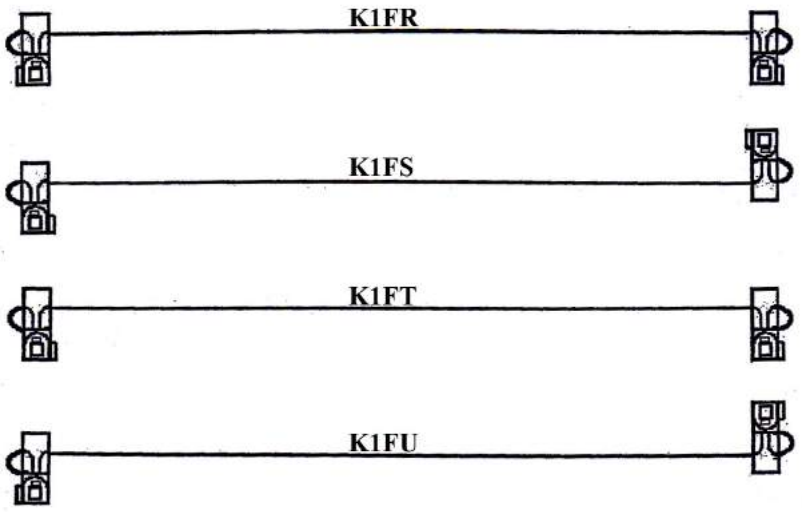

1.27MM*2.54MM IDC SOCKET WITH STRAIN RELIEF

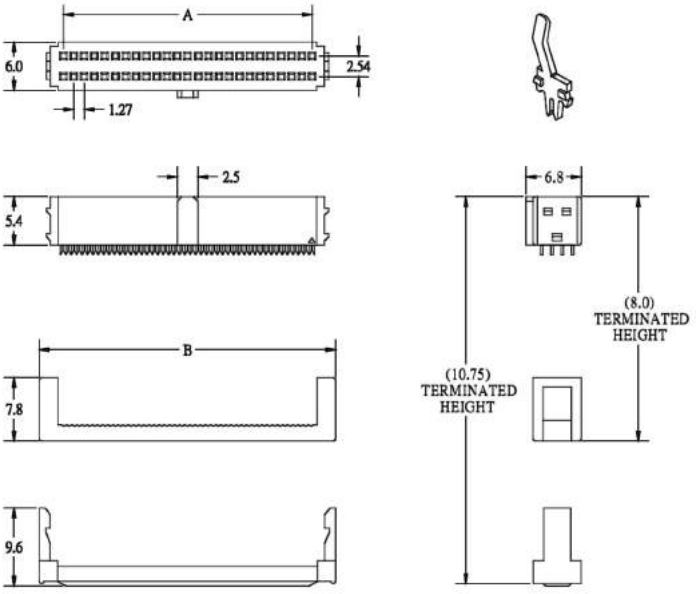

A=1.27*POSITIONS/2-1.27
B=A+6.12

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{}$

1. CONSTRUCTION TYPE:
   1FR, 1FS, 1FT, 1FU
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*2.54MM IDC SOCKETS WITH S.R. (H=14.7MM) (B6)

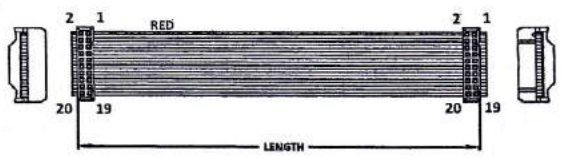

K1GL

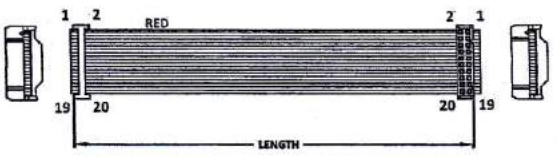


K1GM

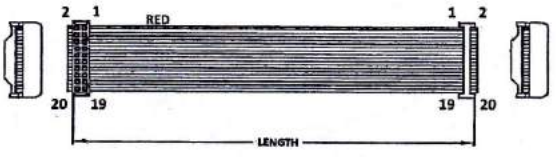

K1GN

1.27MM*2.54MM IDC SOCKET WITH BI-LEVEL IDC TERMINATION

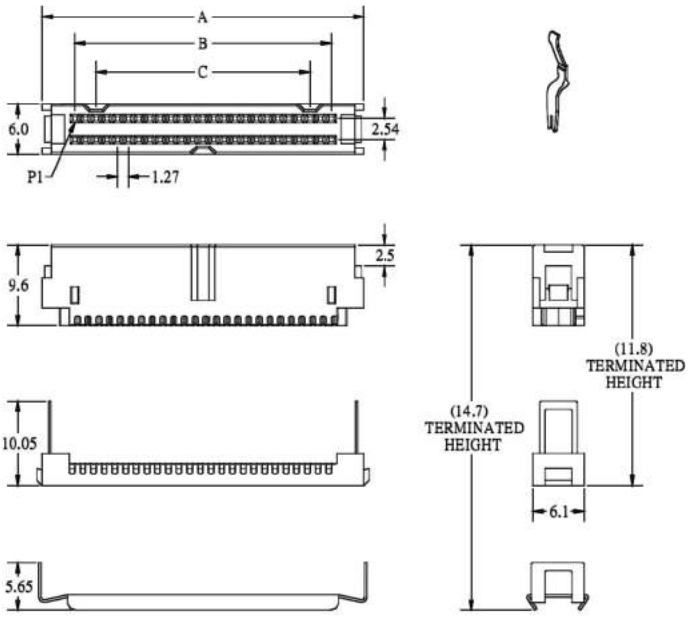

A=B+7.75
B=1.27*POSITIONS/2-1.27
C=B-5.08

NO. OF CONTACTS:
010, 020, 026, 030, 034,
036, 040, 050, 060, 068,
080, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMA}{4}$


1. CONSTRUCTION TYPE:
   1GL, 1GM, 1GN
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*2.54MM IDC SOCKETS WITH STEEL LATCH (H=12.4MM)

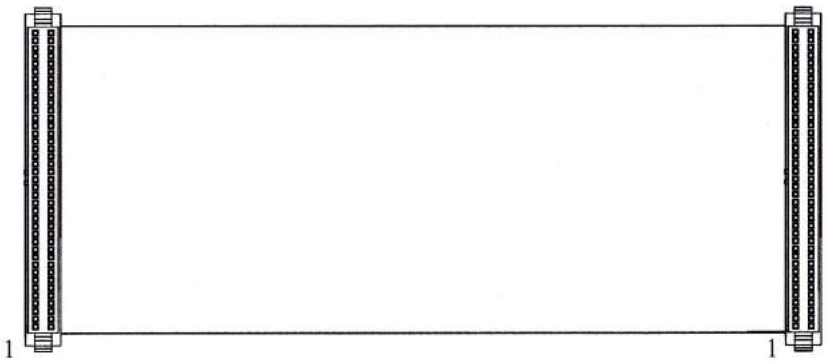

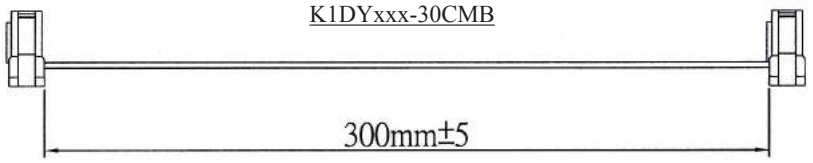

1.27MM*2.54MM IDC SOCKET WITH STEEL LATCH

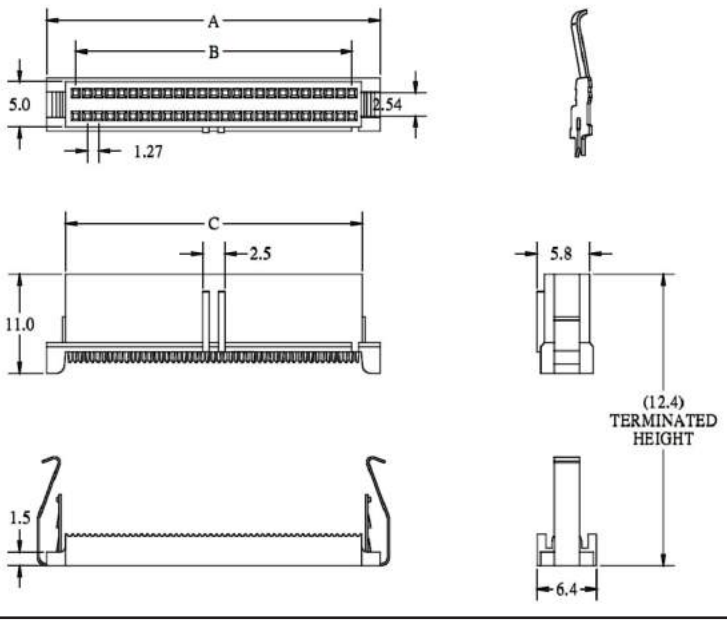

A=B+2.35
B=1.27*POSITIONS/2-1.27
C=B+6.35

NO. OF CONTACTS:
010, 014, 016, 020, 024,
026, 030, 034, 040, 044,
050, 060, 064, 068, 072,
080, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ C M $\frac{B}{4}$

1. CONSTRUCTION TYPE:
   1DY
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM FLAT CABLE WITH 2*1.27MM*2.54MM 44 PIN IDC SOCKETS

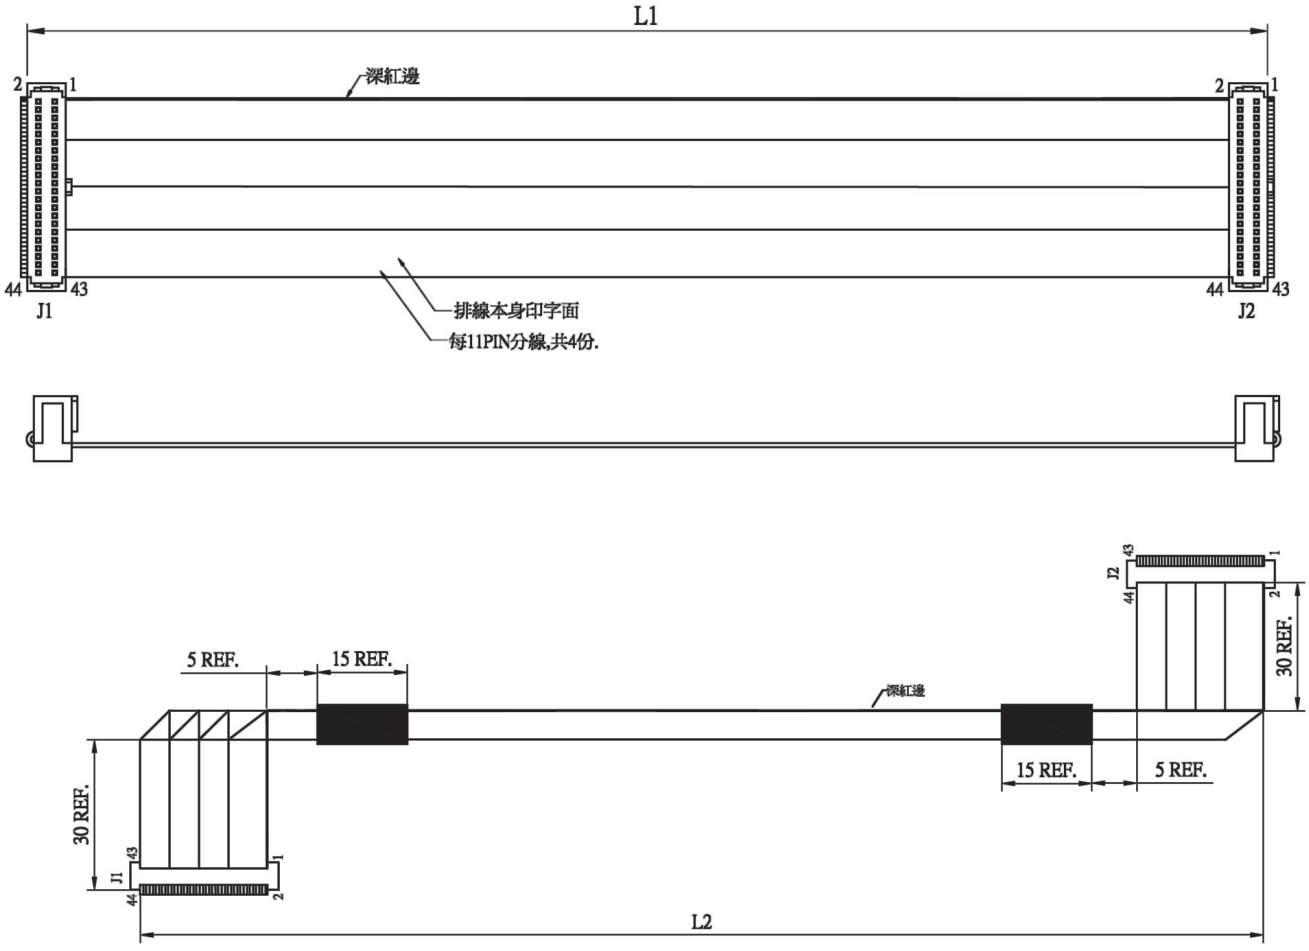


ORDERING INFORMATION:

P/N K D 4 4 K T - L1 / L2 C M


1. LENGTH L1 IN CM
2. LENGTH L2 IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 1.27MM*2.54MM IDC SOCKET (H=6.6MM) TO DIP PLUG (H=5.5MM) (D1)

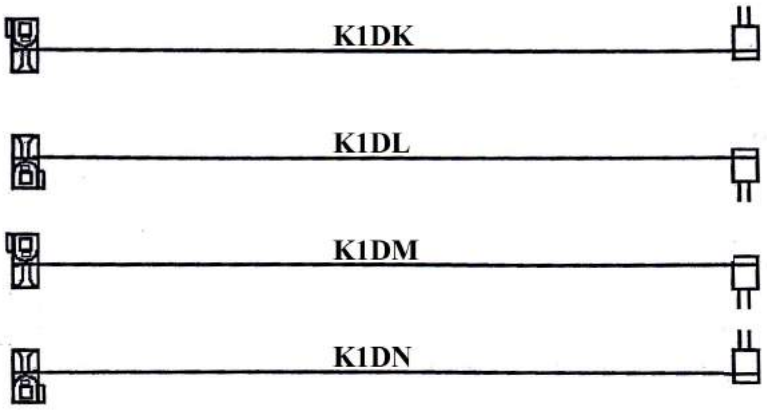


1.27MM*2.54MM LOW PROFILE IDC SOCKET W/O S.R.

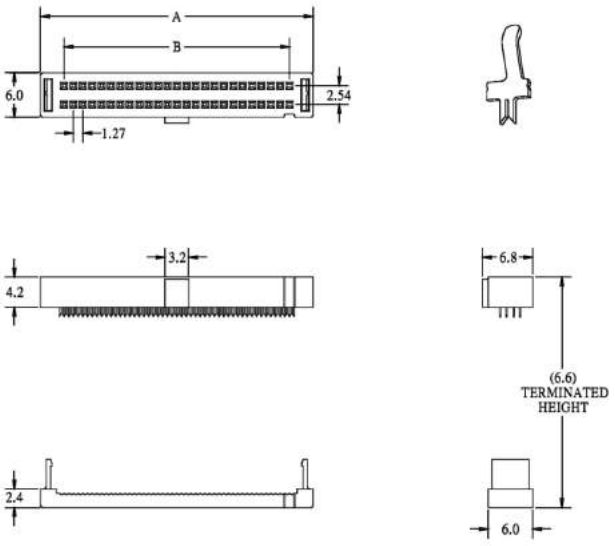

A=B+6.37
B=1.27*POSITIONS/2-1.27

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

1.27MM*2.54MM DIP PLUG

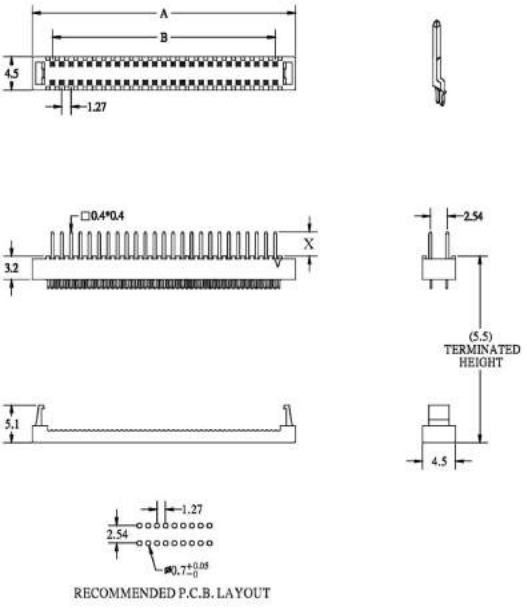

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   1DK, 1DL, 1DM, 1DN
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.3MM (STANGARD)
   "2" X=2.1MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 1.27MM*2.54MM IDC SOCKET (H=13.1MM) TO DIP PLUG (H=5.5MM) (D2)

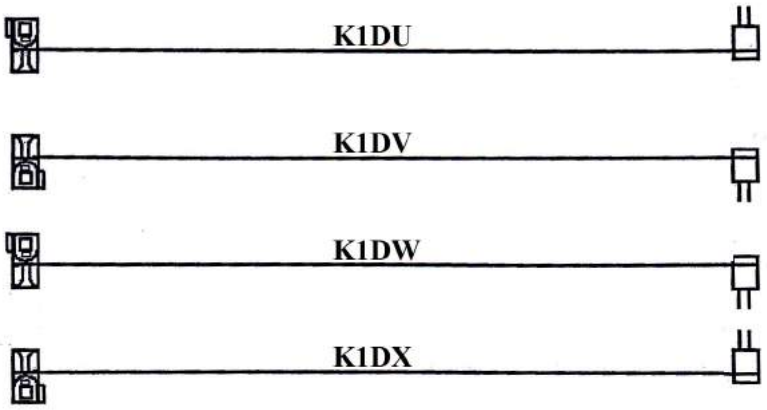


1.27MM*2.54MM IDC SOCKET W/O S.R.

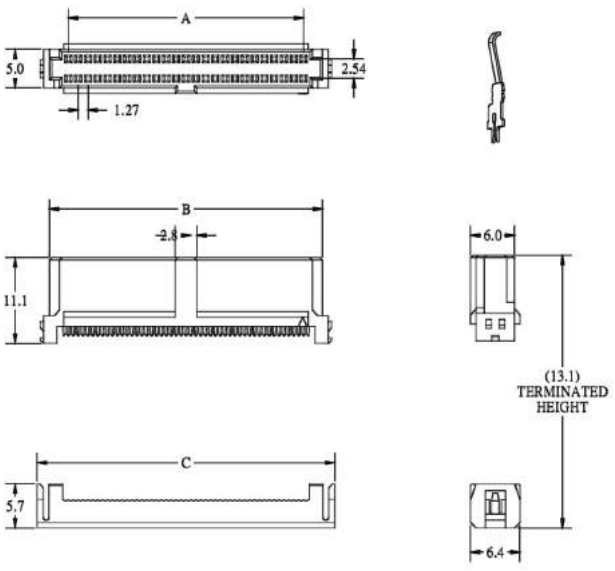

A=1.27*POSITIONS/2-1.27
B=A+4.48
C=A+8.08

NO. OF CONTACTS:
010, 020, 026, 030, 034, 040, 050, 060, 068, 080, 100

1.27MM*2.54MM DIP PLUG

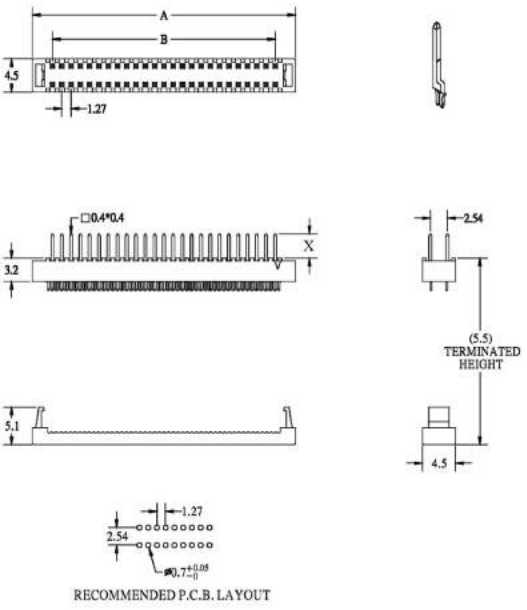

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026, 030, 034, 040, 050, 060, 068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x}{3}$ $\frac{C\,M}{4}$ $\frac{B}{5}$ $\frac{x}{}$

1. CONSTRUCTION TYPE:
   1DU, 1DV, 1DW, 1DX
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.3MM (STANGARD)
   "2" X=2.1MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 1.27MM*2.54MM SHRUNK IDC SOCKET (H=13.1MM) TO DIP PLUG (H=5.5MM) (D3)

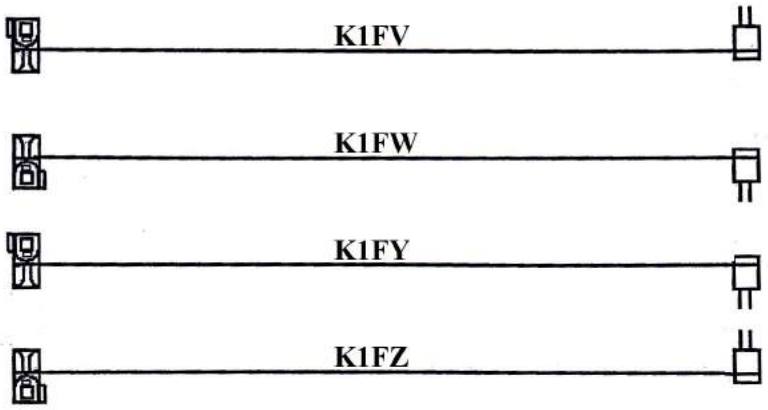


1.27MM*2.54MM SHRUNK IDC SOCKET W/O S.R.

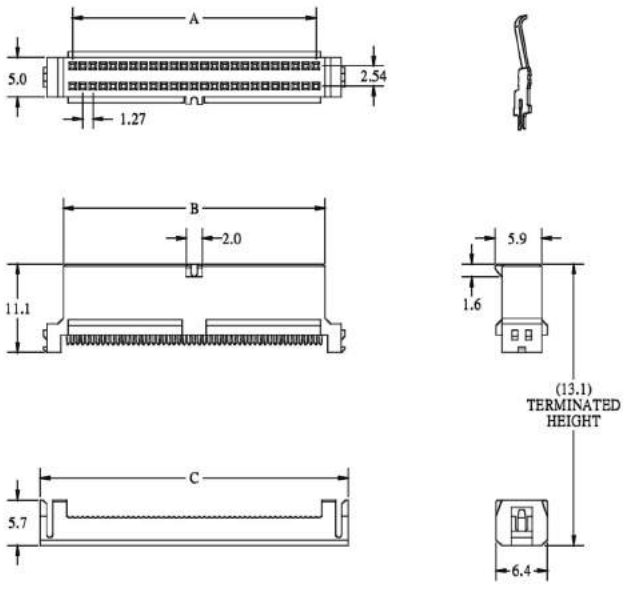

A=1.27*POSITIONS/2-1.27
B=A+2.28
C=A+8.08

NO. OF CONTACTS:
010, 020, 026, 030, 034, 040, 050, 060, 068, 080, 100

1.27MM*2.54MM DIP PLUG

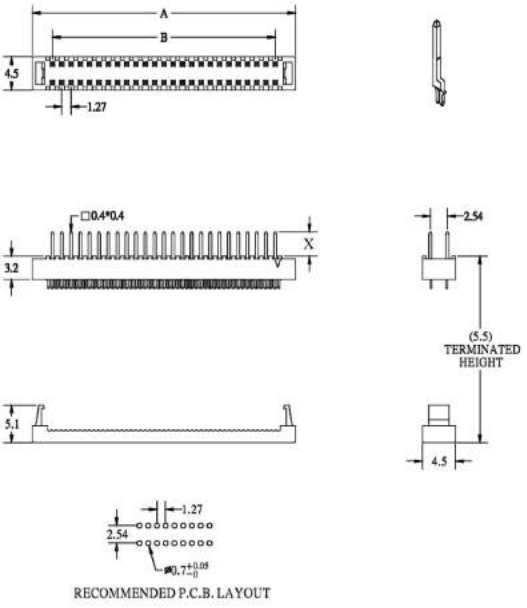

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026, 030, 034, 040, 050, 060, 068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{Bx}{5}$

1. CONSTRUCTION TYPE:
   1FV, 1FW, 1FY, 1FZ
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.3MM (STANGARD)
   "2" X=2.1MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH S.R. (H=10.75MM) TO DIP PLUG (H=5.5MM) (E1)

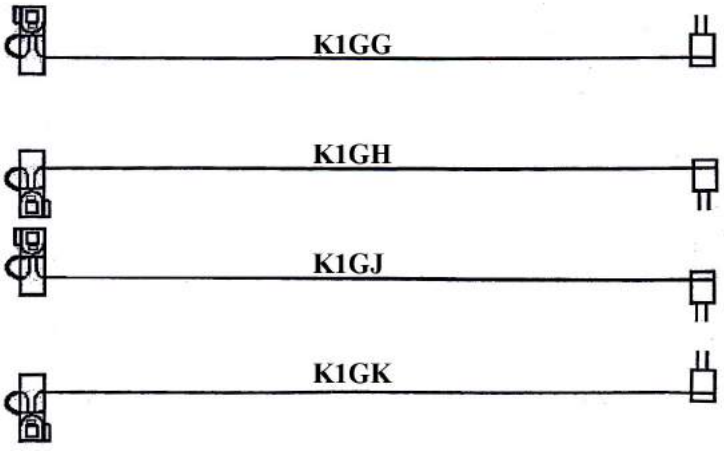


1.27MM*2.54MM IDC SOCKET WITH S.R.

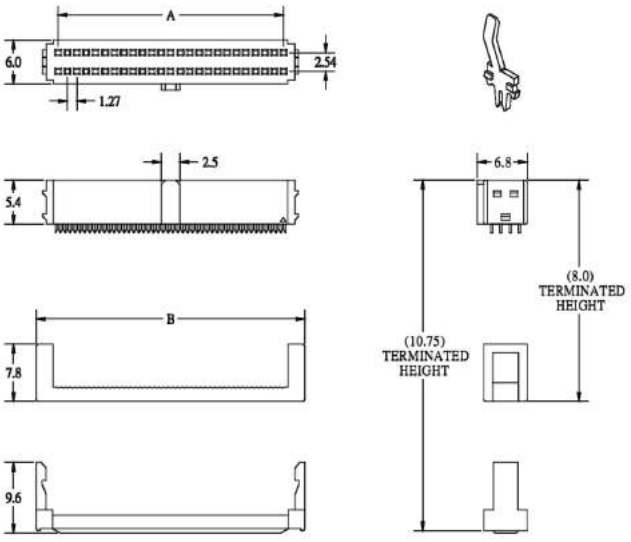

A=1.27*POSITIONS/2-1.27
B=A+6.12

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

1.27MM*2.54MM DIP PLUG

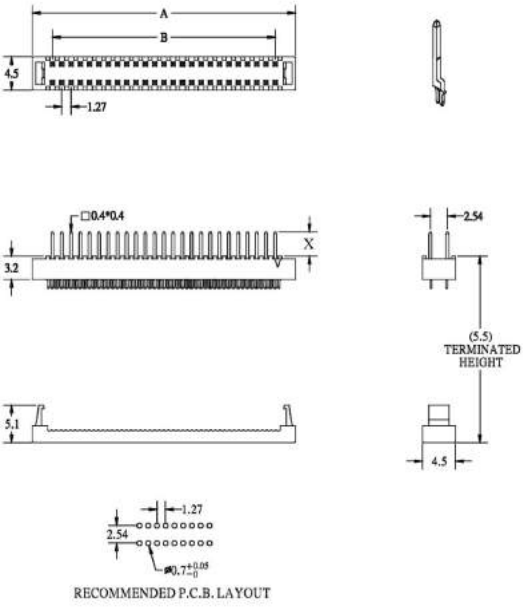

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   1GG, 1GH, 1GJ, 1GK
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.3MM (STANGARD)
   "2" X=2.1MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH S.R. (H=14.7MM) TO DIP PLUG (H=5.5MM) (E2)

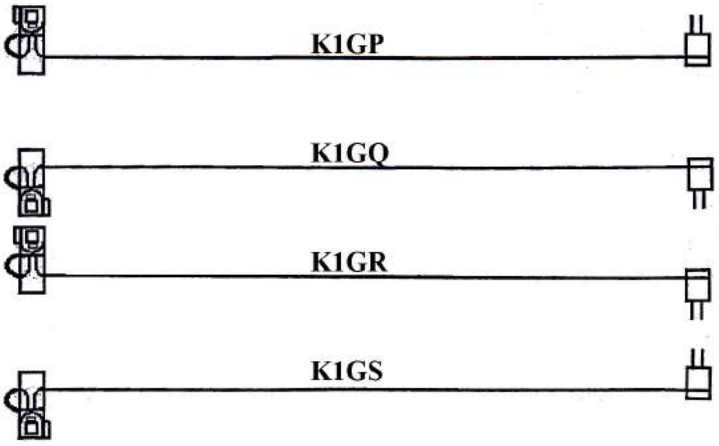


1.27MM*2.54MM IDC SOCKET WITH BI-LEVEL IDC TERMINATION

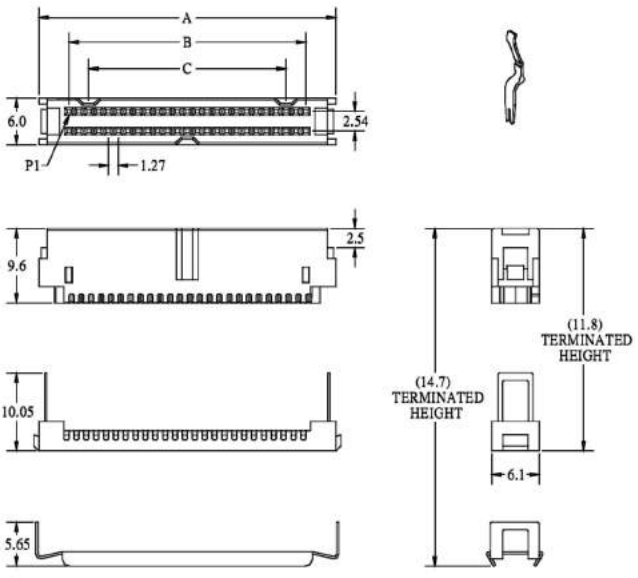

A=B+7.75
B=1.27*POSITIONS/2-1.27
C=B-5.08

NO. OF CONTACTS:
010, 020, 026, 030, 034, 036, 040, 050, 060, 068, 080, 100

1.27MM*2.54MM DIP PLUG

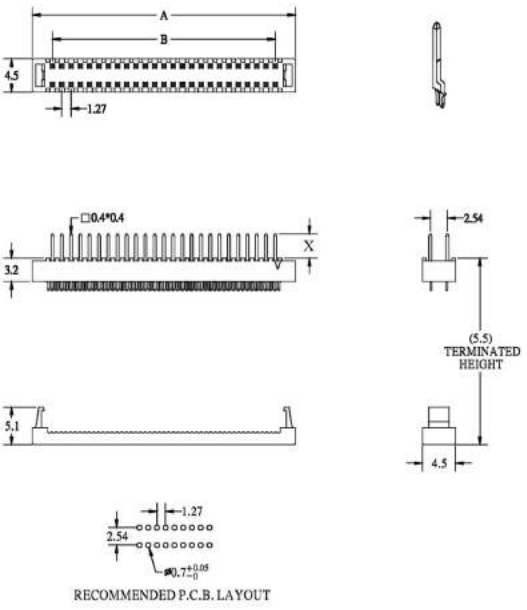

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026, 030, 034, 040, 050, 060, 068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{D}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   1GP, 1GQ, 1GR, 1GS
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" GRAY(IDC SOCKET)+BLACK(DIP PLUG)
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.3MM (STANGARD)
   "2" X=2.1MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET W/O S.R. (H=8.0MM) TO DIP PLUG (H=6.9MM) (F1)

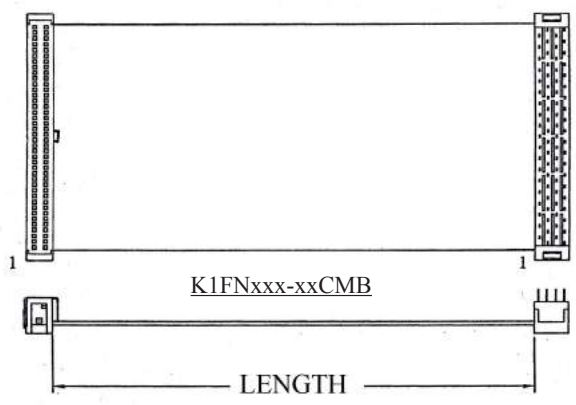


K1FNxxx-xxCMB

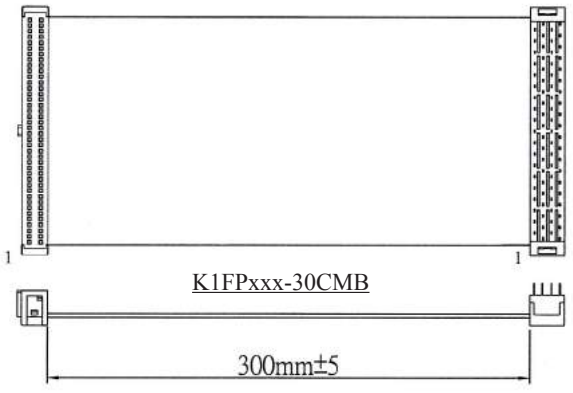


K1FPxxx-30CMB

1.27MM*2.54MM IDC SOCKET W/O S.R.

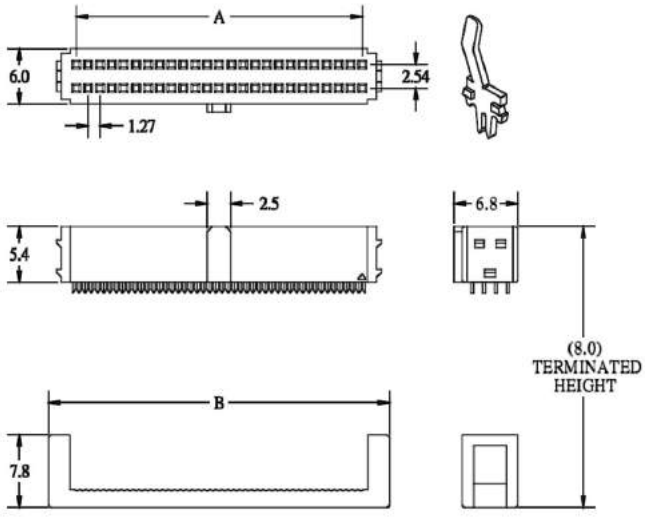

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

1.27MM*2.54MM DIP PLUG

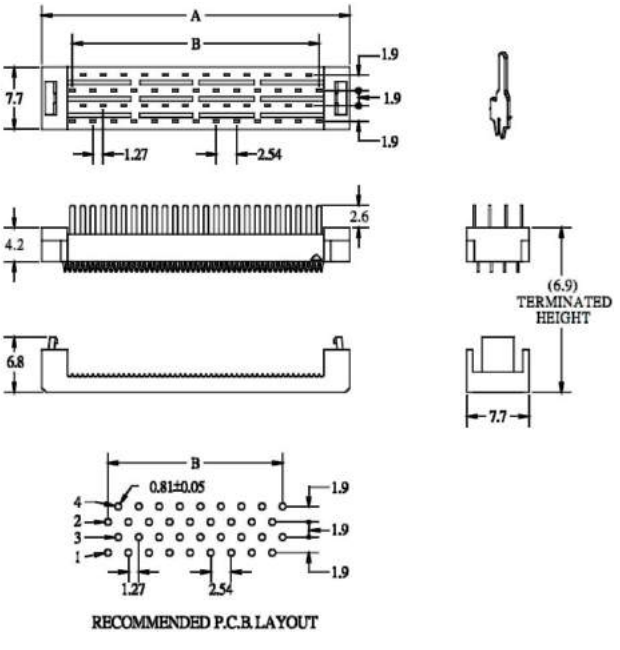

A=B+7.55
B=1.27*POSITIONS/2-1.27

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 080, 100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   1FN, 1FP
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM SHRUNK IDC SOCKET (H=13.1MM) TO 1.27MM*2.54MM DIP PLUG (H=6.9MM) (F2)

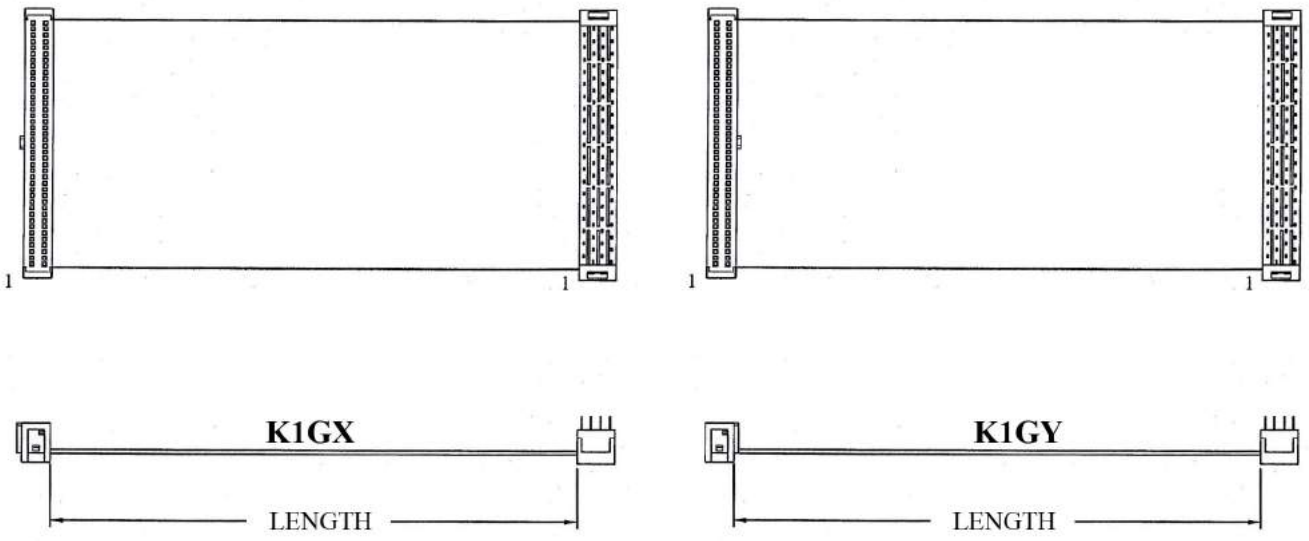


ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{B}{4}$

1. CONSTRUCTION TYPE:
   1GX, 1GY
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET (H=12.4MM) TO 1.27MM*2.54MM DIP PLUG (H=6.9MM) (F3)

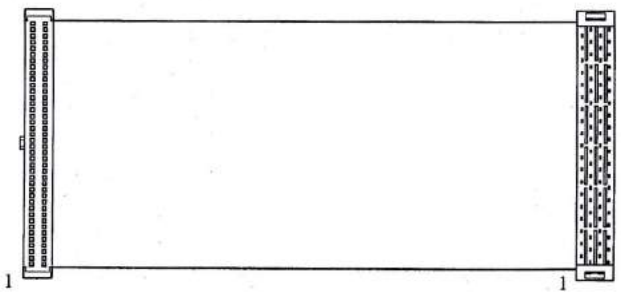

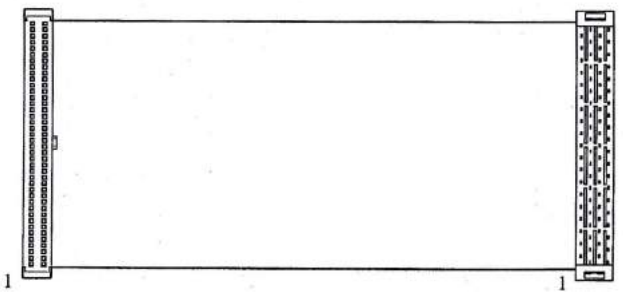






ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$ B


1. CONSTRUCTION TYPE:
   1GT, 1GU
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET (H=13.1MM) TO 1.27MM*2.54MM DIP PLUG (H=6.9MM) (F4)

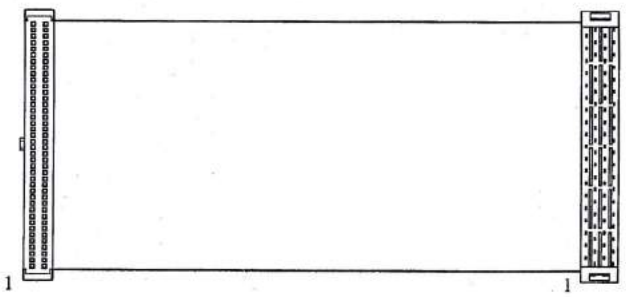

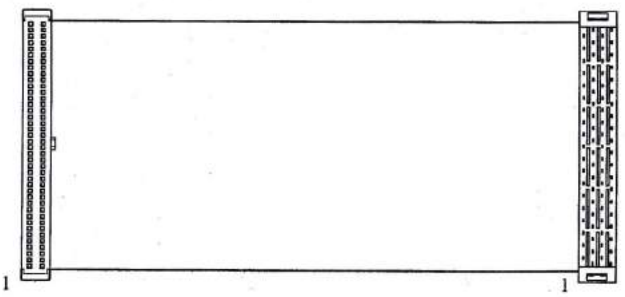

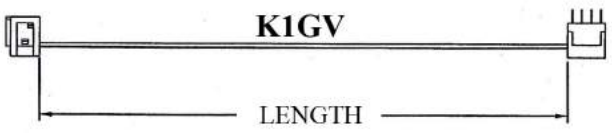

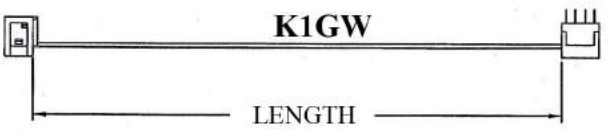


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$


1. CONSTRUCTION TYPE:
   1GV, 1GW
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE
WITH 2*1.27MM*2.54MM DIP PLUGS (H=5.5MM) (G1)

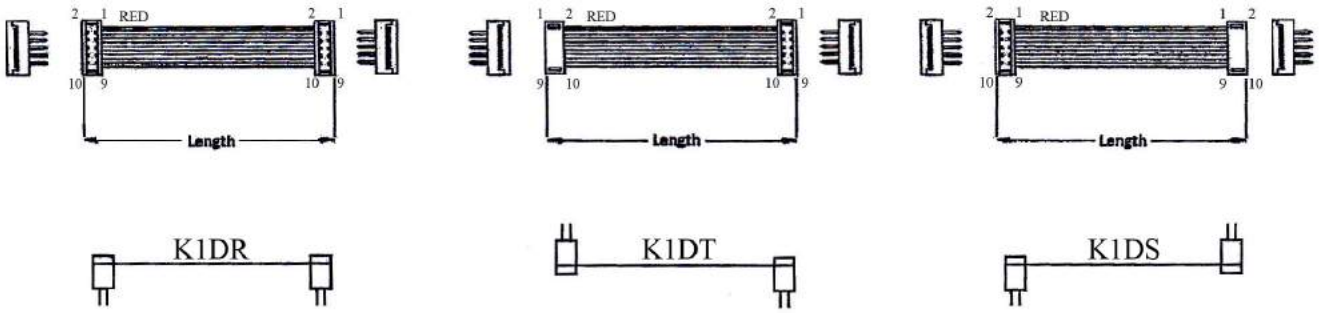

1.27MM*2.54MM PITCH DIP PLUG

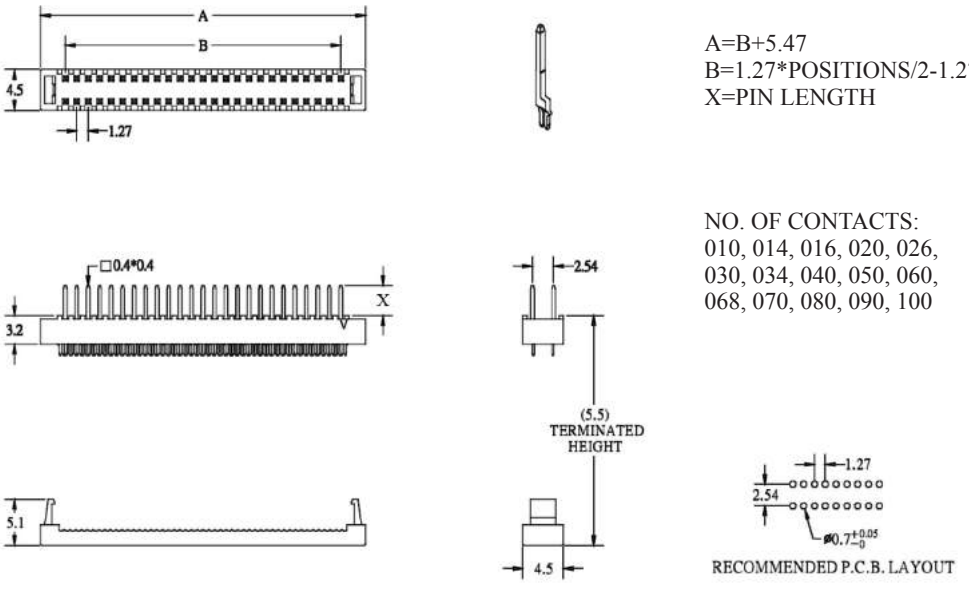

A=B+5.47
B=1.27*POSITIONS/2-1.27
X=PIN LENGTH

NO. OF CONTACTS:
010, 014, 016, 020, 026,
030, 034, 040, 050, 060,
068, 070, 080, 090, 100

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B x
1 2 3 4 5


1. CONSTRUCTION TYPE:
   1DR, 1DS, 1DT
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.3MM (STANDARD)
   "2" X= 2.1MM

NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 2*1.27MM*2.54MM DIP PLUGS (H=6.9MM)

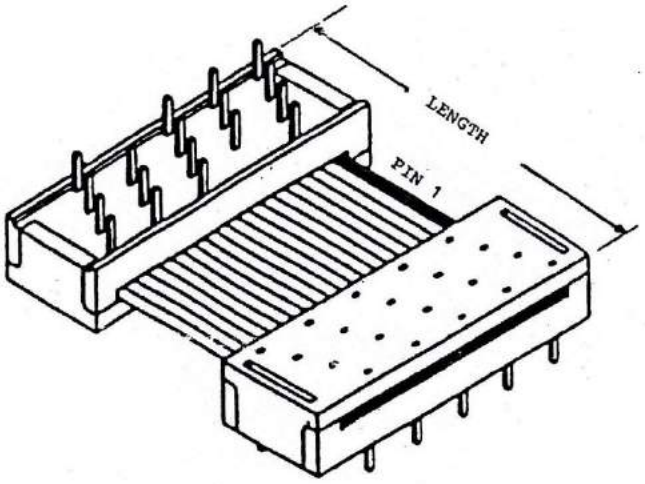

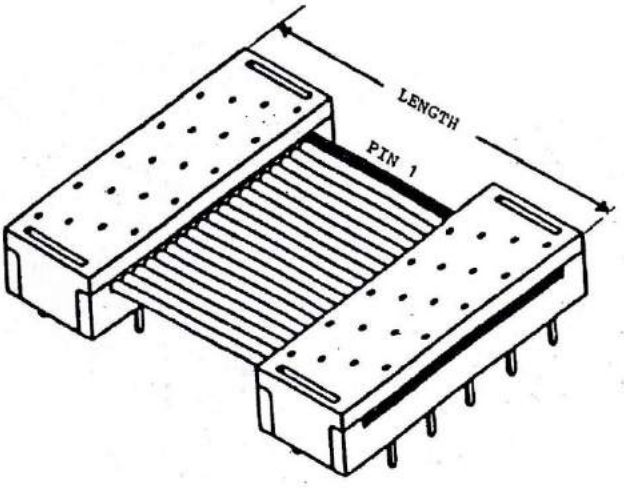






ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   1HE, 1HF
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=7.8MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (A1)

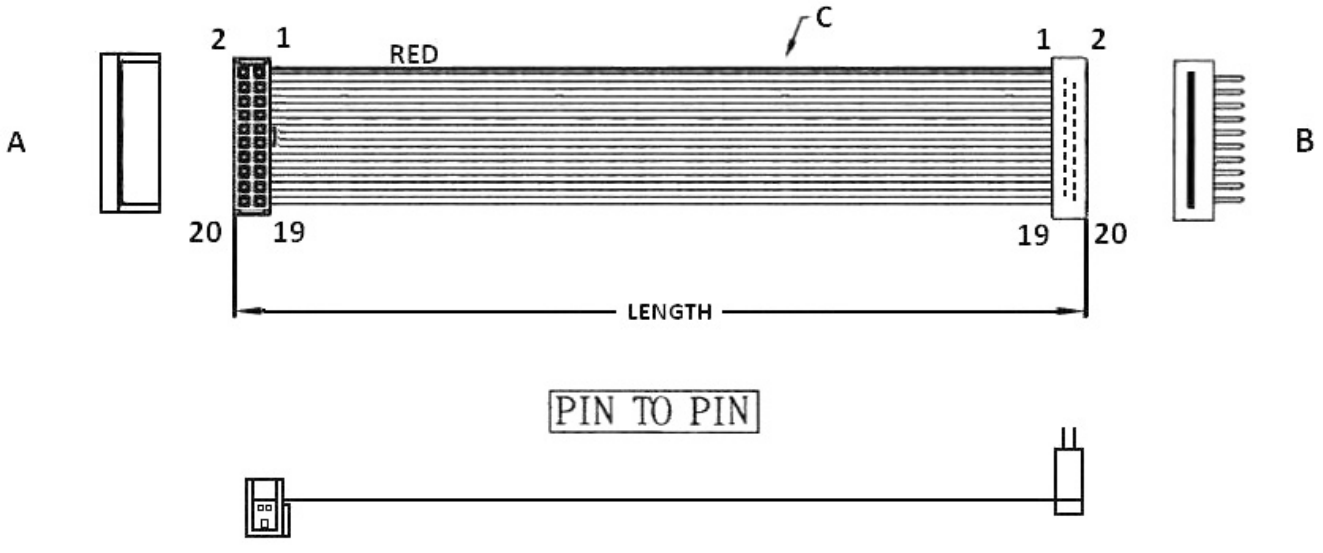

ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{K D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "KD" 1.27MMX2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MMX1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=7.8MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (A2)

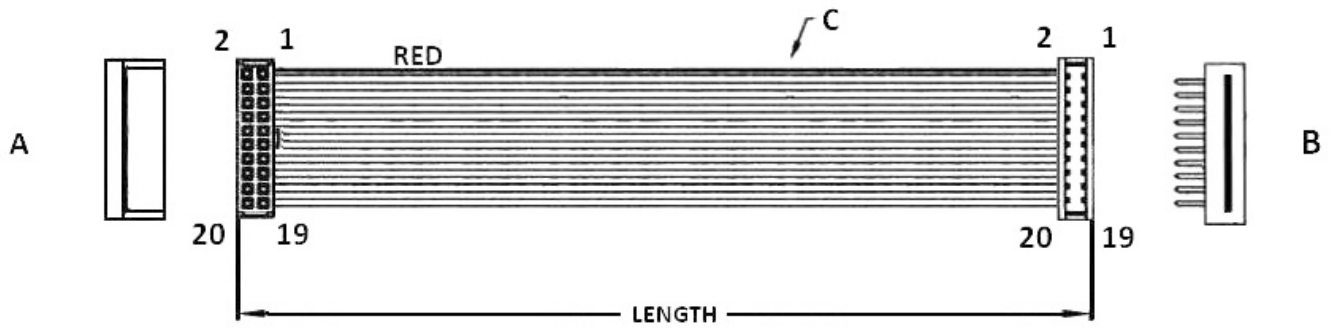

PIN TO PIN



ORDERING INFORMATION:


P/N $\frac{K\,E}{1}\,\frac{x\,x}{2}\,\frac{K\,P}{3}$ - $\frac{x\,x}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "KP" 1.27MM*2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=7.8MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (A3)

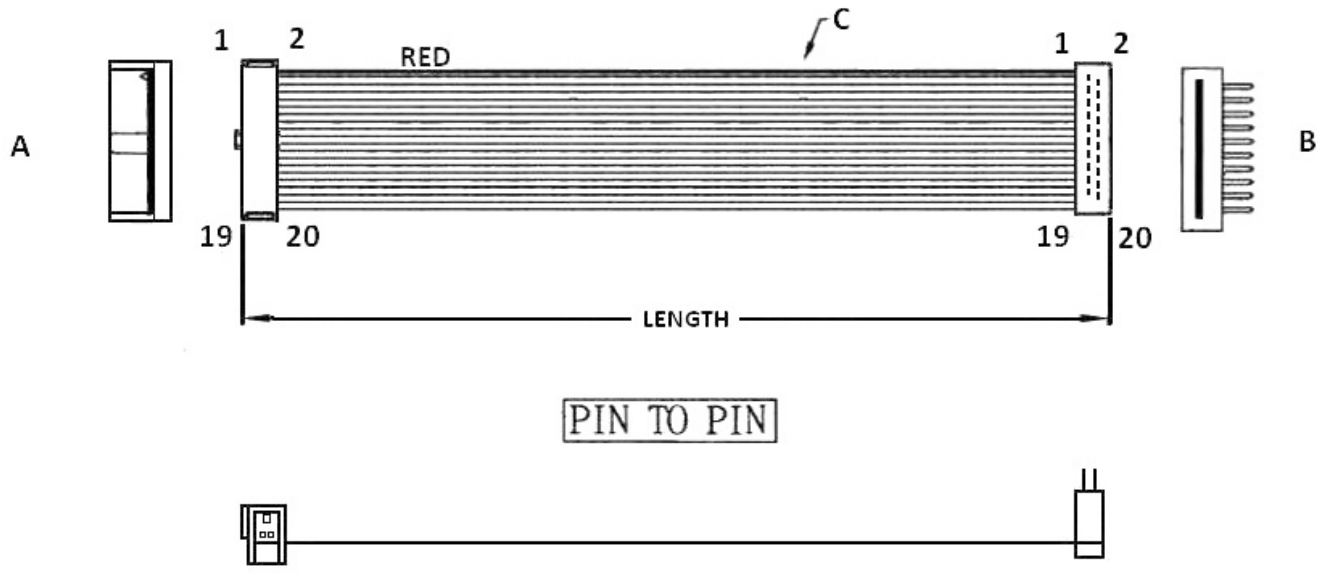

PIN TO PIN

ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{L D}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "LD" 1.27MM*2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=7.8MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (A4)

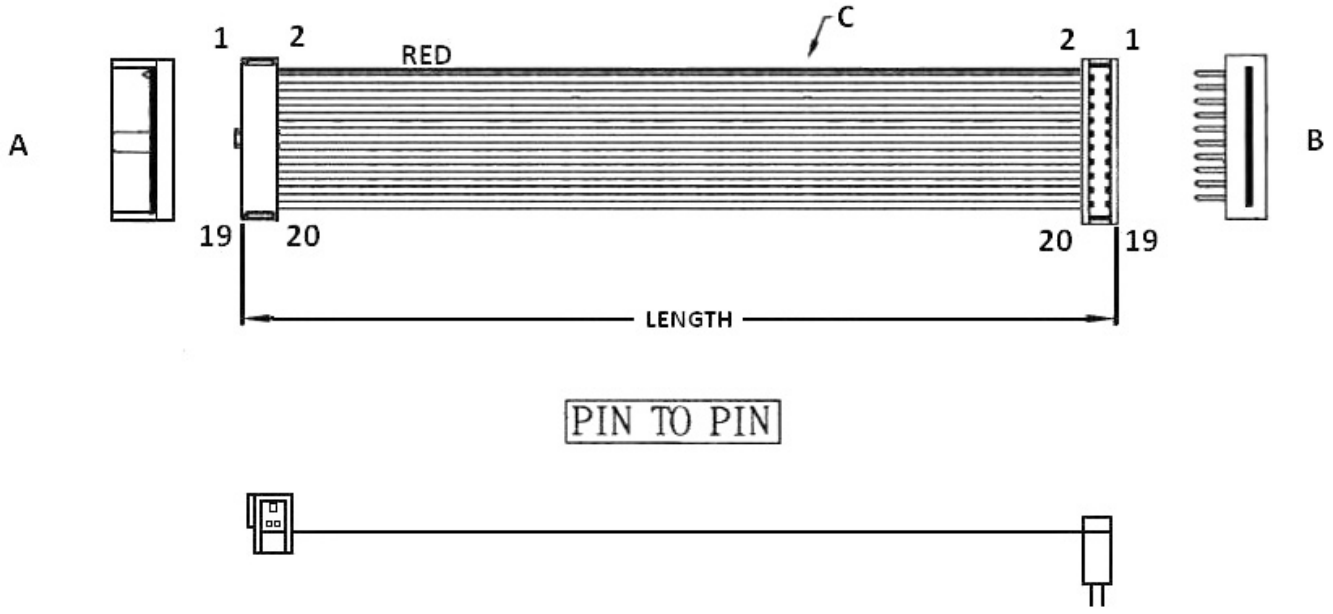

ORDERING INFORMATION:


P/N KE(1) xx(2) LP(3) - xx(4) C M B(5)

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "LP" 1.27MM*2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH STRAIN RELIEF (H=11.0MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (B1)

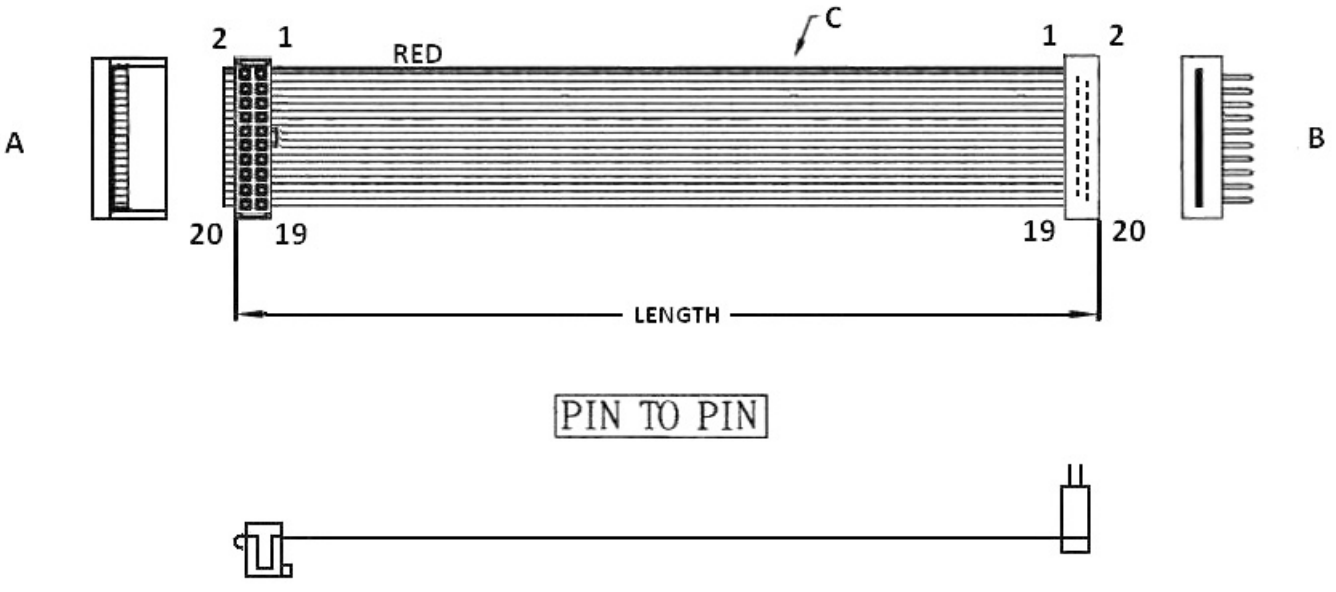

PIN TO PIN

ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{M D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "MD" 1.27MM*2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH STRAIN RELIEF (H=11.0MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (B2)

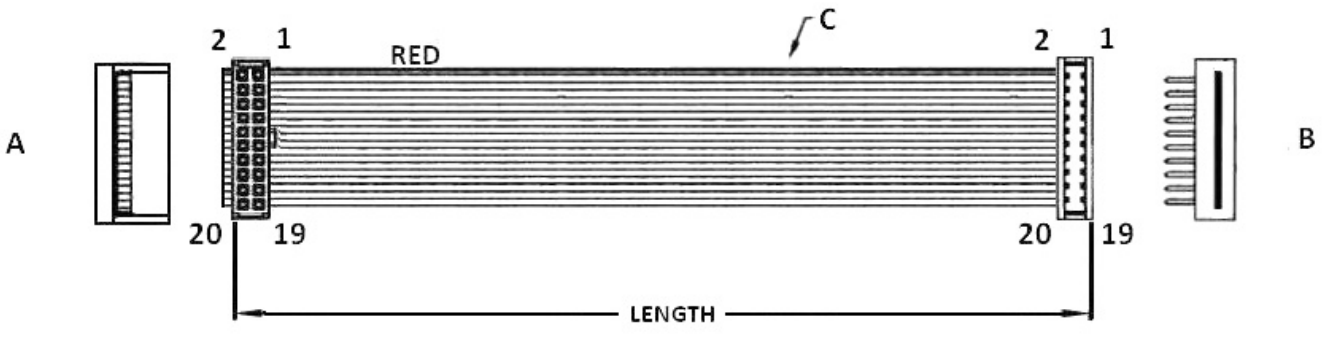

PIN TO PIN



ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{M P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "MP" 1.27MM*2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH STRAIN RELIEF (H=11.0MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (B3)

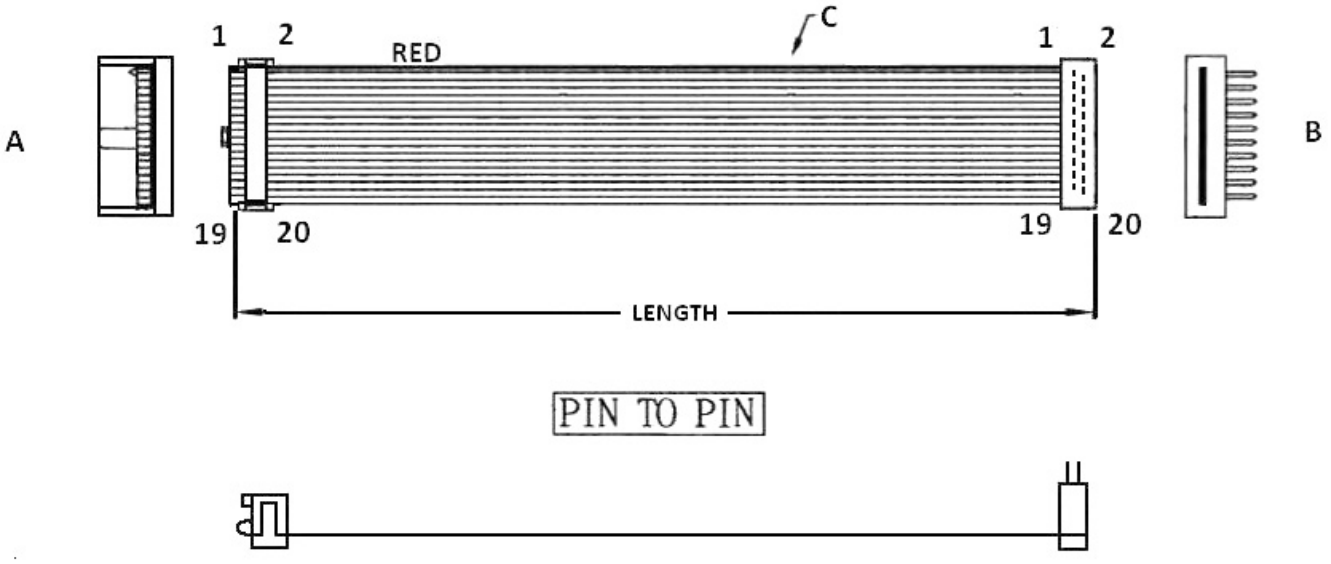

PIN TO PIN

ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N D}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "ND" 1.27MM*2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH FLAT CABLE WITH 1.27MM*2.54MM IDC SOCKET WITH STRAIN RELIEF (H=11.0MM) TO 1.27MM*1.27MM DIP PLUG (H=5.0MM) (B4)

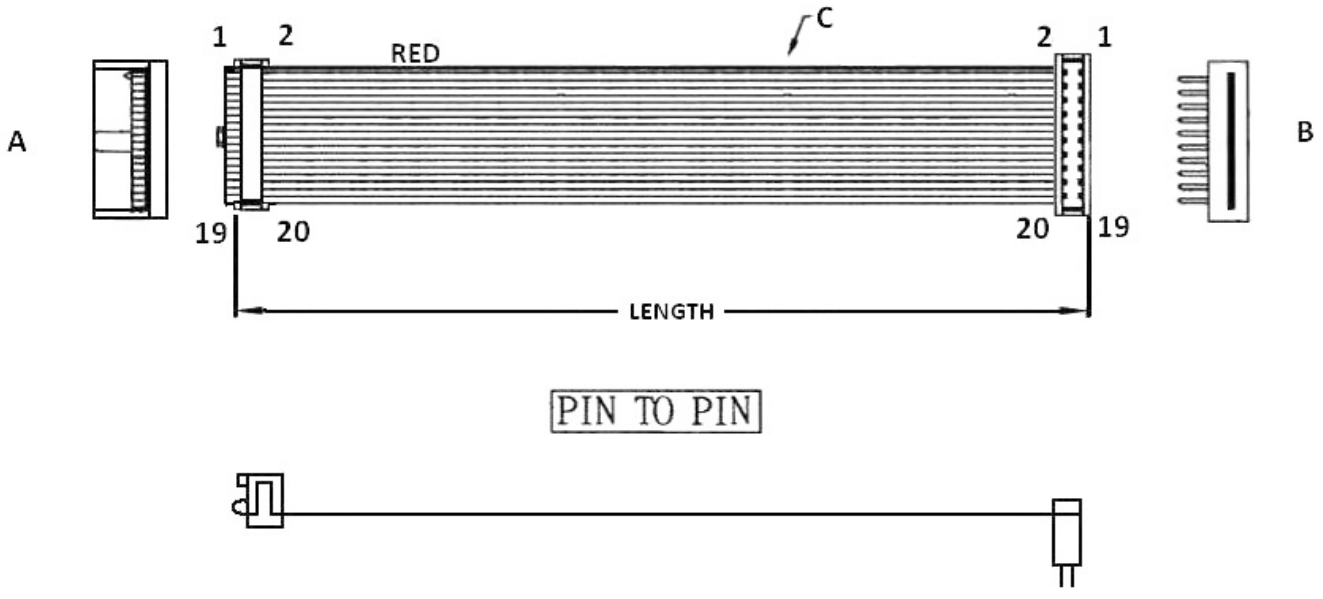

PIN TO PIN

ORDERING INFORMATION:


P/N $\frac{\text{K E}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N P}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KE" 0.635MM AWG30 UL2678 VW-1
   PVC INSULATION DEEP GRAY
2. NO. OF CONTACTS:
   10~100
3. CONNECTORS AT TWO ENDS:
   "NP" 1.27MM*2.54MM IDC SOCKET WITH NOSE & S.R. TO
   1.27MM*1.27MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: 1.27MM*1.27MM PITCH DIP PLUG

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2*1.27MM*2.54MM DOUBLE LAYER IDC SOCKETS (H=14.4MM)

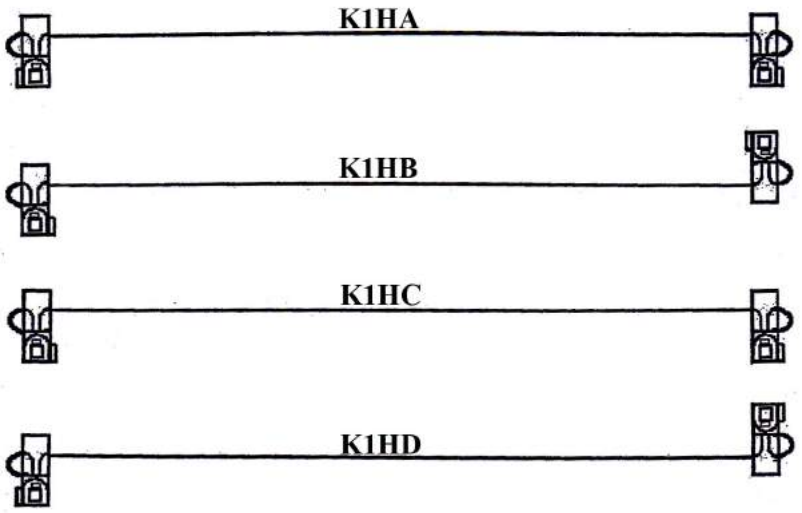

1.27MM*2.54MM DOUBLE LAYER IDC SOCKET FOR 1.27MM PITCH FLAT CABLE

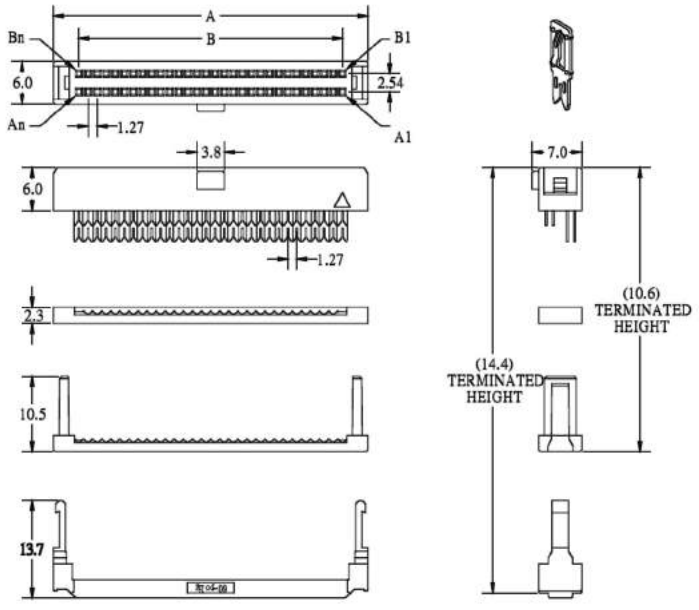

A=B+7.12
B=1.27*POSITIONS/2-1.27

NO. OF CONTACTS:
010, 020, 026, 030, 034,
040, 050, 060, 068, 080,
100

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   1HA, 1HB, 1HC, 1HD
2. NO. OF CONTACTS:
   010~100
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH UL & CSA APPROVED FLAT CABLE

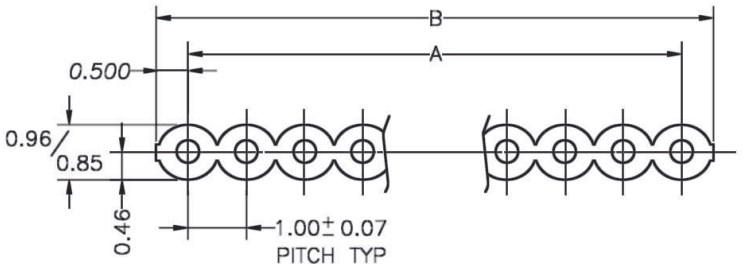

Dimension of each conductor.	0.127± 0.005mm
Conductor Elongation.	18 % ↑
Cross Section Area of conductor.	156 cM↑
Stranded of Lay.	12.7 mm ↓
Average thickness of Insulation.	Min. 0.18mm average 0.23mm
PVC Elongation.	100.0 % ↑
Tensile Strength	1.056 kg/mm² ↑
Spark test	2.5 KV/0.15SEC ↑

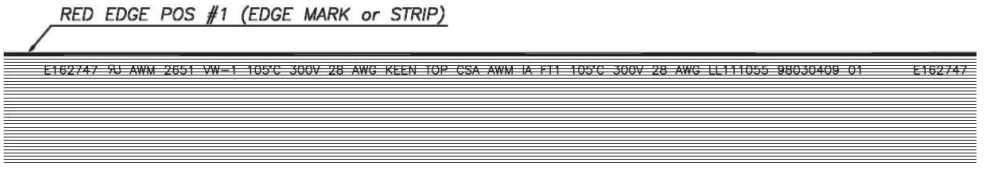

CONSTRUCTION TABLE

Code No.	Size of conductor		A± 0.07	NO. of ConductorX1.00=B $^{0}_{-0.3}$		
	(AWG)	Composition (strands/mm)		Max.	Midst	Min.
10 P	28	7/0.127	9.00	10.00	9.85	9.70
20 P	28	7/0.127	19.00	20.00	19.85	19.70
24 P	28	7/0.127	23.00	24.00	23.85	23.70
30 P	28	7/0.127	29.00	30.00	29.85	29.70
34 P	28	7/0.127	33.00	34.00	33.85	33.70
40 P	28	7/0.127	39.00	40.00	39.85	39.70
44 P	28	7/0.127	43.00	44.00	43.85	43.70
50 P	28	7/0.127	49.00	50.00	49.85	49.70


ORDERING INFORMATION:

P/N F K 1 0 0 $\underset{1}{\underline{x\ x}}$ - $\underset{2}{\underline{7\ 6\ .\ 2\ M}}$

1. NO. OF CONDUCTORS:
   10, 20, 24, 30, 34, 40, 44, 50
2 .LENGTH IN 76.2M/REEL

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) (A1)

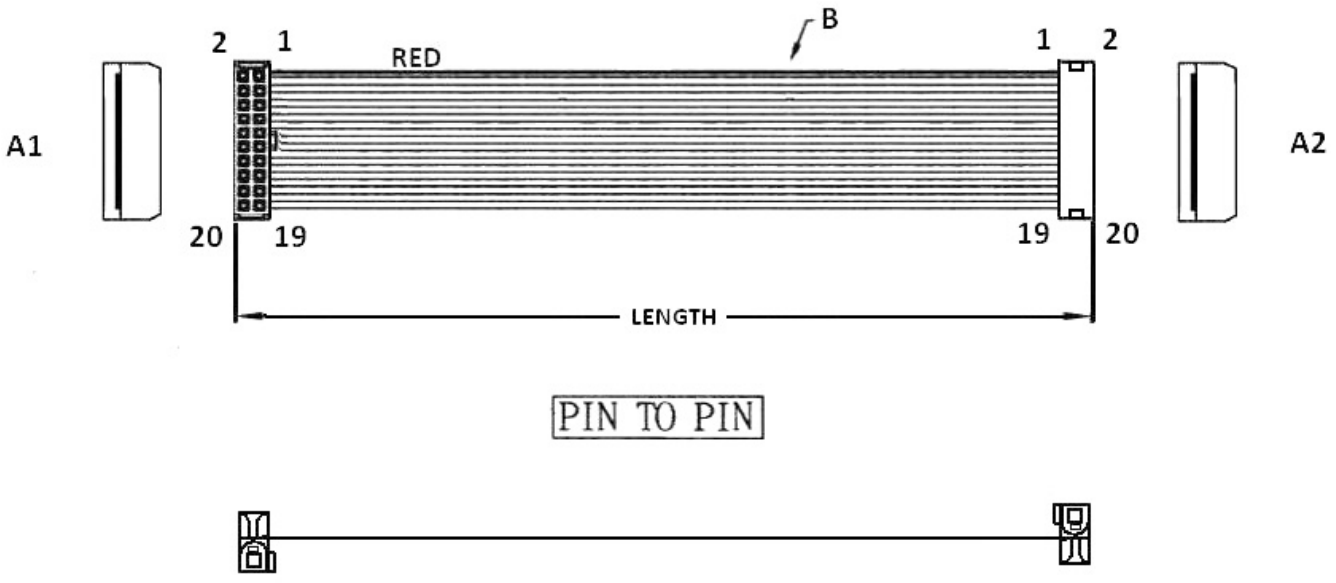

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{KK}{3}$ - $\frac{xx}{4}$ **C M** $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KK" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=9.0MM) (A2)

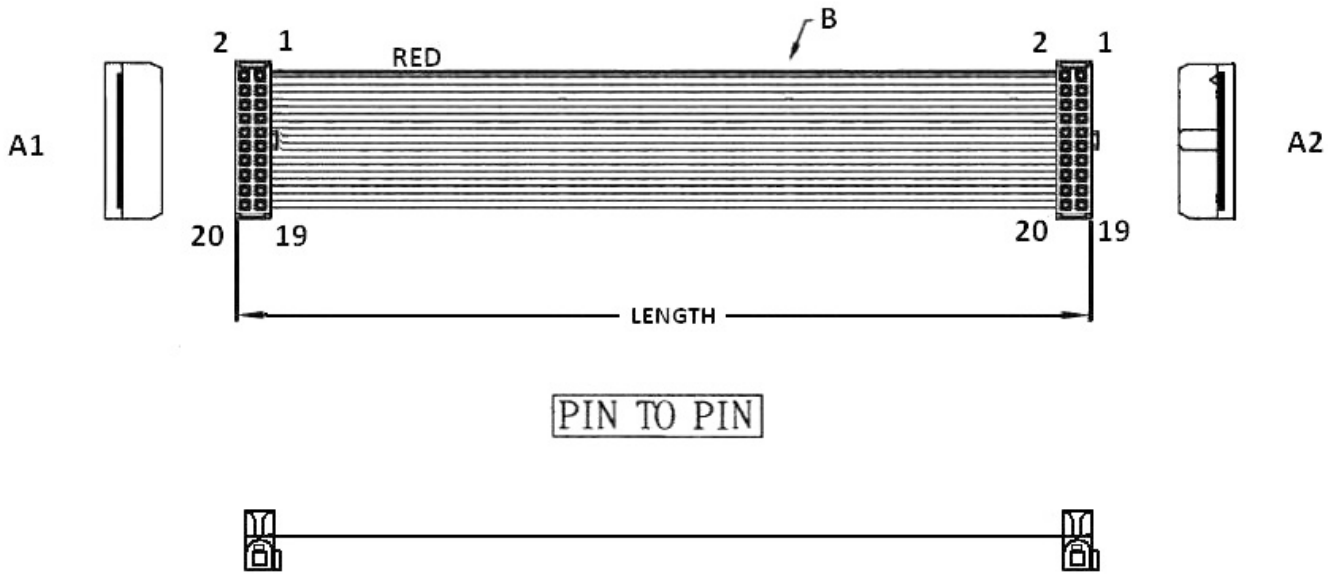


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K L}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KL" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=9.0MM) (A3)

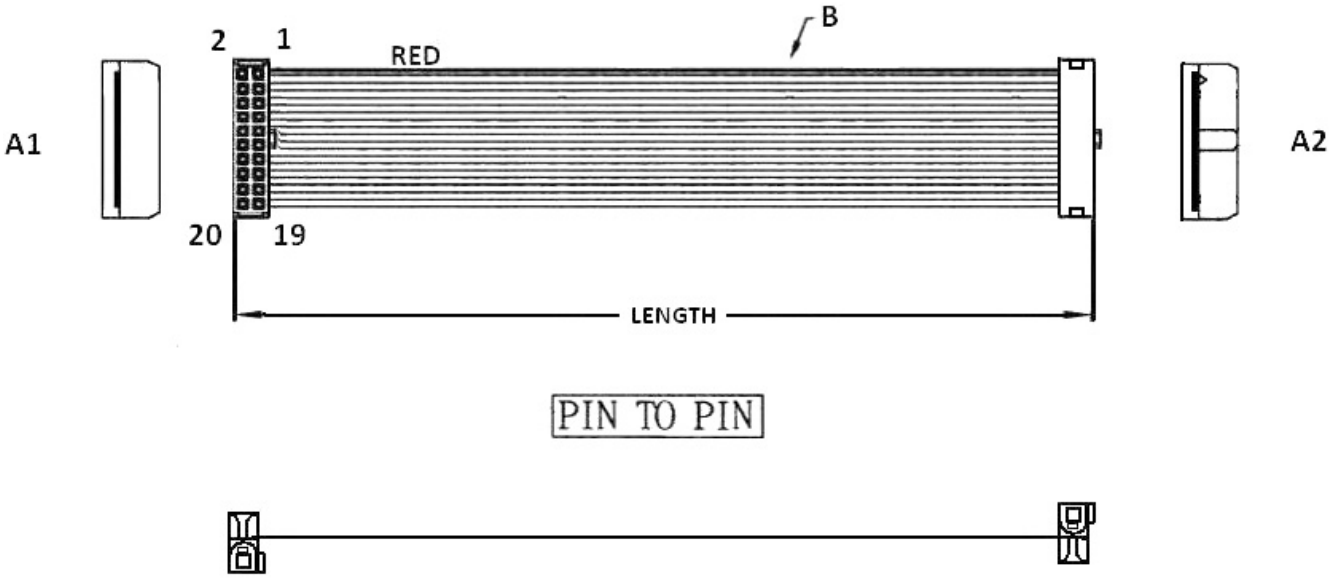


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{KI}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KI" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=9.0MM) (A4)

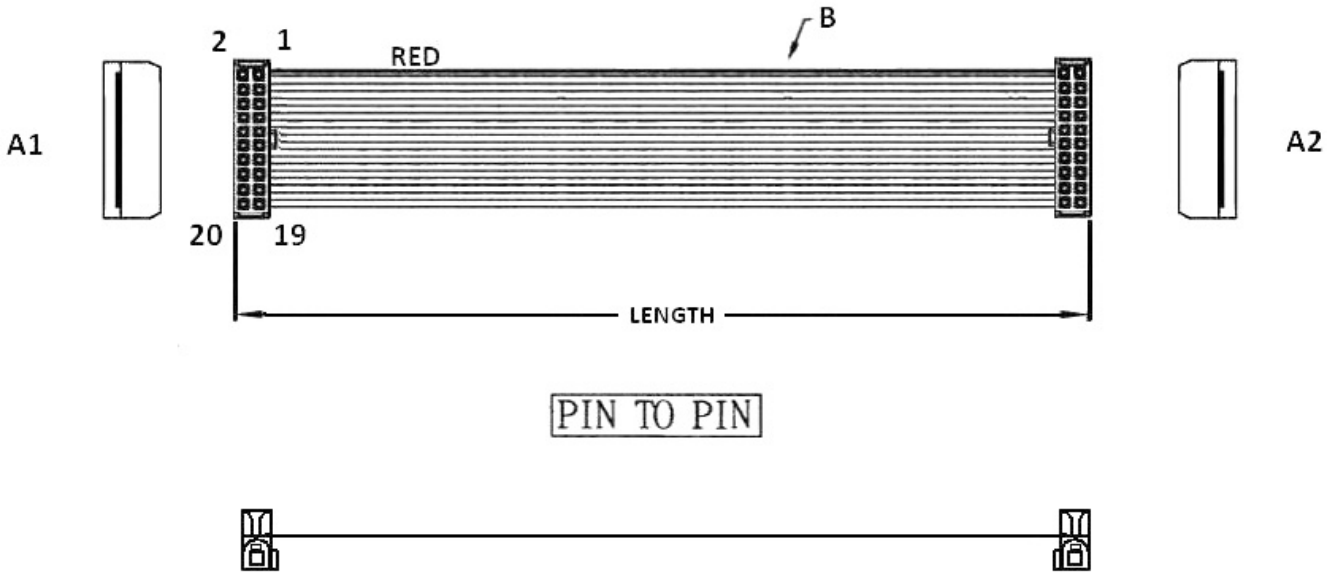

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{K8}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "K8" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=9.0MM) (A5)

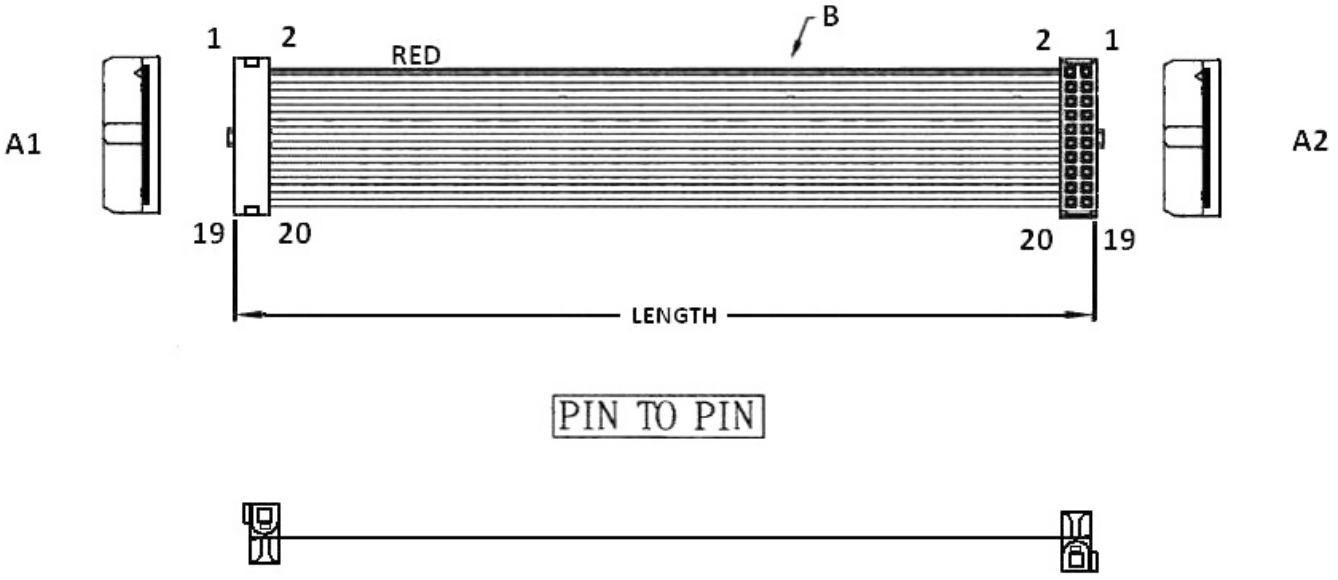


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L L}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LL" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=9.0MM) (A6)

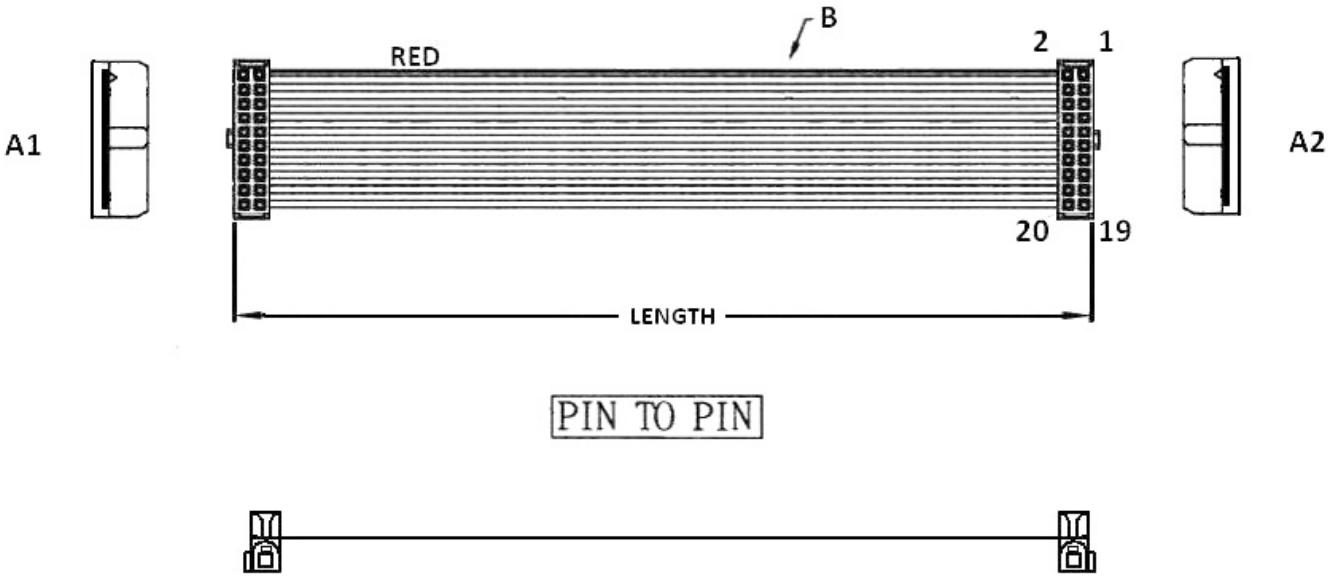


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L I}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LI" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=5.1MM) (A7)

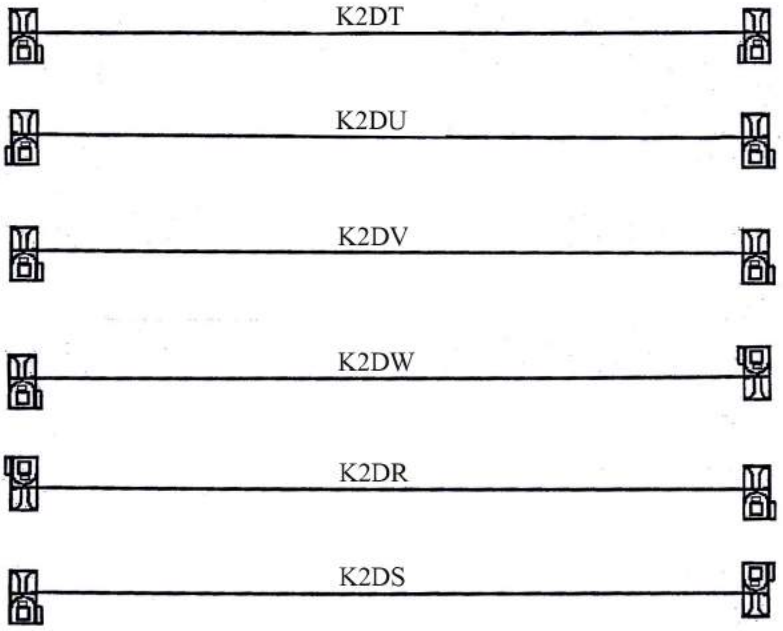

2.00MM PITCH IDC SOCKET WITH INTENSIVE CONTACTS & WITHOUT STRAIN RELIEF

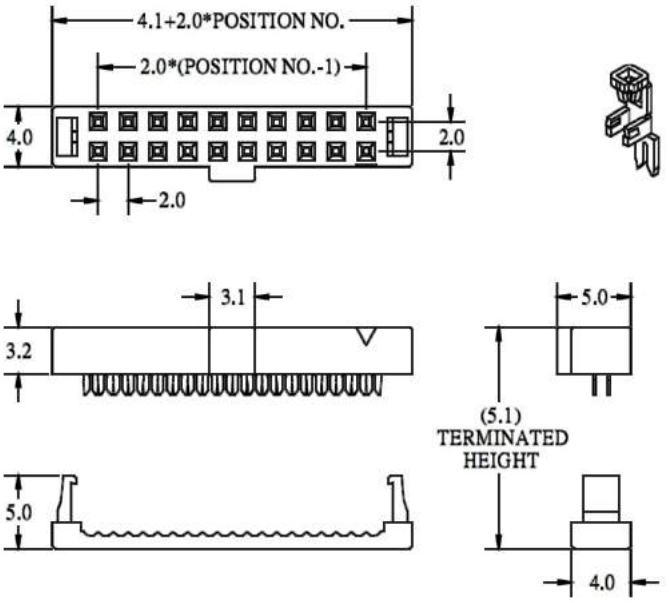

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 036, 040, 044, 050

ORDERING INFORMATION:


P/N K x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   2DT, 2DU, 2DV, 2DW, 2DR, 2DS
2. NO. OF CONTACTS:
   006~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=7.5MM) (A8)

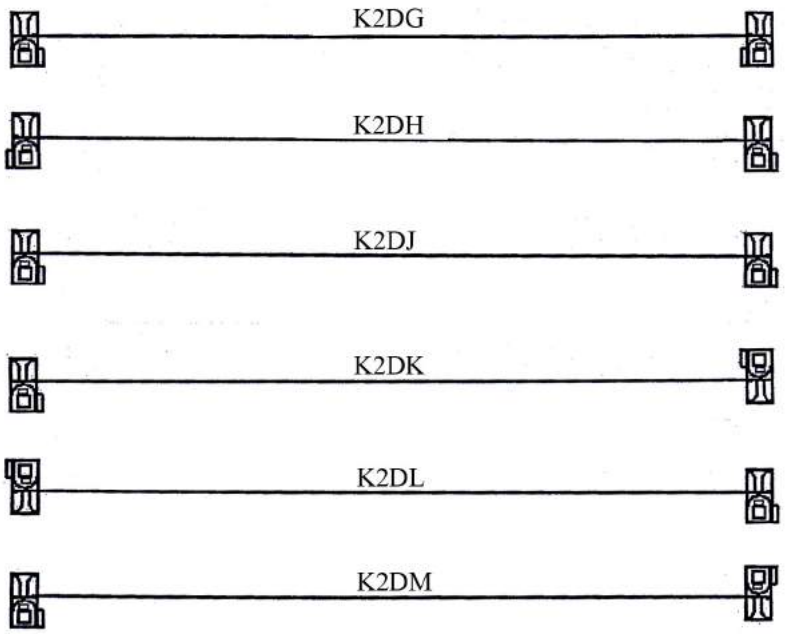


2.00MM PITCH IDC SOCKET WITH CENTRAL BUMP & FRICTION LATCH

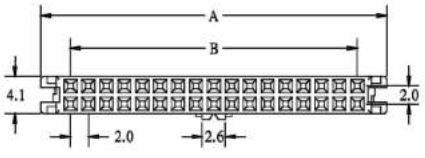




A=B+6.6
B=2.00*POSITIONS/2-2.00
C=B+3.2

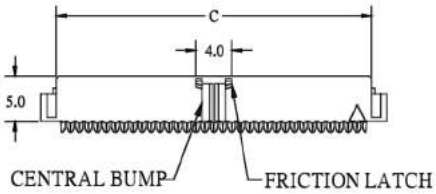





NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 028, 030, 034, 036,
040, 044, 048, 050, 060,
064, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2DG, 2DH, 2DJ, 2DK, 2DL, 2DM
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=8.5MM) (A9)

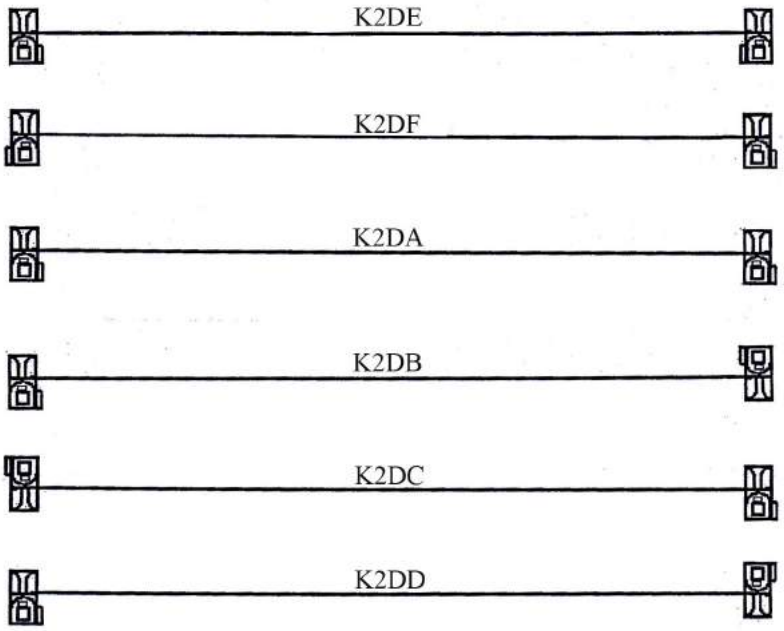



2.00MM PITCH IDC SOCKET WITHOUT S.R. ECONOMICAL TYPE

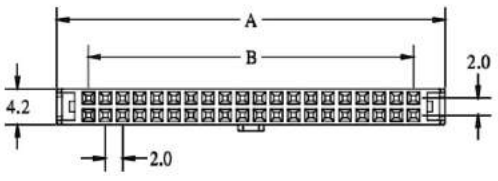




A=B+7.2
B=2.00*POSITIONS/2-2.00





NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068



ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2DE, 2DF, 2DA, 2DB, 2DC, 2DD
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=8.5MM) (A10)

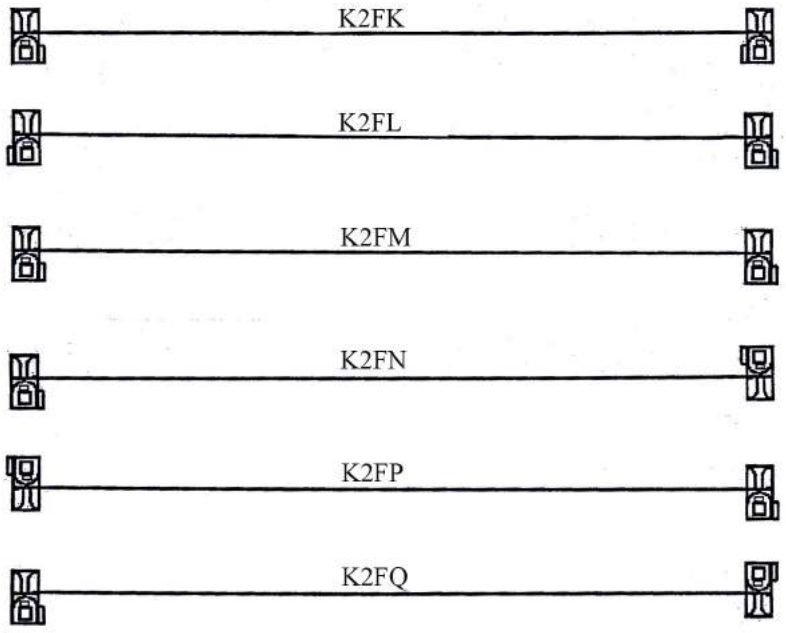



2.00MM PITCH IDC SOCKET WITH HOOKY TERMINATIONS & WITHOUT STRAIN RELIEF

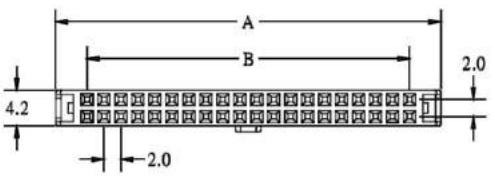




A=B+7.20
B=2.00*POSITIONS/2-2.00







NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2FK, 2FL, 2FM, 2FN, 2FP, 2FQ
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM SHRUNK IDC SOCKETS (H=8.5MM) (A11)

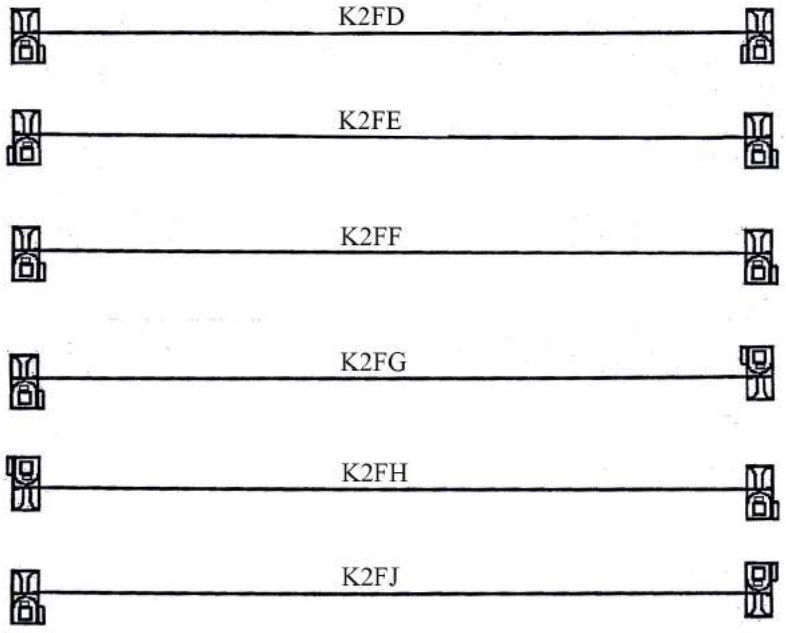



2.00MM PITCH SHRUNK IDC SOCKET WITHOUT STRAIN RELIEF

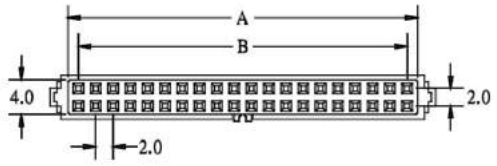




A=B+2.4
B=2.00*POSITIONS/2-2.00
C=B+7.17



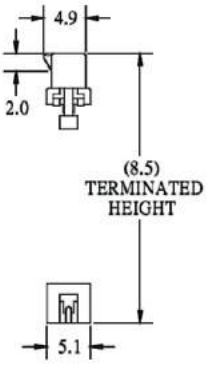

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068



ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2FD, 2FE, 2FF, 2FG, 2FH, 2FJ
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=9.2MM) (A12)

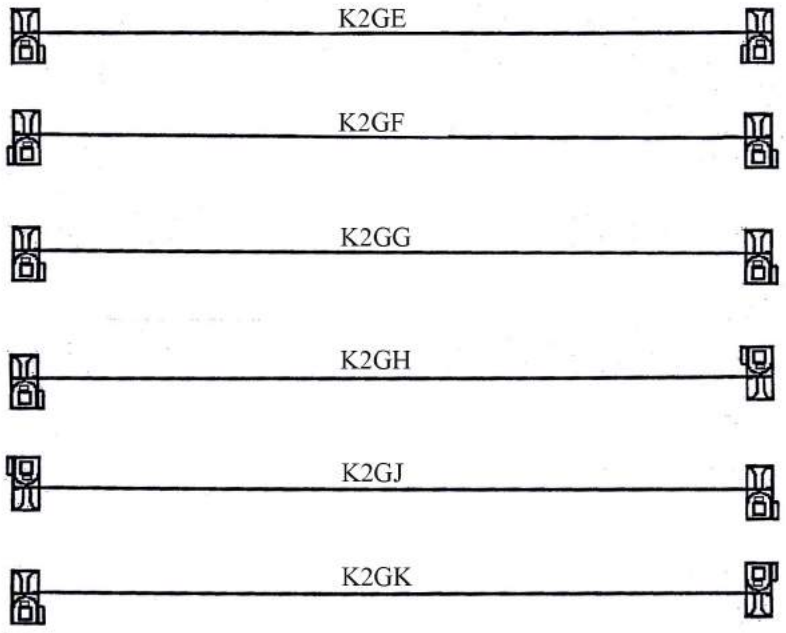

2.00MM PITCH IDC SOCKET WITH RAMP LOCKING & WITHOUT STRAIN RELIEF

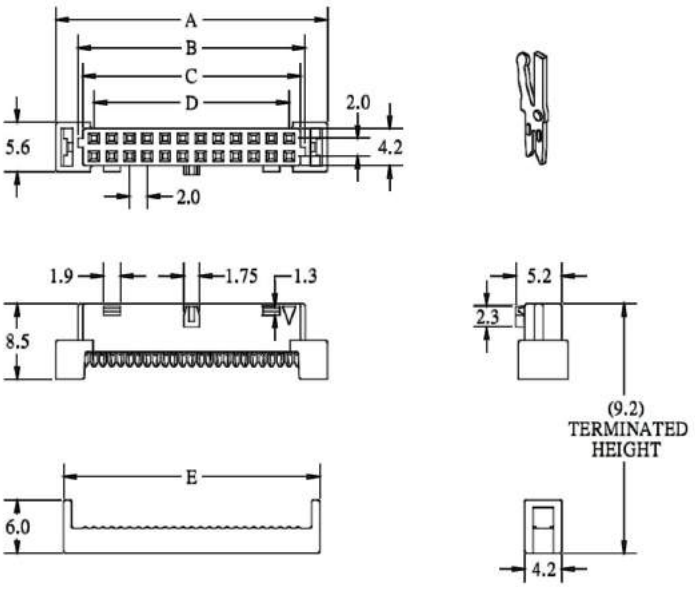

A=D+8.65
B=D+3.65
C=D+2.55
D=2.00*POSITIONS/2-2.00
E=D+6.90

NO. OF CONTACTS:
010, 012, 014, 016, 020,
022, 024, 026, 030, 034,
040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2GE, 2GF, 2GG, 2GH, 2GJ, 2GK
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT NOSE (H=9.0MM) (B1)

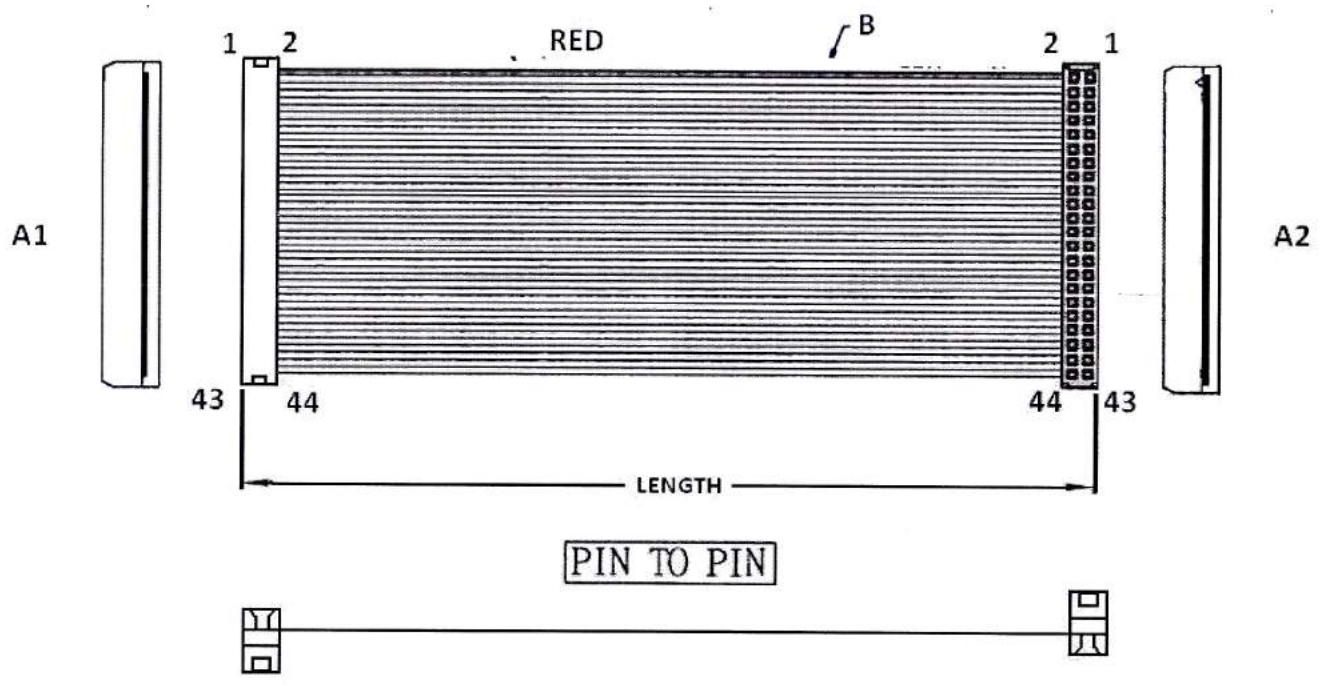


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{A A}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AA" 2.00MM IDC SOCKET W/O NOSE W/O S.R.
   TO 2.00MM IDC SOCKET W/O NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT NOSE (H=9.0MM) (B2)

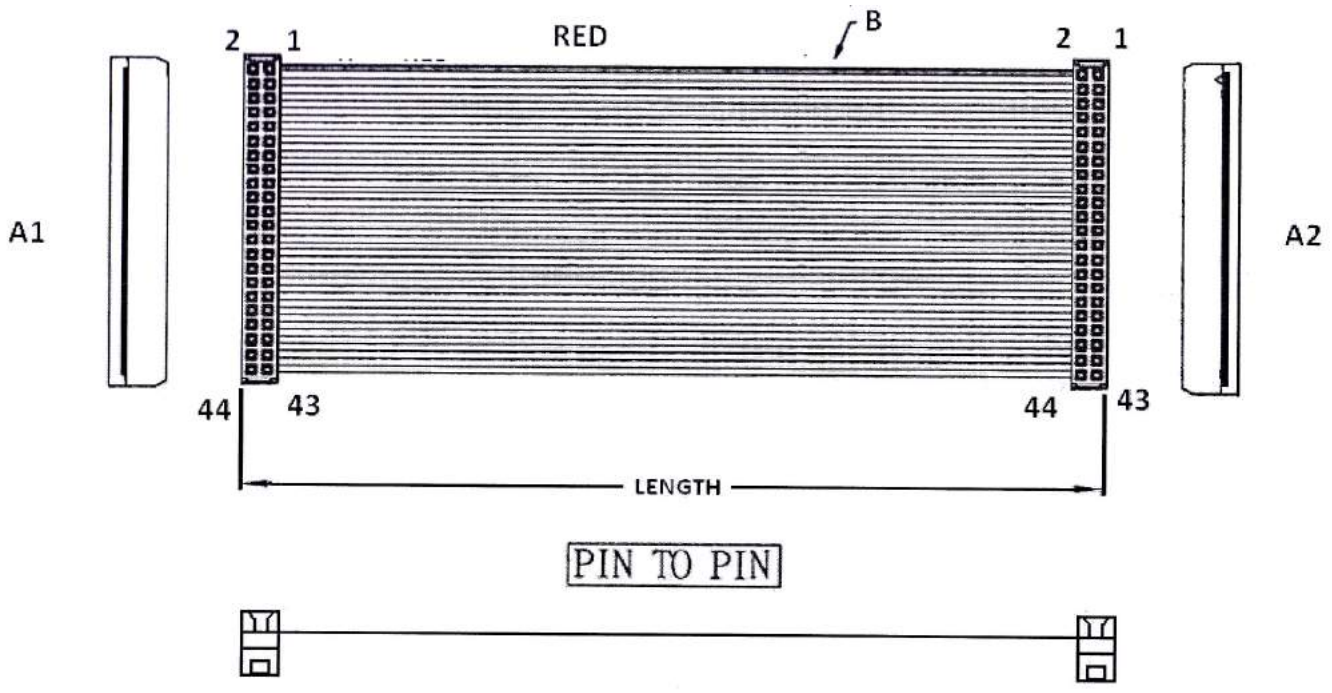


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{A V}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AV" 2.00MM IDC SOCKET W/O NOSE W/O S.R.
   TO 2.00MM IDC SOCKET W/O NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITHOUT NOSE (H=9.0MM) (B3)

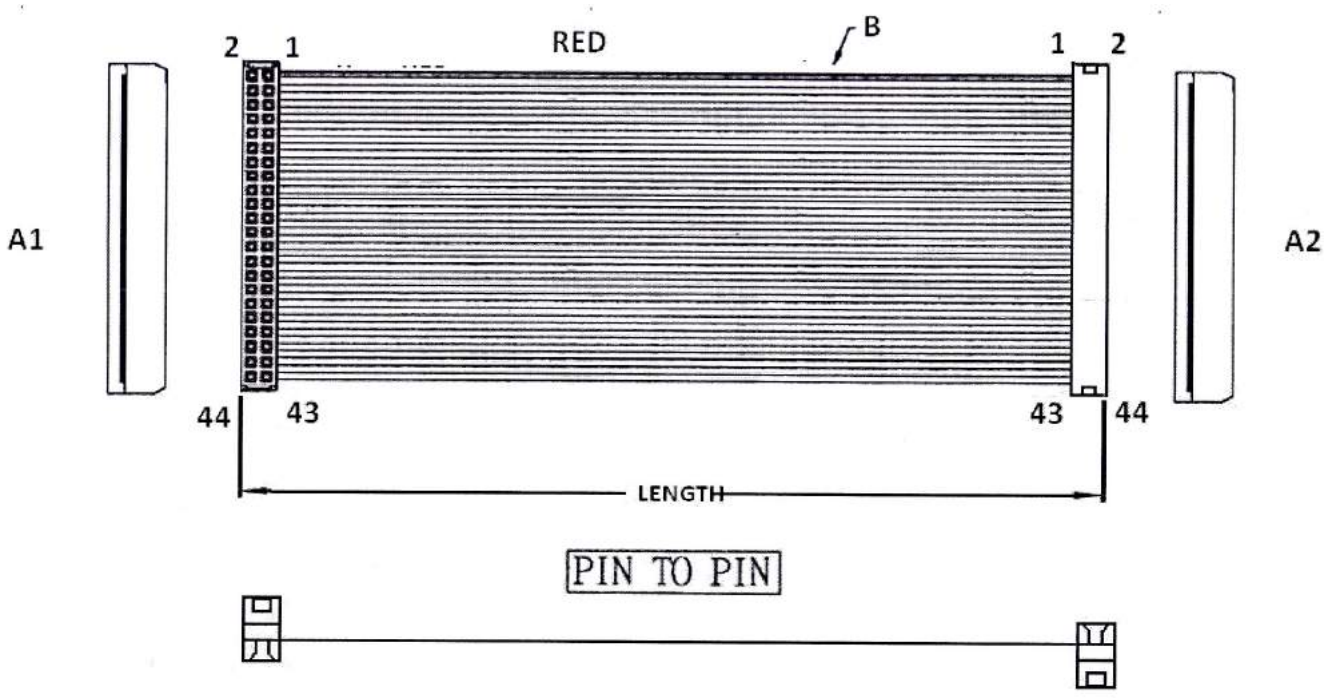


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{V V}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "VV" 2.00MM IDC SOCKET W/O NOSE W/O S.R.
   TO 2.00MM IDC SOCKET W/O NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH
2* 2.00MM LOW PROFILE IDC SOCKETS W/O NOSE (H=7.4MM) (B4)

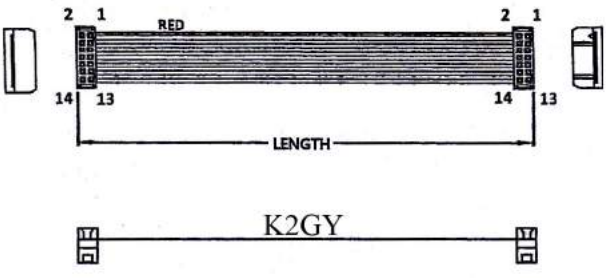

K2GY

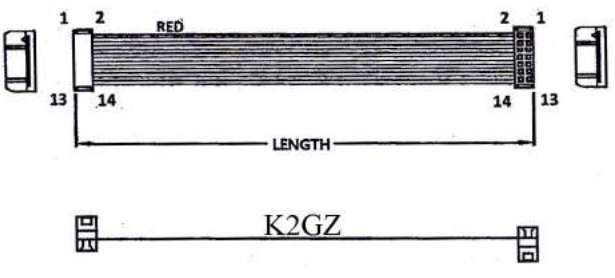

K2GZ

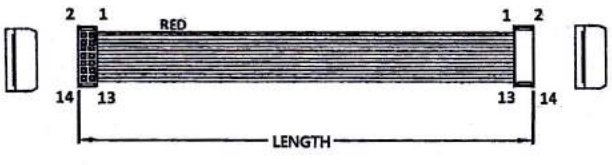

K2GX


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   2GX, 2GY, 2GZ
2. NO. OF CONTACTS:
   008~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=13.0MM) (C1)

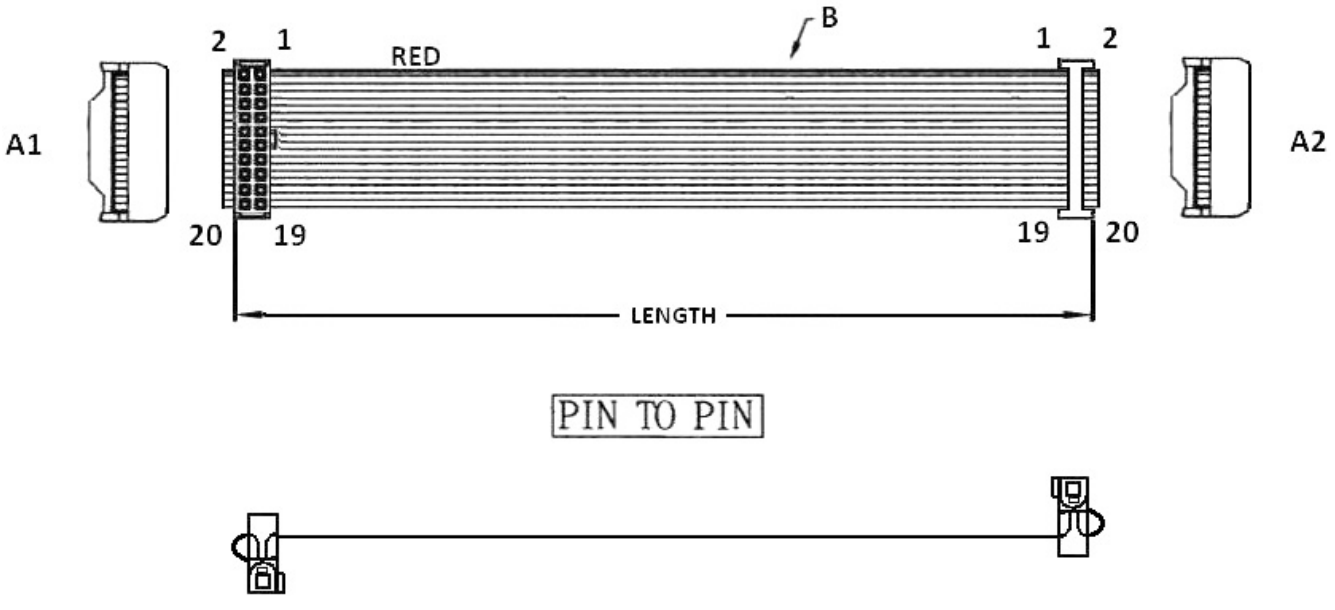

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{M M}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MM" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=13.0MM) (C2)

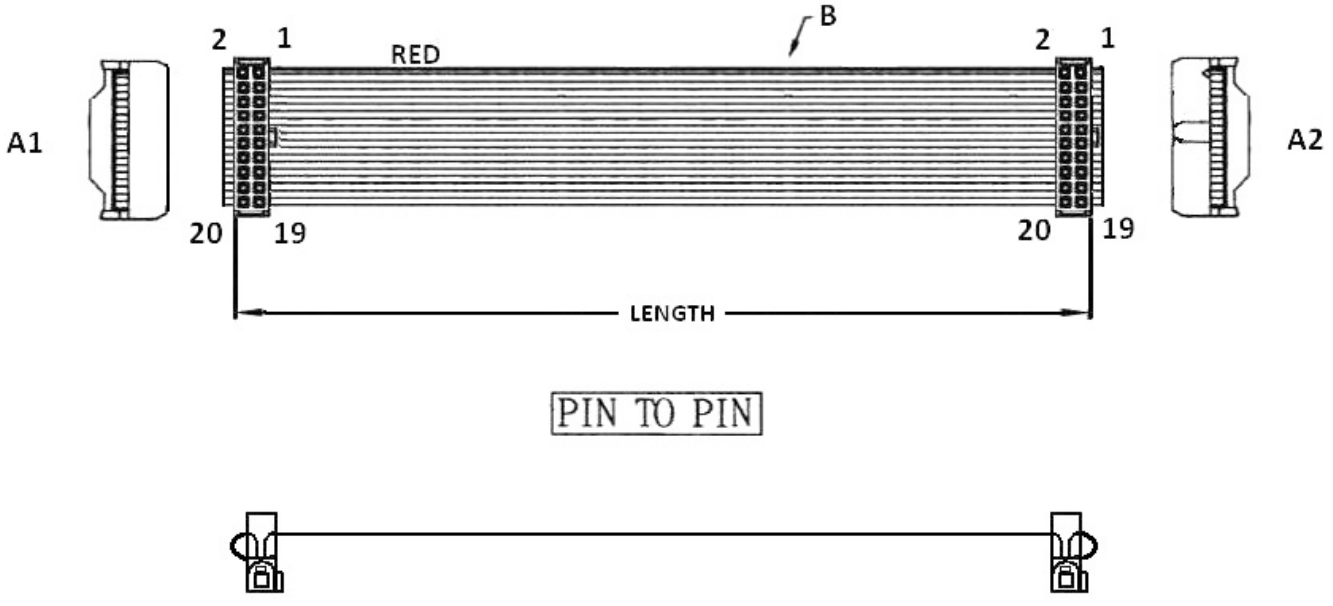

PIN TO PIN


ORDERING INFORMATION:

P/N $\underset{1}{\underline{KB}}\ \underset{2}{\underline{xx}}\ \underset{3}{\underline{MN}}$ - $\underset{4}{\underline{xx}}$ C M $\underset{5}{\underline{B}}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MN" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=13.0MM) (C3)

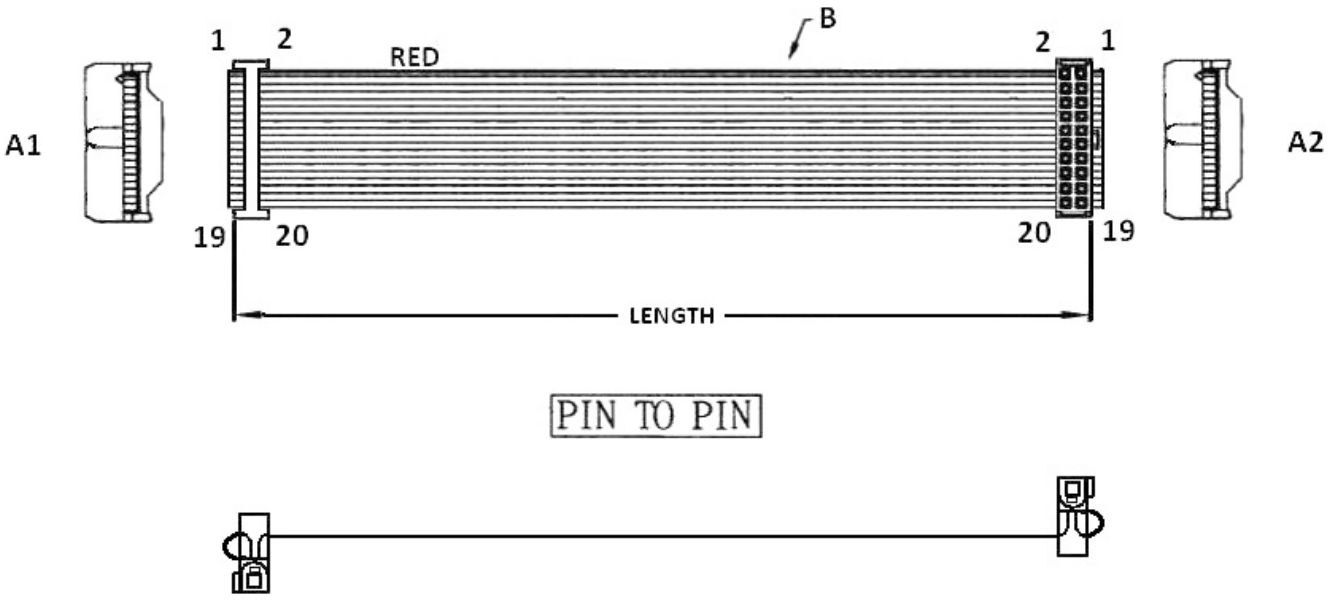


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N N}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NN" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*
2.00MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=13.0MM) (C4)

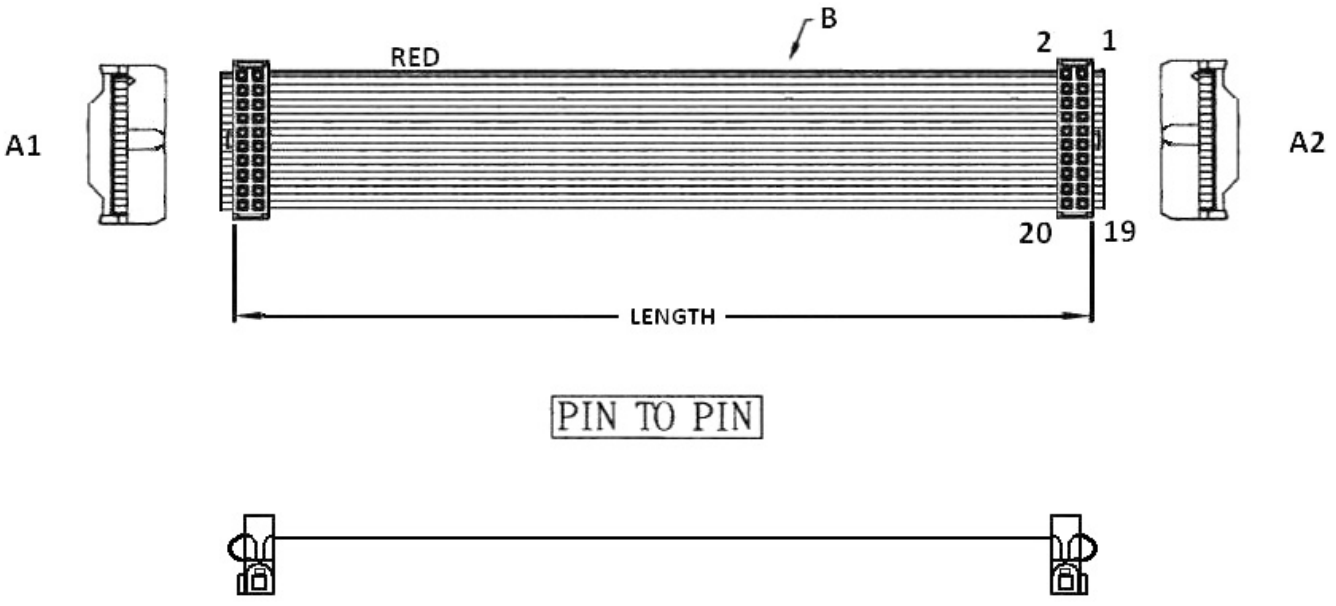

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N X}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NX" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=13.0MM) (C5)

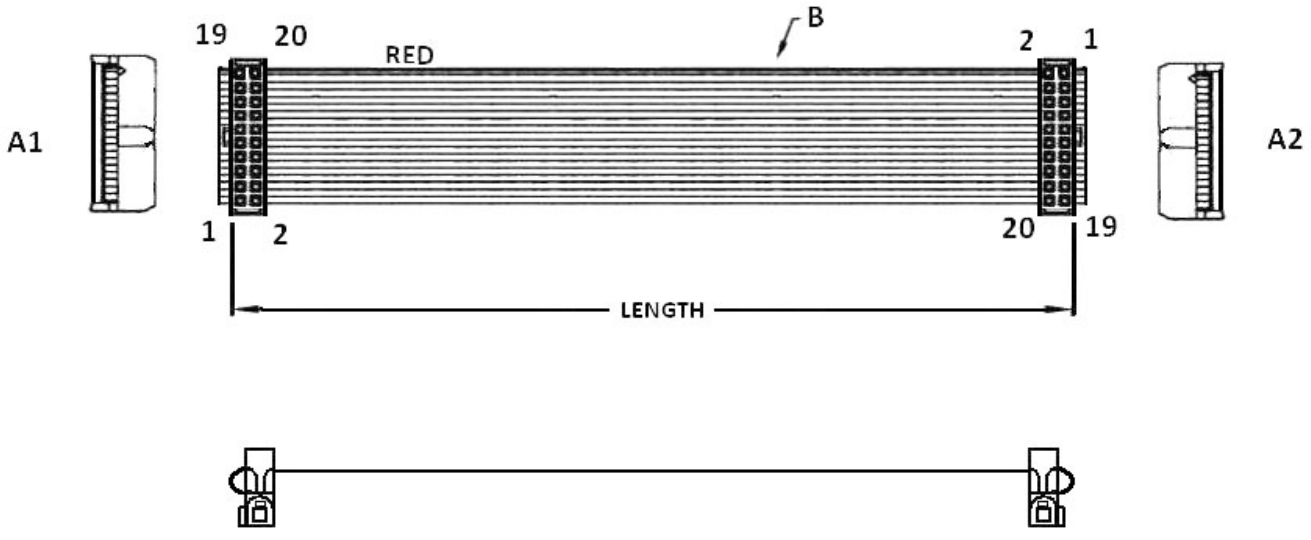


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N I}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NI" 2.00MM IDC SOCKET WITH NOSE & S.R.
   TO 2.00MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=7.8MM) (C6)

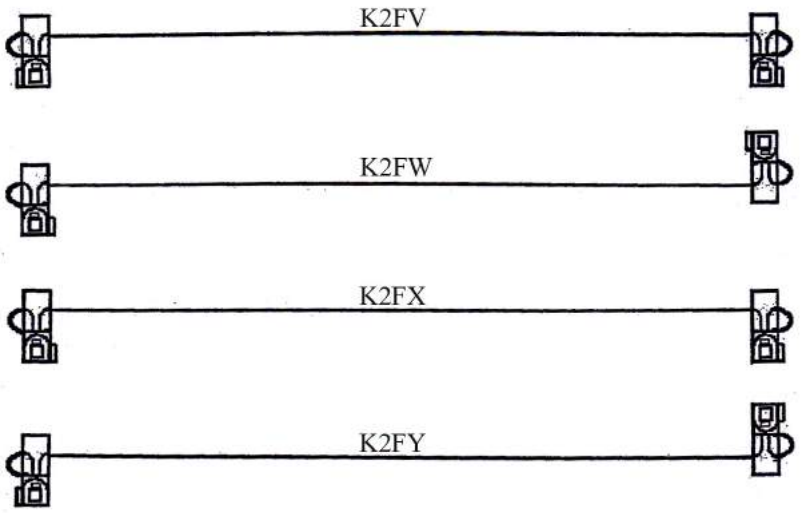

2.00MM PITCH IDC SOCKET WITH INTENSIVE CONTACTS & S.R.

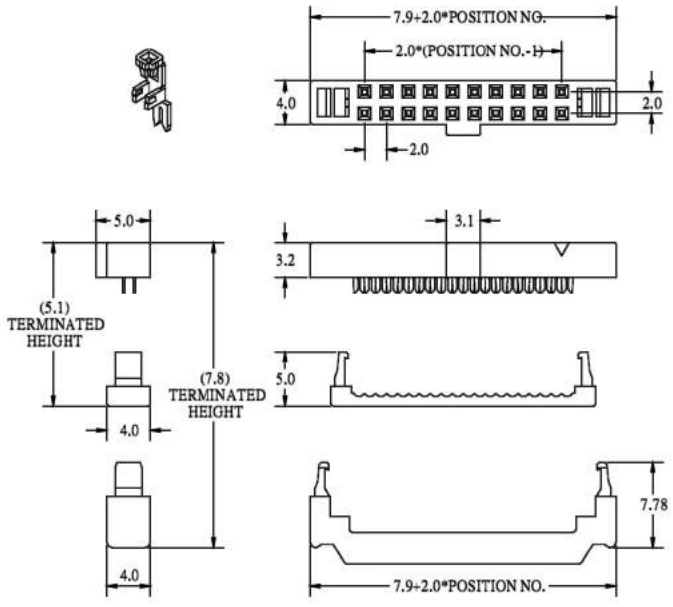

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 036, 040, 044, 050

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2FV, 2FW, 2FX, 2FY
2. NO. OF CONTACTS:
   006~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=11.4MM) (C7)

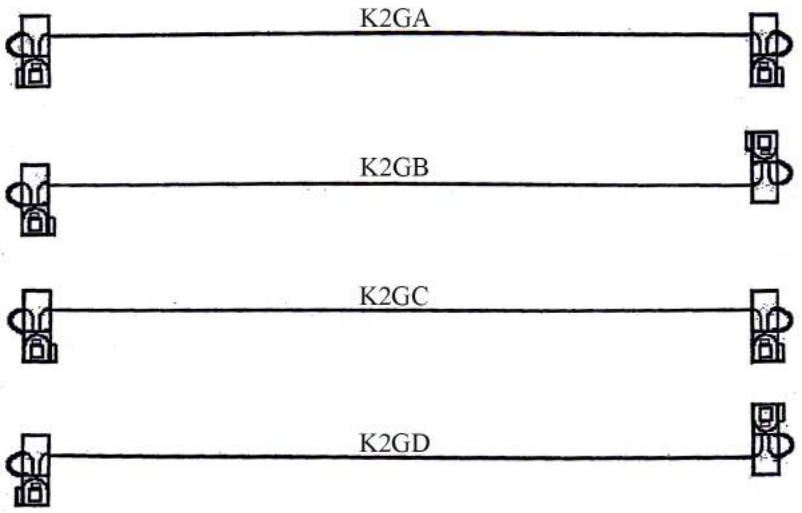

2.00MM PITCH IDC SOCKET WITH HOOKY TERMINATIONS & S.R.

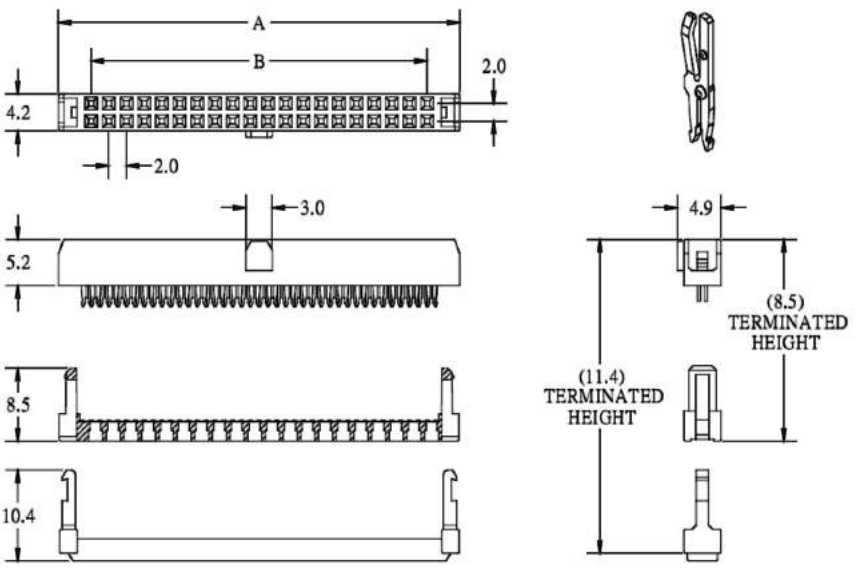

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2GA, 2GB, 2GC, 2GD
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=11.4MM) (C8)

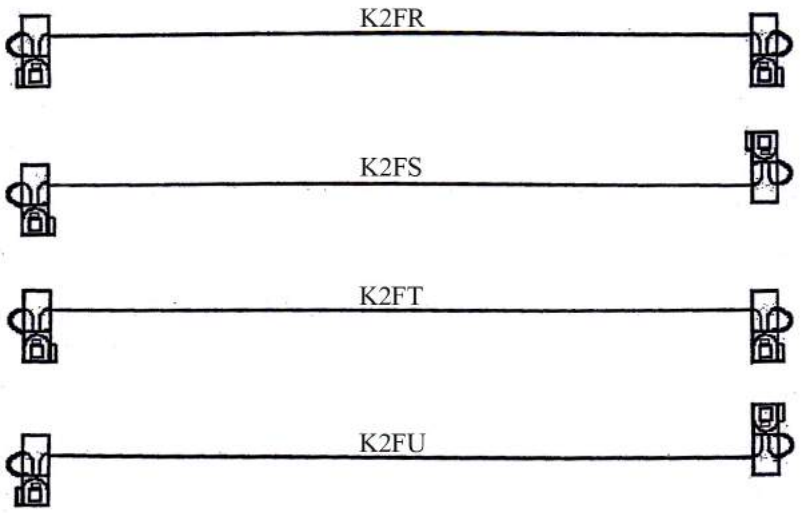

2.00MM PITCH IDC SOCKET WITH S.R. ECONOMICAL TYPE

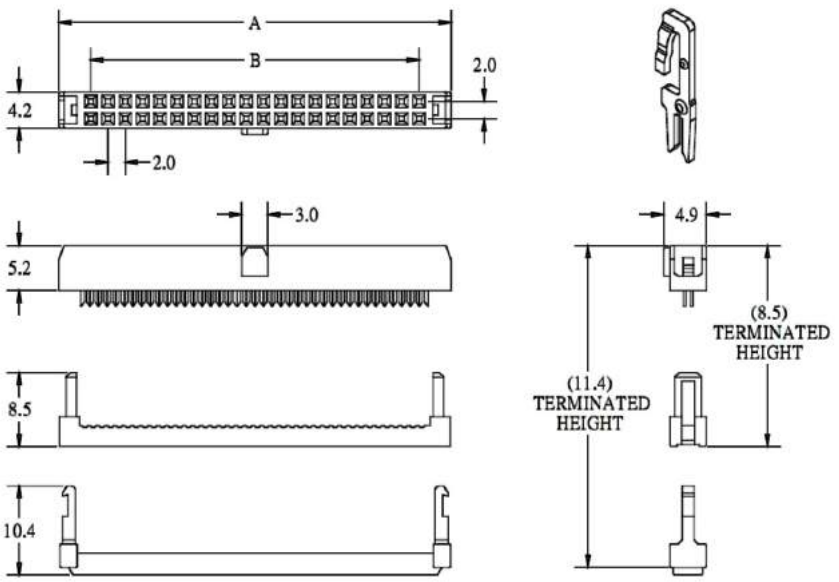

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2FR, 2FS, 2FT, 2FU
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM IDC SOCKETS (H=14.0MM) (C9)

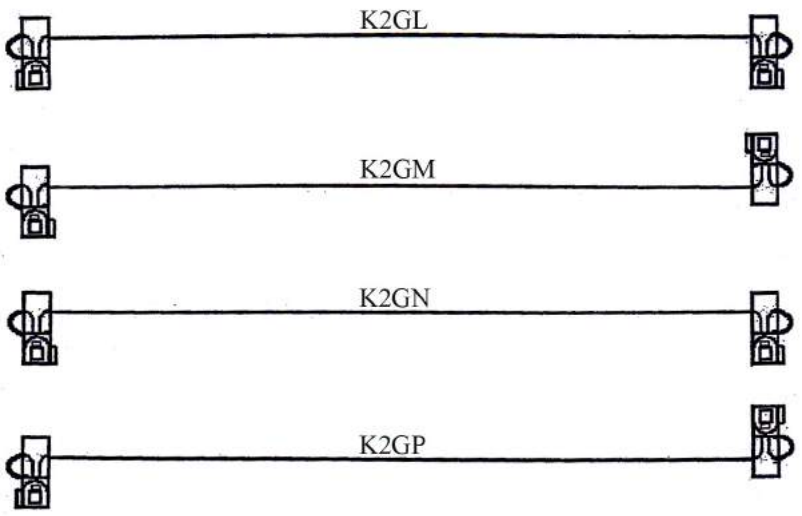

2.00MM PITCH IDC SOCKET WITH RAMP LOCKING & S.R.

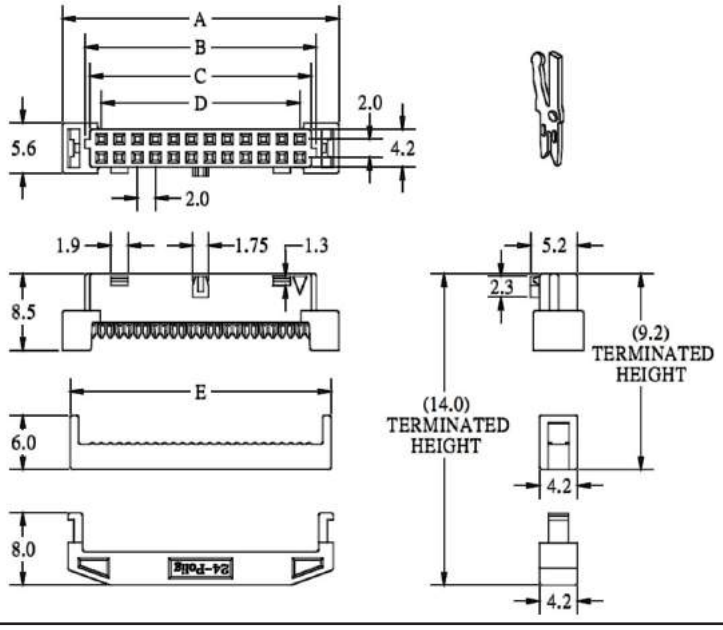

A=D+8.65
B=D+3.65
C=D+2.55
D=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
010, 012, 014, 016, 020,
022, 024, 026, 030, 034,
040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2GL, 2GM, 2GN, 2GP
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH IDC SOCKETS W/O NOSE & WITH STRAIN RELIEFS (H=13.0MM) (D1)

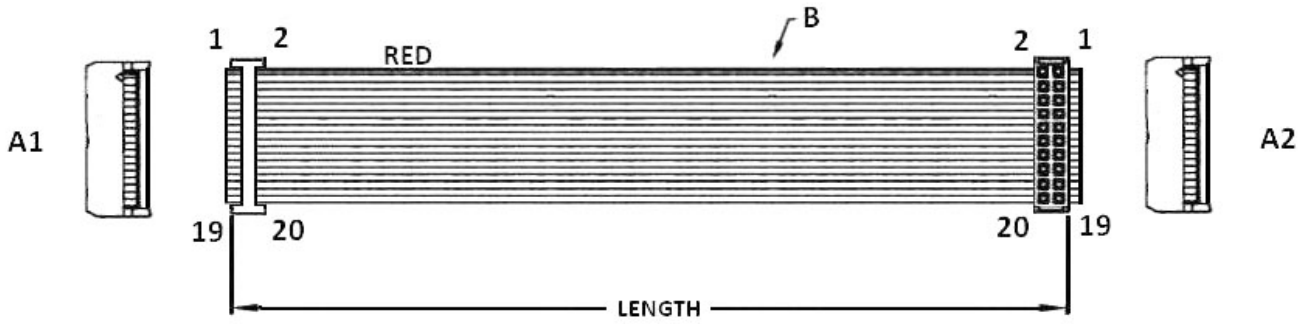

PIN TO PIN




ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{Q Q}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "QQ" 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
   TO 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH IDC SOCKETS W/O NOSE & WITH STRAIN RELIEFS (H=13.0MM) (D2)

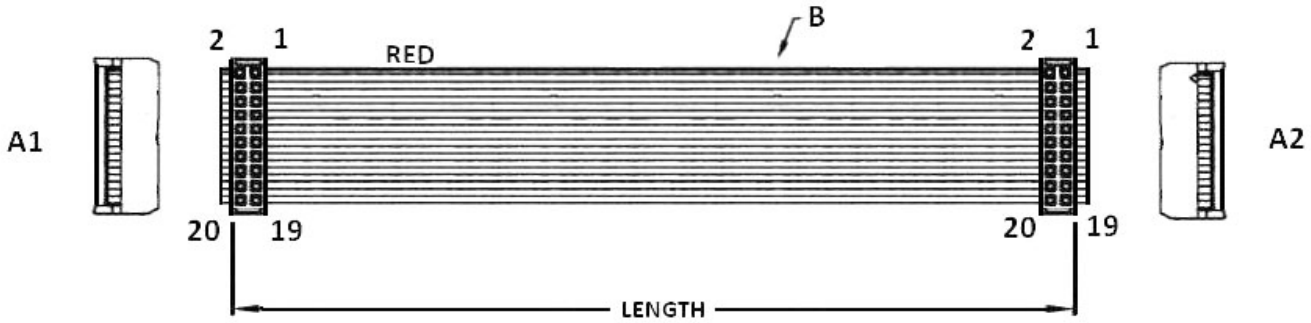

PIN TO PIN




ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{Q R}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "QR" 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
   TO 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH IDC SOCKETS W/O NOSE & WITH STRAIN RELIEFS (H=13.00MM) (D3)

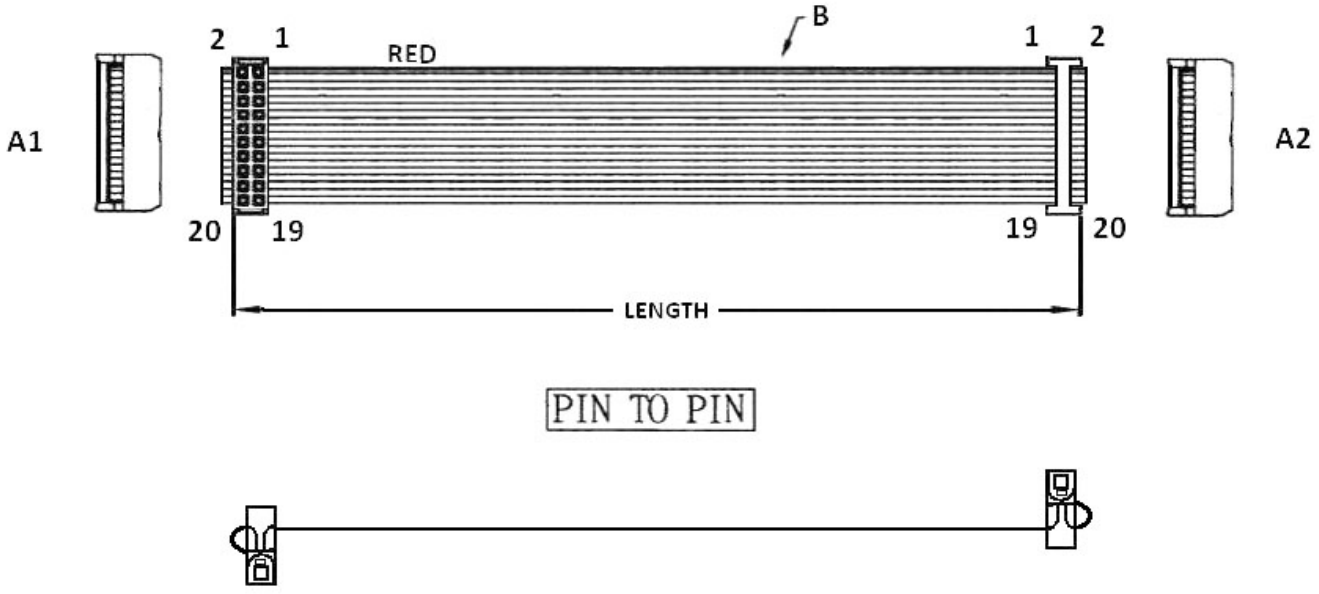

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{R R}}{3}$ **-** $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "RR" 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
   TO 2.00MM IDC SOCKET W/O NOSE & WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH
2* 2.00MM IDC SOCKETS WITH STAINLESS CABLE LOCK & W/O NOSE (H=9.8MM) (D4)

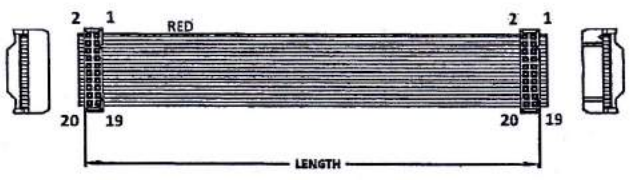



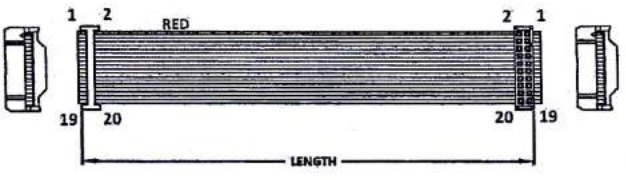



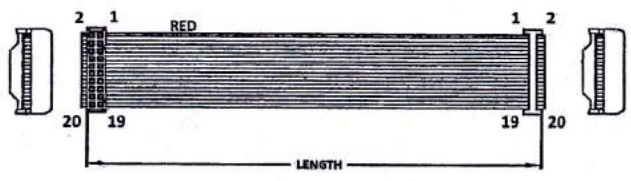




ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$


1. CONSTRUCTION TYPE:
   2FA, 2FB, 2FC
2. NO. OF CONTACTS:
   008~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM 44 PIN IDC SOCKETS

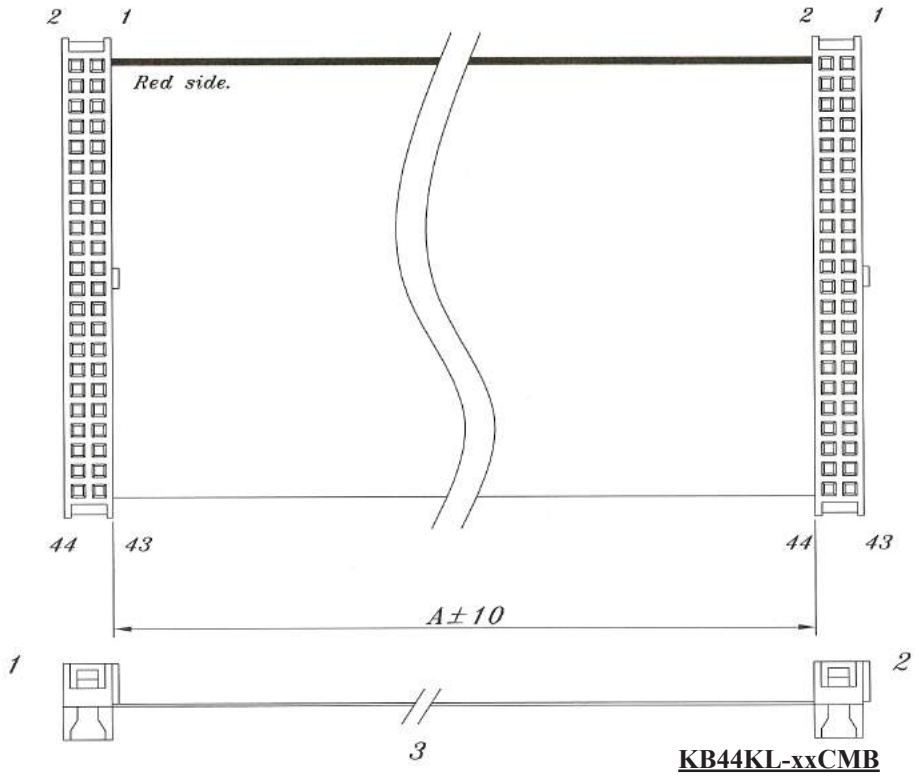

KB44KL-xxCMB

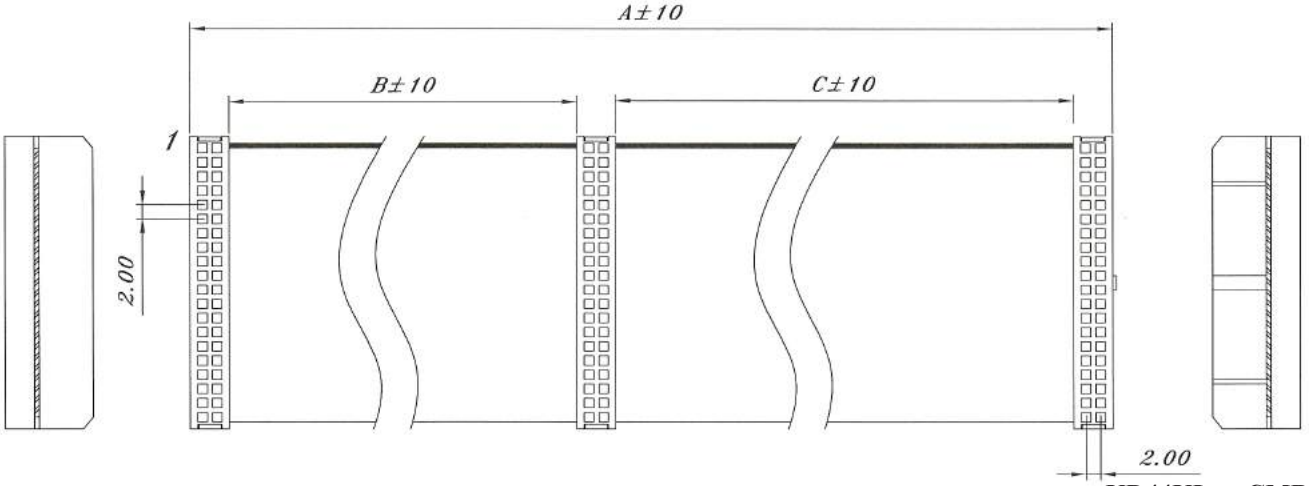

KD44KL-xxCMB

ORDERING INFORMATION:

P/N K B 4 4 K L - x x C M B


FLAT CABLE 2*2.00MM 44 PIN IDC SOCKETS WITH 2 POLARIZATION NOSES
A= LENGTH IN CM

P/N K D 4 4 K L - x x C M B

FLAT CABLE 3*2.00MM 44 PIN IDC SOCKETS IN WHICH 2 SOCKETS WITHOUT POLARIZATION NOSES AND 1 SOCKET WITH POLARIZATION NOSE, A= LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET W/O STRAIN RELIEF (H=9.0MM) TO DIP PLUG (H=5.2MM) (E1)

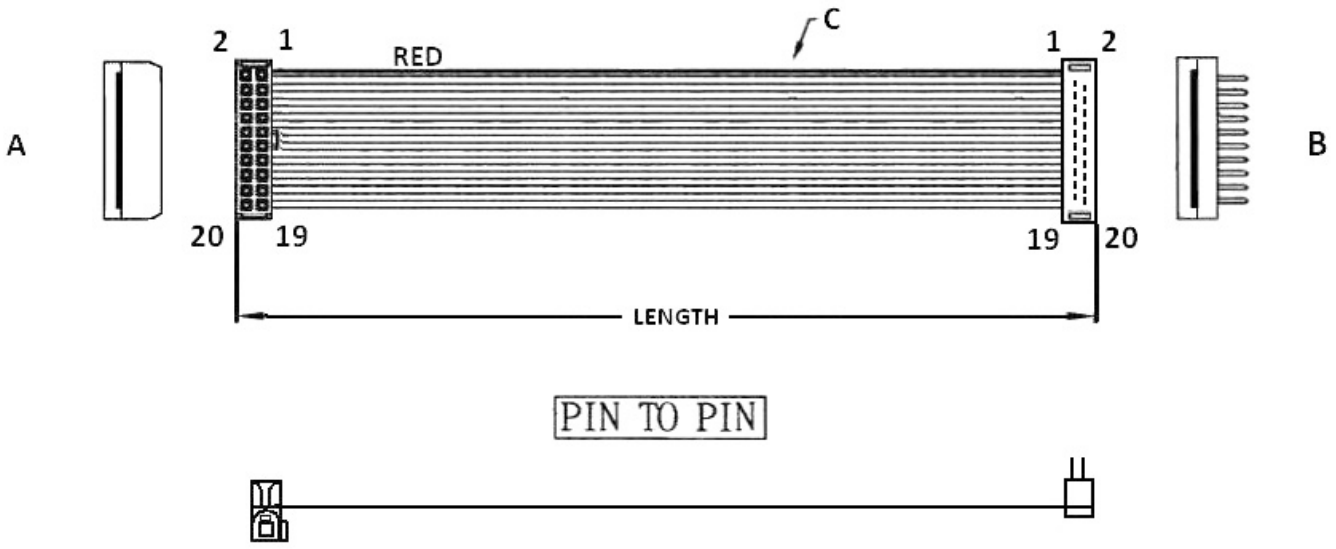

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{KD}{3}$ - $\frac{xx}{4}$ **C M** $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KD" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO DIP PLUG (H=5.2MM) (E2)

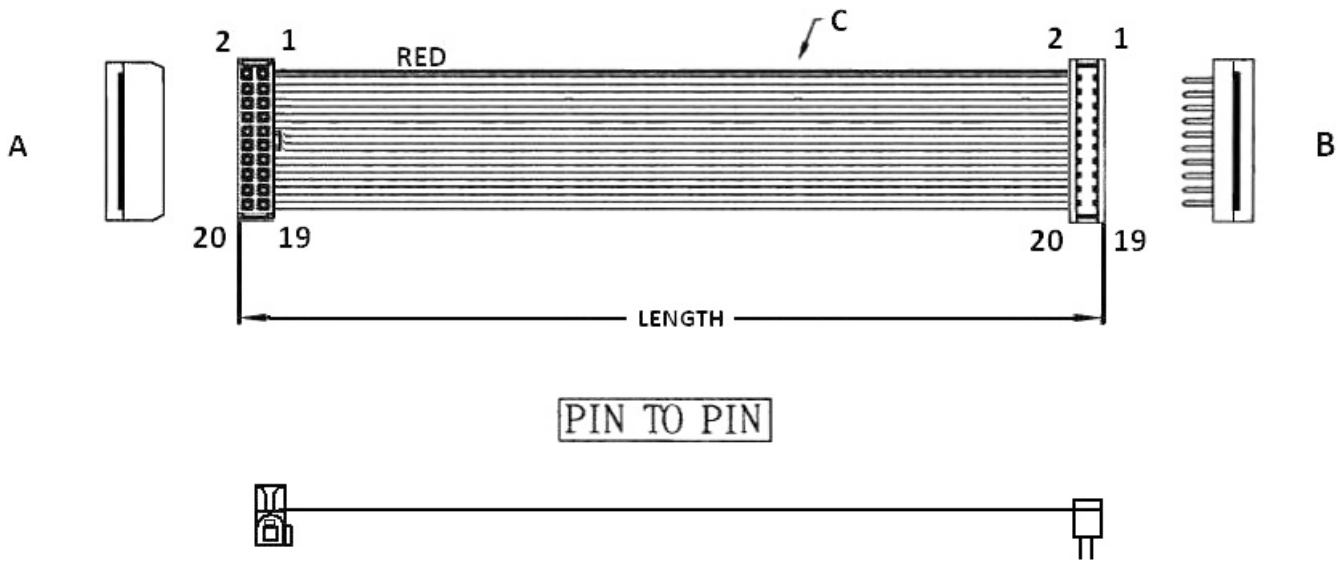

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{KP}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KP" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO DIP PLUG (H=5.2MM) (E3)

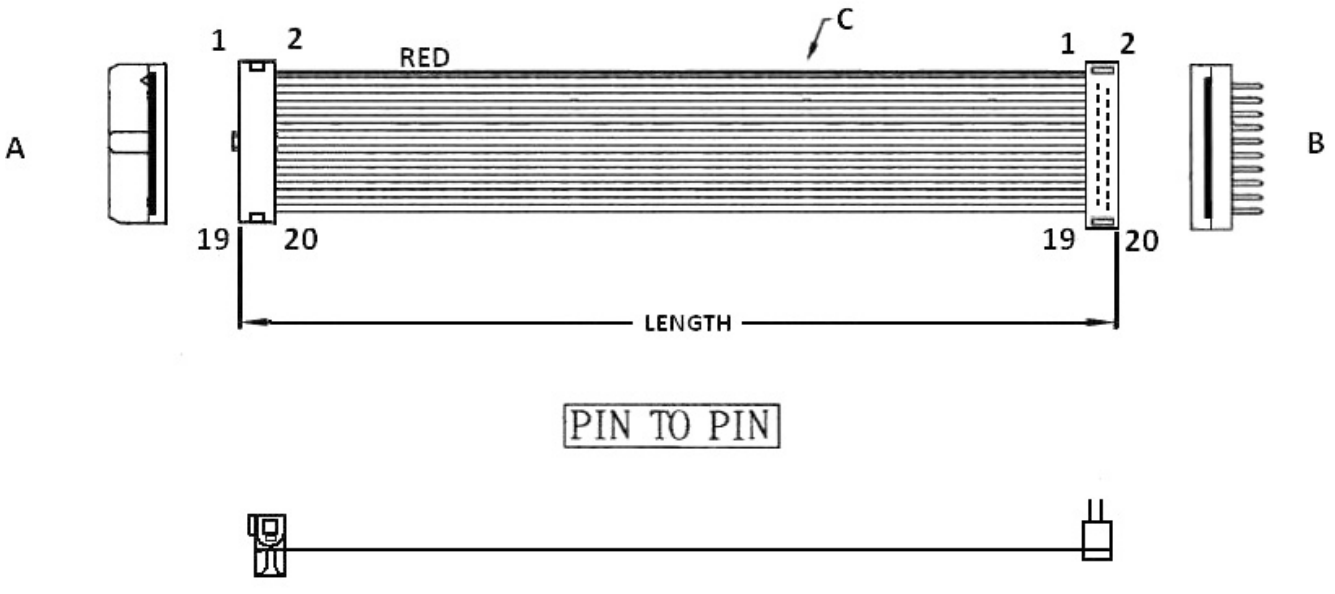


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LD" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO DIP PLUG (H=5.2MM) (E4)

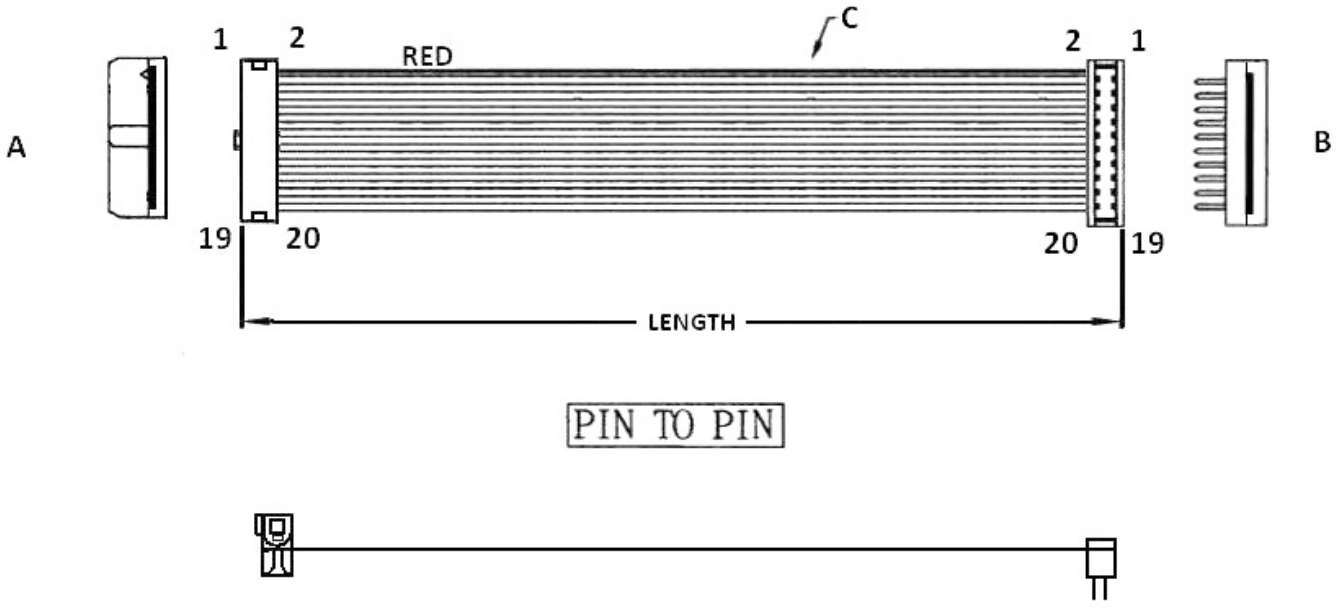

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{L P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LP" 2.00MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=5.1MM) TO DIP PLUG (H=5.2MM) (E5)

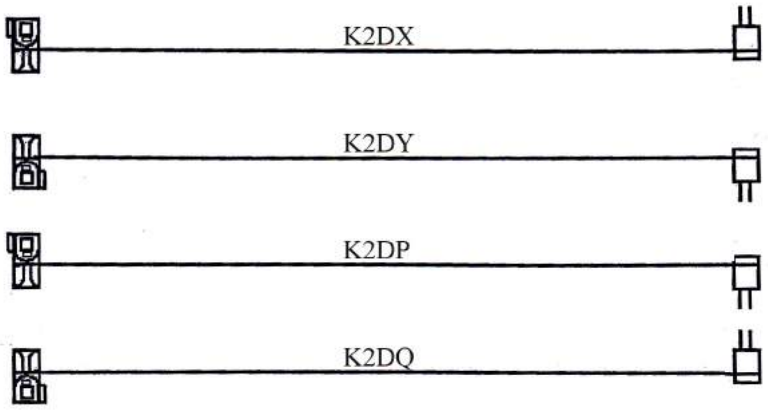


2.00MM IDC SOCKET
W/O S.R. & WITH INTENSIVE CONTACTS

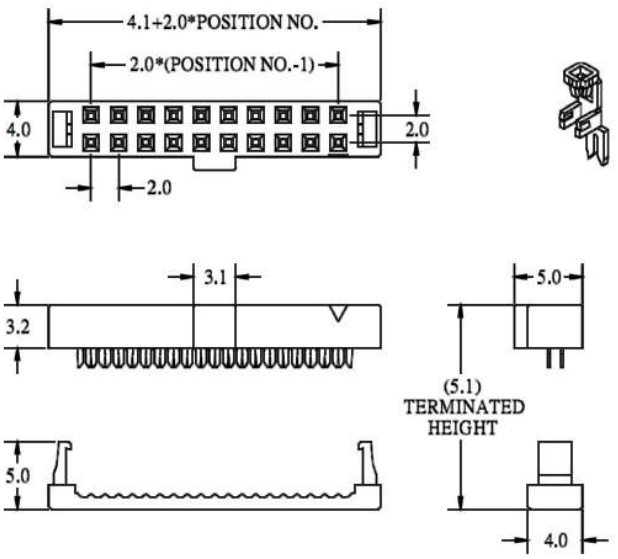

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 036, 040, 044, 050

2.00MM PITCH DIP PLUG

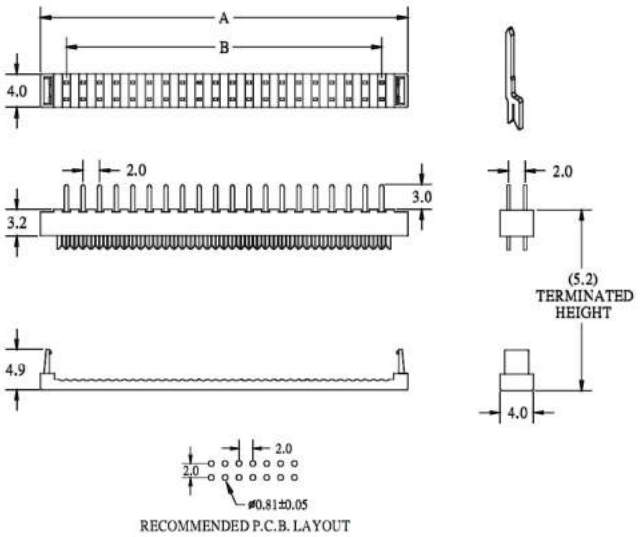

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2DX, 2DY, 2DP, 2DQ
2. NO. OF CONTACTS:
   006~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=7.5MM) TO DIP PLUG (H=5.2MM) (E6)

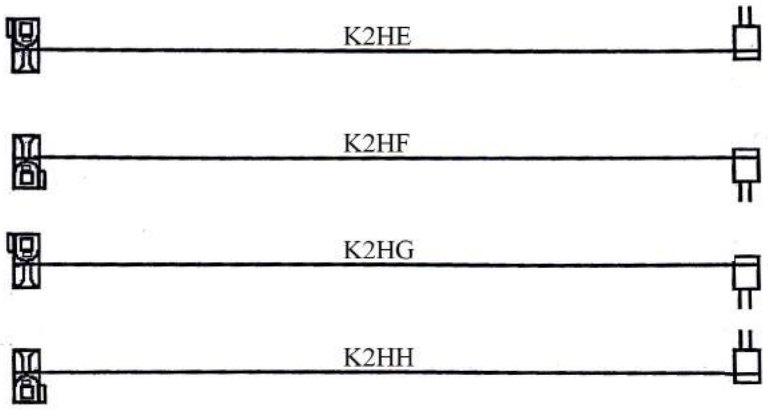


2.00MM IDC SOCKET
WITH CENTRAL BUMP & FRICTION LATCH

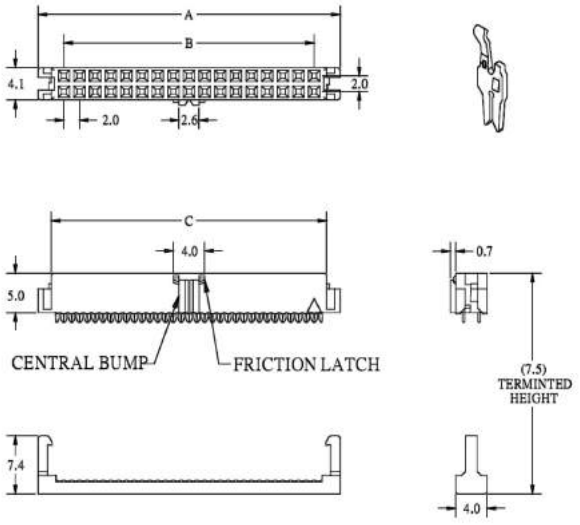

A=B+6.60
B=2.00*POSITIONS/2-2.00
C=B+3.20

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 018, 020, 022, 024, 026, 028, 030, 034, 036, 040, 044, 048, 050, 060, 064, 068

2.00MM PITCH DIP PLUG

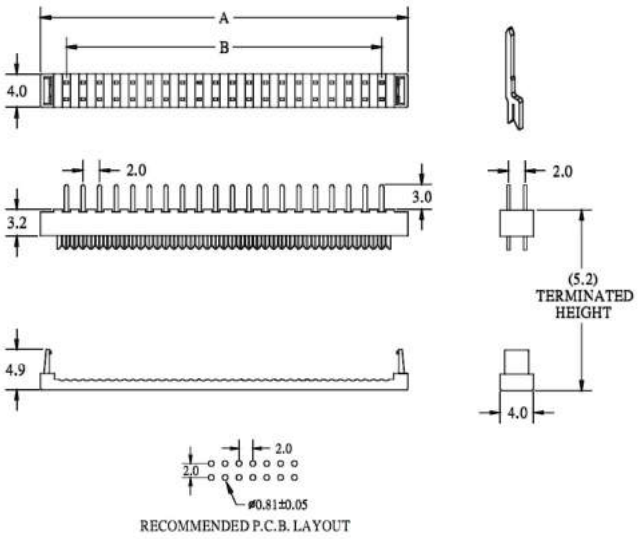

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ B

1. CONSTRUCTION TYPE:
   2HE, 2HF, 2HG, 2HH
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=8.5MM) TO DIP PLUG (H=5.2MM) (E7)

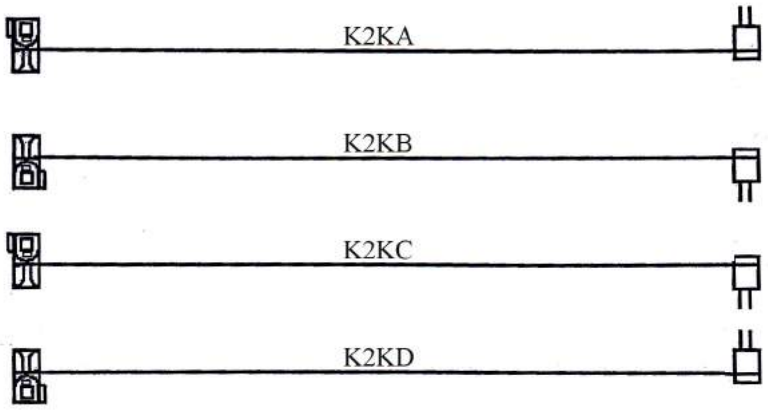


2.00MM IDC SOCKET
WITHOUT STRAIN RELIEF

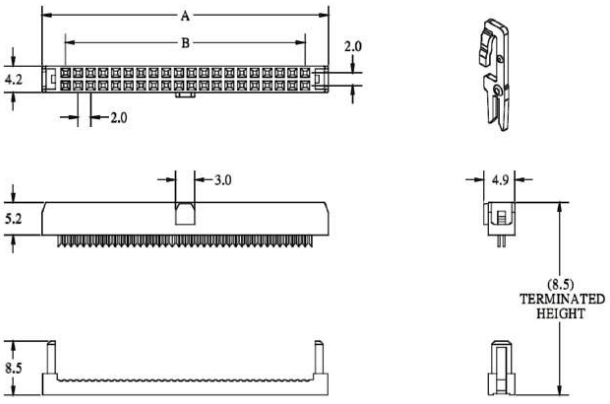

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068

2.00MM PITCH DIP PLUG

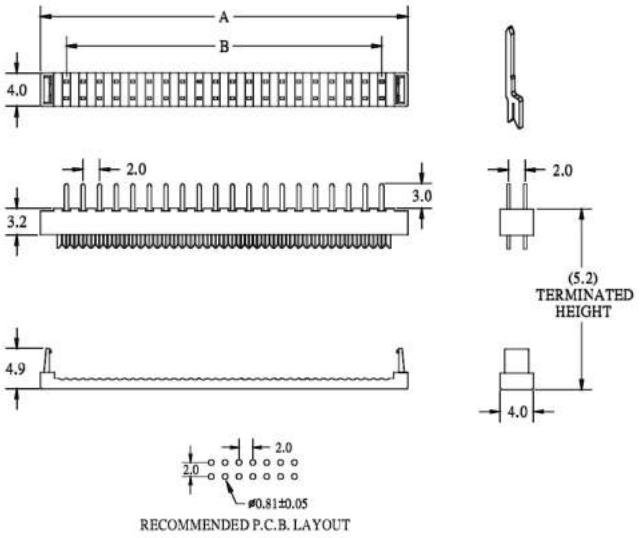

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016,
020, 022, 024, 026, 030,
034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2KA, 2KB, 2KC, 2KD
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=8.5MM) TO DIP PLUG (H=5.2MM) (E8)

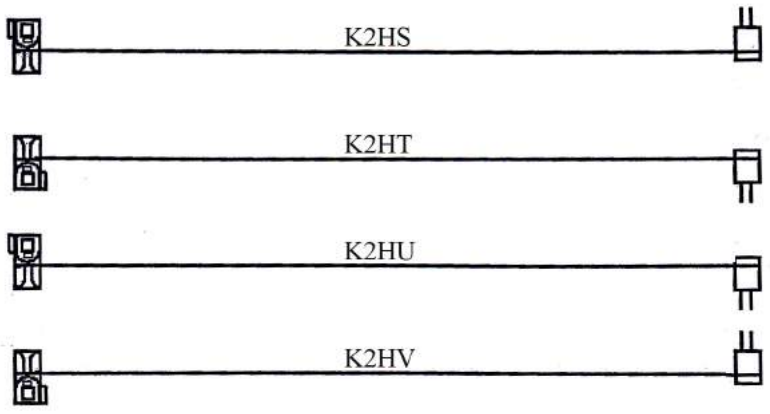


2.00MM IDC SOCKET
WITH HOOKY TERMINATIONS & W/O S.R.

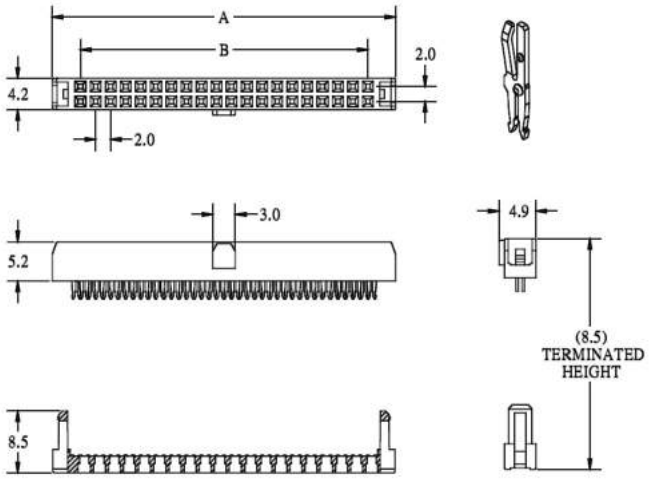

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 018, 020, 022, 024,
026, 030, 032, 034, 036,
038, 040, 044, 048, 050,
056, 060, 064, 068

2.00MM PITCH DIP PLUG

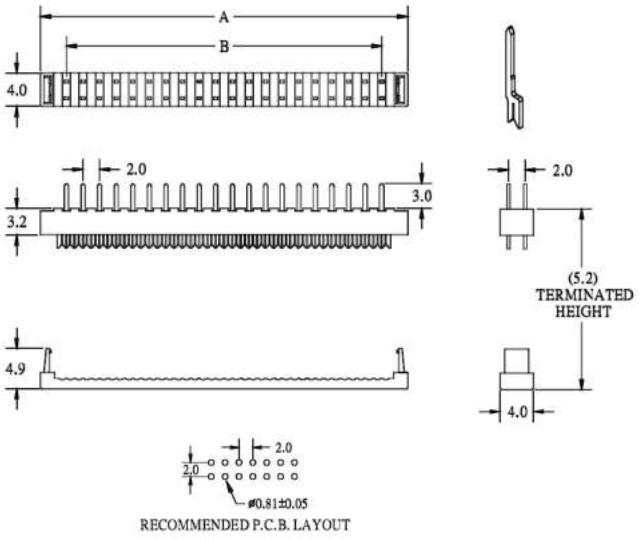

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016,
020, 022, 024, 026, 030,
034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2HS, 2HT, 2HU, 2HV
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM SHRUNK IDC SOCKET (H=8.5MM) TO DIP PLUG (H=5.2MM) (E9)

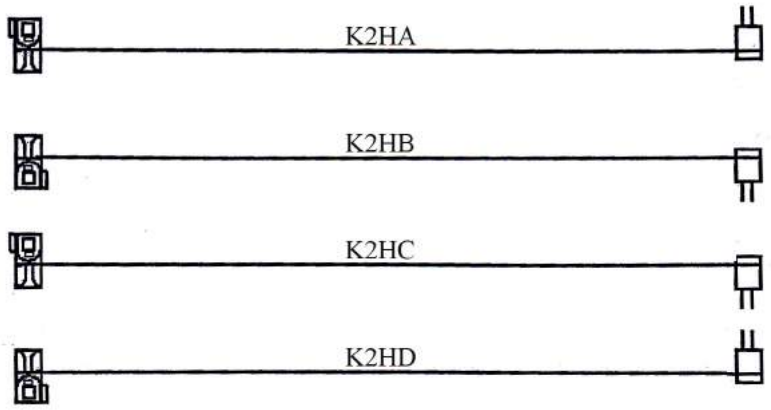


2.00MM SHRUNK IDC SOCKET

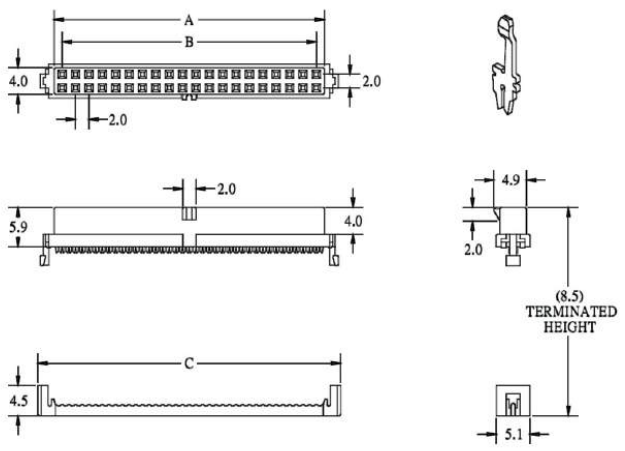

A=B+2.40
B=2.00*POSITIONS/2-2.00
C=B+7.17

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

2.00MM PITCH DIP PLUG

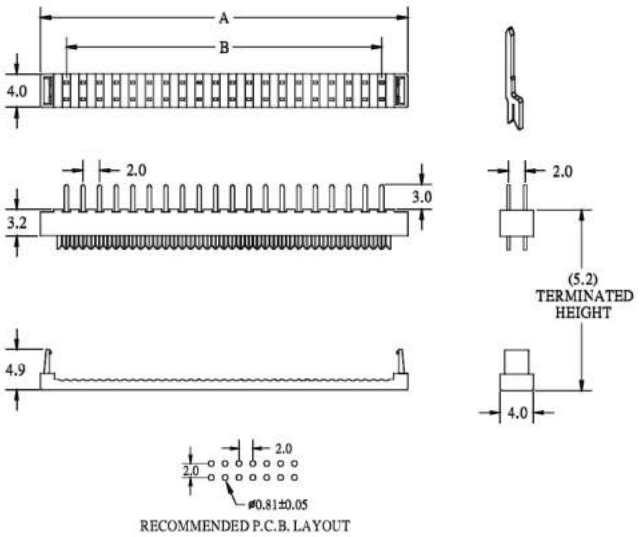

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2HA, 2HB, 2HC, 2HD
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=9.2MM) TO DIP PLUG (H=5.2MM) (E10)

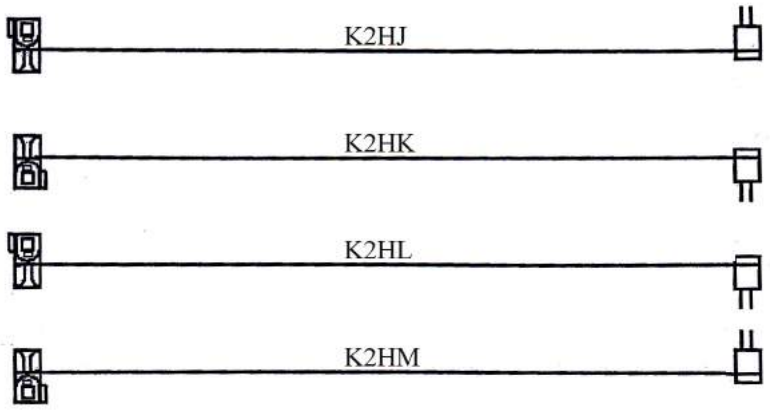


2.00MM IDC SOCKET
WITH RAMP LOCKING & W/O S.R.

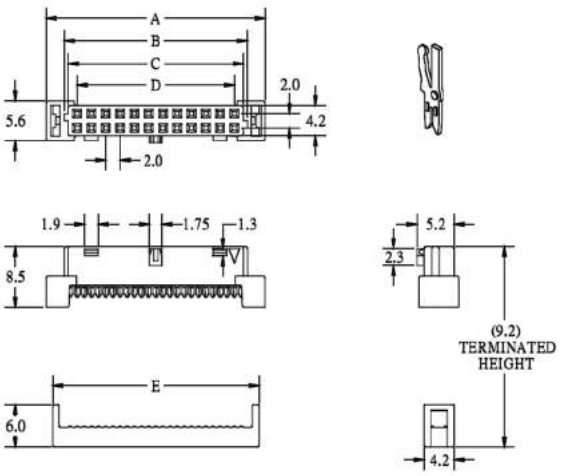

A=D+8.65
B=D+3.65
C=D+2.55
D=2.00*POSITIONS/2-2.00
E=D+6.90

NO. OF CONTACTS:
010, 012, 014, 016, 020,
022, 024, 026, 030, 034,
040, 044, 050, 068

2.00MM PITCH DIP PLUG

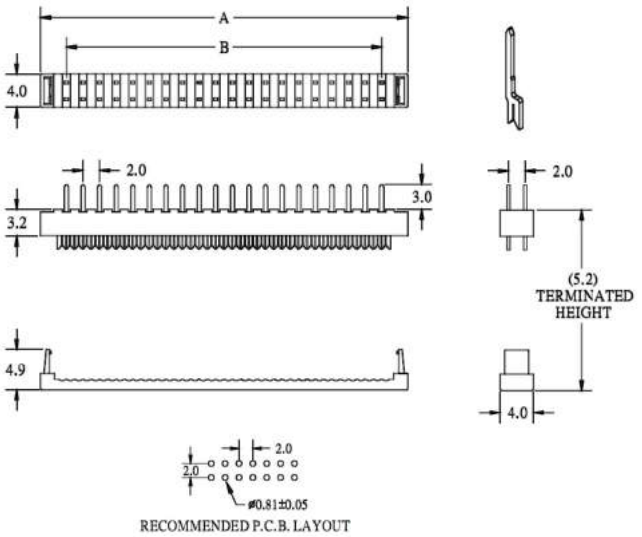

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016,
020, 022, 024, 026, 030,
034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   2HJ, 2HK, 2HL, 2HM
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO DIP PLUG (H=5.2MM) (F1)

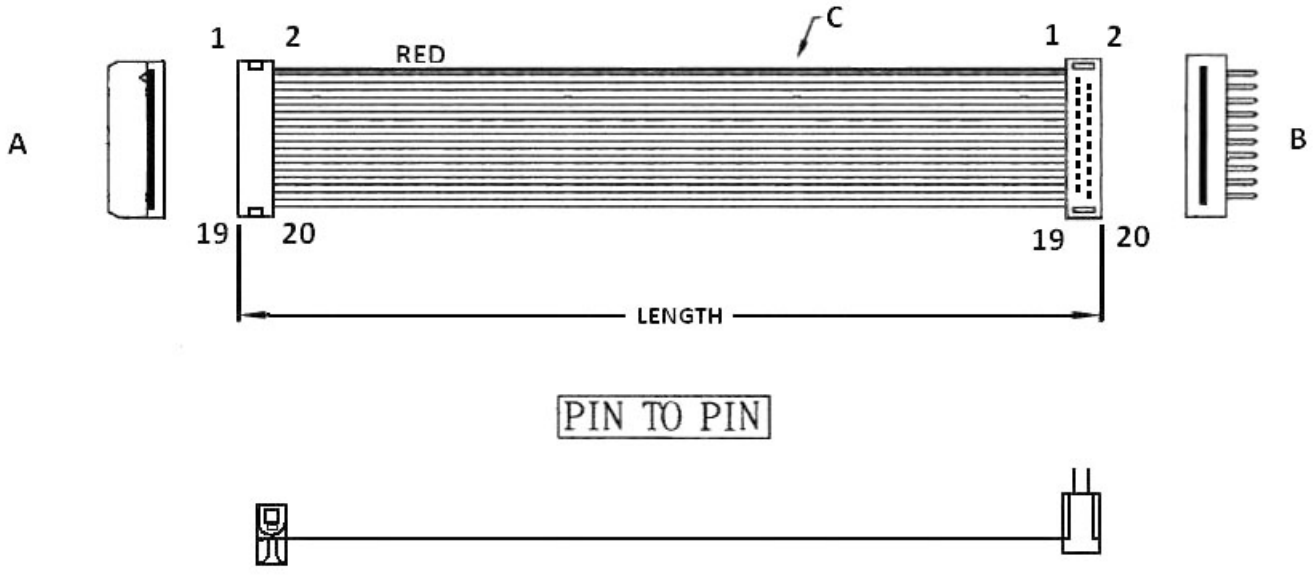

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{A D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AD" 2.00MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO DIP PLUG (H=5.2MM) (F2)

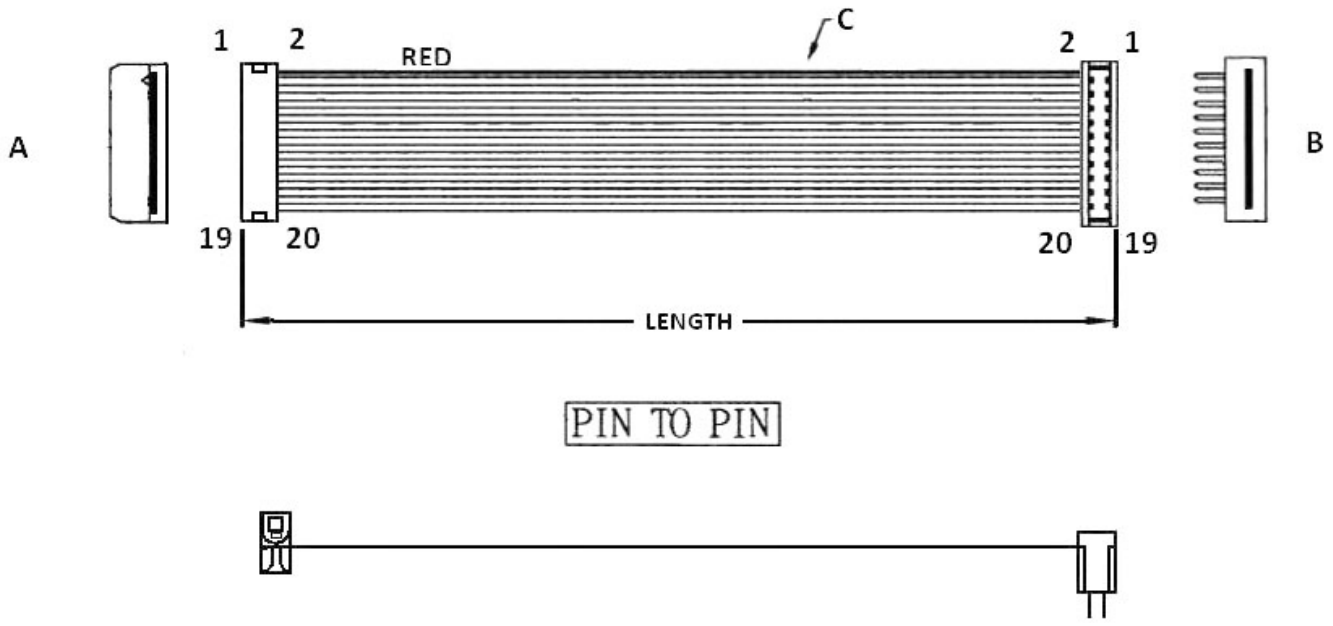

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KB}{1}\ \frac{xx}{2}\ \frac{AP}{3}$ - $\frac{xx}{4}$ **C M** $\frac{B}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AP" 2.00MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO DIP PLUG (H=5.2MM) (F3)

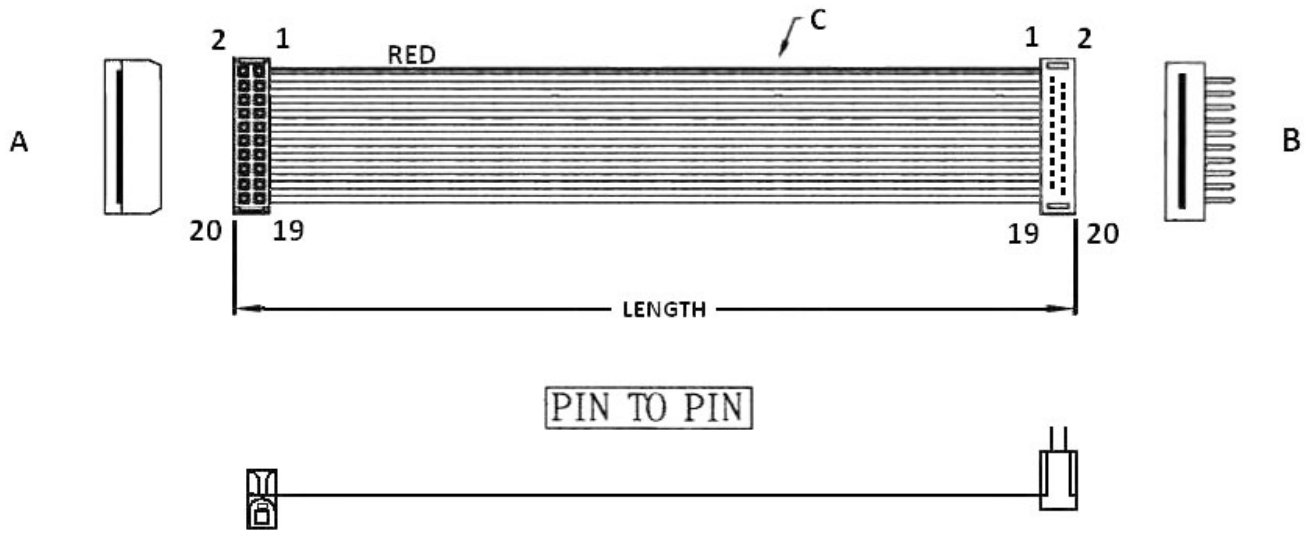


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{V D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "VD" 2.00MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO DIP PLUG (H=5.2MM) (F4)

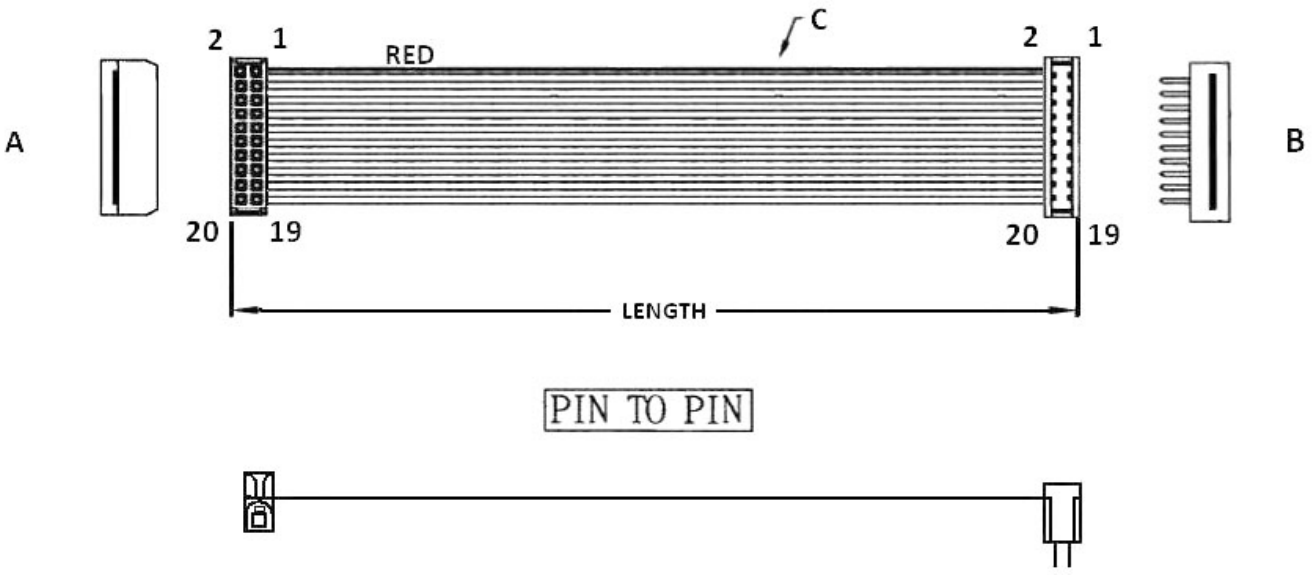


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{V P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "VP" 2.00MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH
2.00MM IDC SOCKET WITHOUT NOSE (H=7.4MM) TO DIP PLUG (H=5.2MM) (F5)

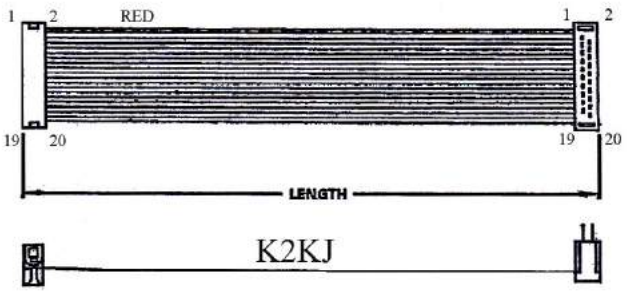


K2KJ

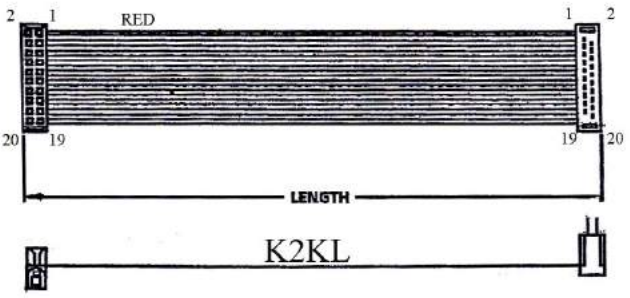

K2KL

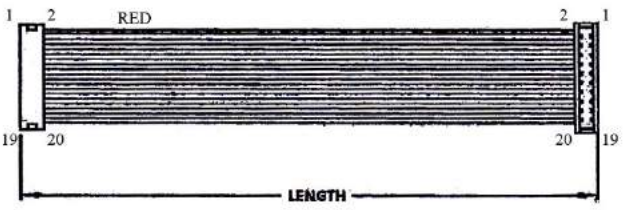

K2KK

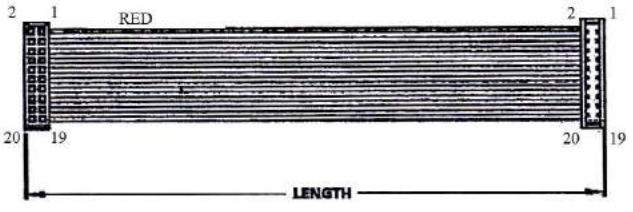

K2KM


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   2KJ, 2KK, 2KL, 2KM
2. NO. OF CONTACTS:
   008~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO DIP PLUG (H=5.2MM) (G1)

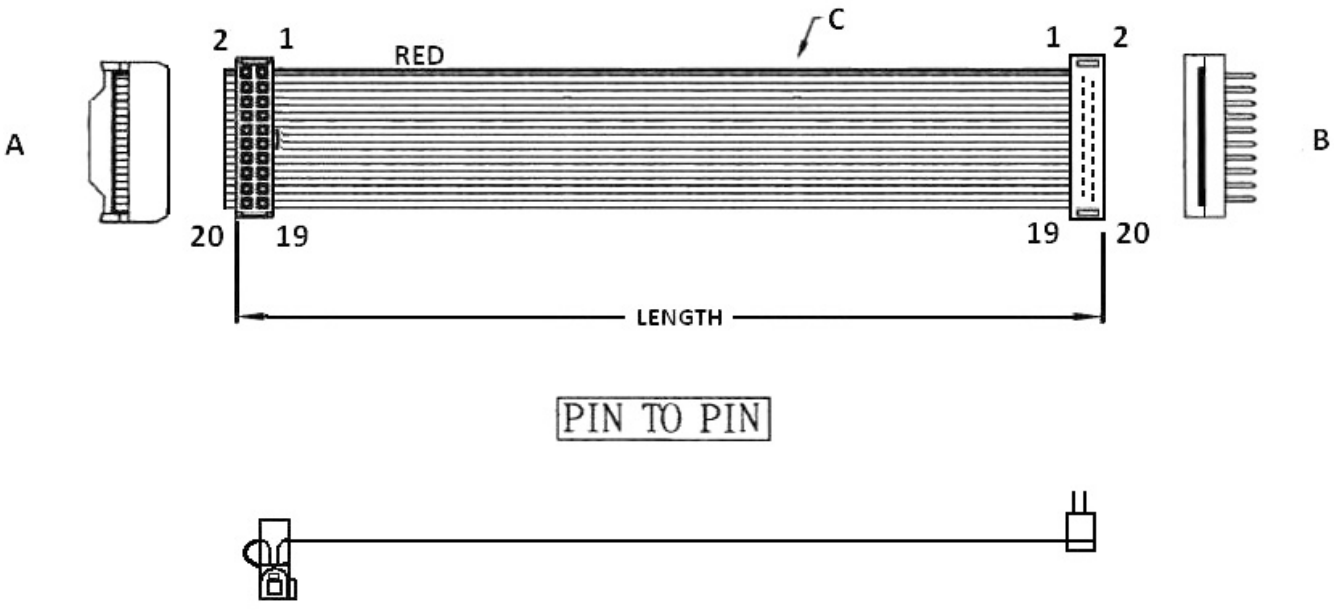

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{M D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MD" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO DIP PLUG (H=5.2MM) (G2)

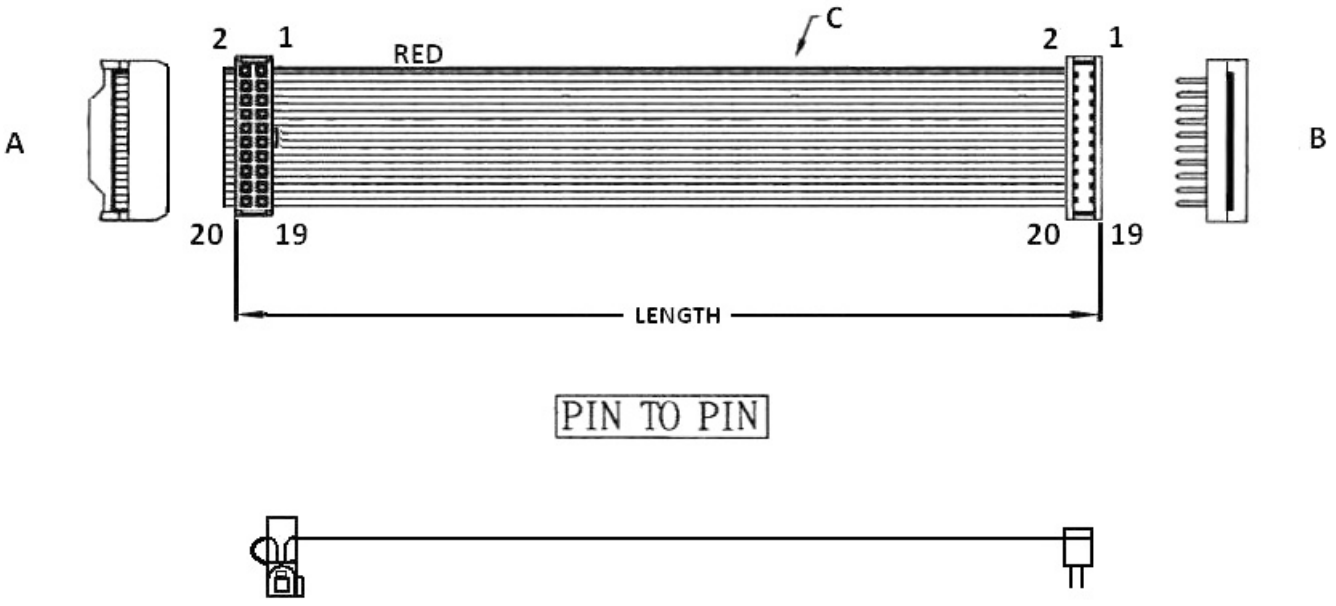


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{M P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MP" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO DIP PLUG (H=5.2MM) (G3)

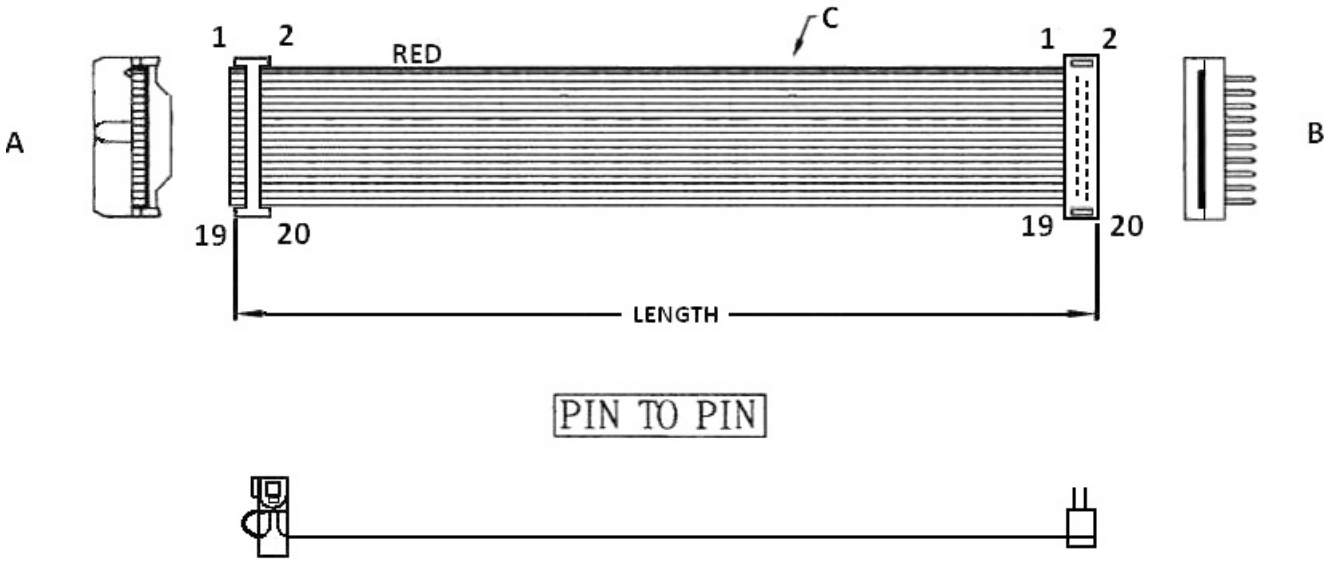

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{N D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "ND" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO DIP PLUG (H=5.2MM) (G4)

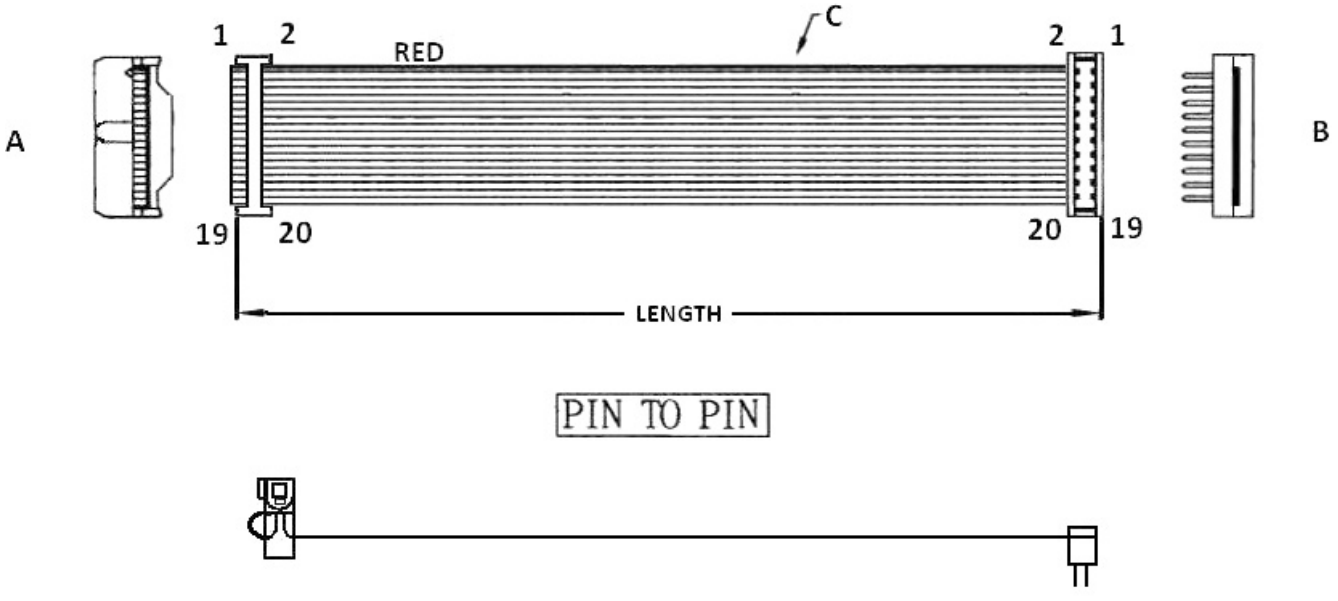

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{N P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NP" 2.00MM IDC SOCKET WITH NOSE & S.R. TO
   2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=7.8MM) TO DIP PLUG (H=5.2MM) (G5)

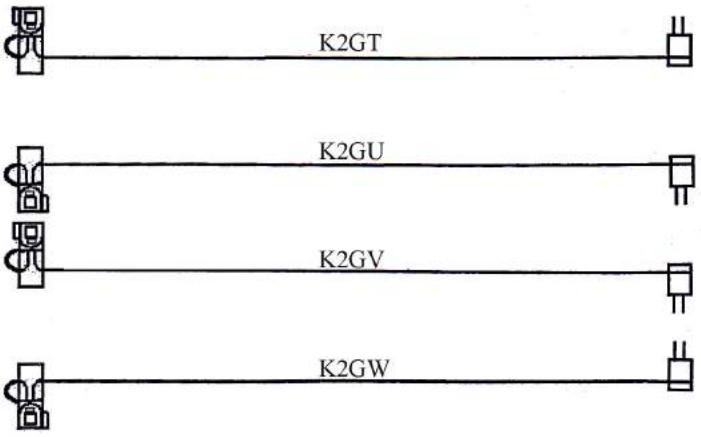


2.00MM IDC SOCKET
WITH INTENSIVE CONTACTS & S.R.

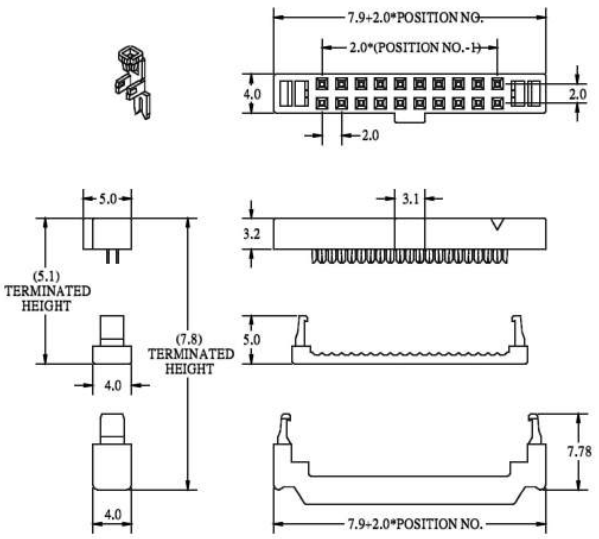

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 036, 040, 044, 050

2.00MM PITCH DIP PLUG

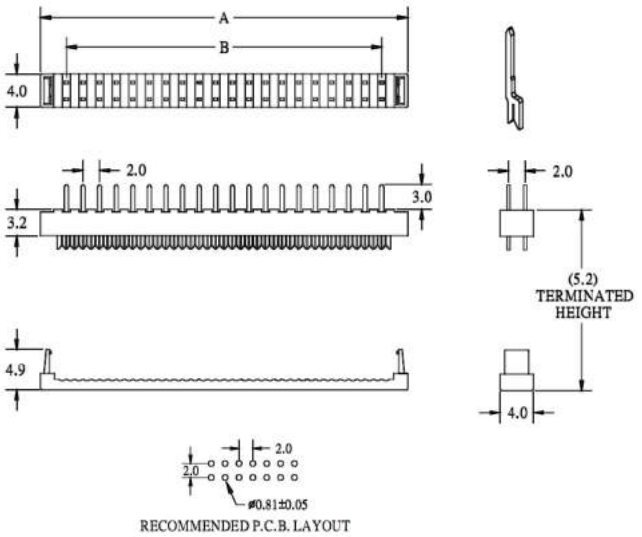

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2GT, 2GU, 2GV, 2GW
2. NO. OF CONTACTS:
   006~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=11.4MM) TO DIP PLUG (H=5.2MM) (G6)

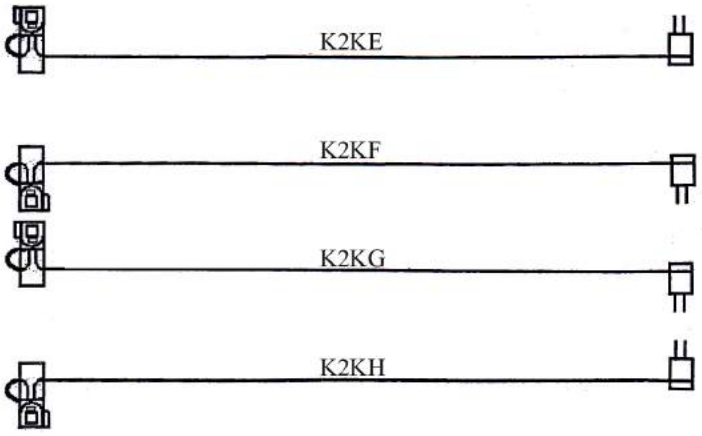


2.00MM IDC SOCKET WITH STRAIN RELIEF

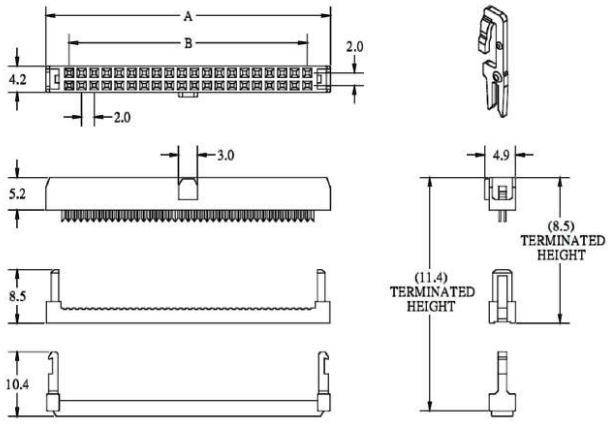

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 018, 020, 022, 024, 026, 030, 032, 034, 036, 038, 040, 044, 048, 050, 056, 060, 064, 068

2.00MM PITCH DIP PLUG

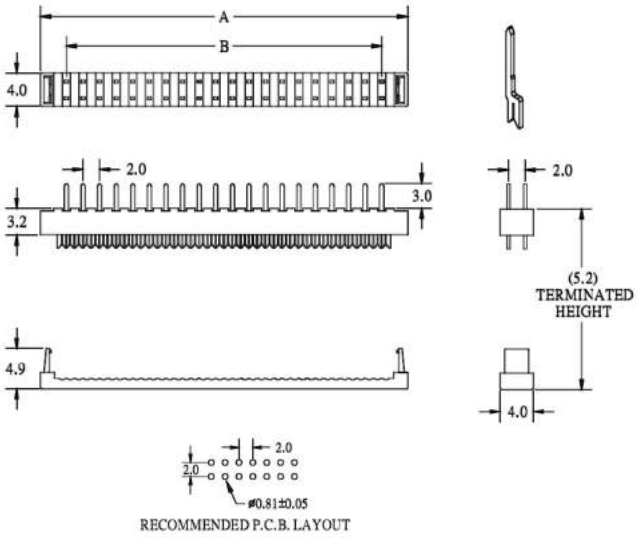

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2KE, 2KF, 2KG, 2KH
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=11.4MM) TO DIP PLUG (H=5.2MM) (G7)

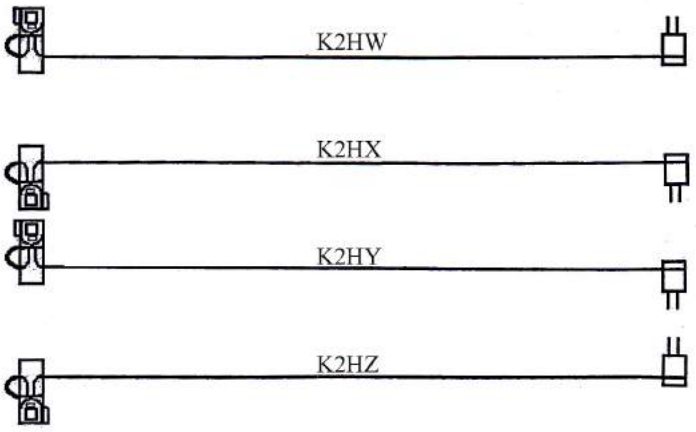


2.00MM IDC SOCKET
WITH HOOKY TERMINATIONS & S.R.

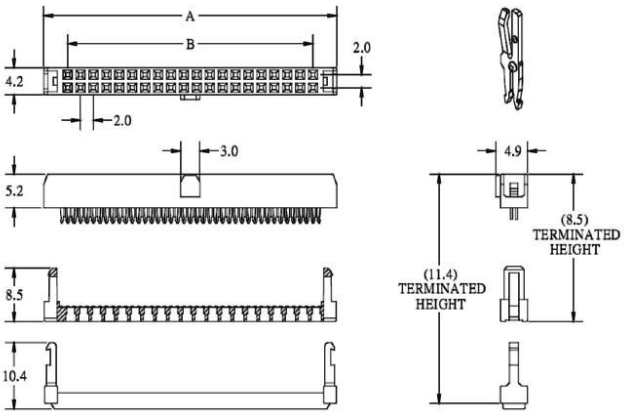

A=B+7.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 018, 020, 022, 024, 026, 030, 032, 034, 036, 038, 040, 044, 048, 050, 056, 060, 064, 068

2.00MM PITCH DIP PLUG

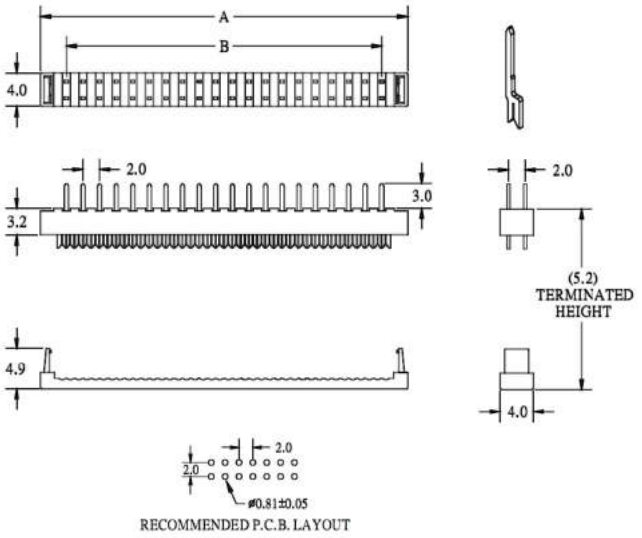

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016, 020, 022, 024, 026, 030, 034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2HW, 2HX, 2HY, 2HZ
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE
WITH 2.00MM IDC SOCKET (H=14.0MM) TO DIP PLUG (H=5.2MM) (G8)

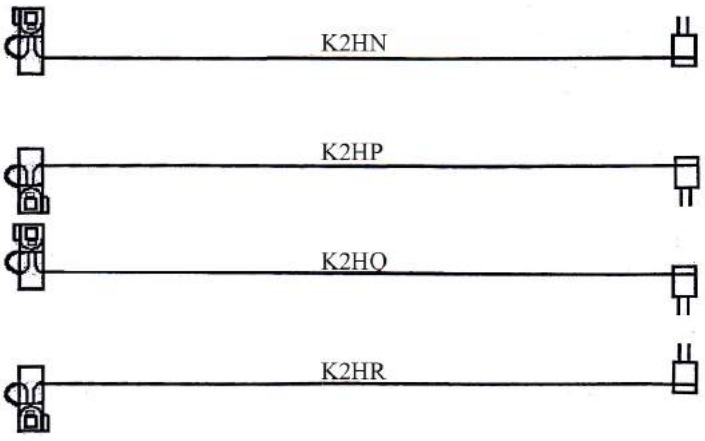


2.00MM IDC SOCKET
WITH RAMP LOCKING & S.R.

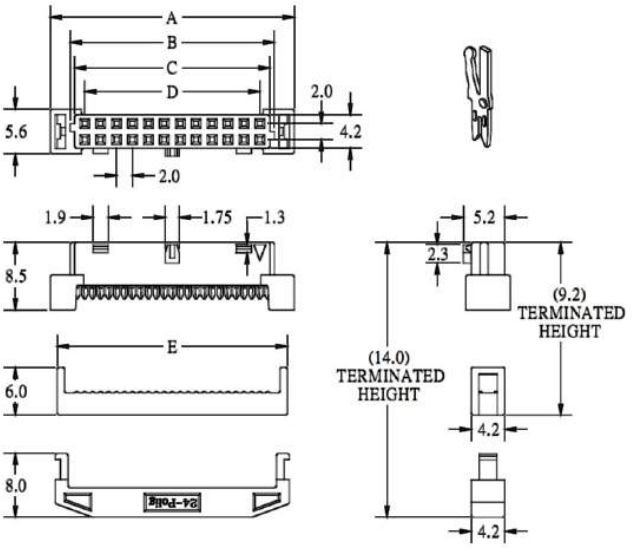

A=D+8.65
B=D+3.65
C=D+2.55
D=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
010, 012, 014, 016, 020,
022, 024, 026, 030, 034,
040, 044, 050, 068

2.00MM PITCH DIP PLUG

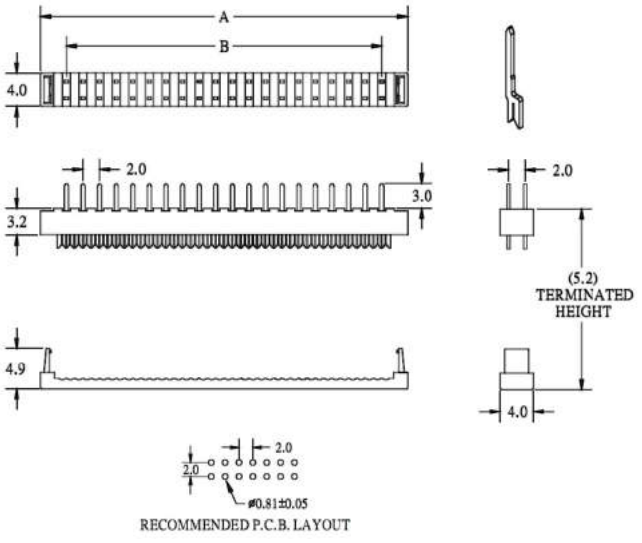

A=B+6.20
B=2.00*POSITIONS/2-2.00

NO. OF CONTACTS:
008, 010, 012, 014, 016,
020, 022, 024, 026, 030,
034, 040, 044, 050, 068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2HN, 2HP, 2HQ, 2HR
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH DIP PLUGS (H=5.2MM) (H1)

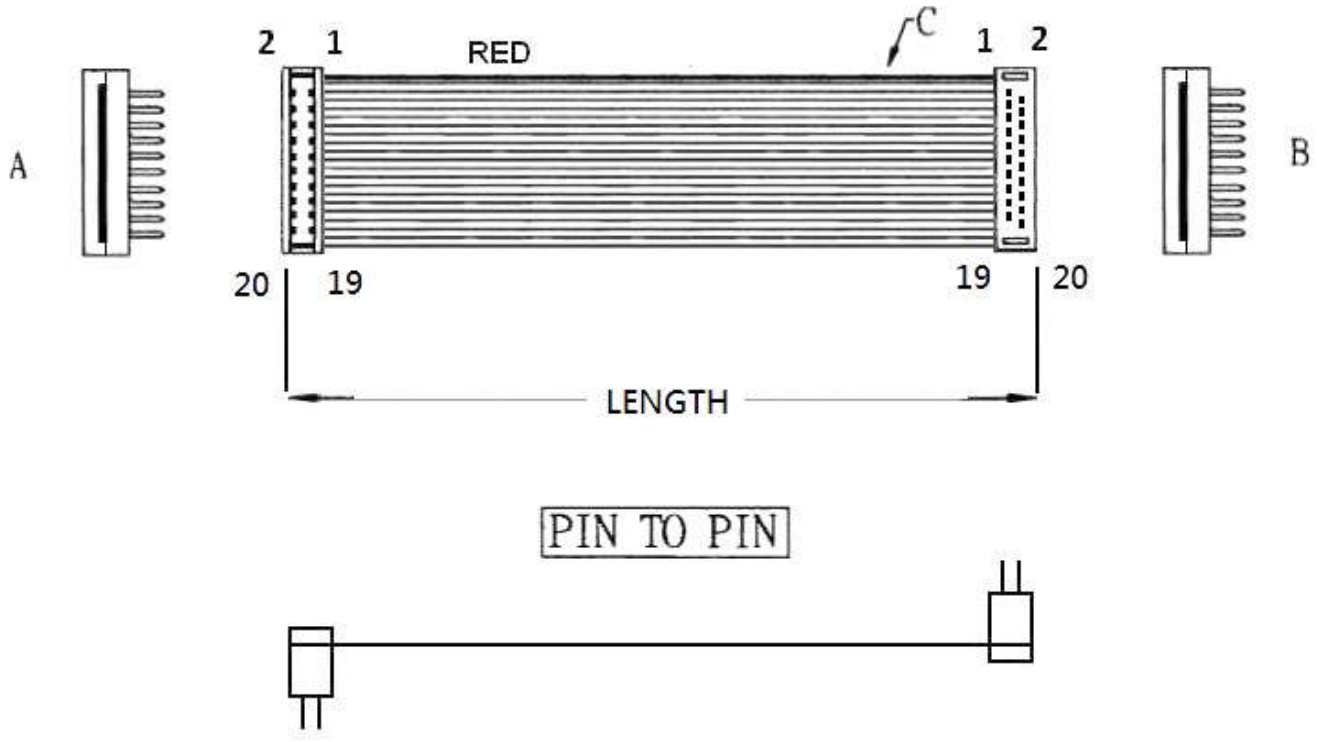


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{D D}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "DD" 2.00MM DIP PLUG
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH DIP PLUGS (H=5.2MM) (H2)

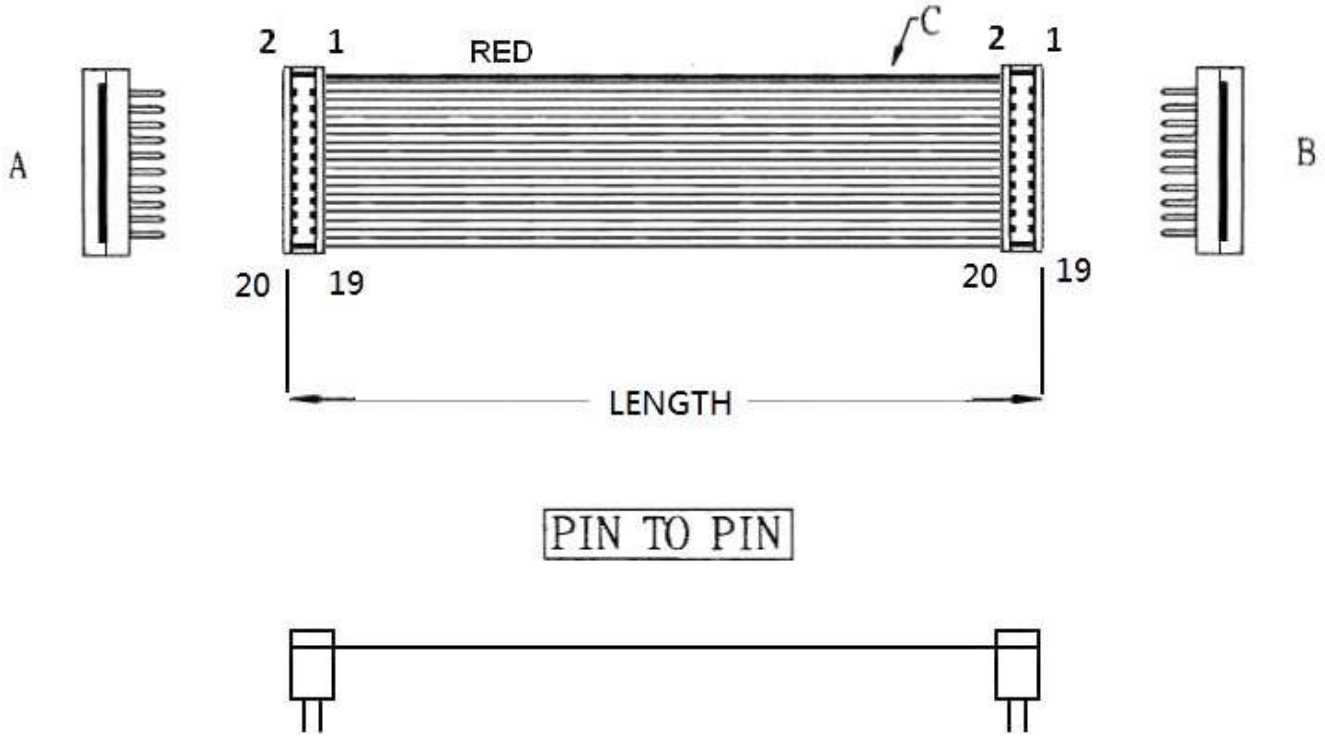

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{D P}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "DP" 2.00MM DIP PLUG
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2* 2.00MM PITCH DIP PLUGS (H=5.2MM) (H3)

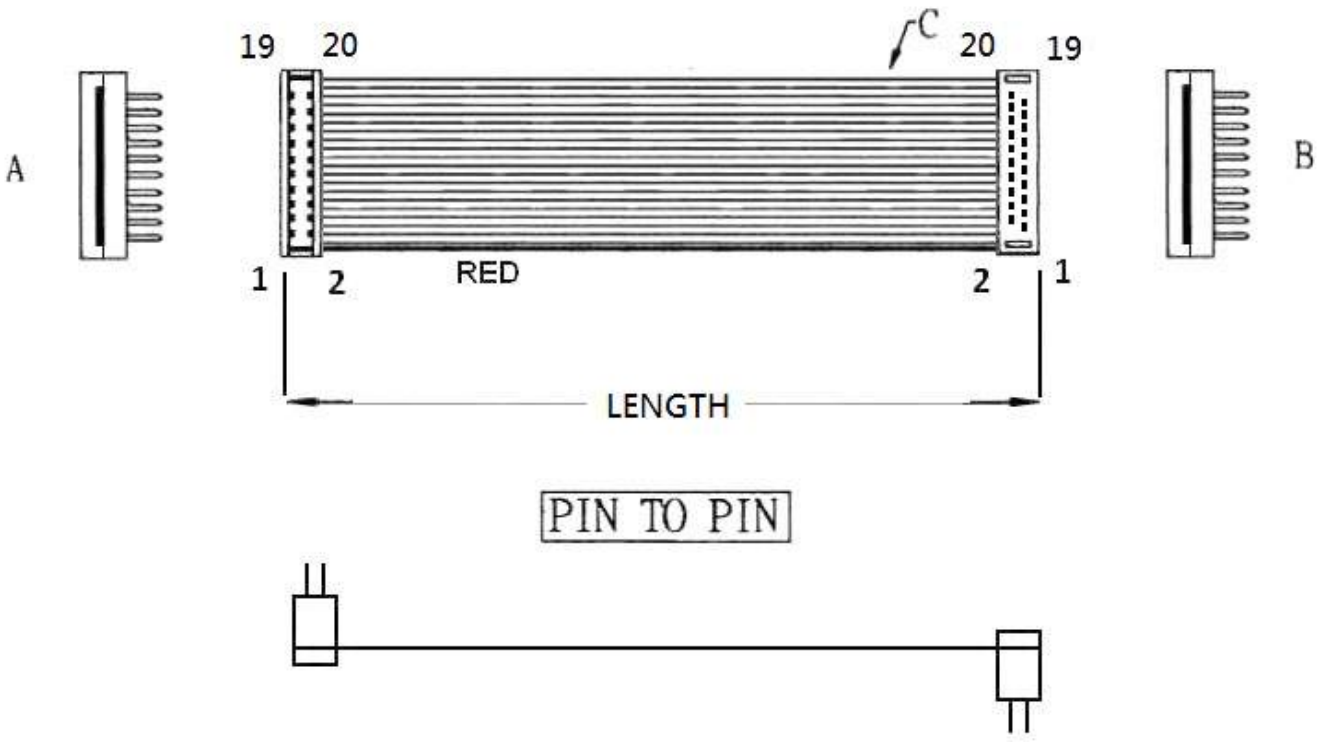

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{P P}}{3}$ **-** $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "PP" 2.00MM DIP PLUG
   TO 2.00MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2* 2.00MM DIP PLUGS (H=5.2MM) (H4)

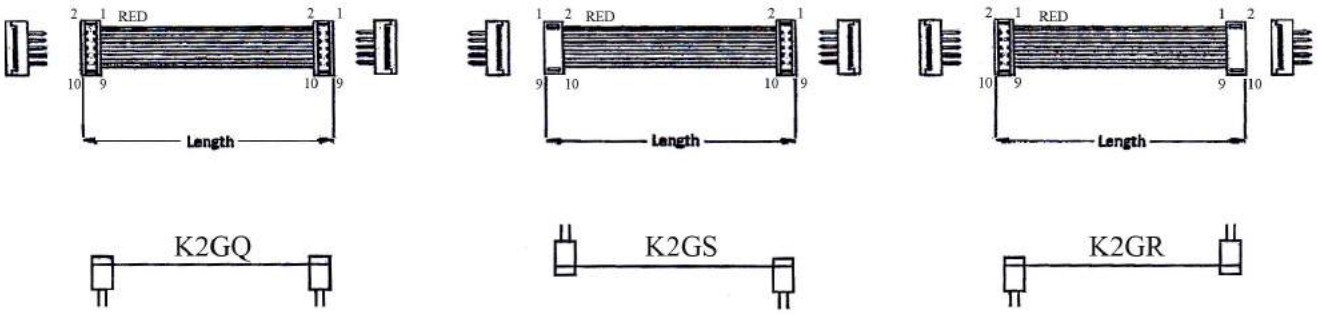

2.00MM PITCH DIP PLUG WITH 0.5MM SQUARE TAILS DIP= 3.0MM

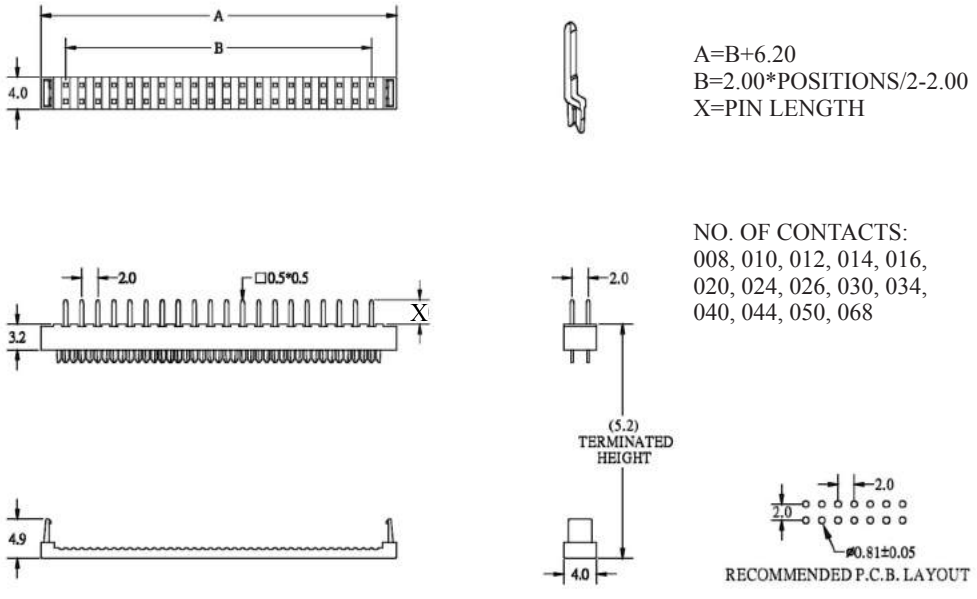

A=B+6.20
B=2.00*POSITIONS/2-2.00
X=PIN LENGTH

NO. OF CONTACTS:
008, 010, 012, 014, 016,
020, 024, 026, 030, 034,
040, 044, 050, 068

ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$


1. CONSTRUCTION TYPE:
   2GQ, 2GR, 2GS
2. NO. OF CONTACTS:
   008~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.0MM (STANDARD)
   "4" X= 3.8MM
   "6" X= 6.0MM


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=5.1MM & 7.8MM) TO BOX HEADER IDC TYPE (STANDARD)

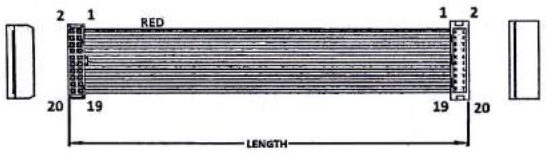


K2NJ

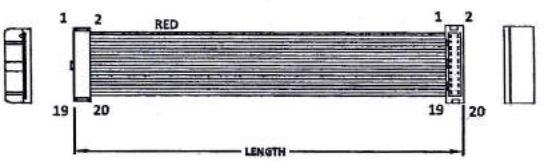

K2NK

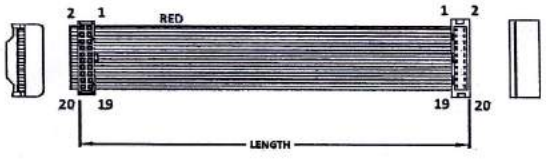


K2NL

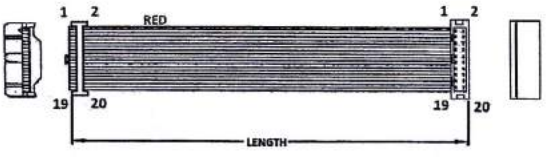

K2NM

2.00MM PITCH BOX HEADER IDC TYPE (STANDARD)

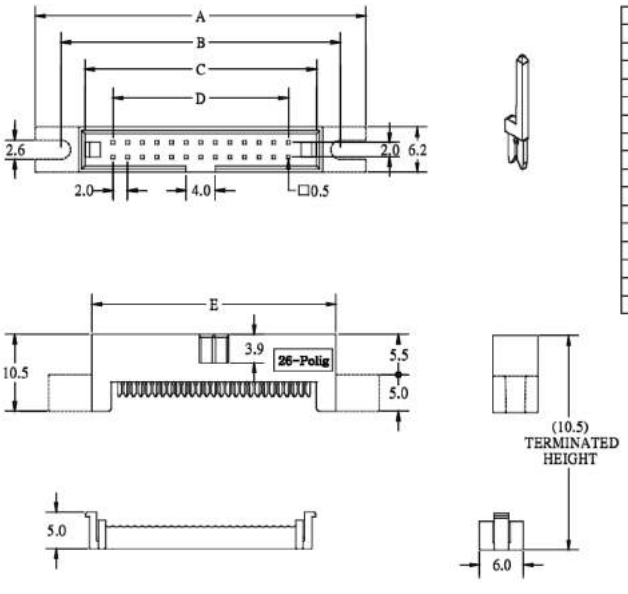

POSITION	A	B	C	D	E
6	25.24	18.24	11.70	4.00	13.40
8	27.24	20.24	13.70	6.00	15.40
10	29.24	22.24	15.70	8.00	17.40
12	31.24	24.24	17.70	10.00	19.40
14	33.24	26.24	19.70	12.00	21.40
16	35.24	28.24	21.70	14.00	23.40
20	39.24	32.24	25.70	18.00	27.40
22	41.24	34.24	27.70	20.00	29.40
24	43.24	36.24	29.70	22.00	31.40
26	45.24	38.24	31.70	24.00	33.40
30	49.24	42.24	35.70	28.00	37.40
34	53.24	46.24	39.70	32.00	41.40
40	59.24	52.24	45.70	38.00	47.40
44	63.24	56.24	49.70	42.00	51.40
50	69.24	62.24	55.70	48.00	57.40
68	87.24	80.24	73.70	66.00	75.40


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2NJ, 2NK (H=5.1MM)
   IDC SOCKET WITH S.R. : 2NL, 2NM (H=7.8MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=5.1MM & 7.8MM) TO BOX HEADER IDC TYPE (SPECIAL I)

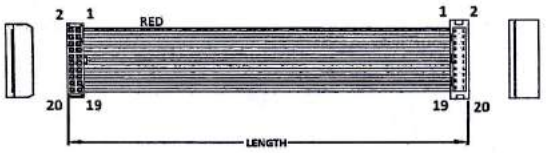


K2NS

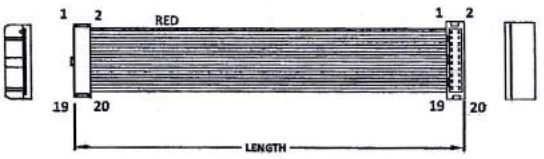

K2NT

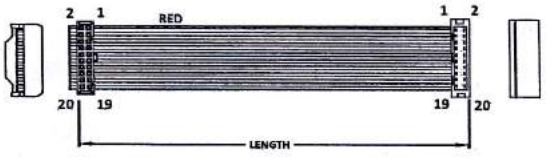


K2NU

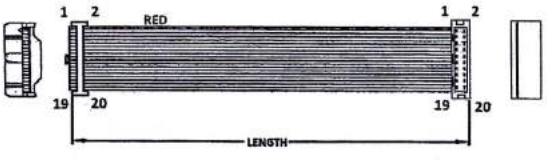

K2NV

2.00MM PITCH BOX HEADER IDC TYPE (SPECIAL I)

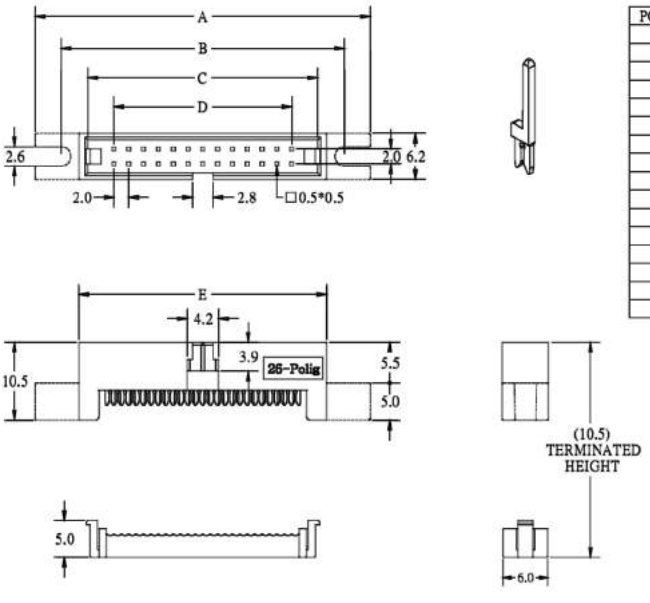

POSITION	A	B	C	D	E
6	25.24	18.24	11.00	4.00	13.40
8	27.24	20.24	13.00	6.00	15.40
10	29.24	22.24	15.00	8.00	17.40
12	31.24	24.24	17.00	10.00	19.40
14	33.24	26.24	19.00	12.00	21.40
16	35.24	28.24	21.00	14.00	23.40
20	39.24	32.24	25.00	18.00	27.40
22	41.24	34.24	27.00	20.00	29.40
24	43.24	36.24	29.00	22.00	31.40
26	45.24	38.24	31.00	24.00	33.40
30	49.24	42.24	35.00	28.00	37.40
34	53.24	46.24	39.00	32.00	41.40
40	59.24	52.24	45.00	38.00	47.40
44	63.24	56.24	49.00	42.00	51.40
50	69.24	62.24	55.00	48.00	57.40
68	87.24	80.24	73.00	66.00	75.40

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{D}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2NS, 2NT (H=5.1MM)
   IDC SOCKET WITH S.R. : 2NU, 2NV (H=7.8MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)


NOTE: MATES WITH FEMALE HEADERS 20051, 20052, 20053 & 20054 SERIES

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH
2.00MM IDC SOCKET (H=5.1MM & 7.8MM) TO BOX HEADER IDC TYPE (SPECIAL II)

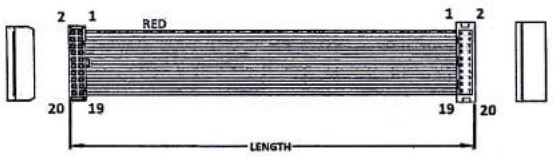


K2PE

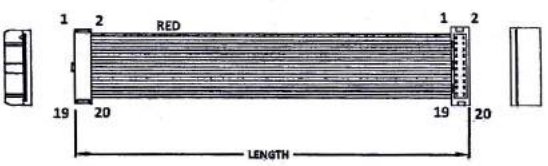

K2PF

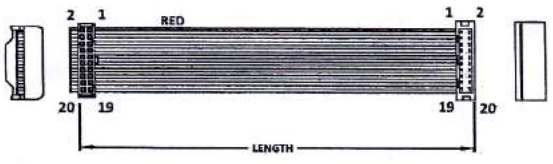


K2PG

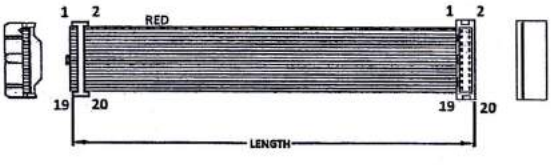


K2PH

2.00MM PITCH BOX HEADER IDC TYPE (SPECIAL II)

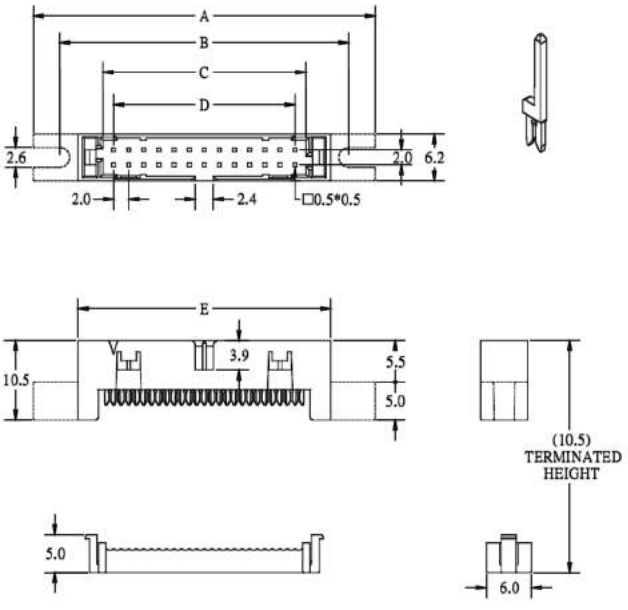

POSITION	A	B	C	D	E
10	29.24	22.24	10.84	8.00	17.40
12	31.24	24.24	12.84	10.00	19.40
14	33.24	26.24	14.84	12.00	21.40
16	35.24	28.24	16.84	14.00	23.40
20	39.24	32.24	20.84	18.00	27.40
22	41.24	34.24	22.84	20.00	29.40
24	43.24	36.24	24.84	22.00	31.40
26	45.24	38.24	26.84	24.00	33.40
30	49.24	42.24	30.84	28.00	37.40
34	53.24	46.24	34.84	32.00	41.40
40	59.24	52.24	40.84	38.00	47.40
44	63.24	56.24	44.84	42.00	51.40
50	69.24	62.24	50.84	48.00	57.40
68	87.24	80.24	68.84	66.00	75.40

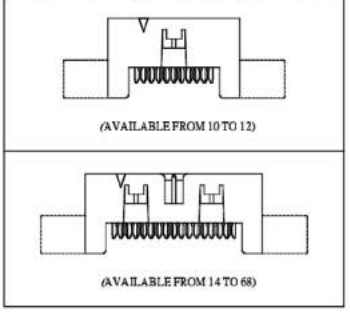


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2PE, 2PF (H=5.1MM)
   IDC SOCKET WITH S.R. : 2PG, 2PH (H=7.8MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=8.5MM & 11.4MM) TO BOX HEADER IDC TYPE (STANDARD)

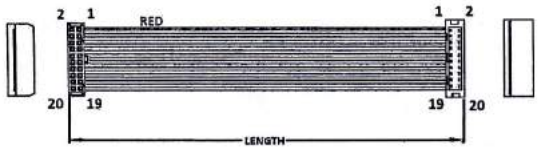


K2NE

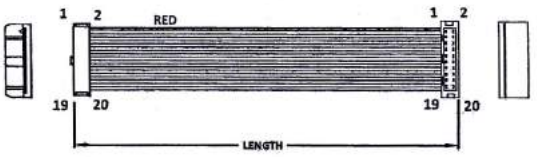

K2NF

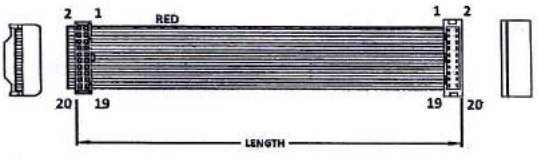


K2NG

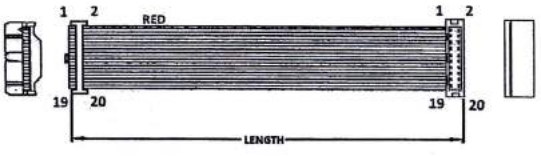

K2NH

2.00MM PITCH BOX HEADER IDC TYPE (STANDARD)

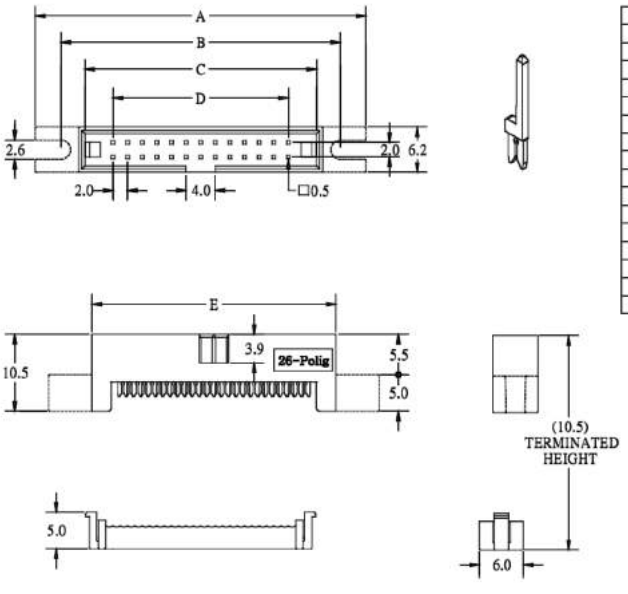

POSITION	A	B	C	D	E
6	25.24	18.24	11.70	4.00	13.40
8	27.24	20.24	13.70	6.00	15.40
10	29.24	22.24	15.70	8.00	17.40
12	31.24	24.24	17.70	10.00	19.40
14	33.24	26.24	19.70	12.00	21.40
16	35.24	28.24	21.70	14.00	23.40
20	39.24	32.24	25.70	18.00	27.40
22	41.24	34.24	27.70	20.00	29.40
24	43.24	36.24	29.70	22.00	31.40
26	45.24	38.24	31.70	24.00	33.40
30	49.24	42.24	35.70	28.00	37.40
34	53.24	46.24	39.70	32.00	41.40
40	59.24	52.24	45.70	38.00	47.40
44	63.24	56.24	49.70	42.00	51.40
50	69.24	62.24	55.70	48.00	57.40
68	87.24	80.24	73.70	66.00	75.40


ORDERING INFORMATION:

P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\;M}{3}$ $\frac{D}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2NE, 2NF (H=8.5MM)
   IDC SOCKET WITH S.R. : 2NG, 2NH (H=11.4MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=8.5MM & 11.4MM) TO BOX HEADER IDC TYPE (SPECIAL I)

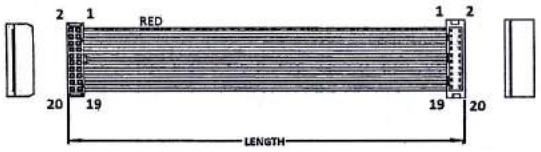


K2NN

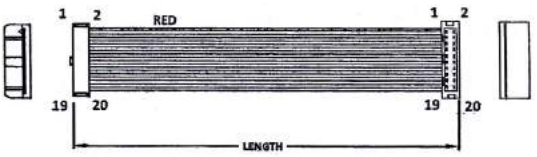

K2NP

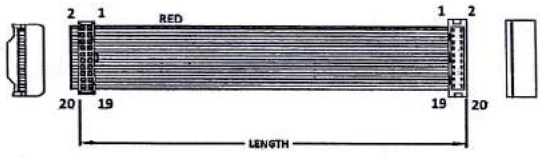


K2NQ

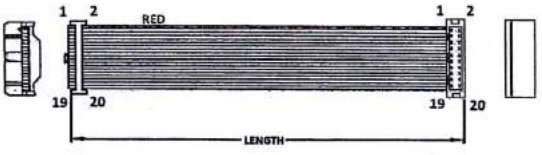

K2NR

2.00MM PITCH BOX HEADER IDC TYPE (SPECIAL I)

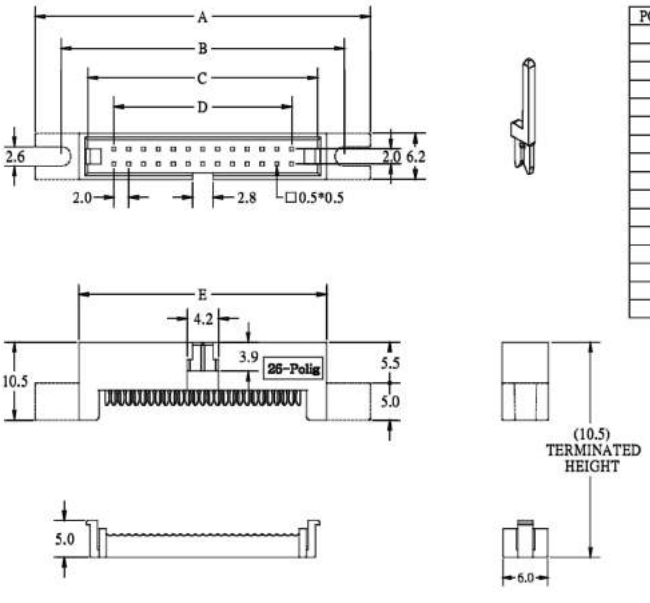

POSITION	A	B	C	D	E
6	25.24	18.24	11.00	4.00	13.40
8	27.24	20.24	13.00	6.00	15.40
10	29.24	22.24	15.00	8.00	17.40
12	31.24	24.24	17.00	10.00	19.40
14	33.24	26.24	19.00	12.00	21.40
16	35.24	28.24	21.00	14.00	23.40
20	39.24	32.24	25.00	18.00	27.40
22	41.24	34.24	27.00	20.00	29.40
24	43.24	36.24	29.00	22.00	31.40
26	45.24	38.24	31.00	24.00	33.40
30	49.24	42.24	35.00	28.00	37.40
34	53.24	46.24	39.00	32.00	41.40
40	59.24	52.24	45.00	38.00	47.40
44	63.24	56.24	49.00	42.00	51.40
50	69.24	62.24	55.00	48.00	57.40
68	87.24	80.24	73.00	66.00	75.40

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2NN, 2NP (H=8.5MM)
   IDC SOCKET WITH S.R. : 2NQ, 2NR (H=11.4MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)


NOTE: MATES WITH FEMALE HEADERS 20051, 20052, 20053 & 20054 SERIES

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH
2.00MM IDC SOCKET (H=8.5MM & 11.4MM) TO BOX HEADER IDC TYPE (SPECIAL II)

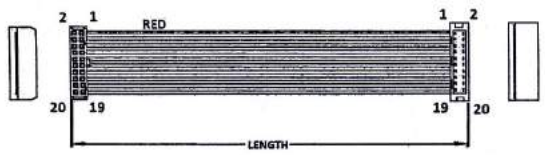


K2PA

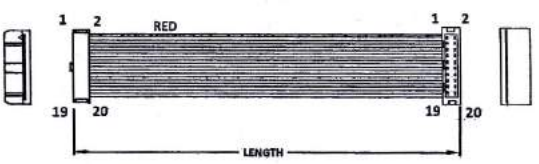

K2PB

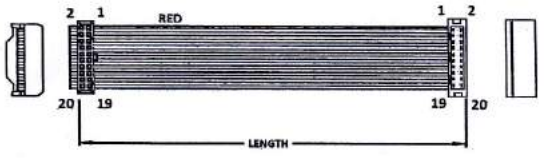


K2PC

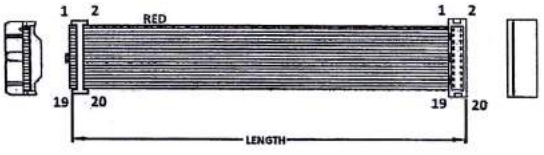


K2PD

2.00MM PITCH BOX HEADER IDC TYPE (SPECIAL II)

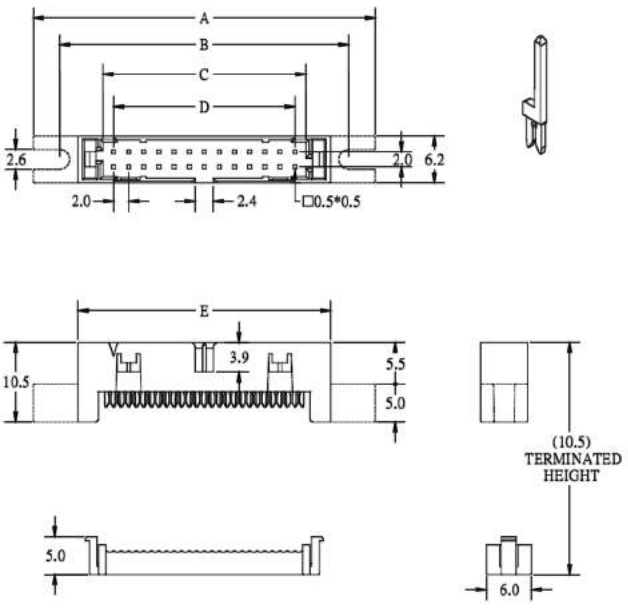

POSITION	A	B	C	D	E
10	29.24	22.24	10.84	8.00	17.40
12	31.24	24.24	12.84	10.00	19.40
14	33.24	26.24	14.84	12.00	21.40
16	35.24	28.24	16.84	14.00	23.40
20	39.24	32.24	20.84	18.00	27.40
22	41.24	34.24	22.84	20.00	29.40
24	43.24	36.24	24.84	22.00	31.40
26	45.24	38.24	26.84	24.00	33.40
30	49.24	42.24	30.84	28.00	37.40
34	53.24	46.24	34.84	32.00	41.40
40	59.24	52.24	40.84	38.00	47.40
44	63.24	56.24	44.84	42.00	51.40
50	69.24	62.24	50.84	48.00	57.40
68	87.24	80.24	68.84	66.00	75.40

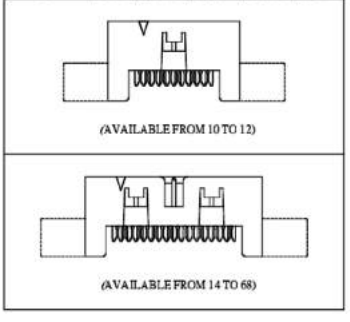


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2PA, 2PB (H=8.5MM)
   IDC SOCKET WITH S.R. : 2PC, 2PD (H=11.4MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (SOCKET) + GRAY (HEADER)

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=8.5MM) TO IDC TYPE BOX HEADER WITH EARS (K1)

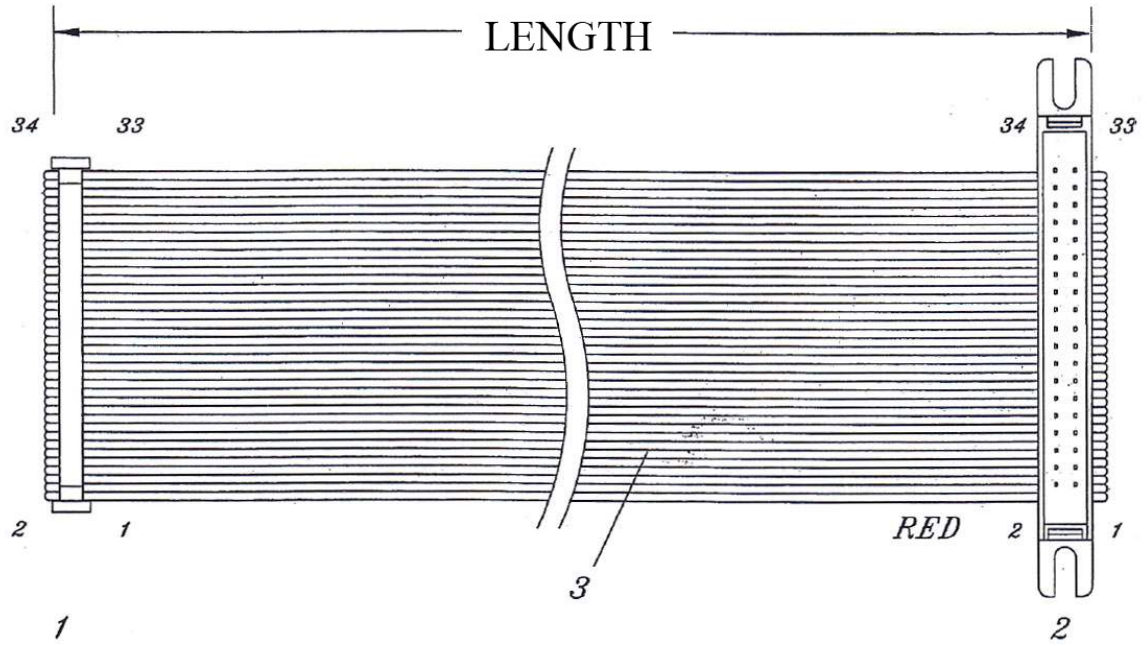

2.00MM PITCH IDC TYPE BOX HEADER WITH EARS (TYPE 1)

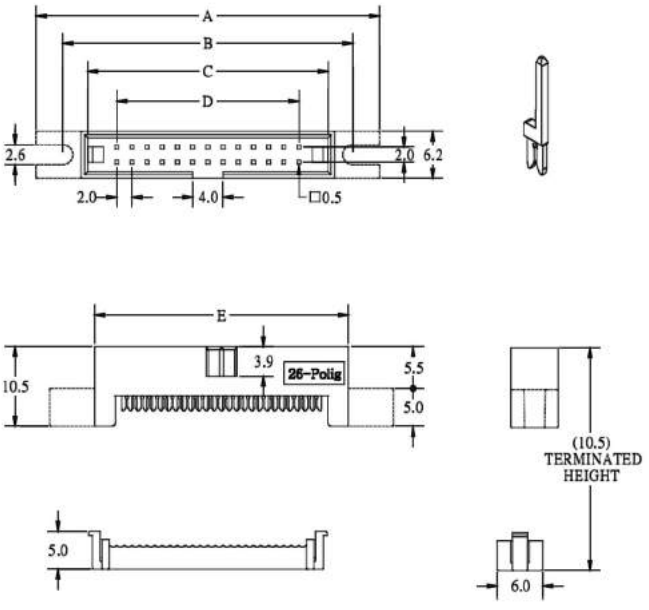

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMD}{4}$


1. CONSTRUCTION TYPE:
   2PU
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=8.5MM) TO IDC TYPE BOX HEADER WITH EARS (K2)

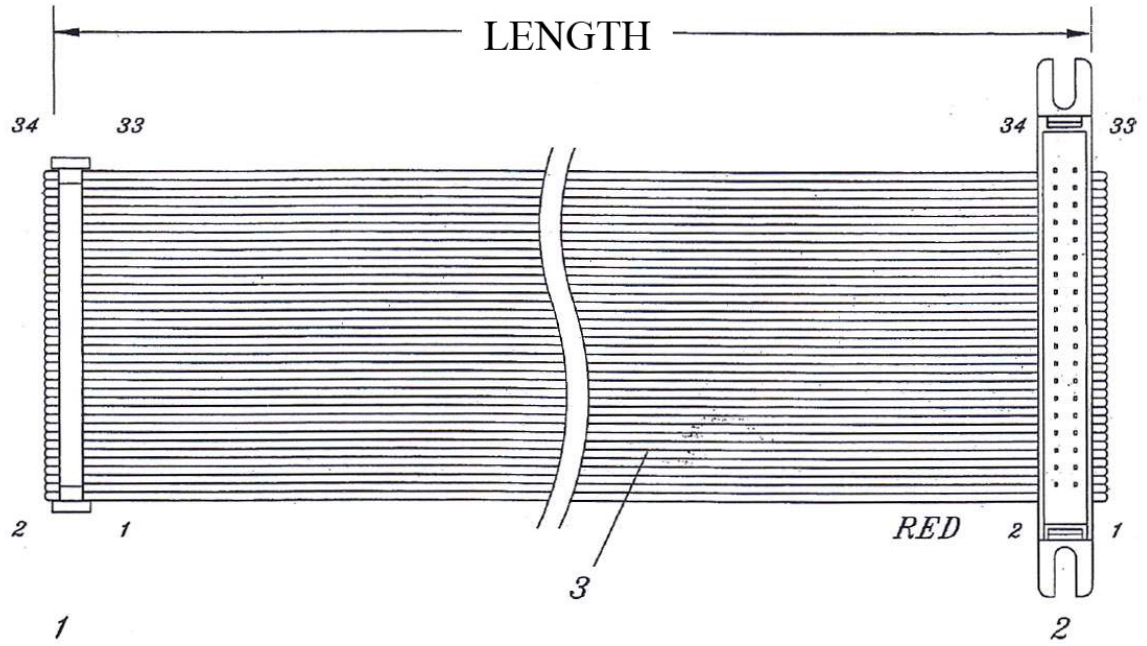

2.00MM PITCH IDC TYPE BOX HEADER WITH EARS (TYPE 2)

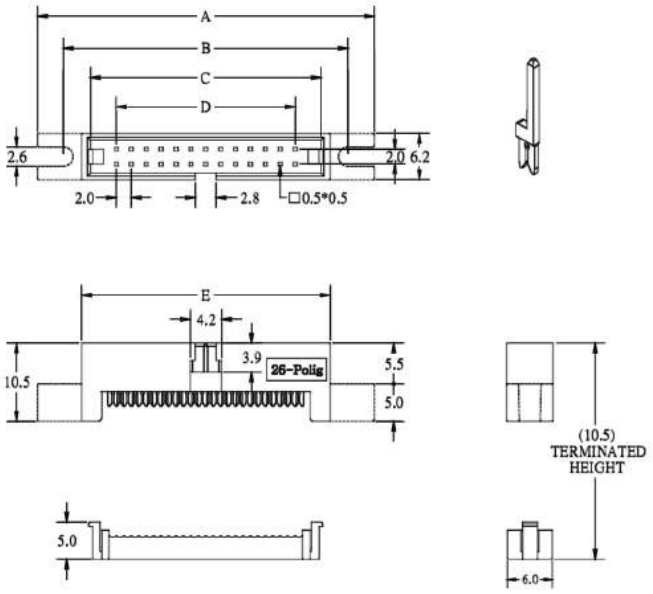

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{D}{4}$

1. CONSTRUCTION TYPE:
   2PV
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)


NOTE: MATES WITH FEMALE HEADERS 20051, 20052, 20053 & 20054 SERIES

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=5.1MM) TO IDC TYPE BOX HEADER WITH EARS (K3)

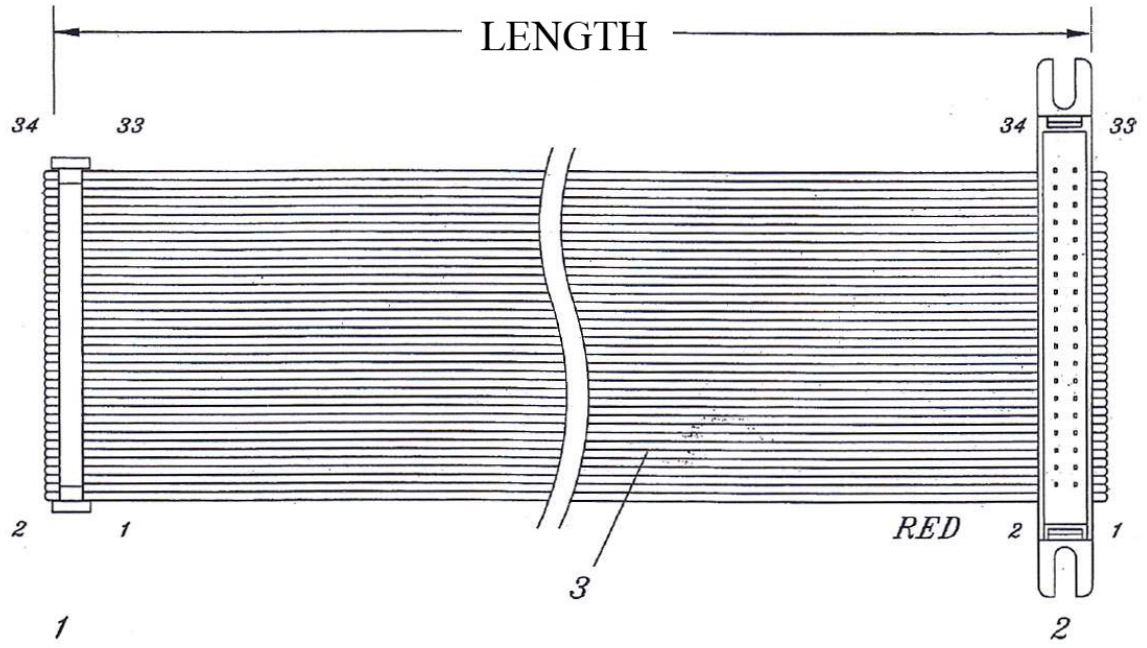

2.00MM PITCH IDC TYPE BOX HEADER WITH EARS (TYPE 1)

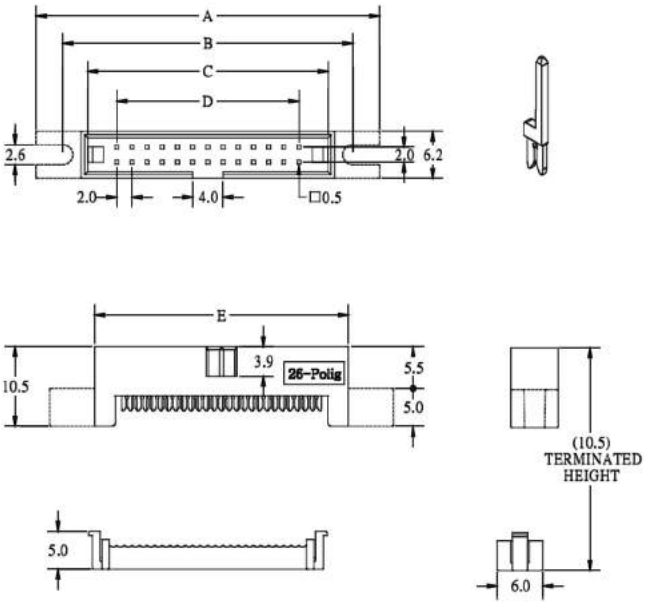

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMD}{4}$


1. CONSTRUCTION TYPE:
   2PW
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET (H=5.1MM) TO IDC TYPE BOX HEADER WITH EARS (K4)

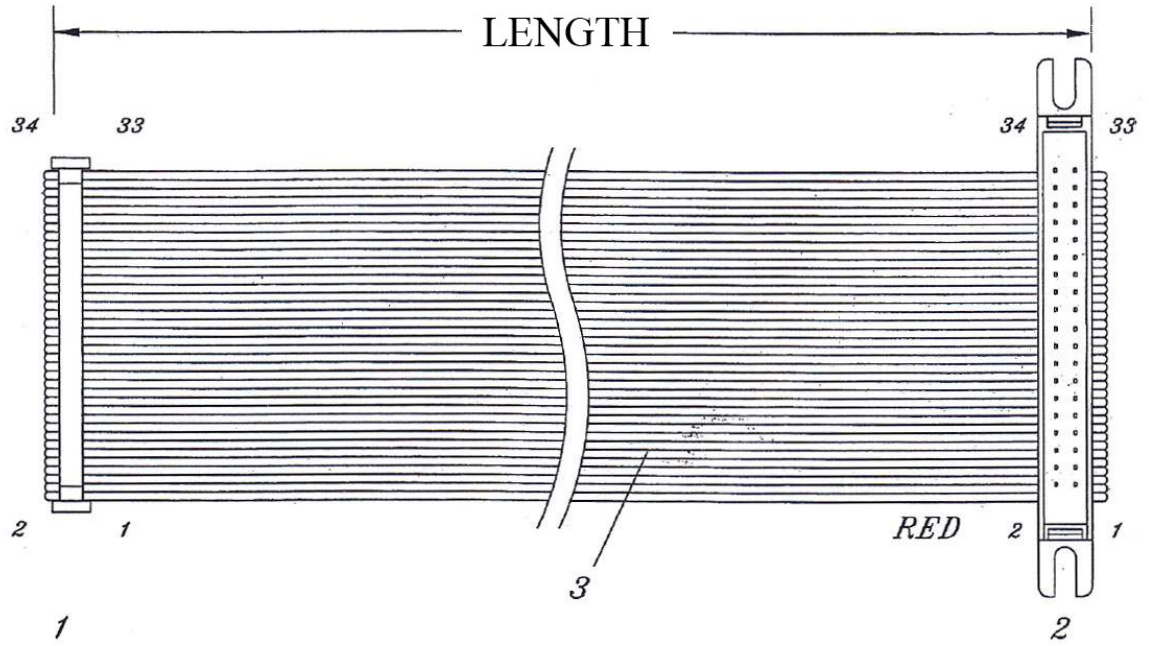

2.00MM PITCH IDC TYPE BOX HEADER WITH EARS (TYPE 2)

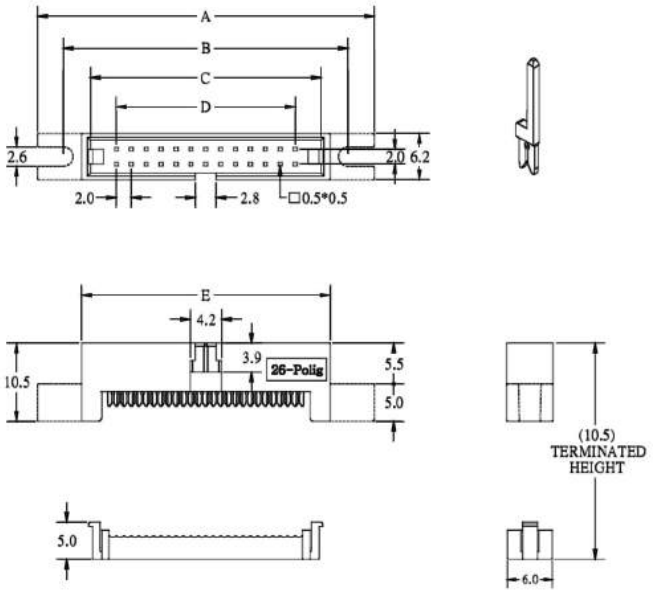

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{D}{4}$

1. CONSTRUCTION TYPE:
   2PX
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)


NOTE: MATES WITH FEMALE HEADERS 20051, 20052, 20053 & 20054 SERIES

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*2.00MM IDC TYPE BOX HEADERS (L1)

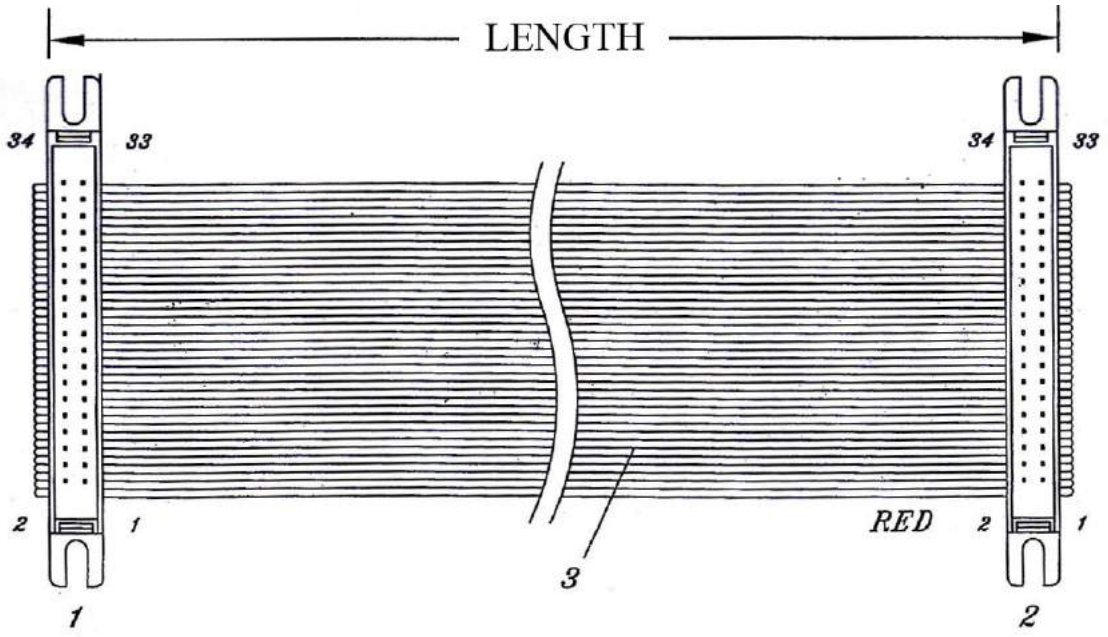

1.00MM PITCH BOX HEADER IDC TYPE WITH EARS (TYPE1)

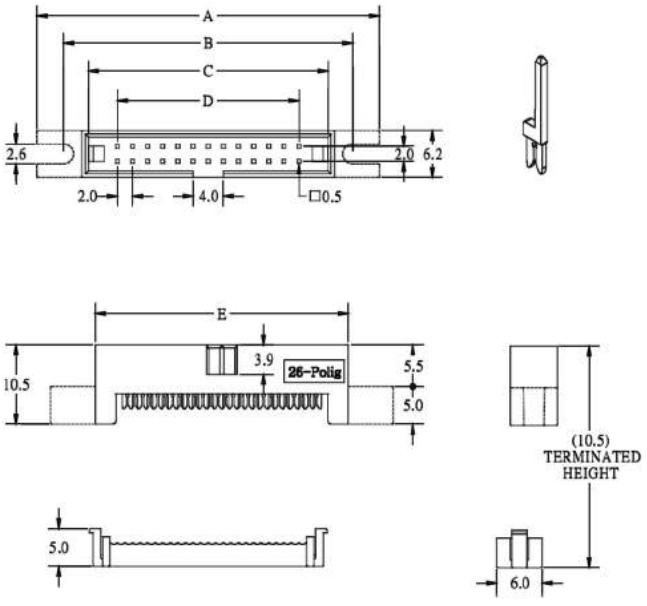

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$


1. CONSTRUCTION TYPE:
   2PS
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2*2.00MM IDC TYPE BOX HEADERS (L2)

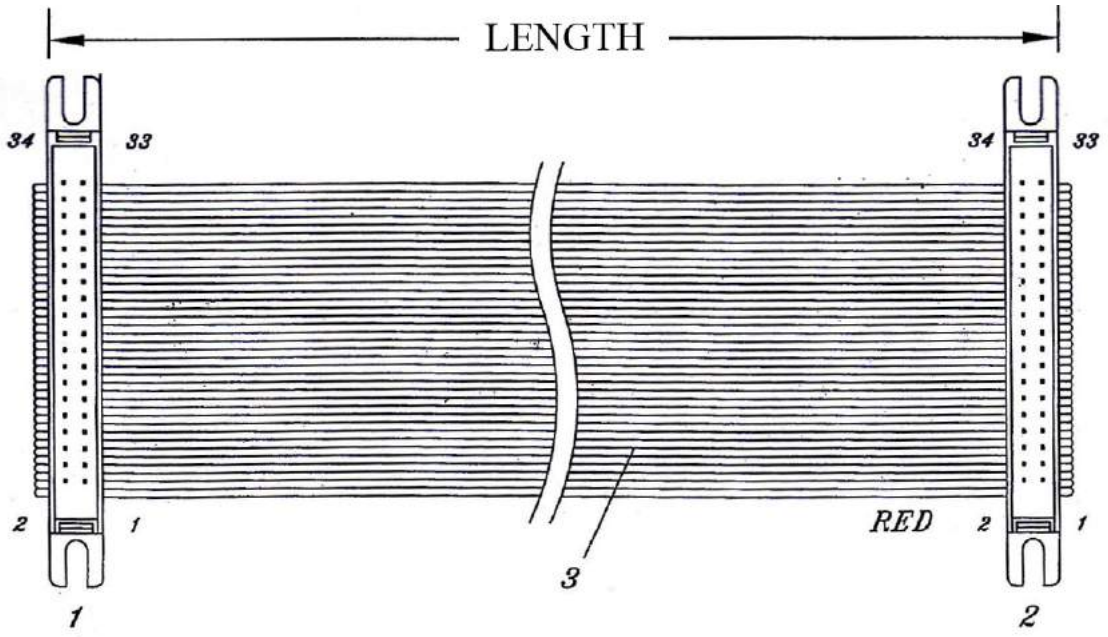

1.00MM PITCH BOX HEADER IDC TYPE WITH EARS (TYPE2)

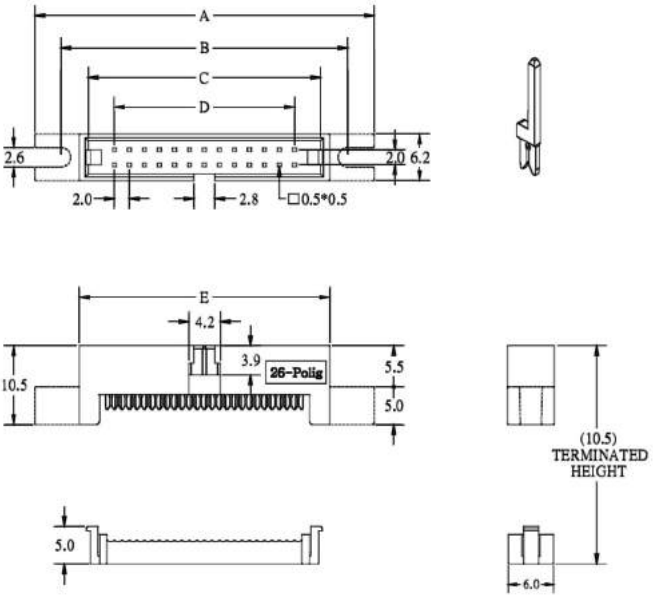

A=D+21.24
B=D+14.24
C=D+7.70
D=2.00*POSITIONS/2-2.00
E=D+9.40

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 022, 024, 026,
030, 034, 040, 044, 050,
068

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMA}{4}$

1. CONSTRUCTION TYPE:
   2PT
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY


NOTE1: BOX HEADER CAN'T BE SUPPLIED ALONE.
NOTE2: MATES WITH FEMALE HEADERS 20051, 20052, 20053 & 20054 SERIES

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O S.R. (H=5.1MM) TO IDC PLUG WITH SHORT LATCHES (M1)

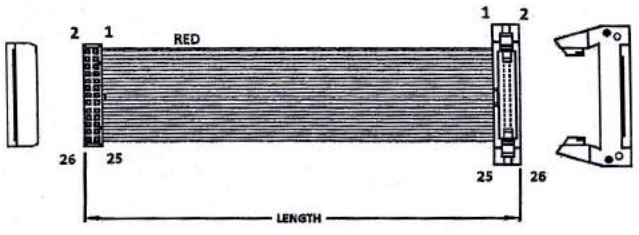


K2ME

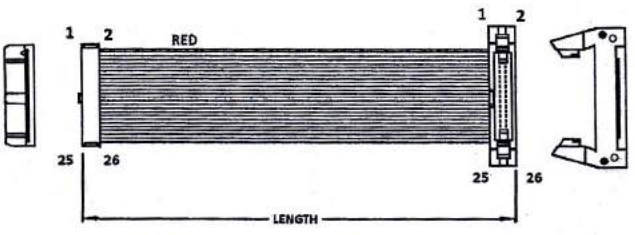

K2MF

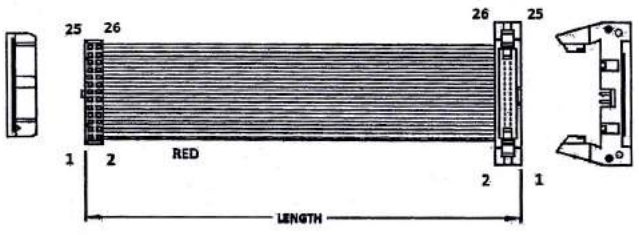

K2MG

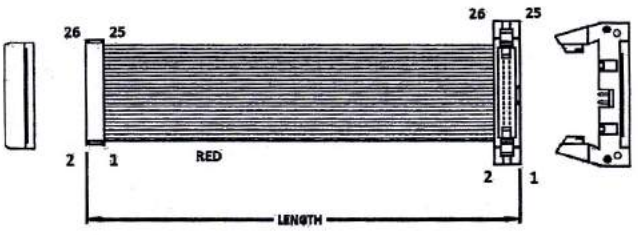

K2MH


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$


1. CONSTRUCTION TYPE:
   2ME, 2MF, 2MG, 2MH
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O NOSE (H=7.4MM) TO IDC PLUG WITH SHORT LATCHES (M2)

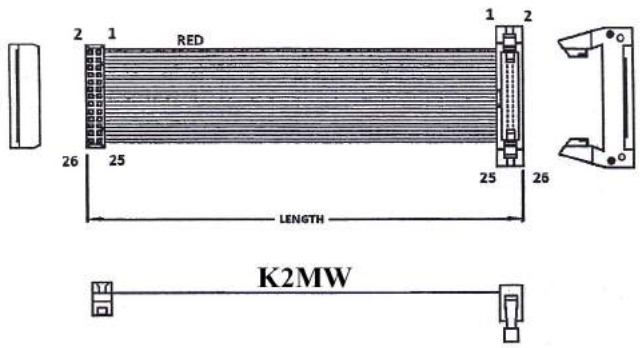


K2MW

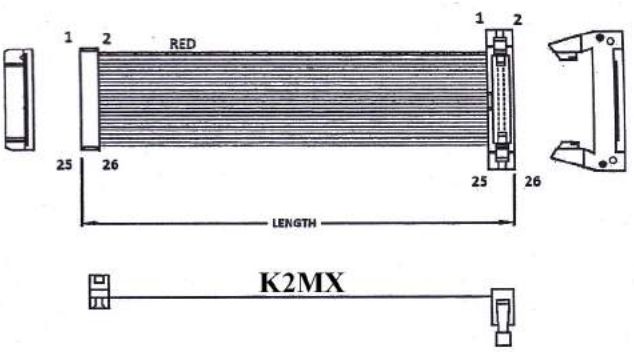

K2MX

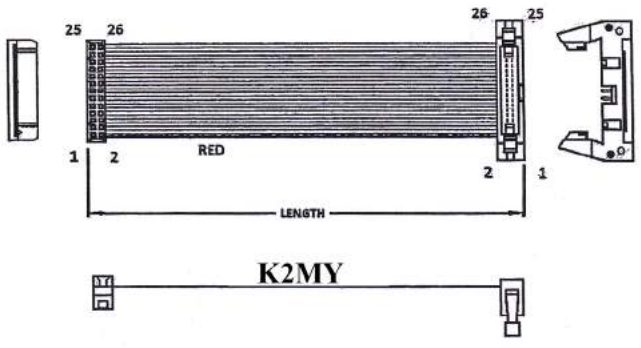

K2MY

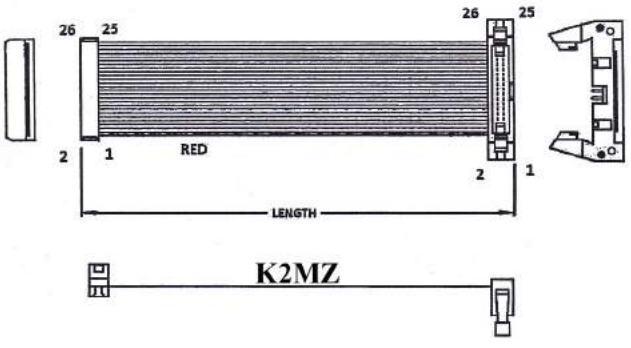

K2MZ


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{}\frac{D}{4}$

1. CONSTRUCTION TYPE:
   2MW, 2MX, 2MY, 2MZ
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O S.R. (H=8.5MM) TO IDC PLUG WITH SHORT LATCHES (M3)

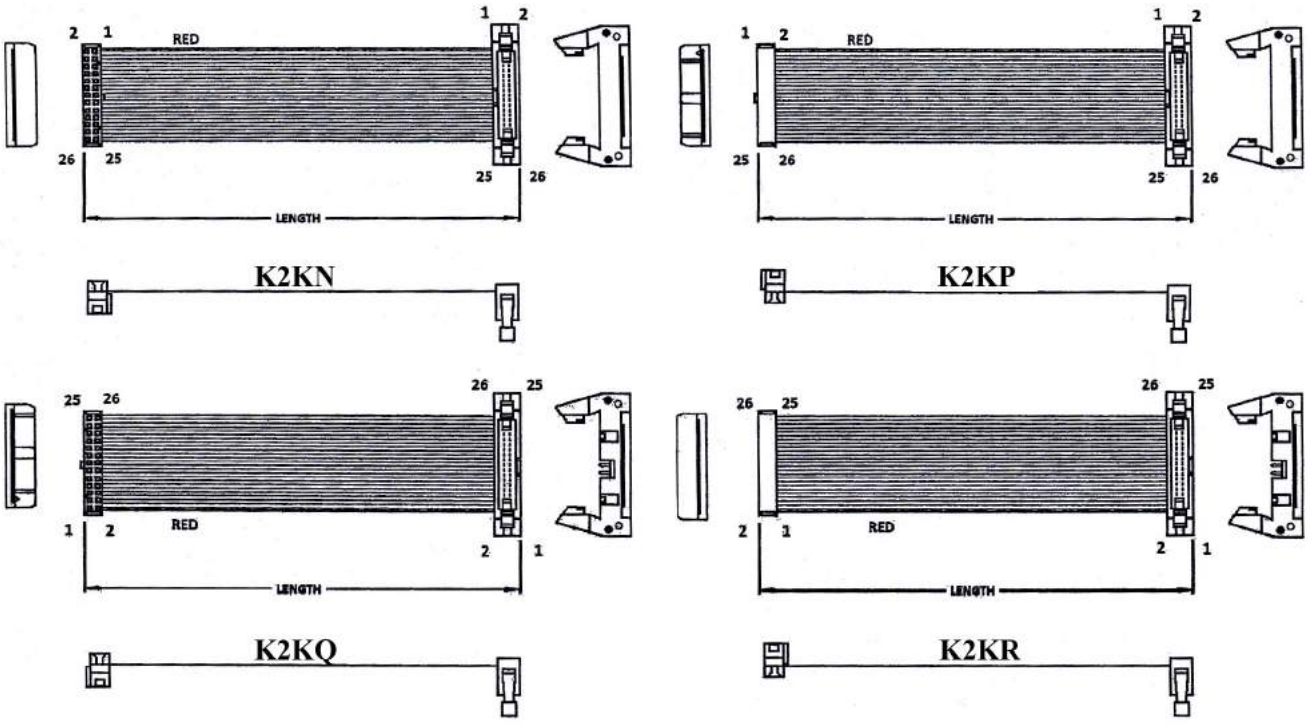


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M D
1 2 3 4


1. CONSTRUCTION TYPE:
   2KN, 2KP, 2KQ, 2KR
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH S.R. (H=7.8MM) TO IDC PLUG WITH SHORT LATCHES (M4)

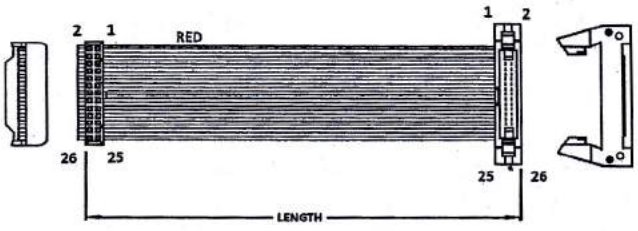


K2MN

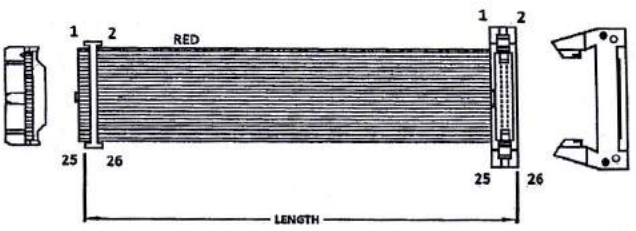

K2MP

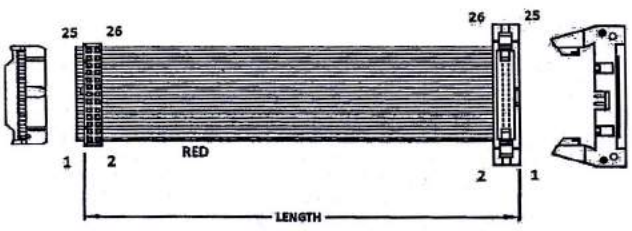

K2MQ

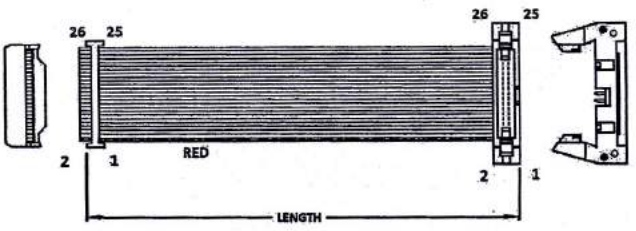

K2MR


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{D}{4}$


1. CONSTRUCTION TYPE:
   2MN, 2MP, 2MQ, 2MR
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH S.R. (H=11.4MM) TO IDC PLUG WITH SHORT LATCHES (M5)

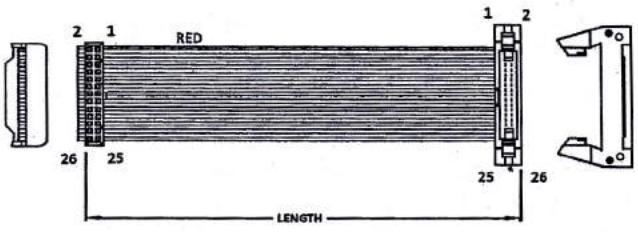


K2KW

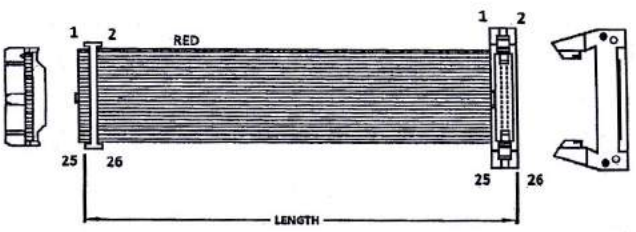

K2KX

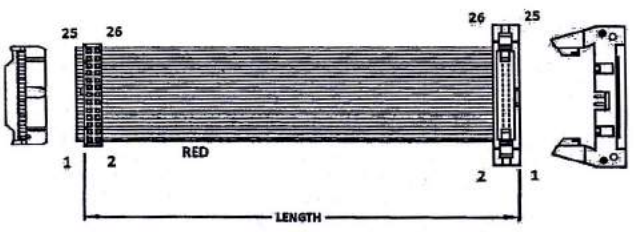

K2KY

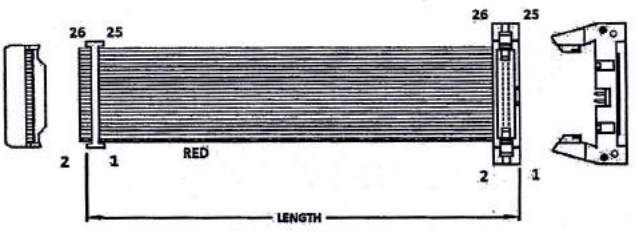

K2KZ


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$


1. CONSTRUCTION TYPE:
   2KW, 2KX, 2KY, 2KZ
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O S.R. (H=5.1MM) TO IDC PLUG WITH LONG LATCHES (N1)

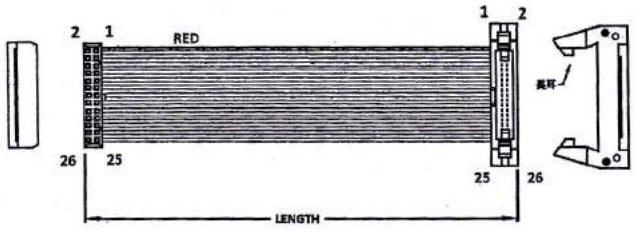


K2MJ

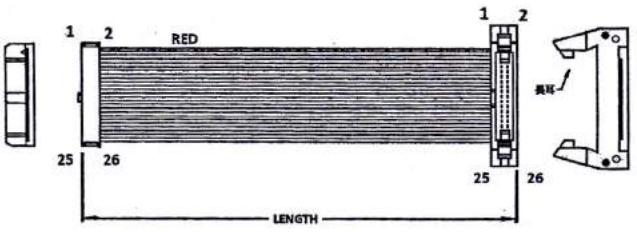

K2MK

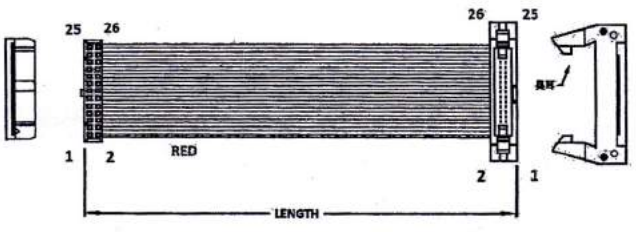

K2ML

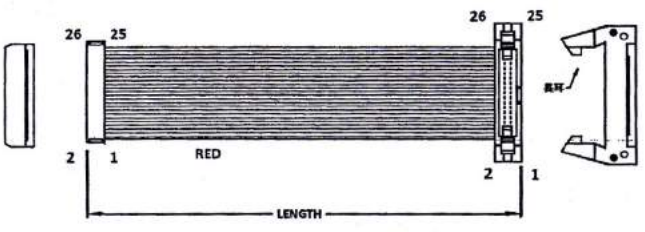

K2MM


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMD}{4}$

1. CONSTRUCTION TYPE:
   2MJ, 2MK, 2ML, 2MM
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O NOSE (H=7.4MM) TO IDC PLUG WITH LONG LATCHES (N2)

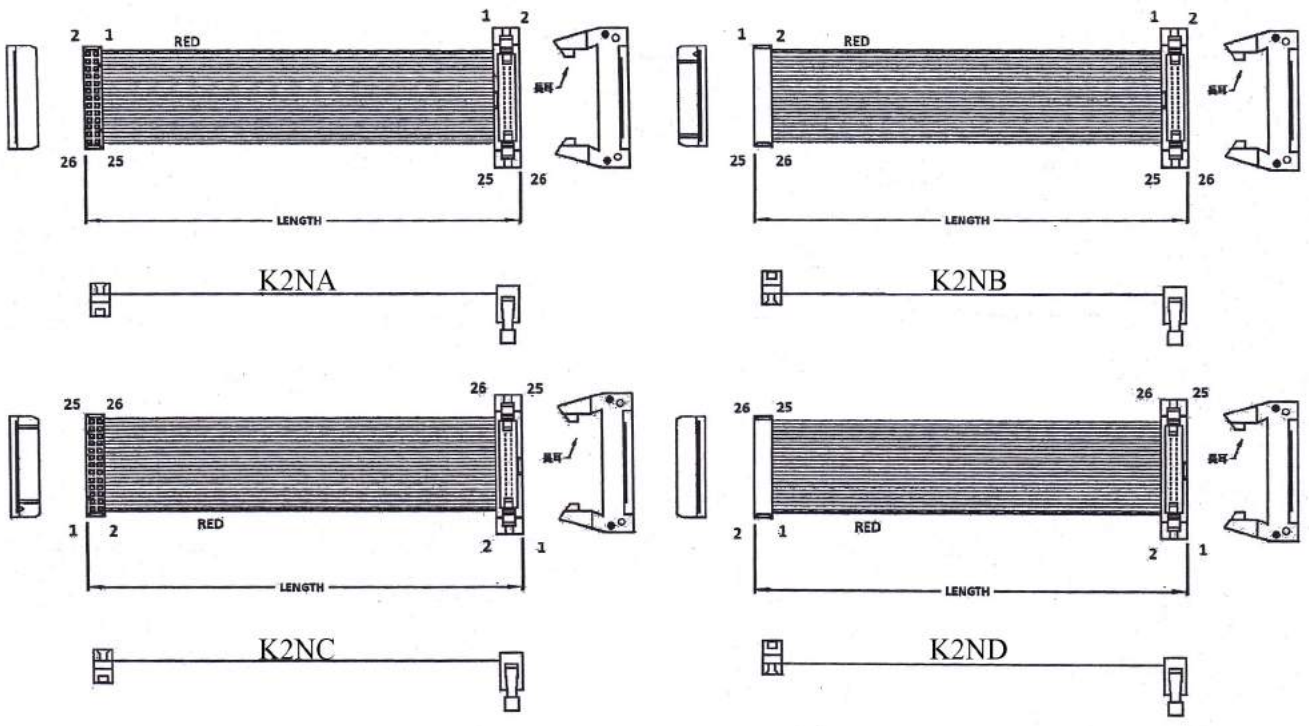


ORDERING INFORMATION:

P/N K x x x x x x - x x C M D
1 2 3 4


1. CONSTRUCTION TYPE:
   2NA, 2NB, 2NC, 2ND
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH S.R. (H=7.8MM) TO IDC PLUG WITH LONG LATCHES (N3)

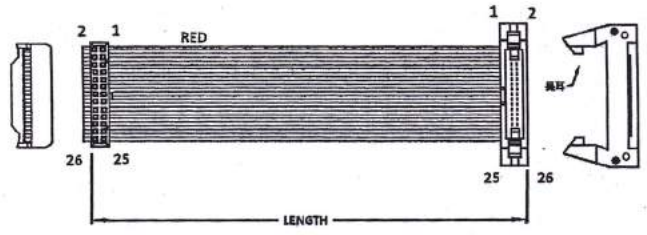


K2MS

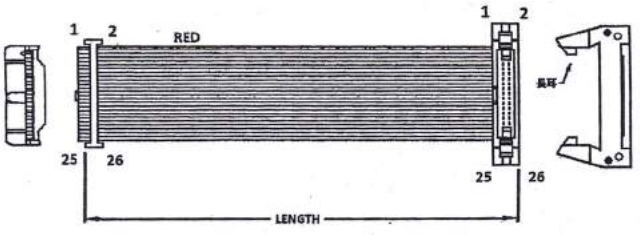

K2MT

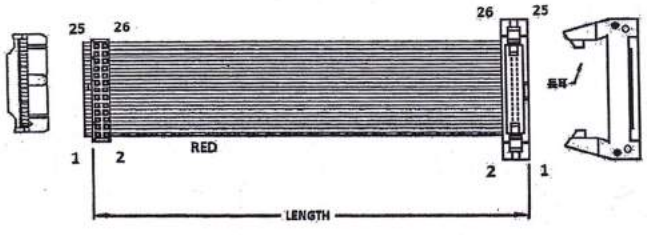

K2MU

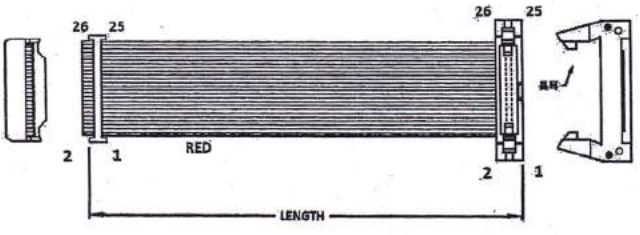

K2MV


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMD}{4}$

1. CONSTRUCTION TYPE:
   2MS, 2MT, 2MU, 2MV
2. NO. OF CONTACTS:
   010~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET W/O S.R. (H=8.5MM) TO IDC PLUG WITH LONG LATCHES (N4)

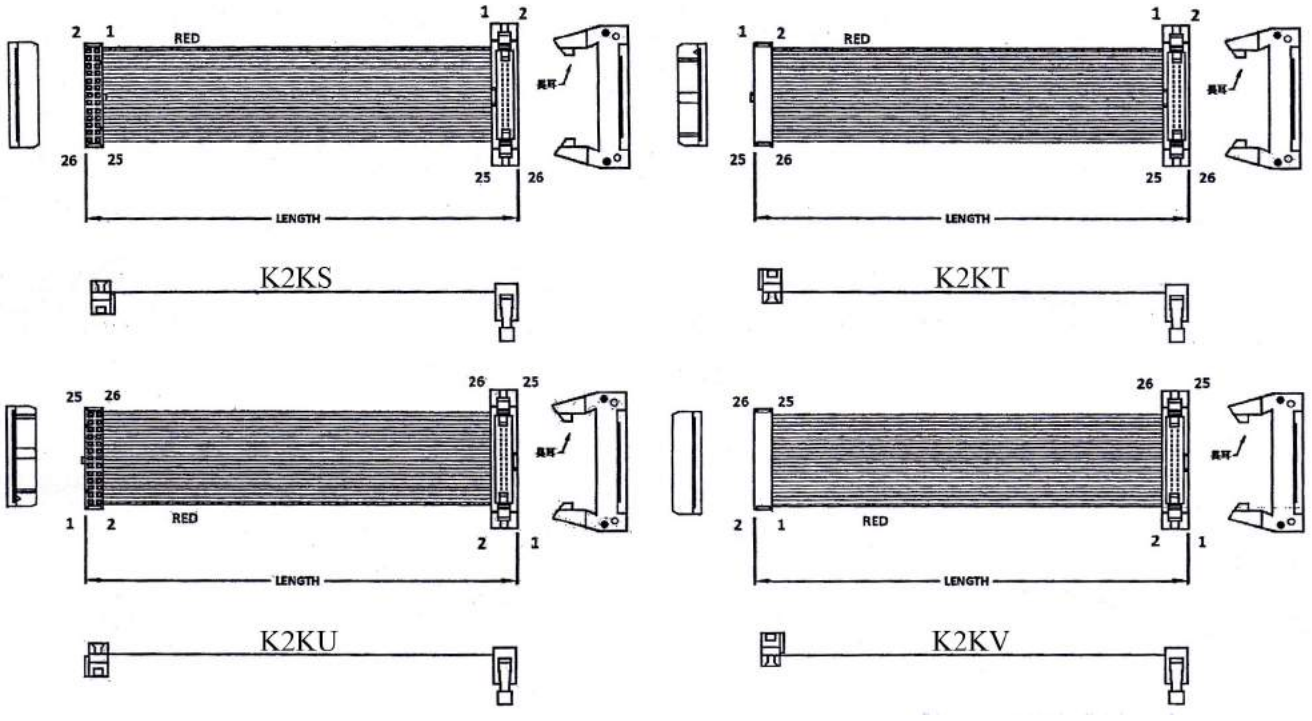


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   2KS, 2KT, 2KU, 2KV
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH S.R. (H=11.4MM) TO IDC PLUG WITH LONG LATCHES (N5)

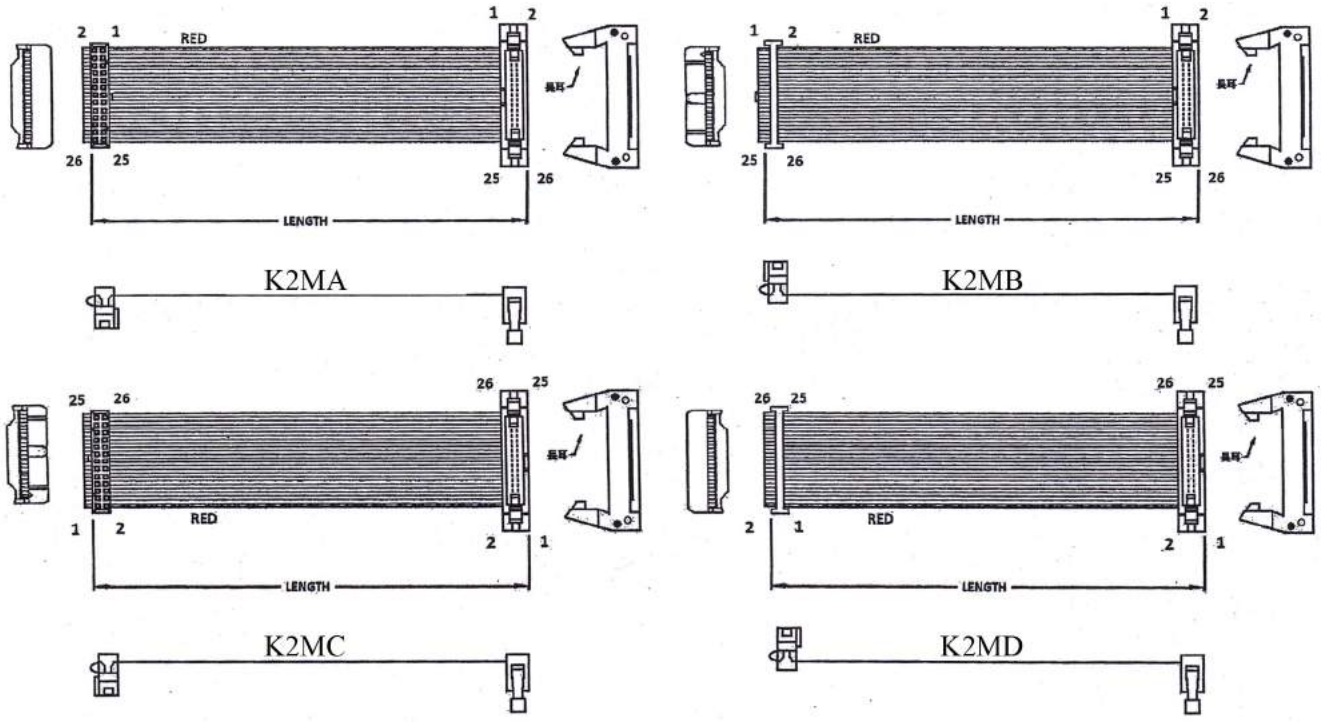


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M D
1 2 3 4

1. CONSTRUCTION TYPE:
   2MA, 2MB, 2MC, 2MD
2. NO. OF CONTACTS:
   010~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO OPEN END (1)

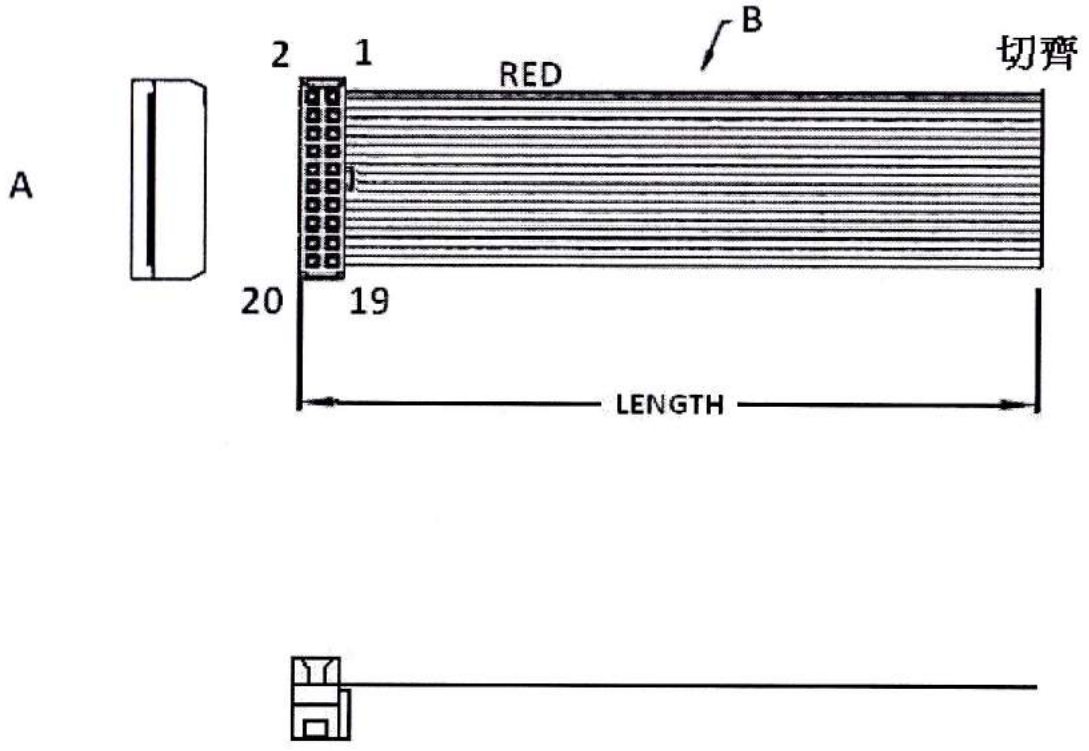


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KO" 2.00MM IDC SOCKET W/O S.R. WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO OPEN END (2)

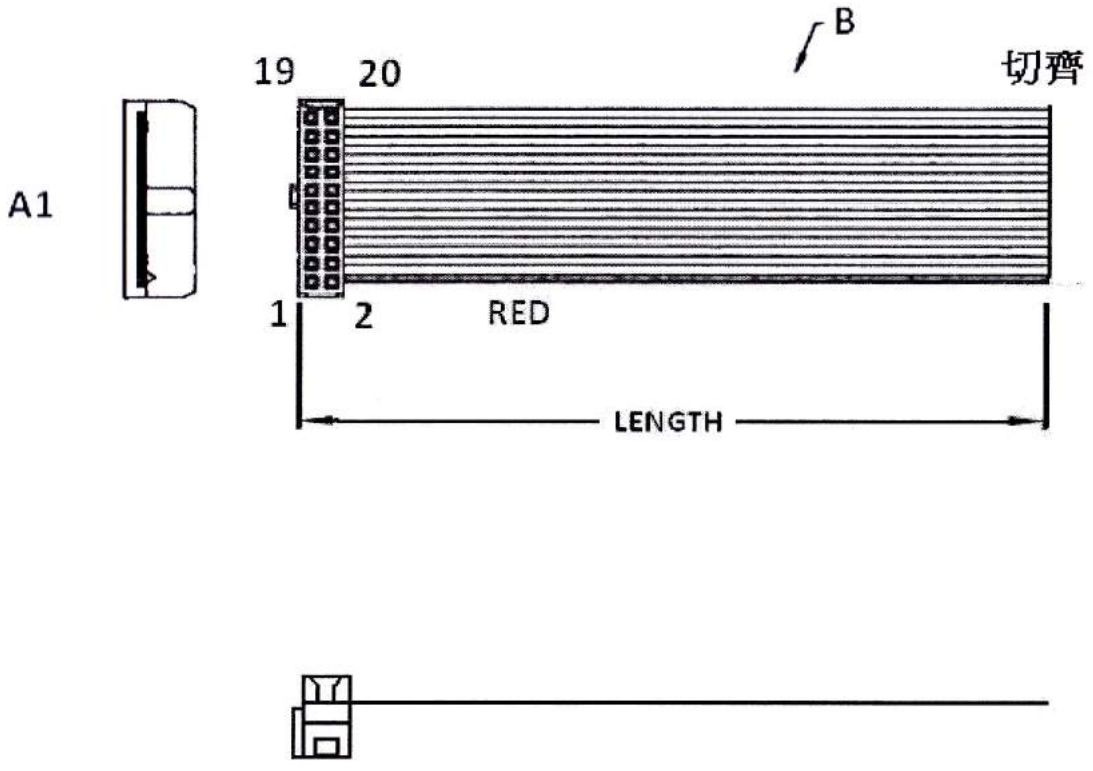


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LO" 2.00MM IDC SOCKET W/O S.R. WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO OPEN END (1)

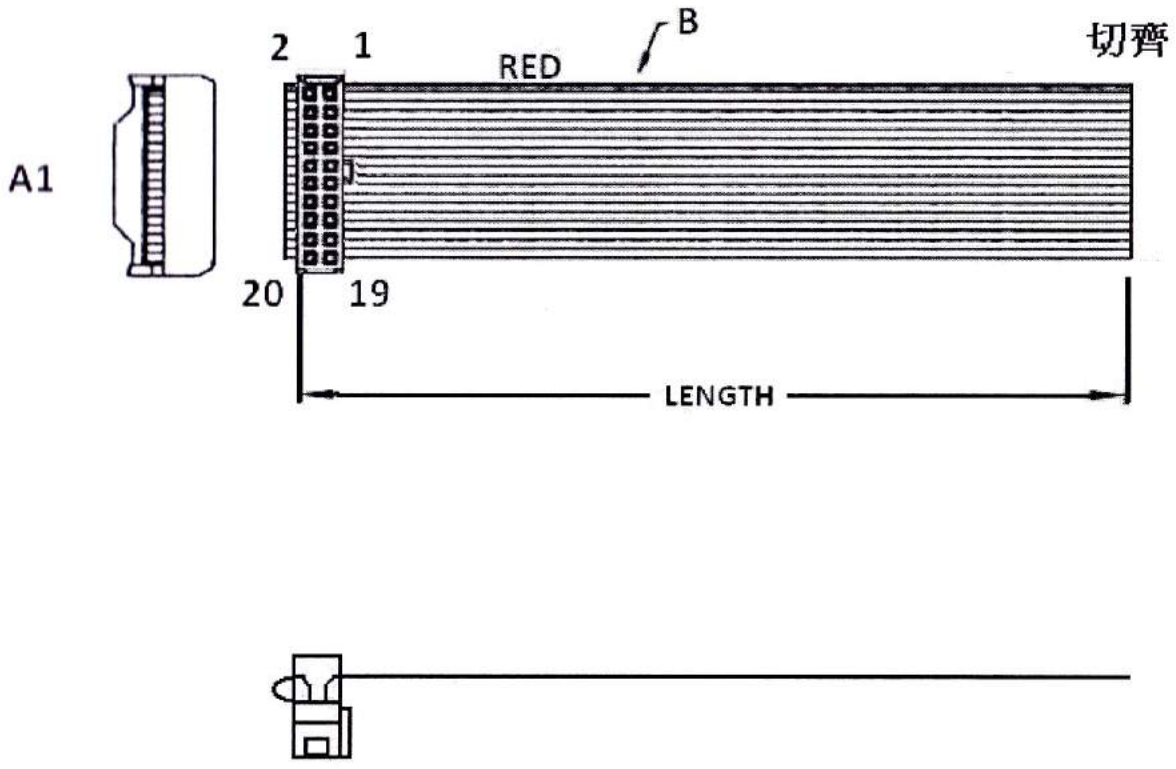


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{M O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MO" 2.00MM IDC SOCKET WITH S.R. WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO OPEN END (2)

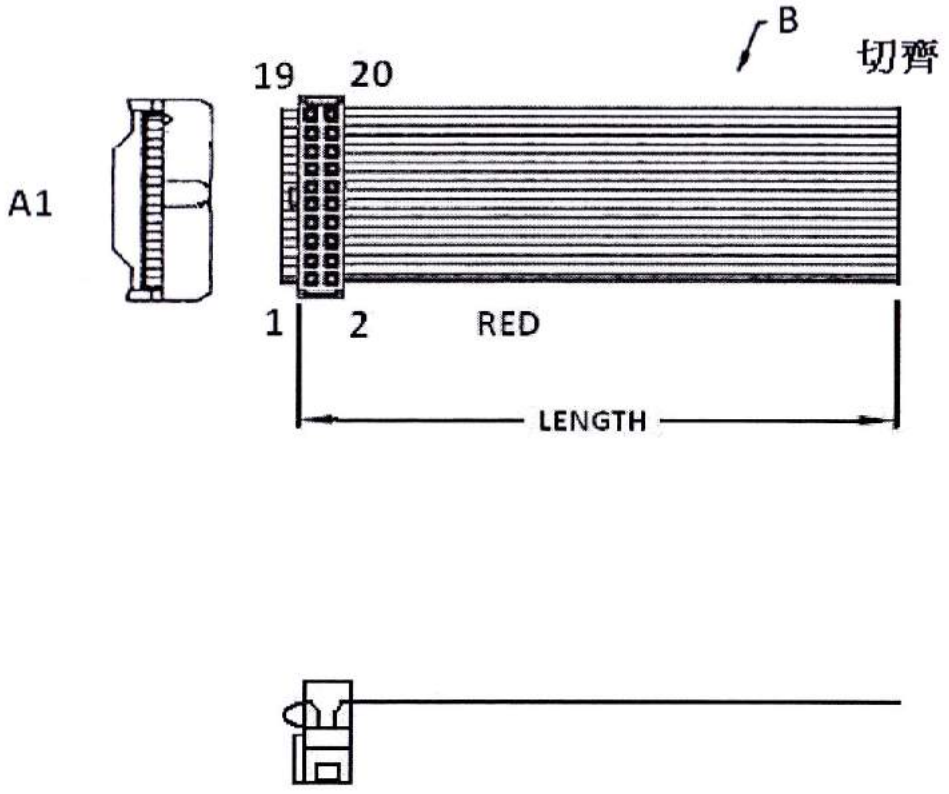


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{N O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NO" 2.00MM IDC SOCKET WITH S.R. WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO OPEN END (1)

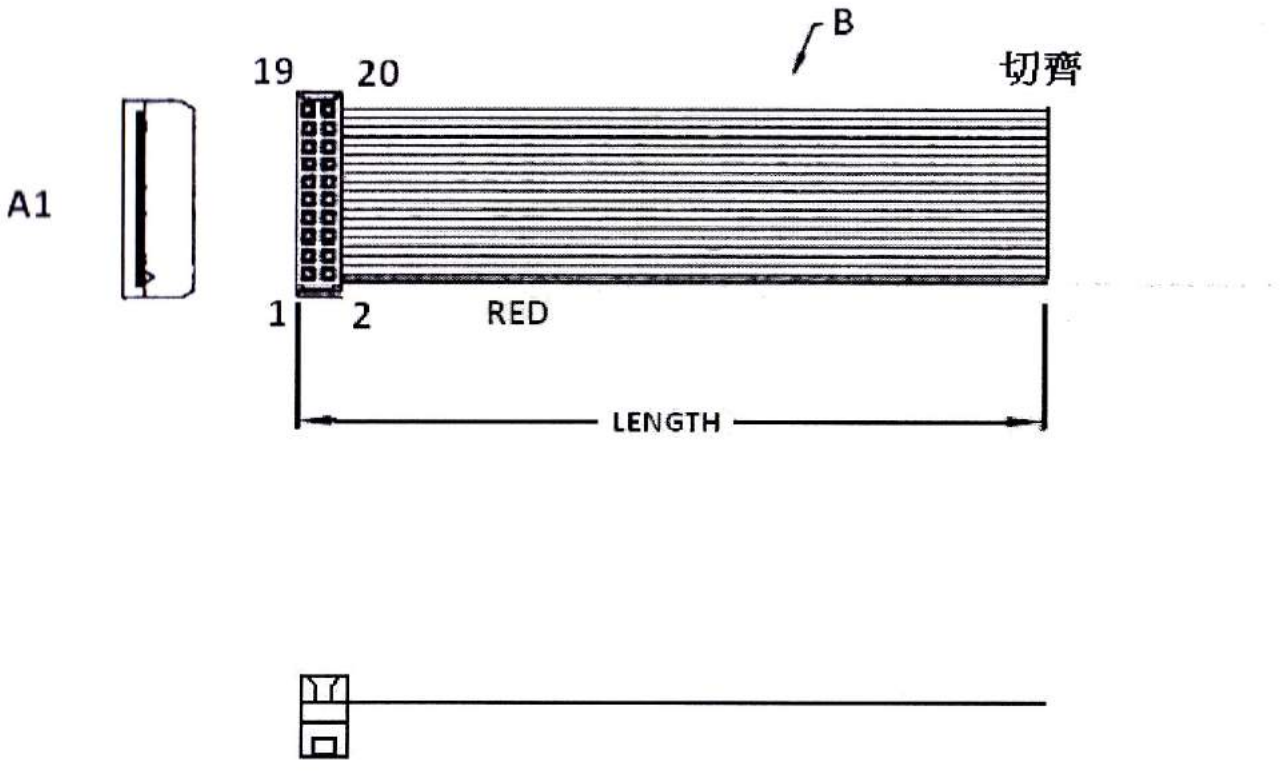


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{A O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AO" 2.00MM IDC SOCKET W/O S.R. W/O NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO OPEN END (2)

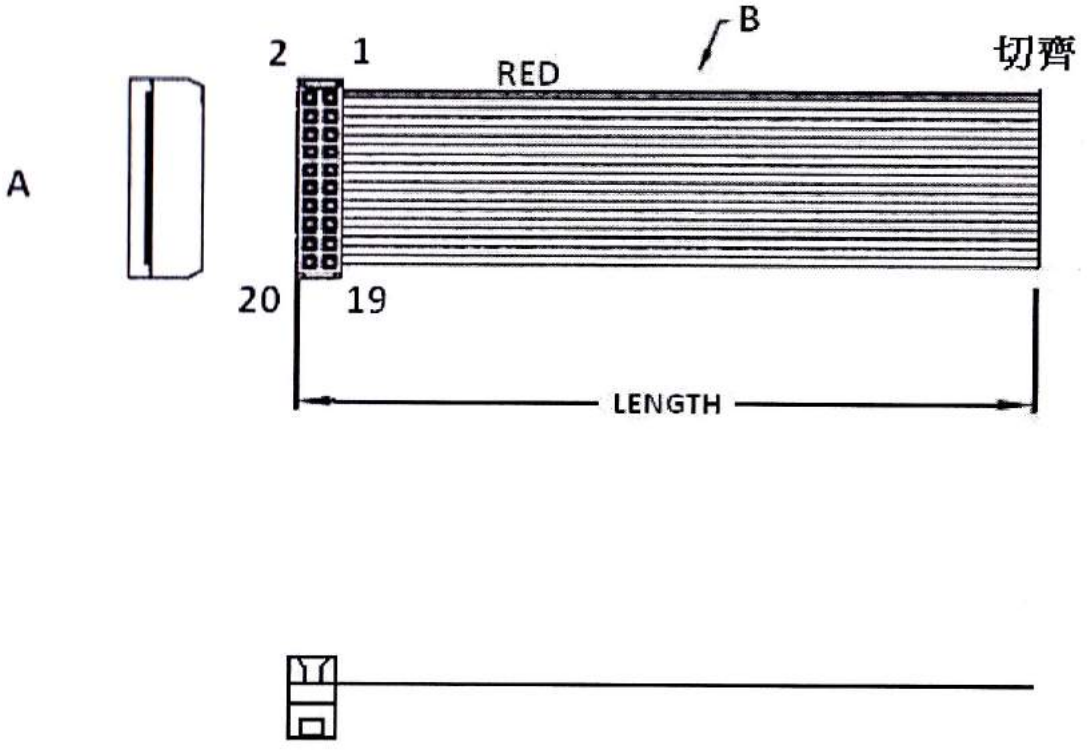


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{V O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$


1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "VO" 2.00MM IDC SOCKET W/O S.R. W/O NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH INTENSIVE CONTACTS (H=5.1MM & 7.8MM) TO OPEN END

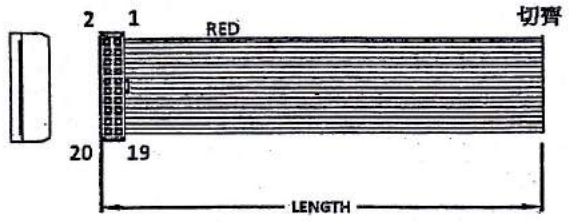




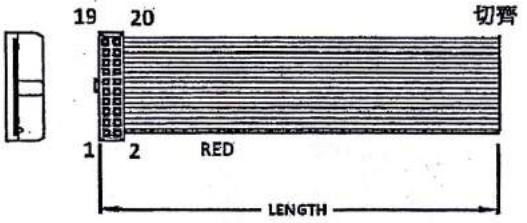



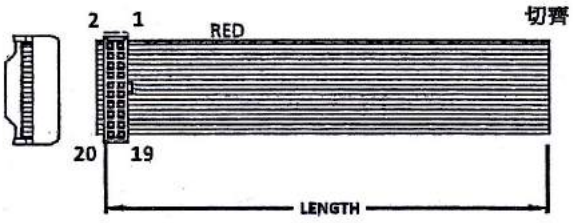



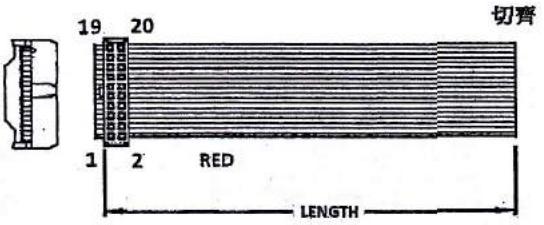



ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2NW, 2NX (H=5.1MM)
   IDC SOCKET WITH S.R. : 2NY, 2NZ (H=7.8MM)
2. NO. OF CONTACTS:
   006~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.00MM PITCH FLAT CABLE WITH 2.00MM IDC SOCKET WITH HOOKY TERMINATIONS (H=8.5MM & 11.4MM) TO OPEN END

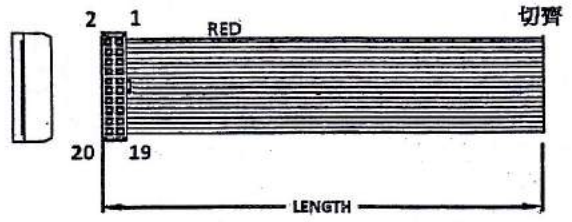


K2PN

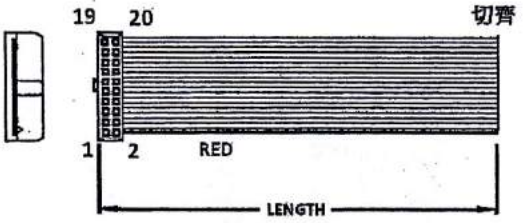

K2PP

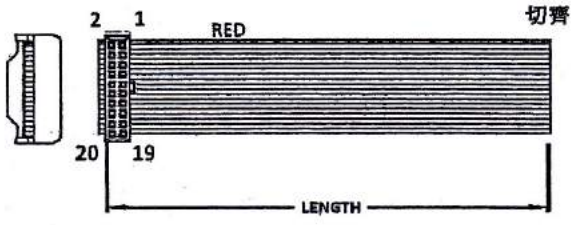

K2PQ

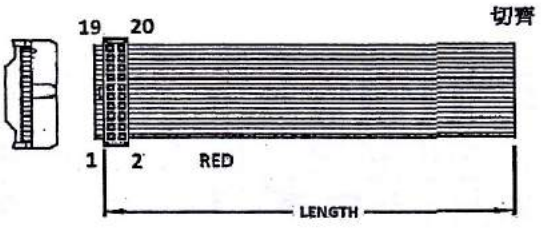

K2PR

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2PN, 2PP (H=8.5MM)
   IDC SOCKET WITH S.R. : 2PQ, 2PR (H=11.4MM)
2. NO. OF CONTACTS:
   006~068
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH 2.00MM SHRUNK IDC SOCKET (H=8.5MM & 12.6MM) TO OPEN END

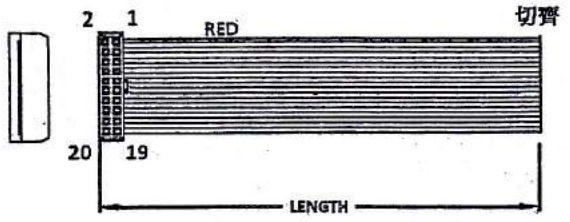





K2PJ

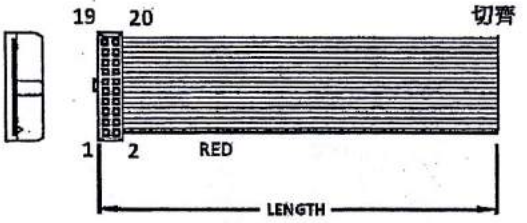





K2PK

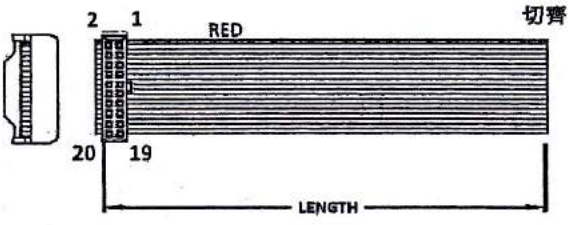



K2PL

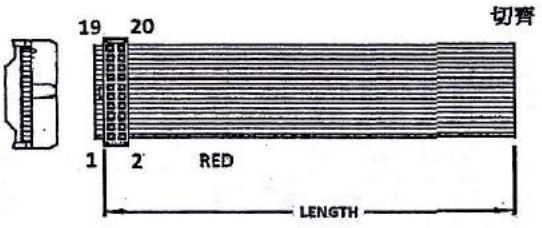



K2PM

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 2PJ, 2PK (H=8.5MM)
   IDC SOCKET WITH S.R. : 2PL, 2PM (H=12.6MM)
2. NO. OF CONTACTS:
   008~050
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH DIP PLUG (H=5.2MM) TO OPEN END (1)

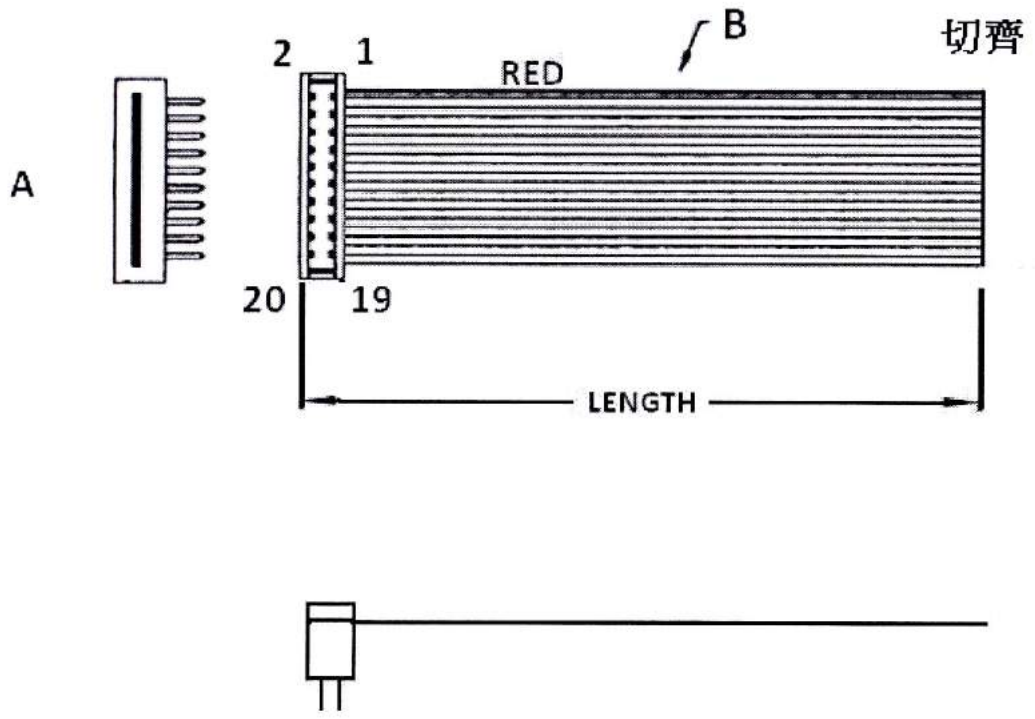


ORDERING INFORMATION:

P/N $\underset{1}{\underline{KB}}\ \underset{2}{\underline{xx}}\ \underset{3}{\underline{DO}}$ - $\underset{4}{\underline{xx}}$ C M $\underset{5}{\underline{B}}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "DO" 2.00MM DIP PLUG
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH DIP PLUG (H=5.2MM) TO OPEN END (2)

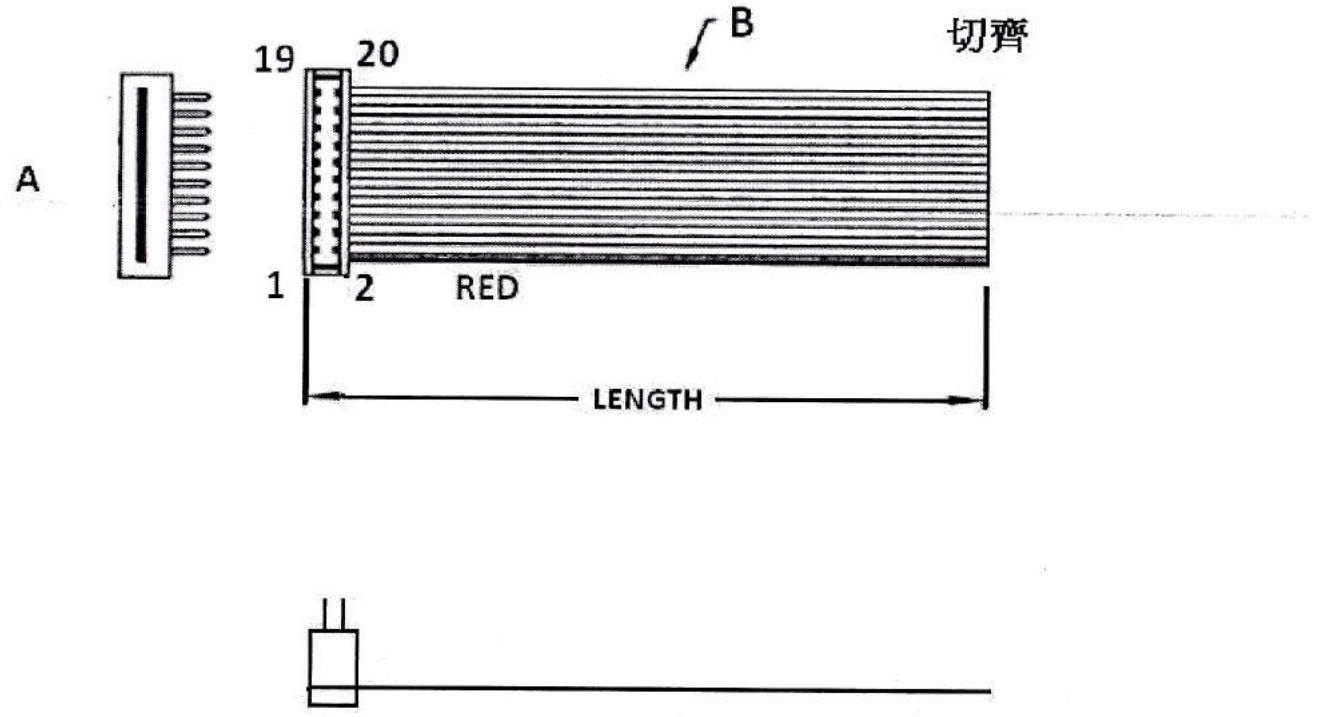


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{P O}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "PO" 2.00MM DIP PLUG
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO TINNED END (1)

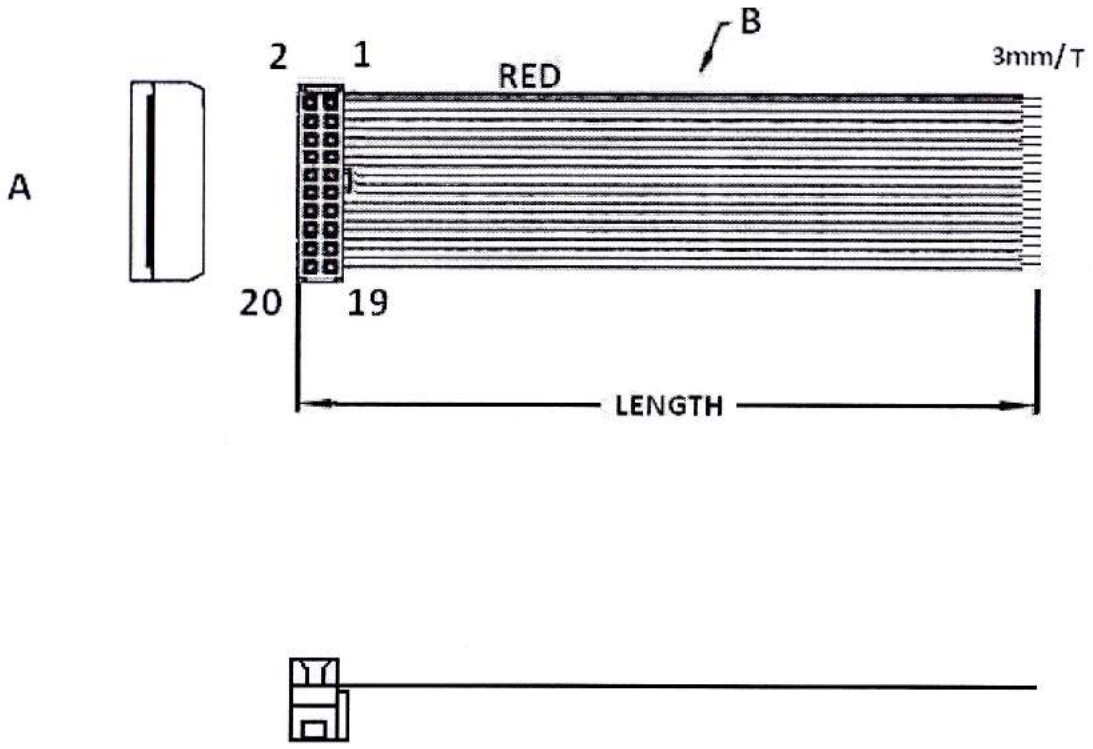


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{K T}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "KT" 2.00MM IDC SOCKET W/O S.R. & WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=9.0MM) TO TINNED END (2)

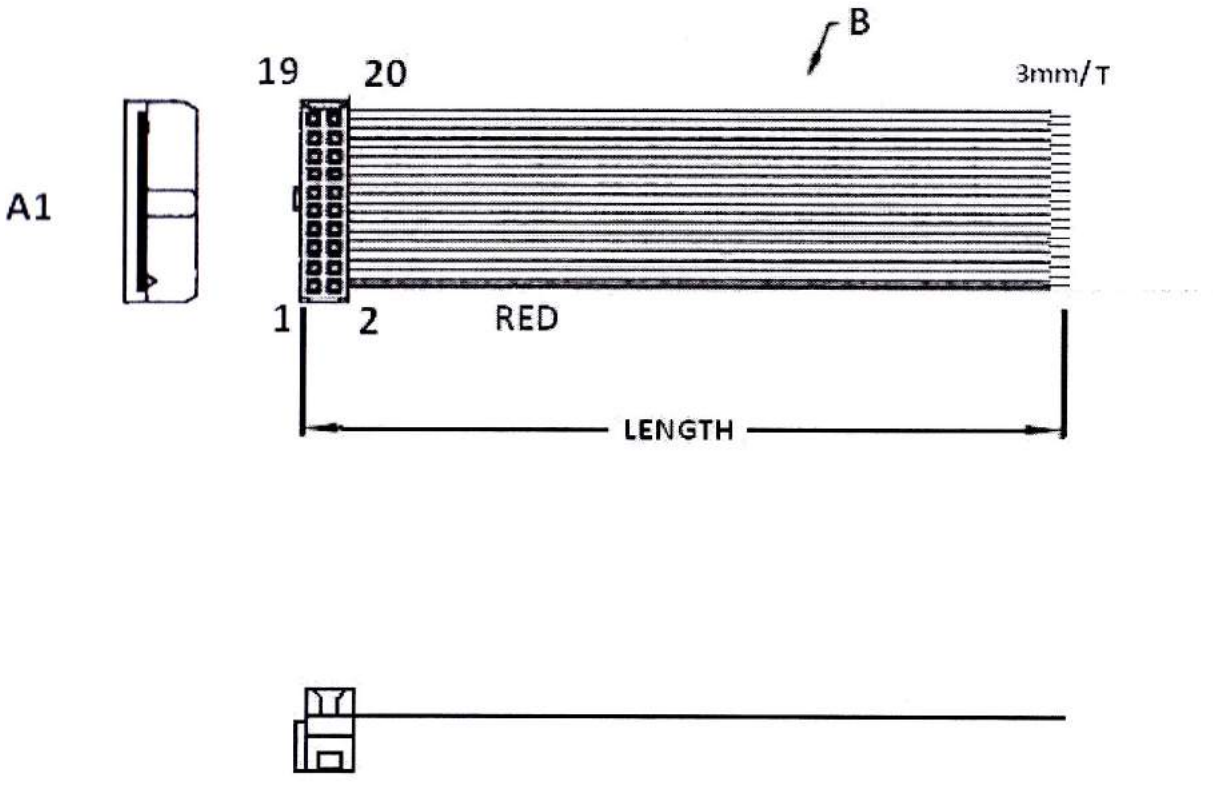


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L T}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "LT" 2.00MM IDC SOCKET W/O S.R. & WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO TINNED END (1)

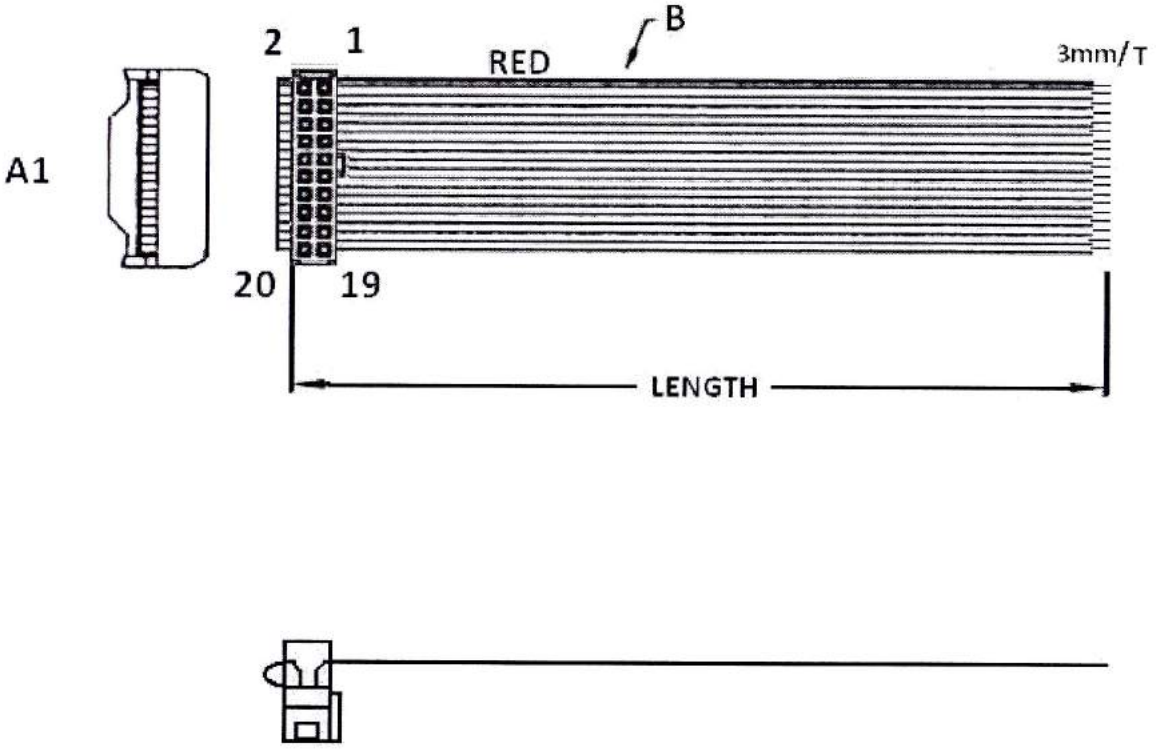


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{M T}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "MT" 2.00MM IDC SOCKET WITH S.R. & NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=13.0MM) TO TINNED END (2)

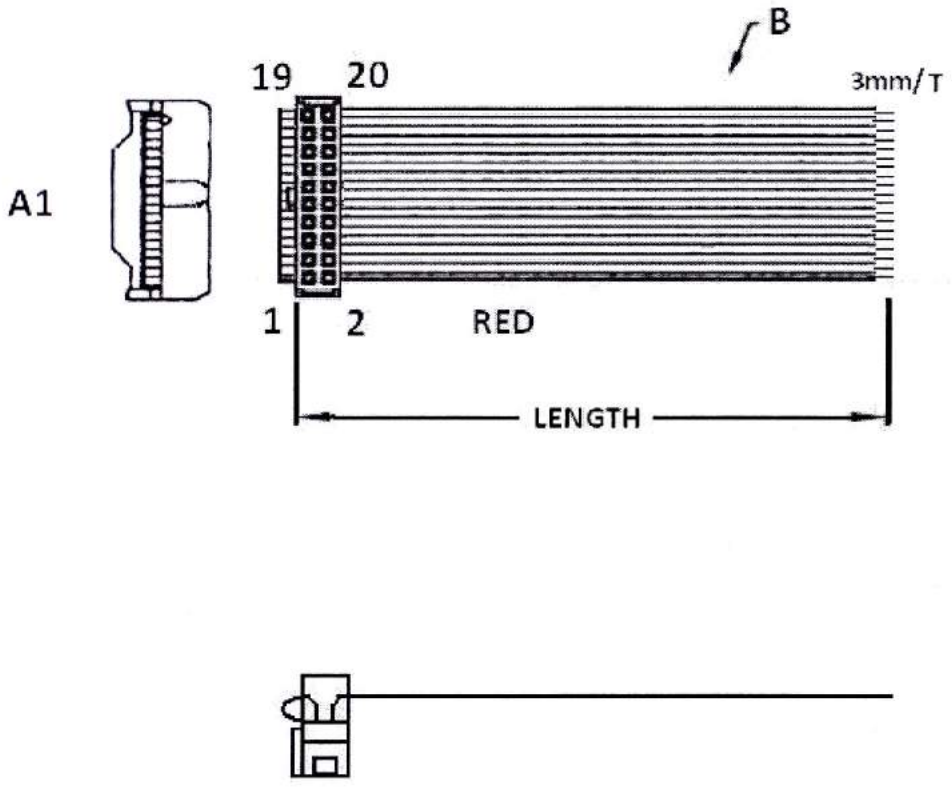


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{N T}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "NT" 2.00MM IDC SOCKET WITH S.R. & NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO TINNED END (1)

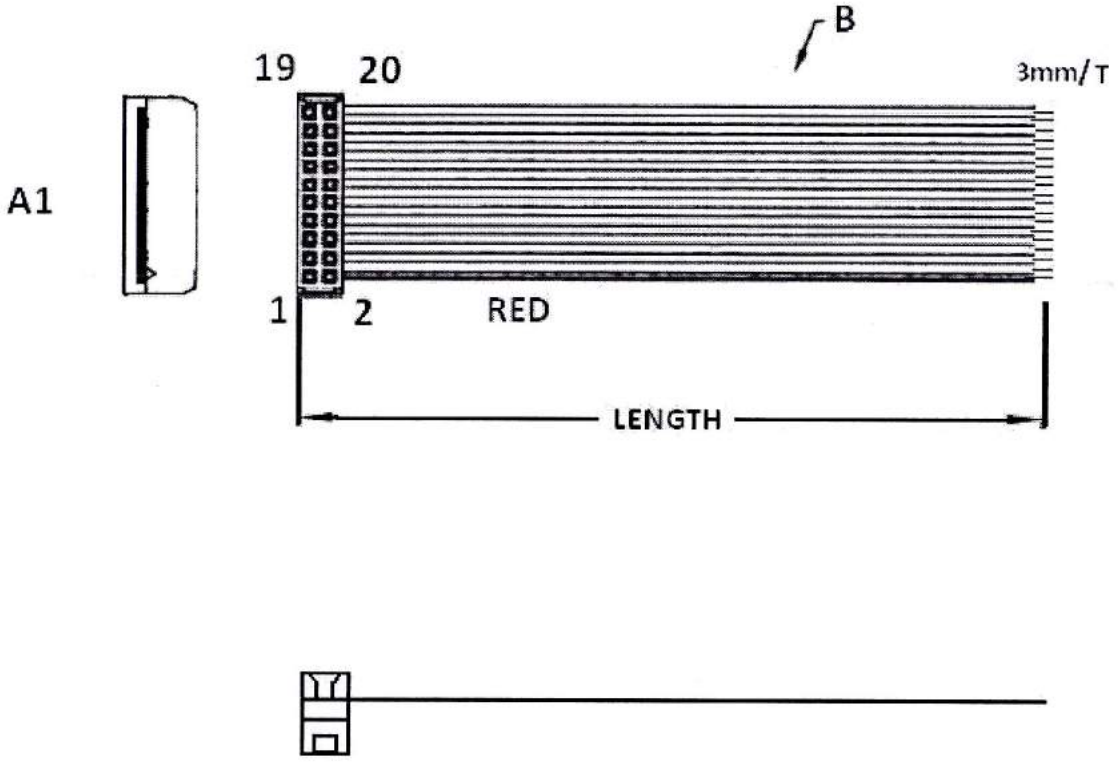


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{A T}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "AT" 2.00MM IDC SOCKET W/O NOSE W/O S.R.
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH IDC SOCKET WITHOUT NOSE (H=9.0MM) TO TINNED END (2)

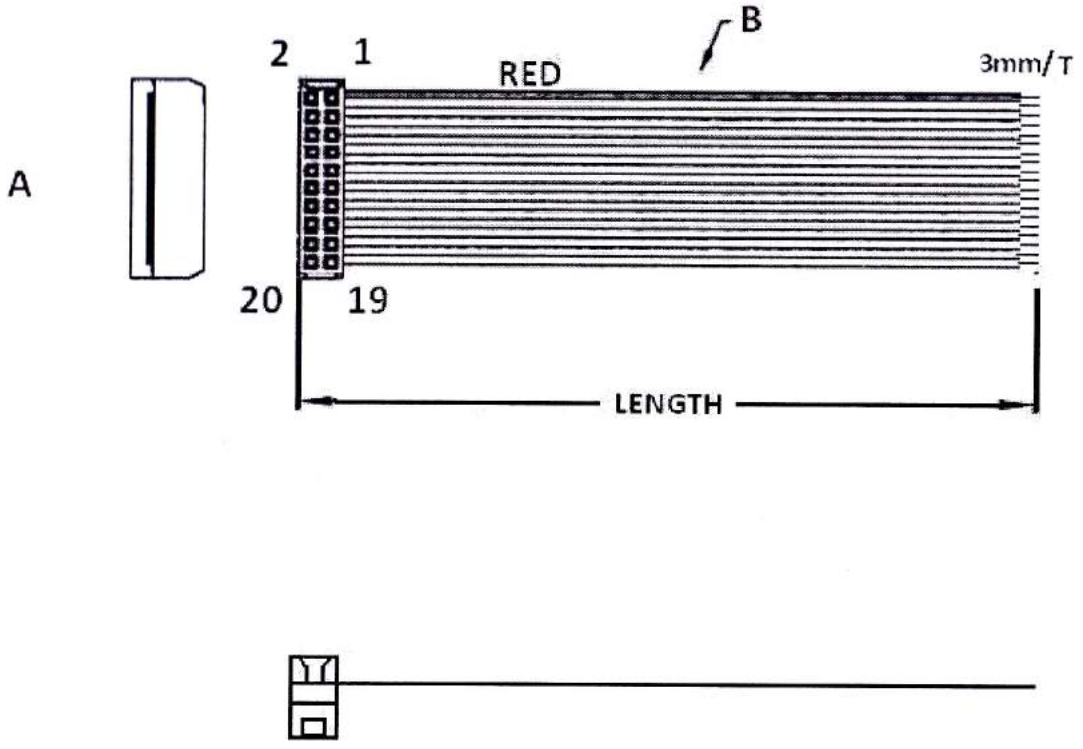


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{V T}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "VT" 2.00MM IDC SOCKET W/O NOSE W/O S.R.
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH DIP PLUG (H=5.2MM) TO TINNED END (1)

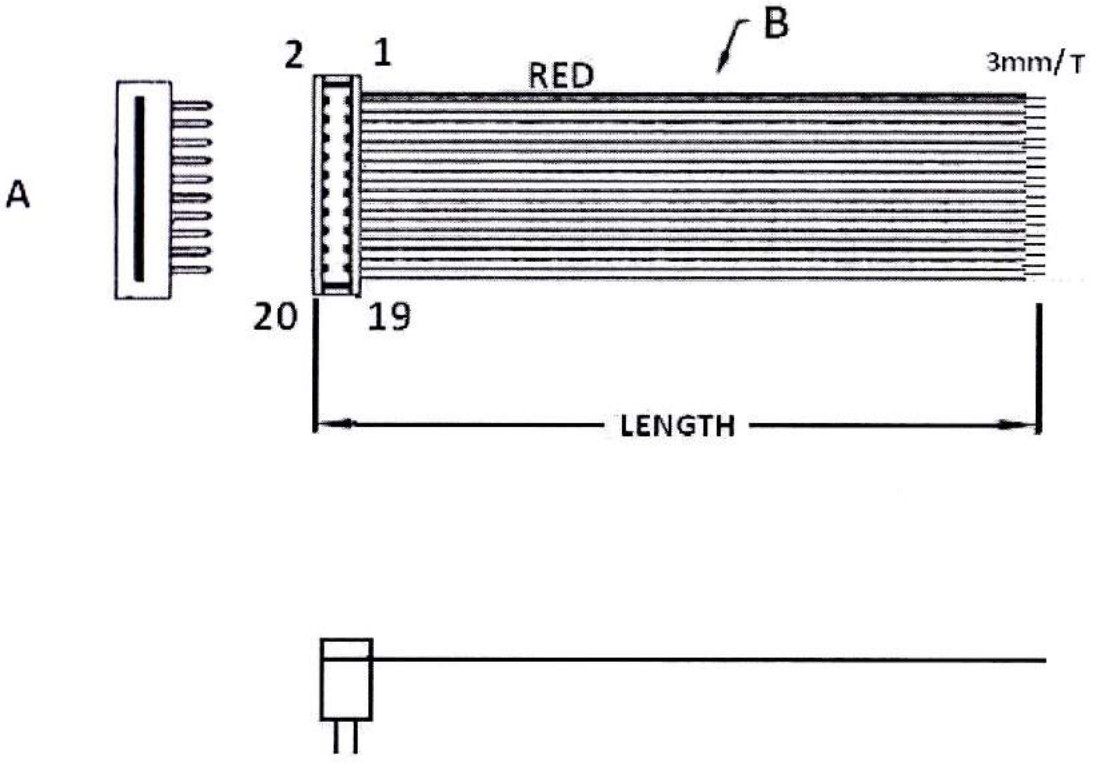


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{D T}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "DT" 2.00MM DIP PLUG
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.00MM PITCH FLAT CABLE WITH
2.00MM PITCH DIP PLUG (H=5.2MM) TO TINNED END (2)

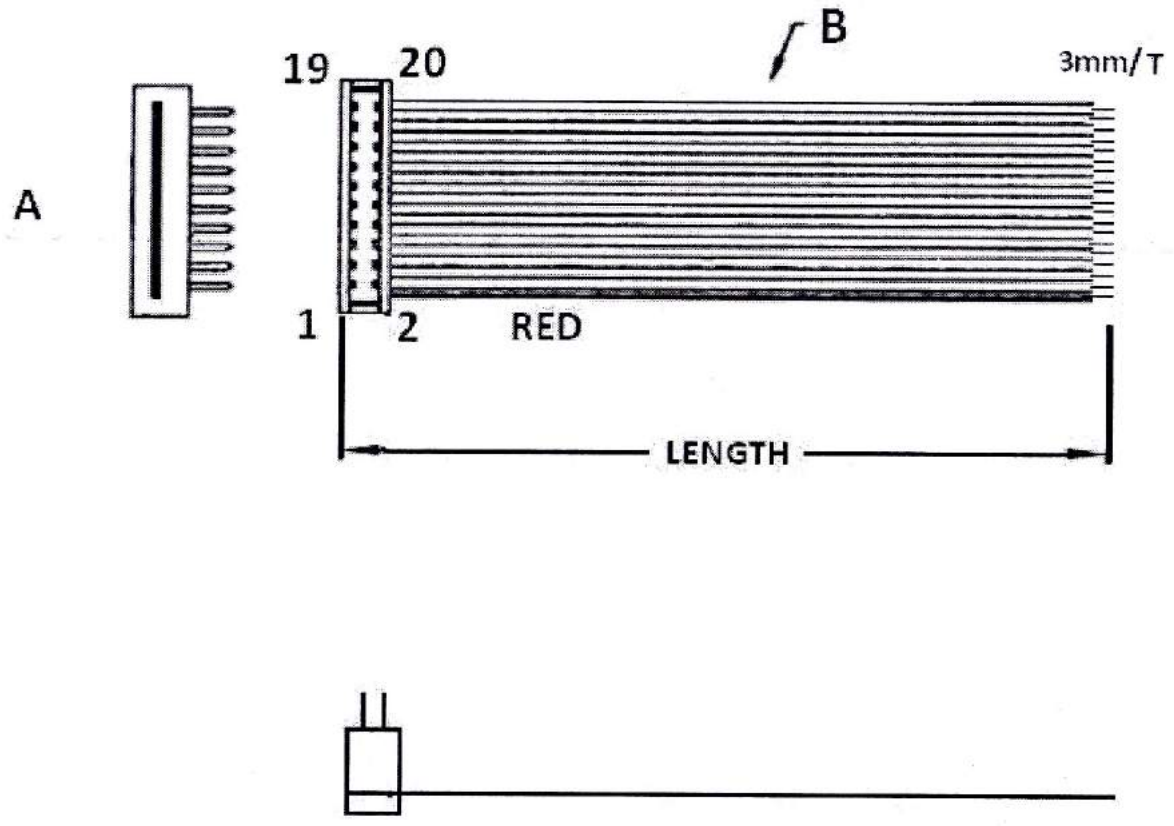


ORDERING INFORMATION:

P/N $\frac{\text{K B}}{1}$ $\frac{\text{x x}}{2}$ $\frac{\text{P T}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{B}}{5}$

1. FLAT CABLE TYPE:
   "KB" 1.00MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~68
3. CONNECTORS AT TWO ENDS:
   "PT" 2.00MM DIP PLUG
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH UL & CSA APPROVED FLAT CABLE

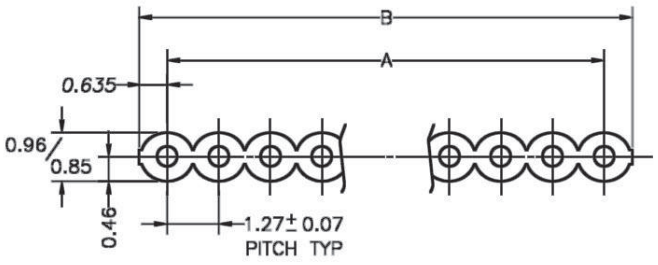


Dimension of each conductor.	0.127± 0.005mm
Conductor Elongation.	18 % ↑
Cross Section Area of conductor.	156 cM ↑
Stranded of Lay.	12.7 mm↓
Average thickness of Insulation.	Min. 0.18mm average 0.23mm
PVC Elongation.	100.0 % ↑
Tensile Strength	1.056 kg/mm² ↑
Spark test	2.5 KV/0.15SEC ↑

E162747 ЯЦ AWM 2651 VW-1 105°C 300V 28 AWG KEEN TOP
CSA AWM IA FT1 105°C 300V 28 AWG LL111055 98030409 01

YEAR
MONTH
DAY
TIME
MACHINE SERIAL NUMBER

RED EDGE POS #1 (EDGE MARK or STRIP)

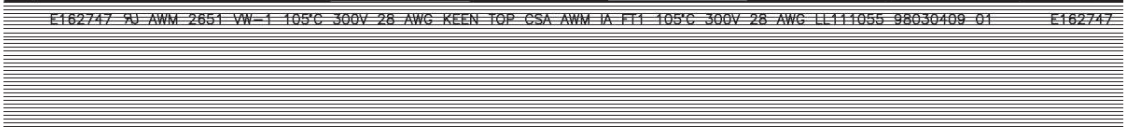

ORDERING INFORMATION:


P/N F K 1 2 7 $\frac{xx}{1}$ - $\frac{76.2M}{2}$

1. NO. OF CONDUCTORS:
   06, 07, 08, 09, 10, 12, 14, 15, 16, 20,
   25, 26, 30, 34, 36, 40, 50, 60, 64
2 .LENGTH IN 76.2M/REEL

Code No.	Size of conductor		A± 0.07	NO. ConductorX1.27=B$^{+0.1}_{-0.3}$		
	(AWG)	Composition (strands/mm)		Max.	DIMENSION	Min.
06	28	7/0.127	6.35	7.72	7.62	7.32
07	28	7/0.127	7.62	8.99	8.89	8.59
08	28	7/0.127	8.89	10.26	10.16	9.86
09	28	7/0.127	10.16	11.53	11.43	11.13
10	28	7/0.127	11.43	12.80	12.70	12.40
12	28	7/0.127	13.97	15.34	15.24	14.94
14	28	7/0.127	16.51	17.88	17.78	17.48
15	28	7/0.127	17.78	19.15	19.05	18.75
16	28	7/0.127	19.05	20.42	20.32	20.02
20	28	7/0.127	24.13	25.50	25.40	25.10
25	28	7/0.127	30.48	31.85	31.75	31.45
26	28	7/0.127	31.75	33.12	33.02	32.72
30	28	7/0.127	36.83	38.20	38.10	37.80
34	28	7/0.127	41.91	43.28	43.18	42.88
36	28	7/0.127	44.45	45.82	45.72	45.42
40	28	7/0.127	49.53	50.90	50.80	50.50
50	28	7/0.127	62.23	63.60	63.50	63.20
60	28	7/0.127	74.93	76.30	76.20	75.90
64	28	7/0.127	80.01	81.38	81.28	80.98

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A1)

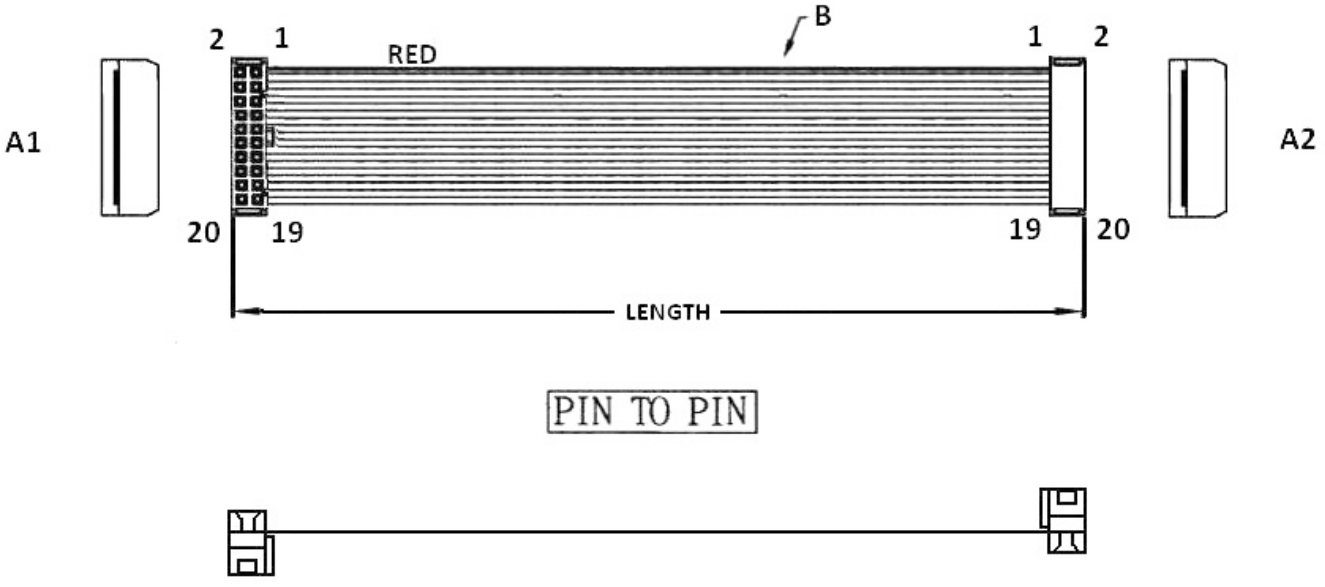


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{KK}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KK" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A2)

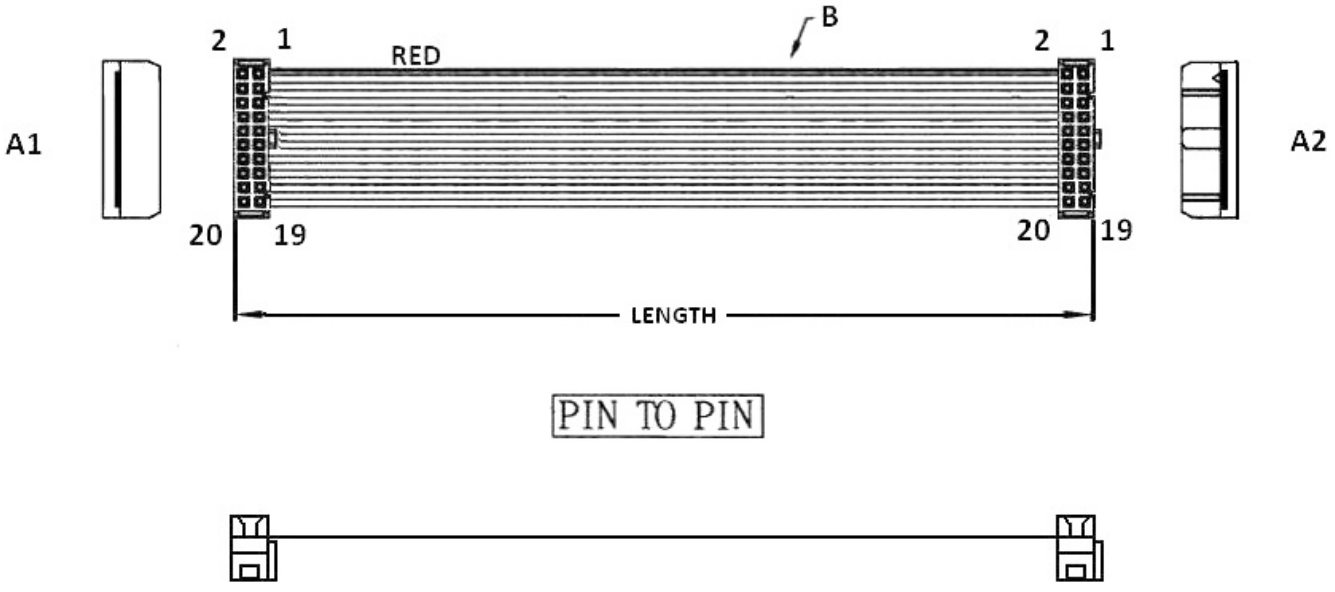

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KL}{3}-\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KL" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A3)

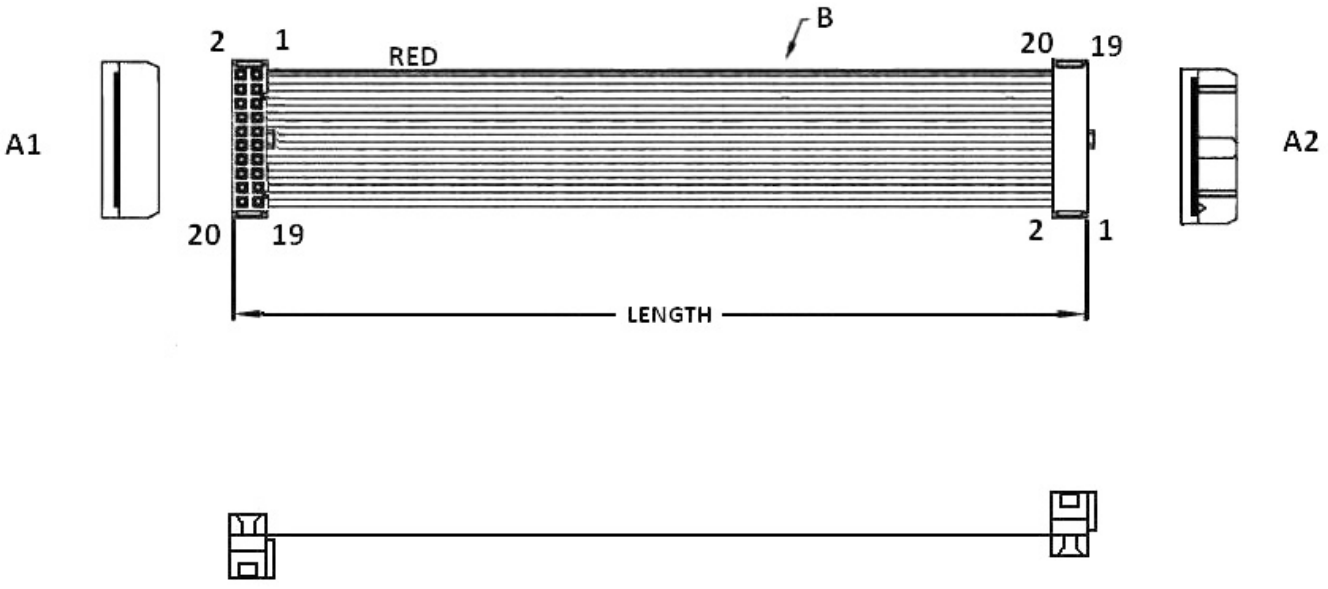


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KI}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KI" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A4)

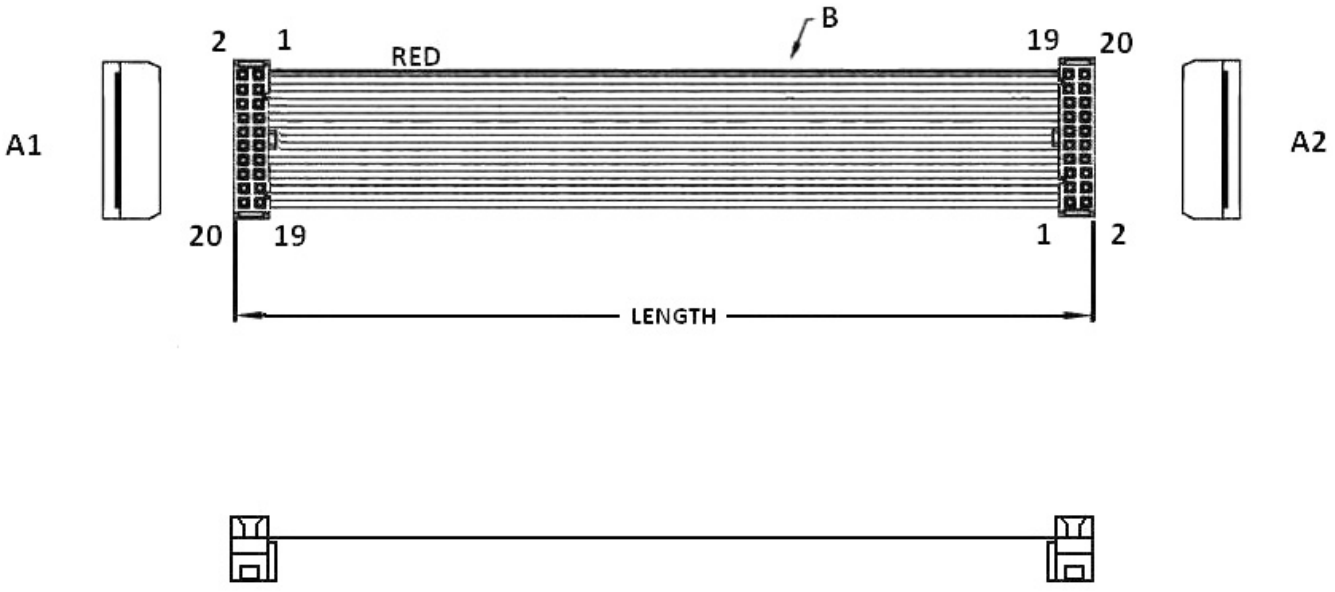


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{K8}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "K8" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A5)

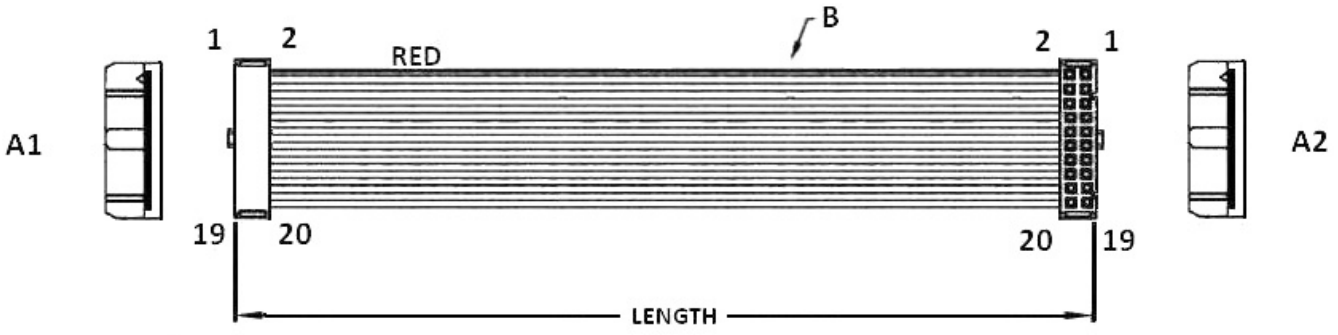

PIN TO PIN




ORDERING INFORMATION:

P/N KA xx LL - xx C M x
1 2 3 4 5

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LL" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT STRAIN RELIEF (H=11.0MM) (A6)

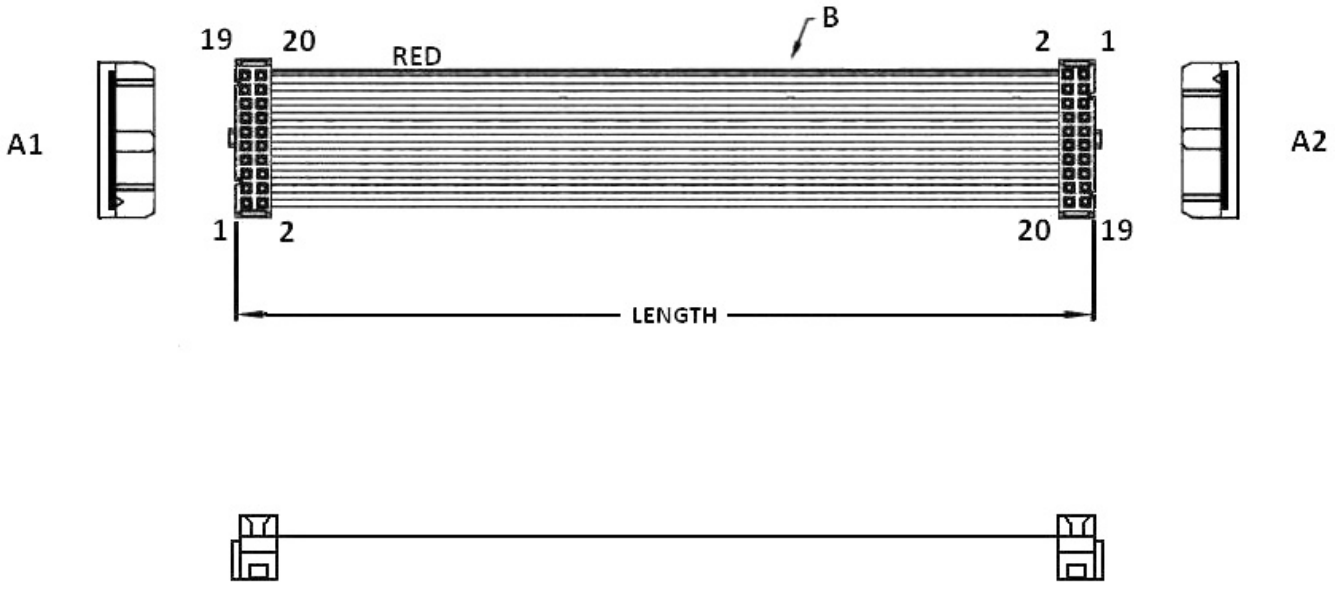


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{LI}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LI" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC SOCKET WITH NOSE W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (H=9.5MM) (A7)

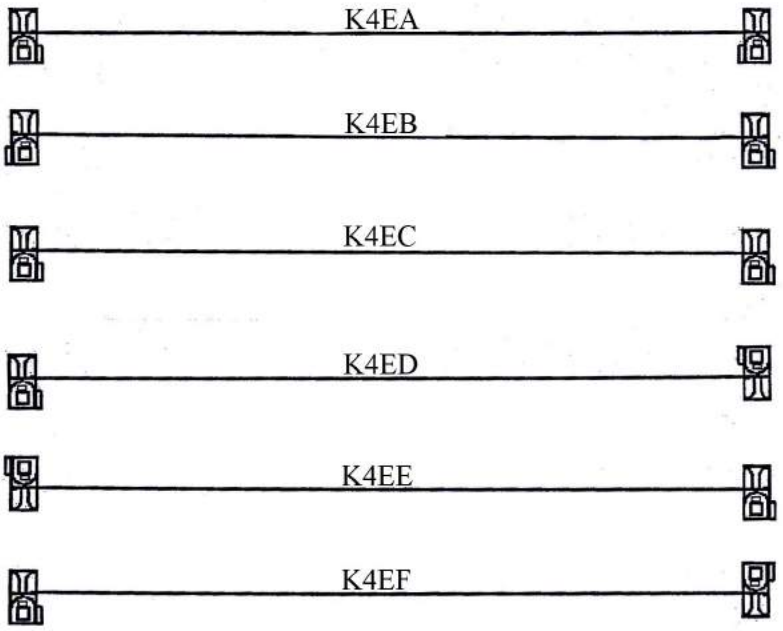

2.54MM PITCH LOW PROFILE IDC SOCKET W/O S.R. H=9.5MM

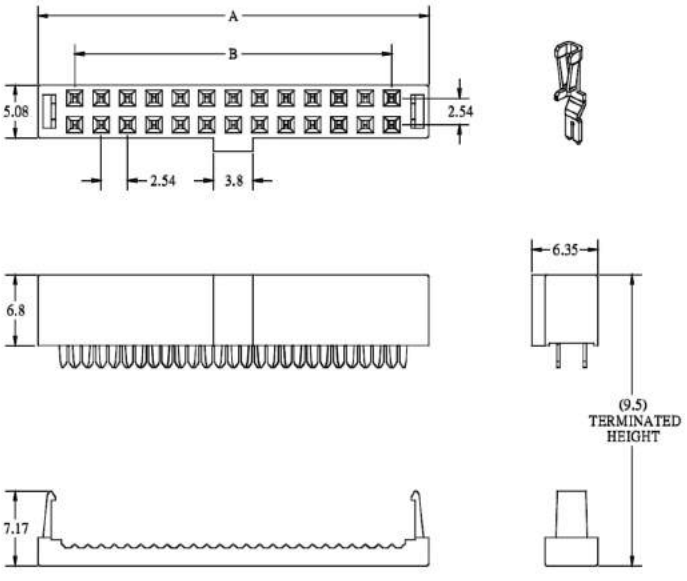

A=B+7.11
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   4EA, 4EB, 4EC, 4ED, 4EE, 4EF
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (H=10.5MM) (A8)

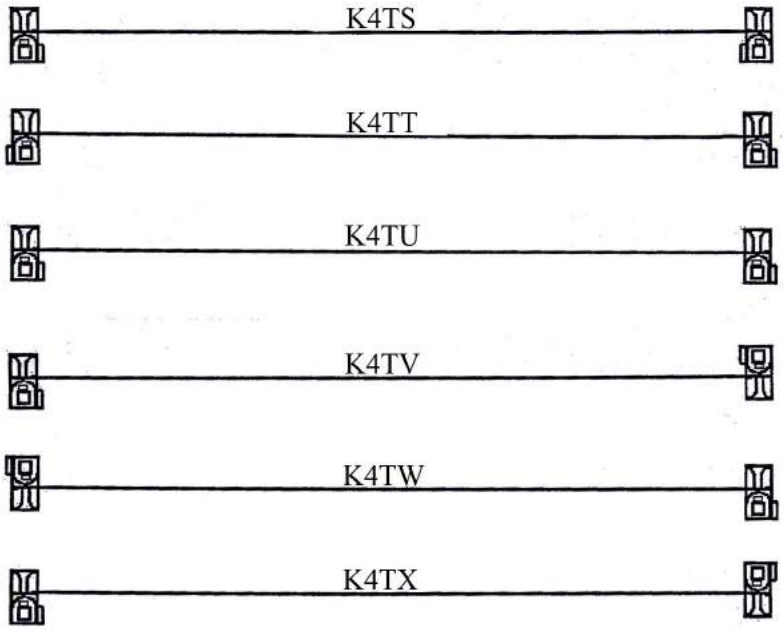



2.54MM PITCH IDC SOCKET W/O S.R. AND WITH DUAL U-SLOT & DUAL CONTACT

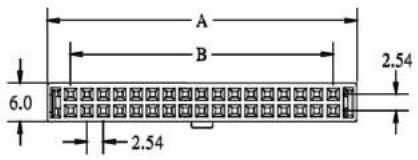




A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS





NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064



ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   4TS, 4TT, 4TU, 4TV, 4TW, 4TX
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (DUAL WIPE CONTACT & H=10.5MM) (A9)

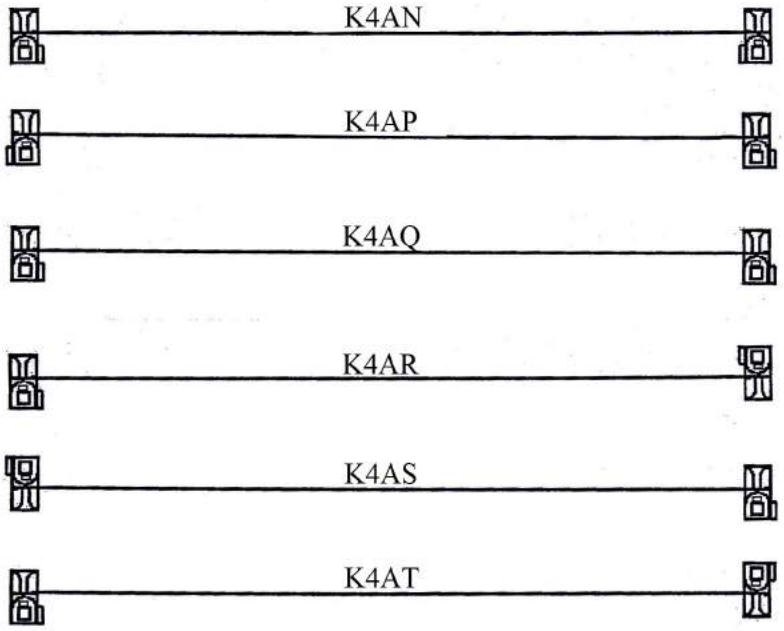



2.54MM PITCH IDC SOCKET WITH DUAL WIPE CONTACT & W/O S.R.

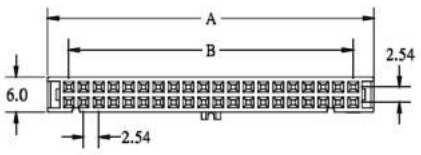




A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS





NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
060, 064



ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ C M $\frac{x}{4}$

1. CONSTRUCTION TYPE:
   4AN, 4AP, 4AQ, 4AR, 4AS, 4AT
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM SHRUNK IDC SOCKETS W/O S.R. (H=11.4MM) (A10)

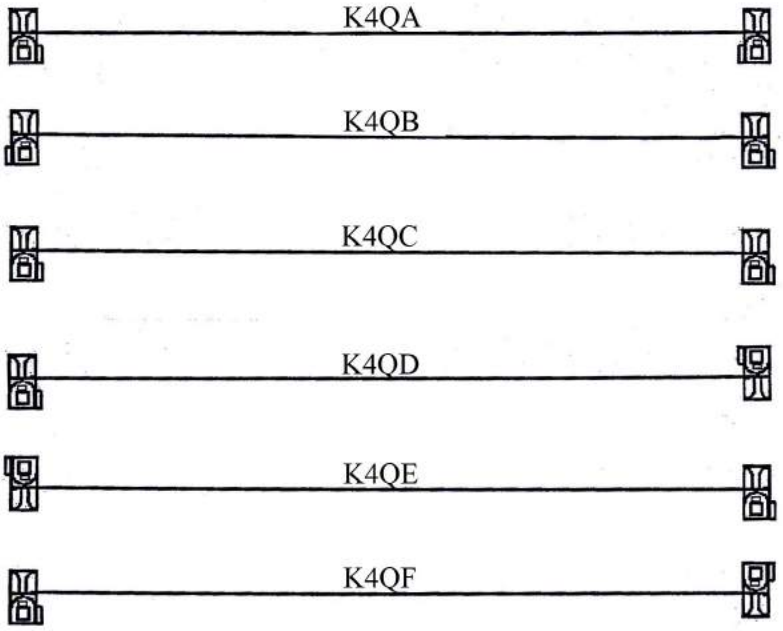

2.54MM PITCH SHRUNK IDC SOCKET W/O STRAIN RELIEF

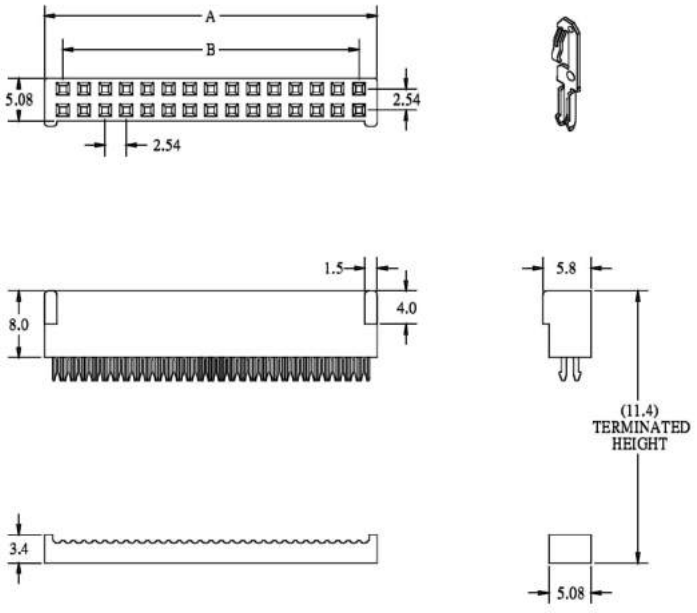

A=B+4.40
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$ B

1. CONSTRUCTION TYPE:
   4QA, 4QB, 4QC, 4QD, 4QE, 4QF
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH IDC SOCKETS WITHOUT NOSE (H=11.0MM) (B1)

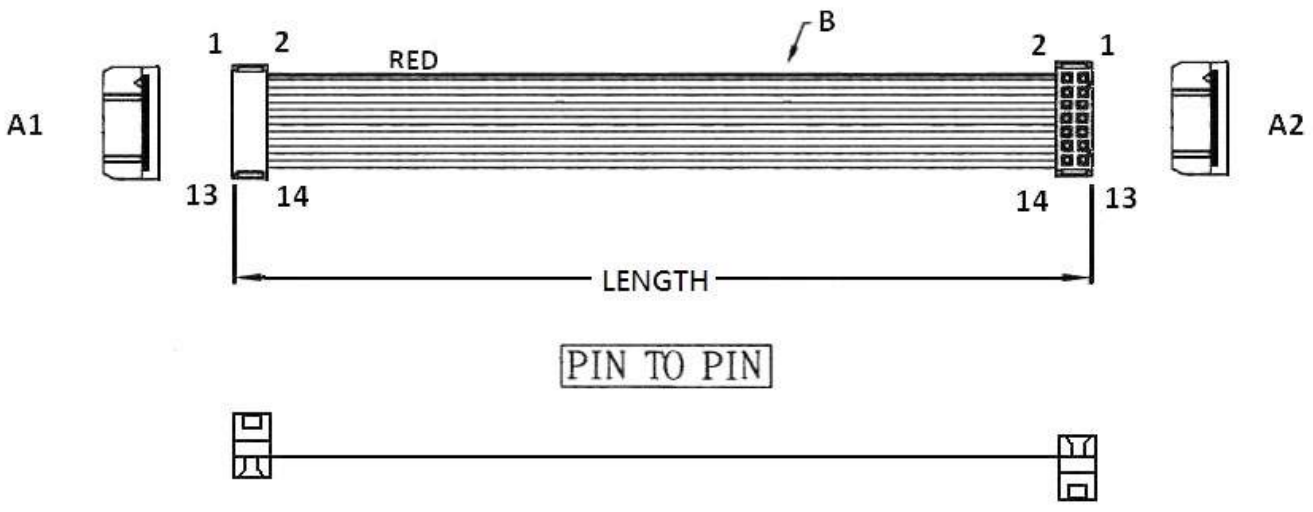


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AA}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AA" 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
   TO 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH IDC SOCKETS WITHOUT NOSE (H=11.0MM) (B2)

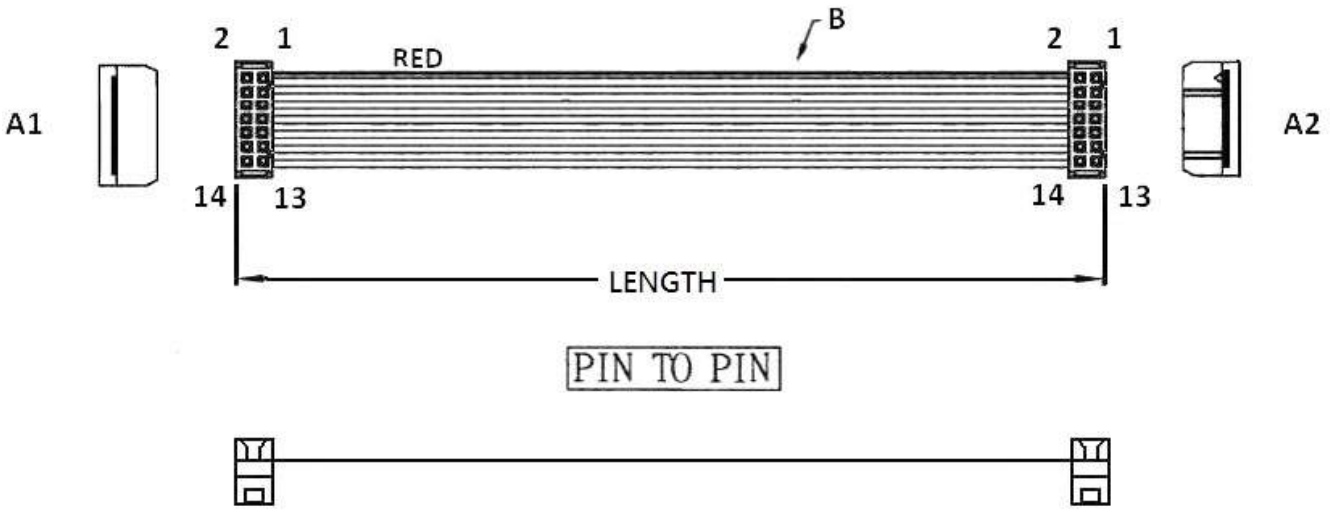


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AV}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AV" 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
   TO 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH IDC SOCKETS WITHOUT NOSE (H=11.0MM) (B3)

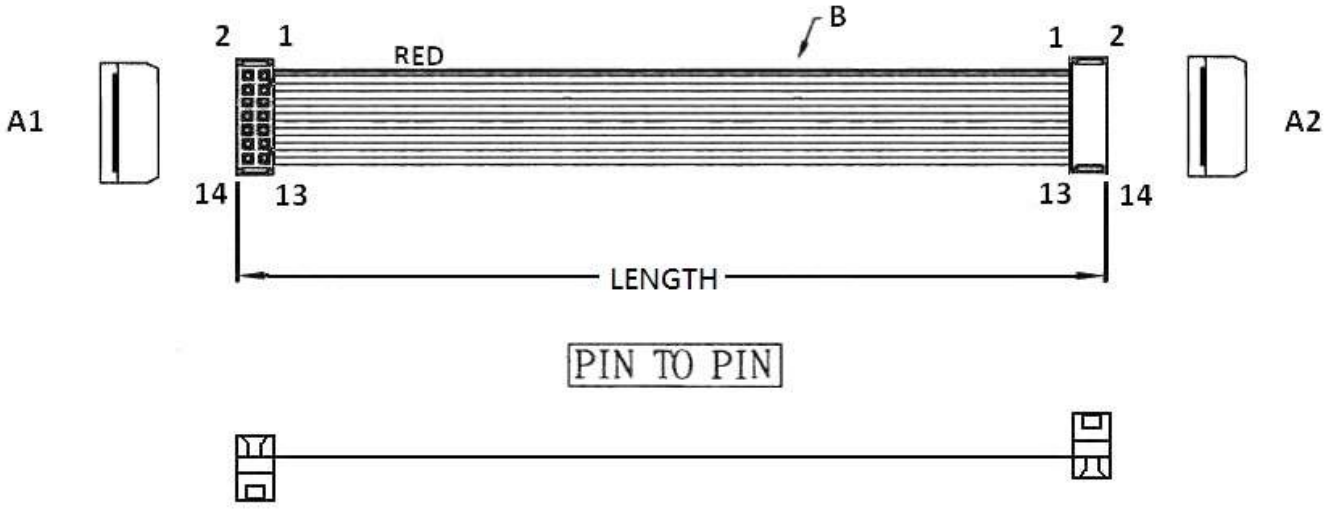


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VV}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "VV" 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
   TO 2.54MM IDC SOCKET W/O NOSE & W/O STRAIN RELIEF
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE
WITH 2* 2.54MM LOW PROFILE SHRUNK IDC SOCKETS W/O NOSE (H=9.3MM) (B4)

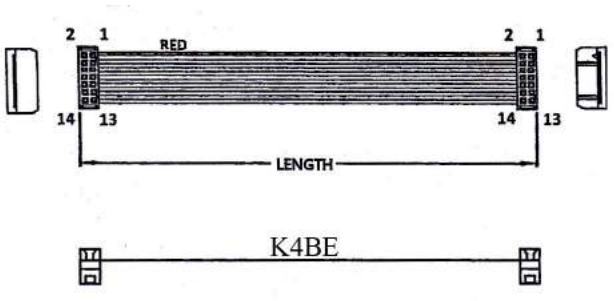

K4BE

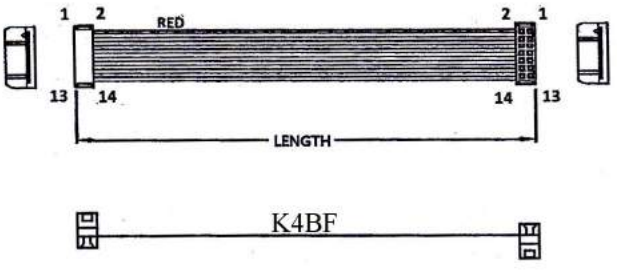

K4BF

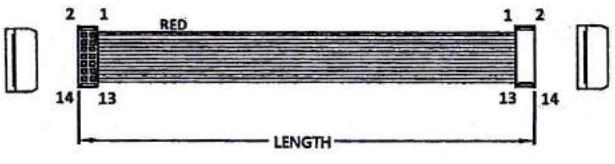

K4BD


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   4BD, 4BE, 4BF
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=16.0MM) (C1)

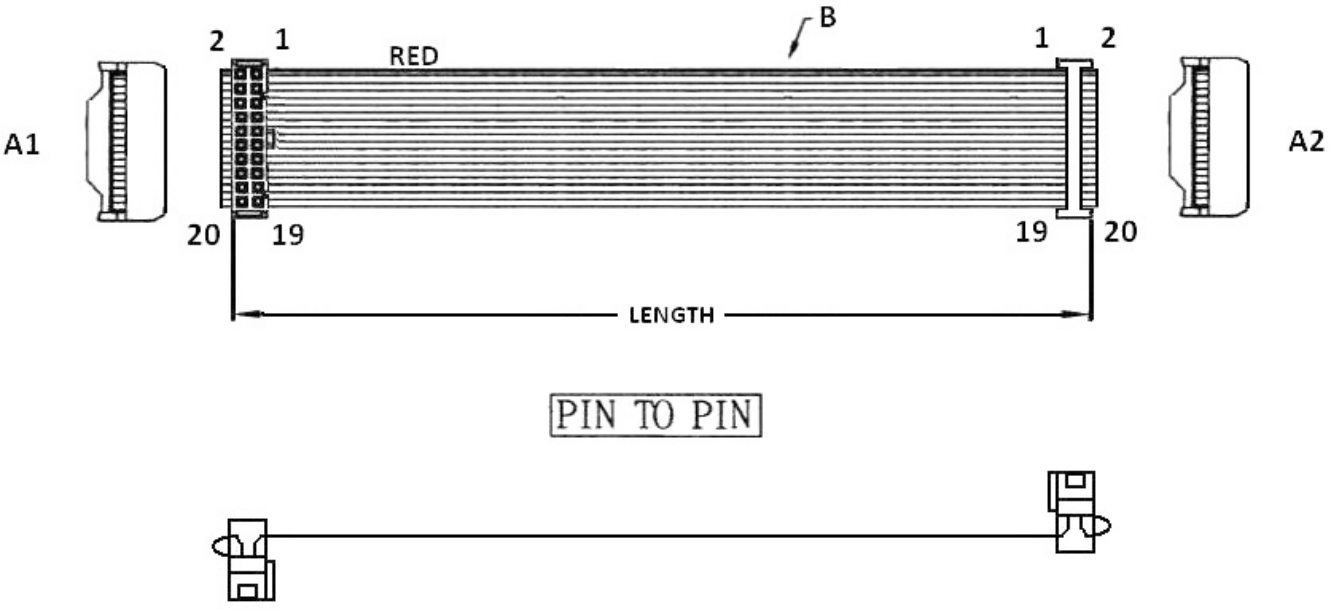

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MM}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MM" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=16.0MM) (C2)

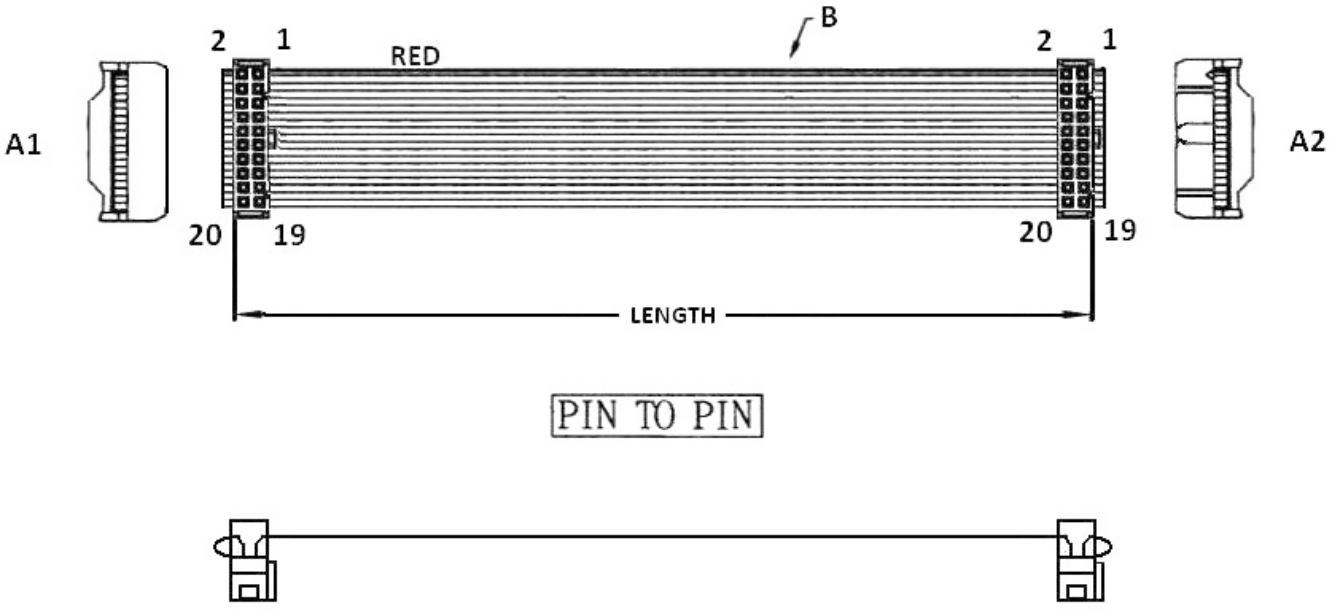


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MN}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MN" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=16.0MM) (C3)

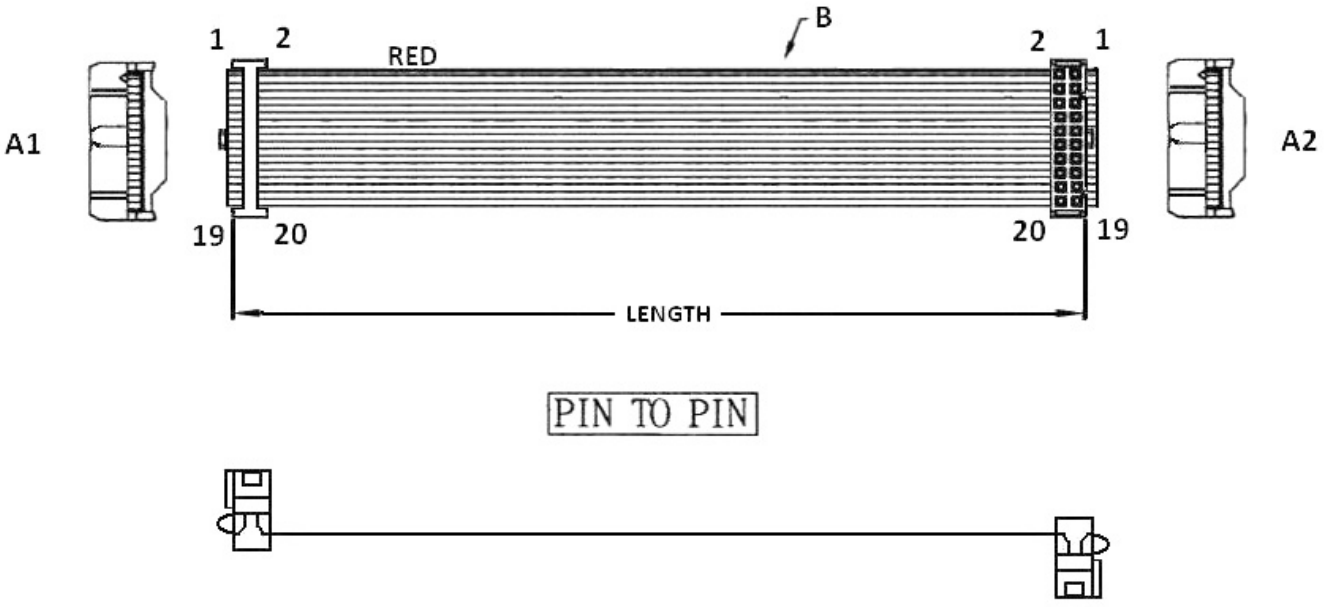


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NN}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NN" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=16.0MM) (C4)

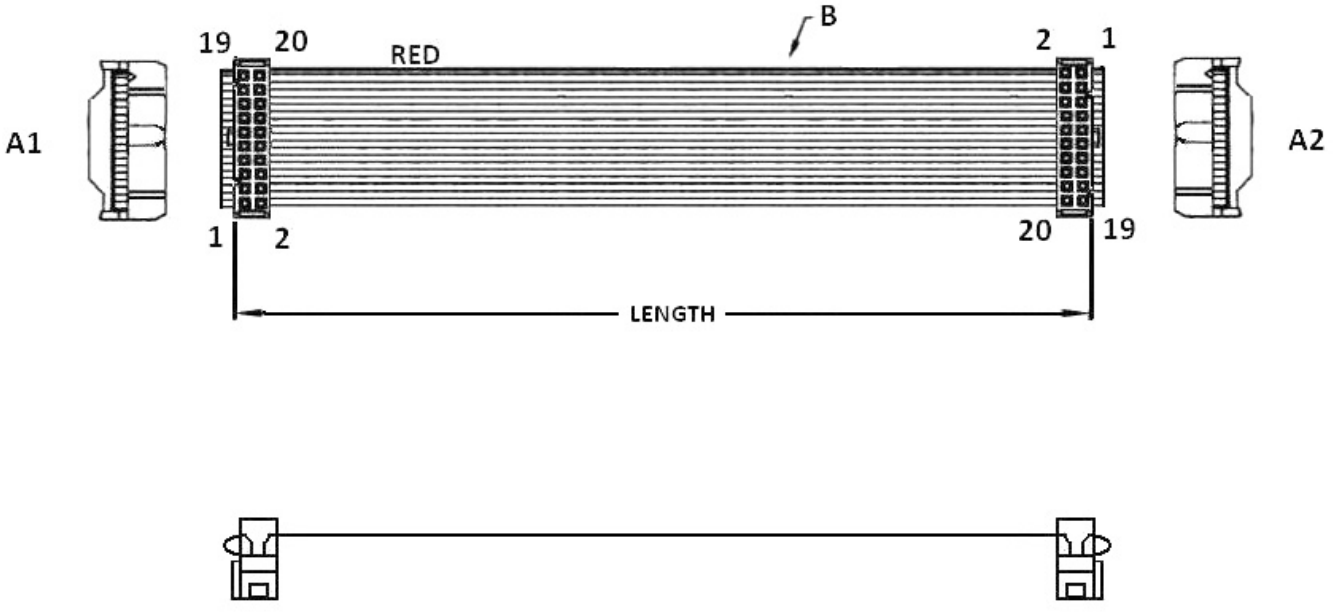


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NX}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NX" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH IDC SOCKETS WITH STRAIN RELIEFS (H=16.0MM) (C5)

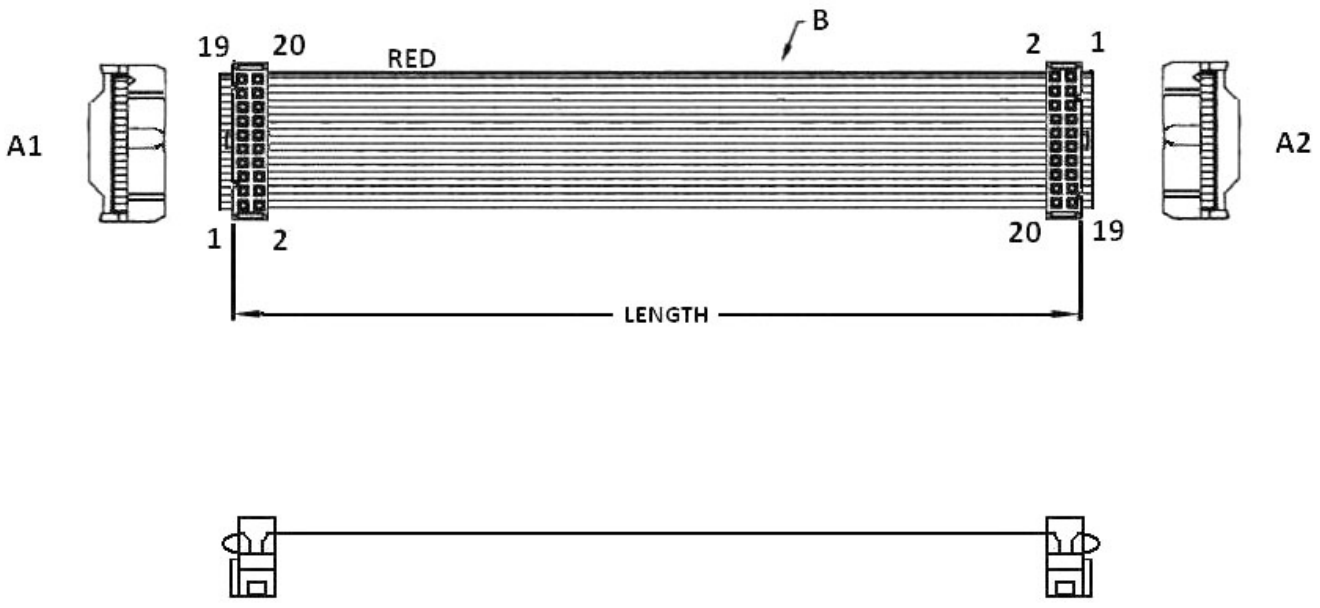


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{NI}{3}-\frac{xx}{4}CM\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NI" 2.54MM IDC SOCKET WITH NOSE & S.R.
   TO 2.54MM IDC SOCKET WITH NOSE & S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM IDC SOCKETS WITH STRAIN RELIEF (H=14.4MM) (C6)

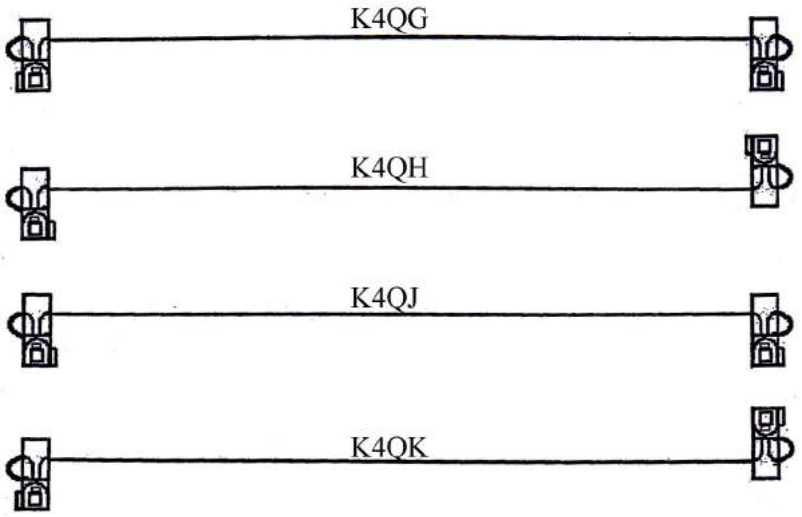

2.54MM PITCH IDC SOCKET WITH S.R. AND WITH DUAL U-SLOT & DUAL CONTACT

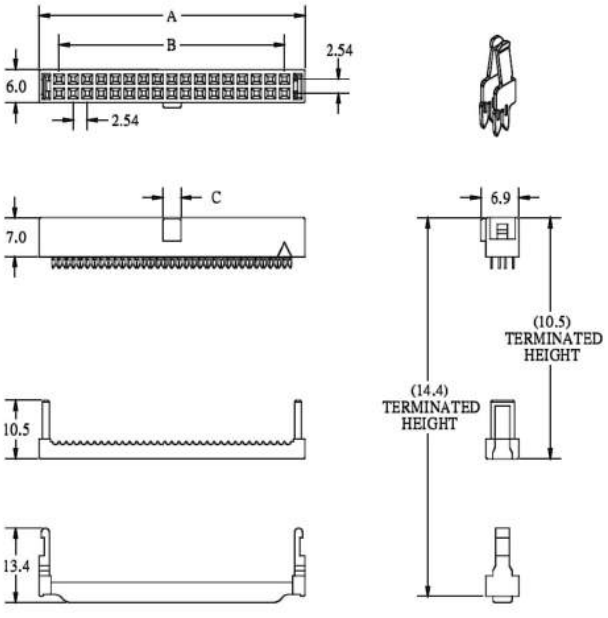

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4QG, 4QH, 4QJ, 4QK
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM IDC SOCKETS (DUAL WIPE CONTACT & H=14.4MM) (C7)

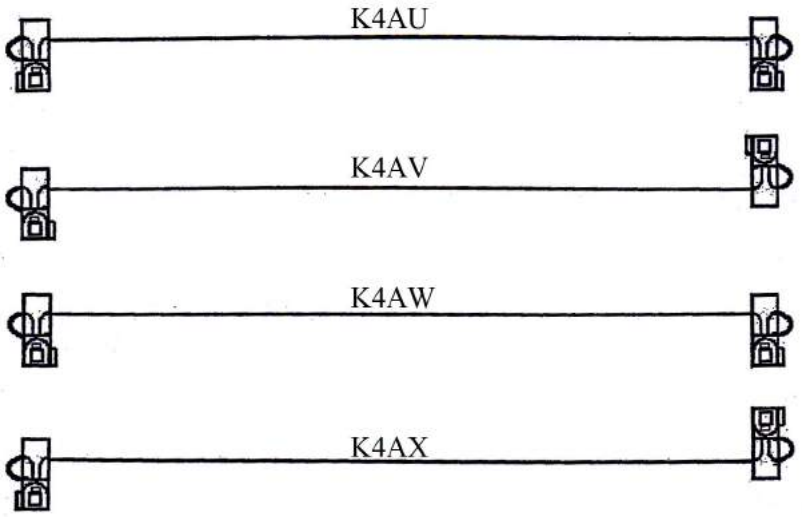

2.54MM PITCH IDC SOCKET WITH DUAL WIPE CONTACT & STRAIN RELIEF

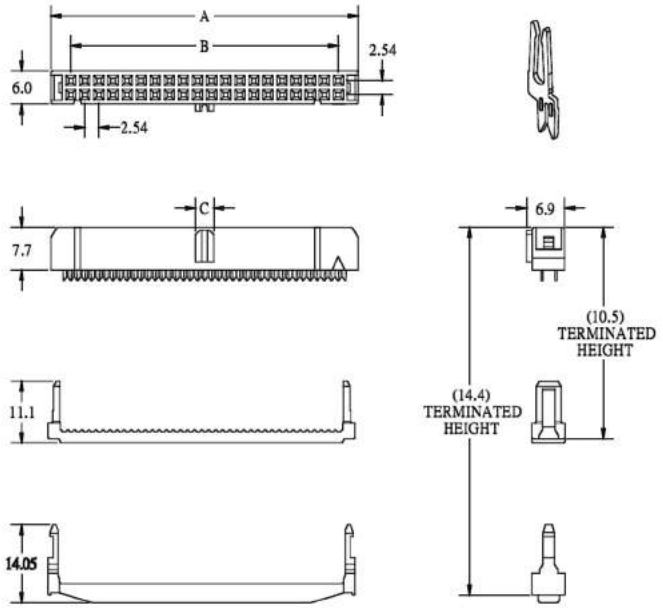

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
060, 064

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{x}}{4}$

1. CONSTRUCTION TYPE:
   4AU, 4AV, 4AW, 4AX
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (H=14.4MM) (C8)

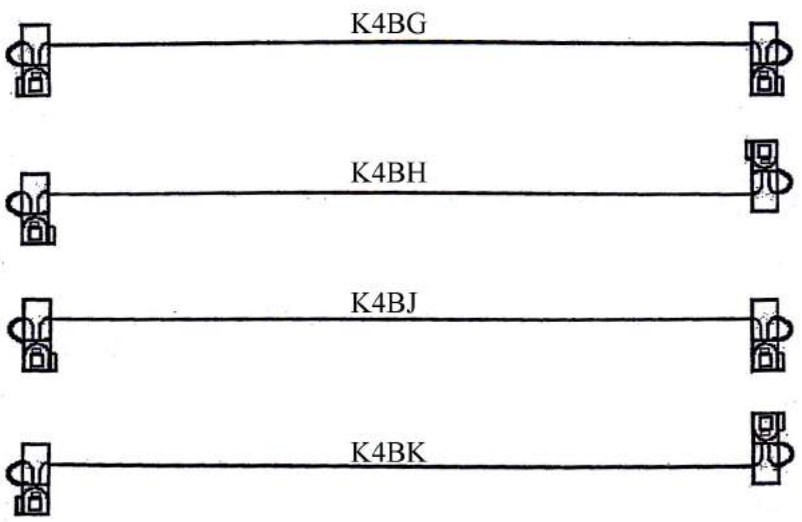

2.54MM PITCH IDC SOCKET WITH SLIM STRAIN RELIEF

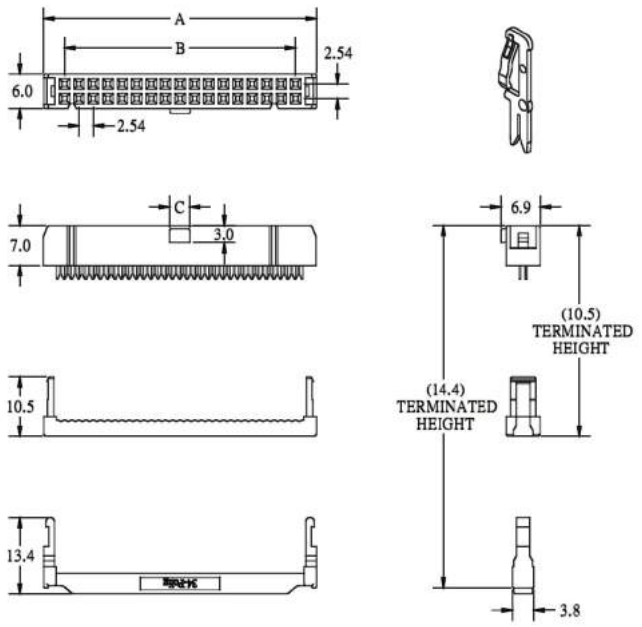

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012,
014, 016, 020, 024, 026,
030, 034, 036, 040, 044,
050, 056, 060, 062, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ x

1. CONSTRUCTION TYPE:
   4BG, 4BH, 4BJ, 4BK
2. NO. OF CONTACTS:
   004~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (H=17.0MM) (C9)

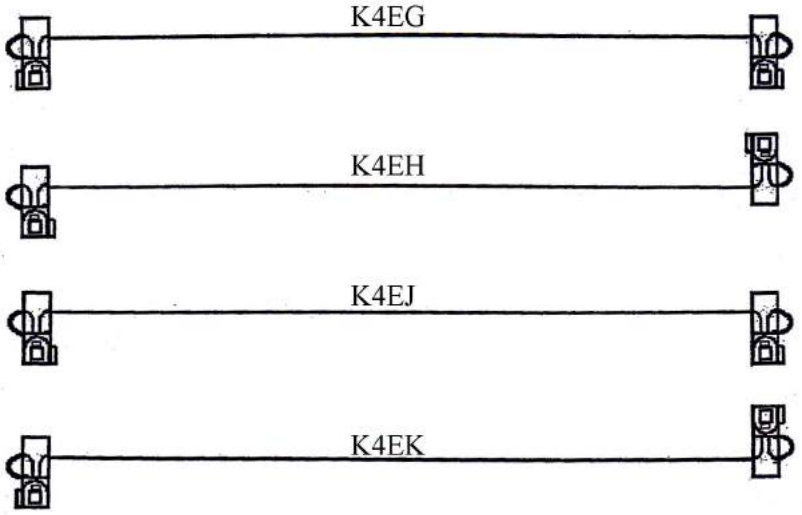

2.54MM PITCH IDC SOCKET WITH SPRING LATCH & STRAIN RELIEF

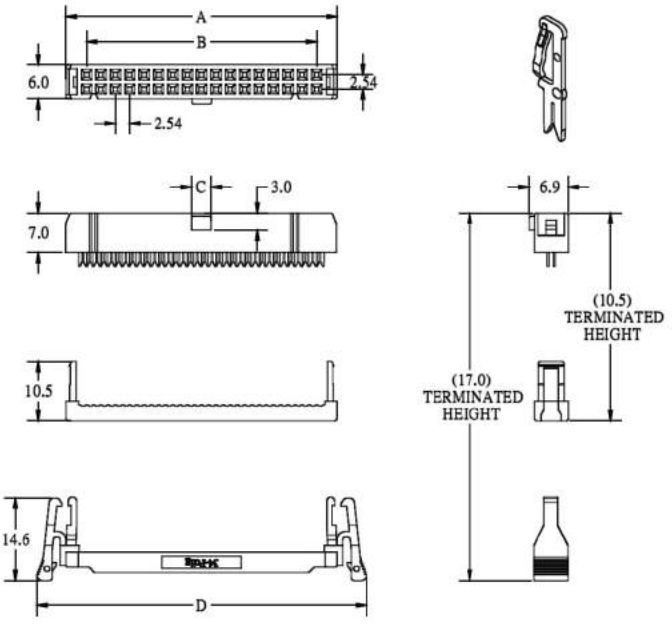

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
056, 060, 062, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4EG, 4EH, 4EJ, 4EK
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM IDC SOCKETS (H=14.4MM) (C10)

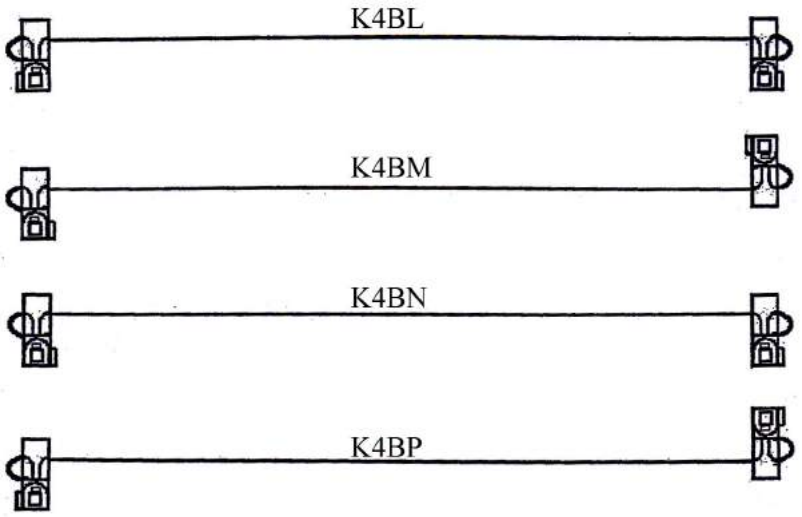

2.54MM PITCH IDC SOCKET WITH DUAL WIPE CONTACT & SLIM STRAIN RELIEF

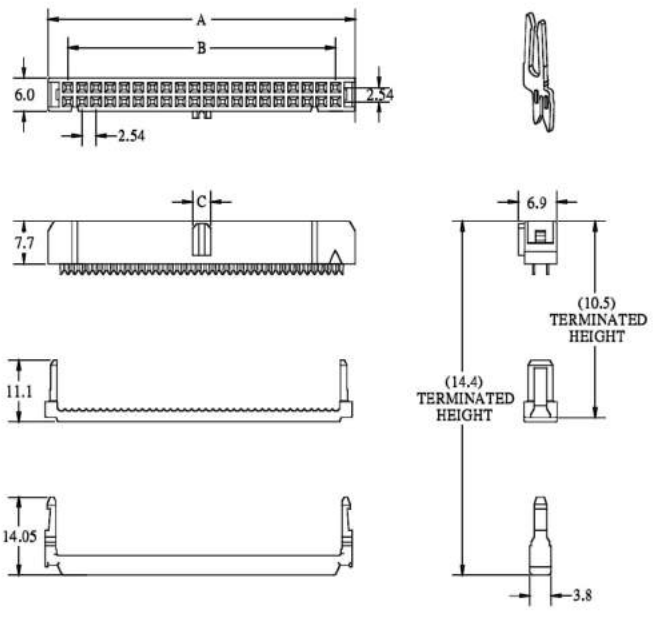

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
060, 064

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}\ \frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}\ \frac{x}{4}$

1. CONSTRUCTION TYPE:
   4BL, 4BM, 4BN, 4BP
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT NOSE WITH STRAIN RELIEFS (H=16.0MM) (D1)

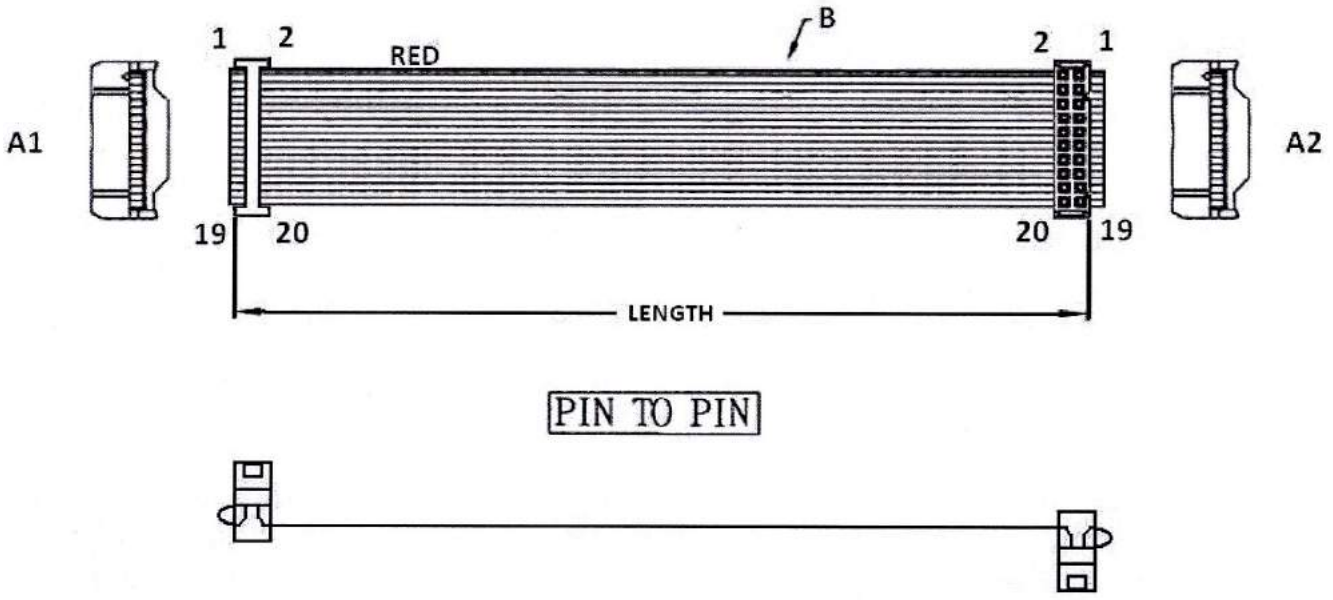


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{QQ}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "QQ" 2.54MM IDC SOCKET W/O NOSE WITH S.R. TO
   2.54MM IDC SOCKET W/O NOSE WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKETS WITHOUT NOSE WITH STRAIN RELIEFS (H=16.0MM) (D2)

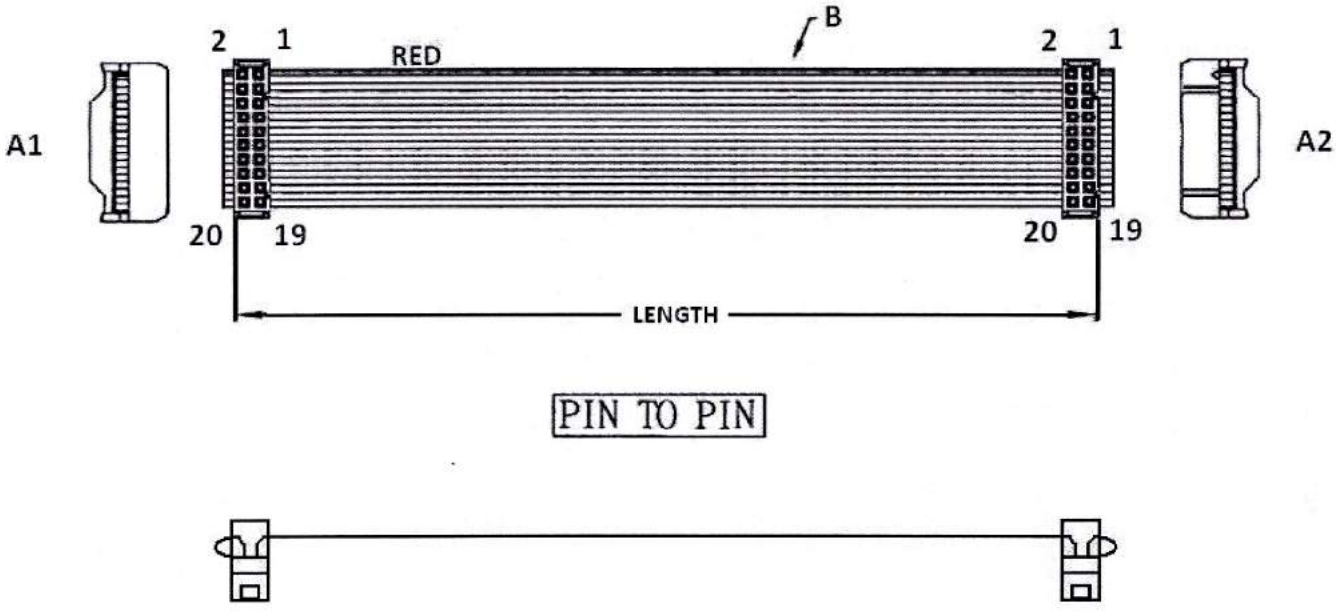

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{QR}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "QR" 2.54MM IDC SOCKET W/O NOSE WITH S.R. TO
   2.54MM IDC SOCKET W/O NOSE WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM PITCH IDC SOCKET WITHOUT NOSE WITH STRAIN RELIEFS (H=16.0MM) (D3)

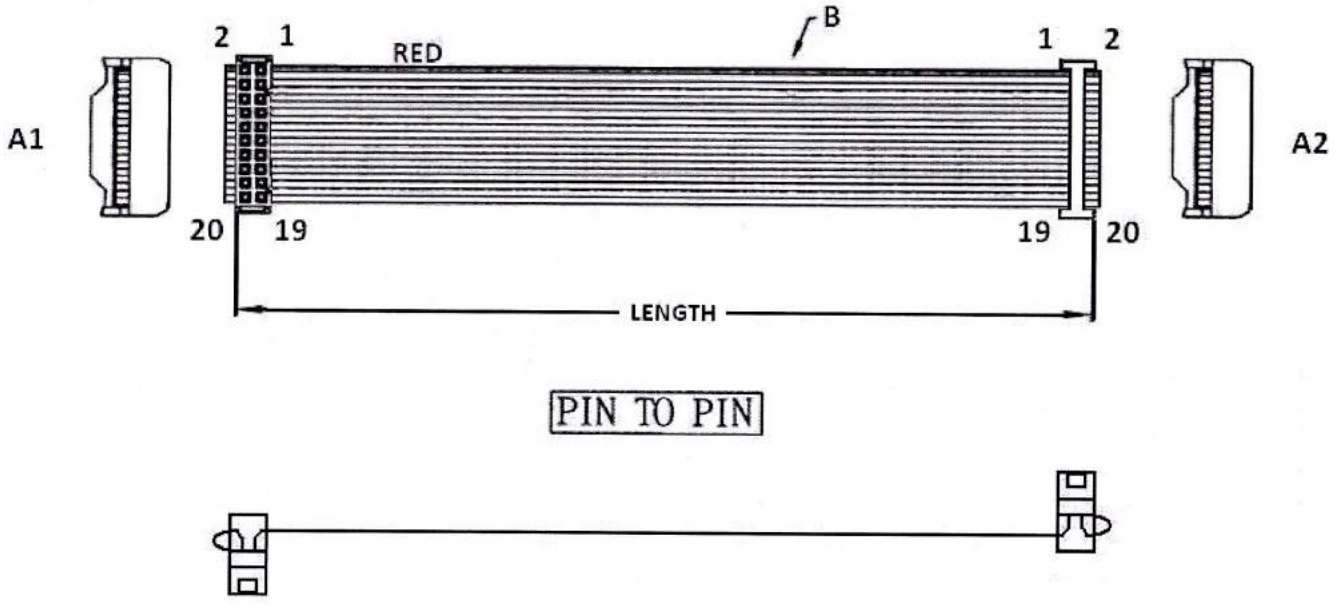


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{RR}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "RR" 2.54MM IDC SOCKET W/O NOSE WITH S.R. TO
   2.54MM IDC SOCKET W/O NOSE WITH S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO DIP PLUG (H=7.6MM) (E1)

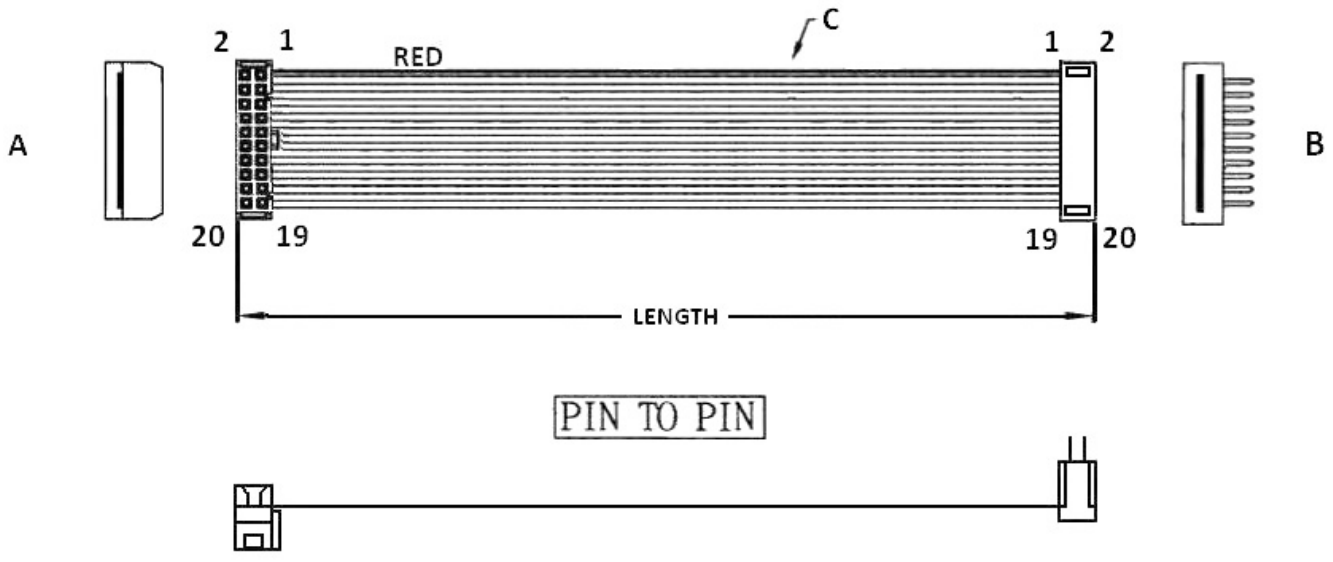


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{KD}{3}$ **-** $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KD" 2.54MM IDC SOCKET WITH NOSE WITHOUT S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO DIP PLUG (H=7.6MM) (E2)

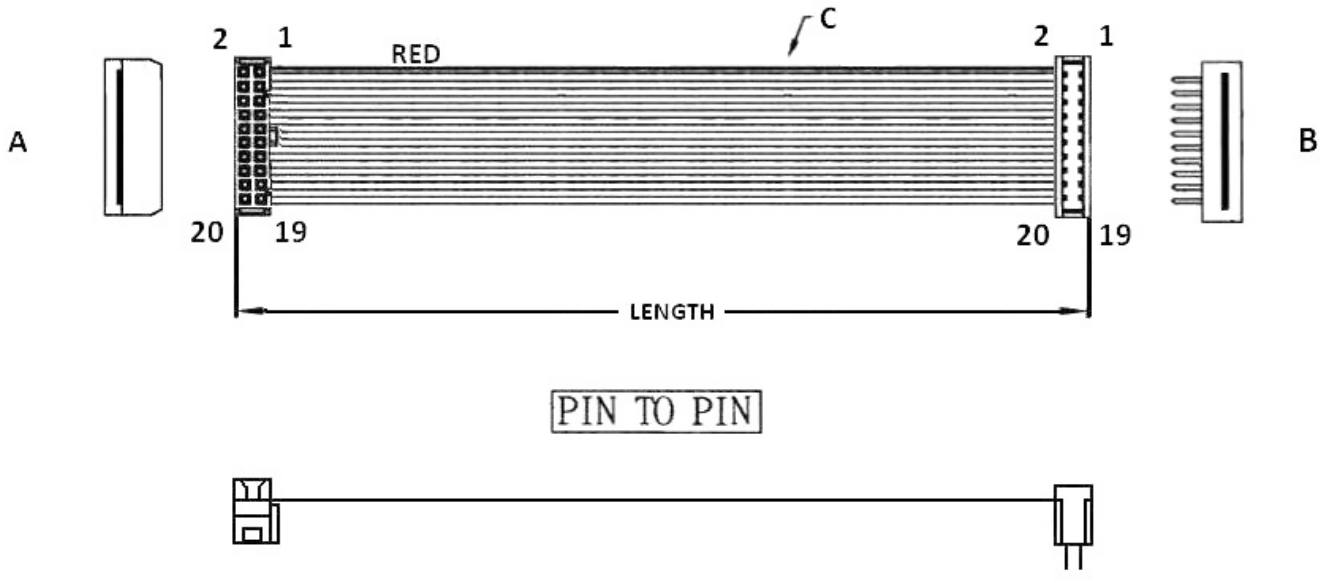


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KP}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KP" 2.54MM IDC SOCKET WITH NOSE WITHOUT S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO DIP PLUG (H=7.6MM) (E3)

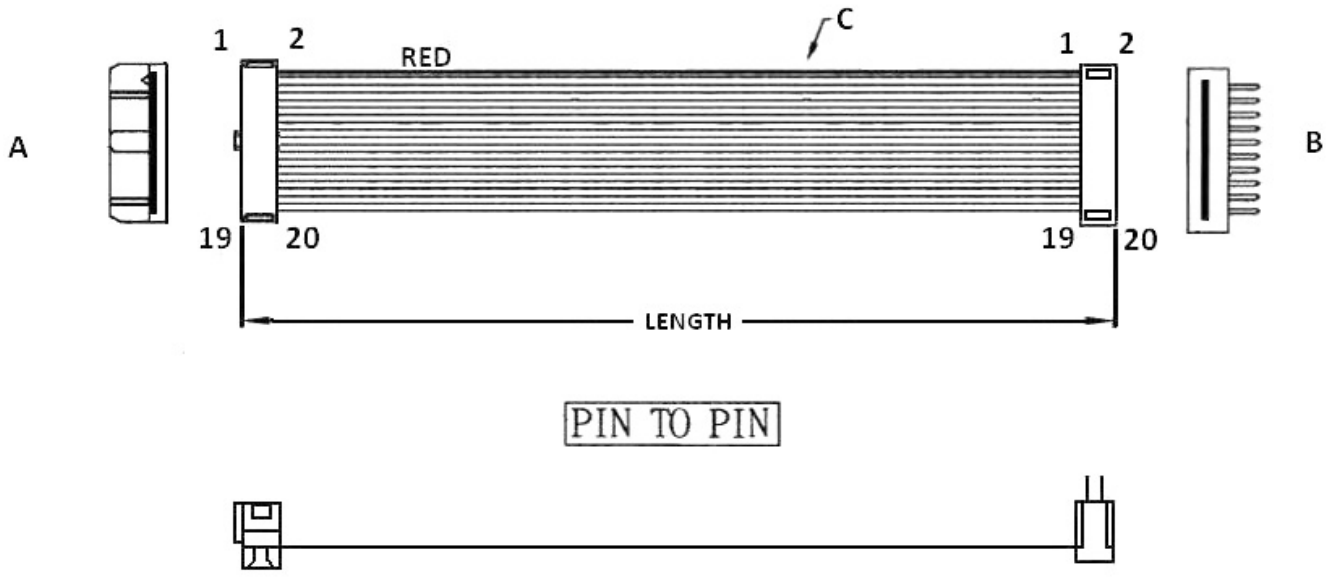


ORDERING INFORMATION:

P/N KA xx LD - xx C M x
(1) (2) (3) (4) (5)

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LD" 2.54MM IDC SOCKET WITH NOSE WITHOUT S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO DIP PLUG (H=7.6MM) (E4)

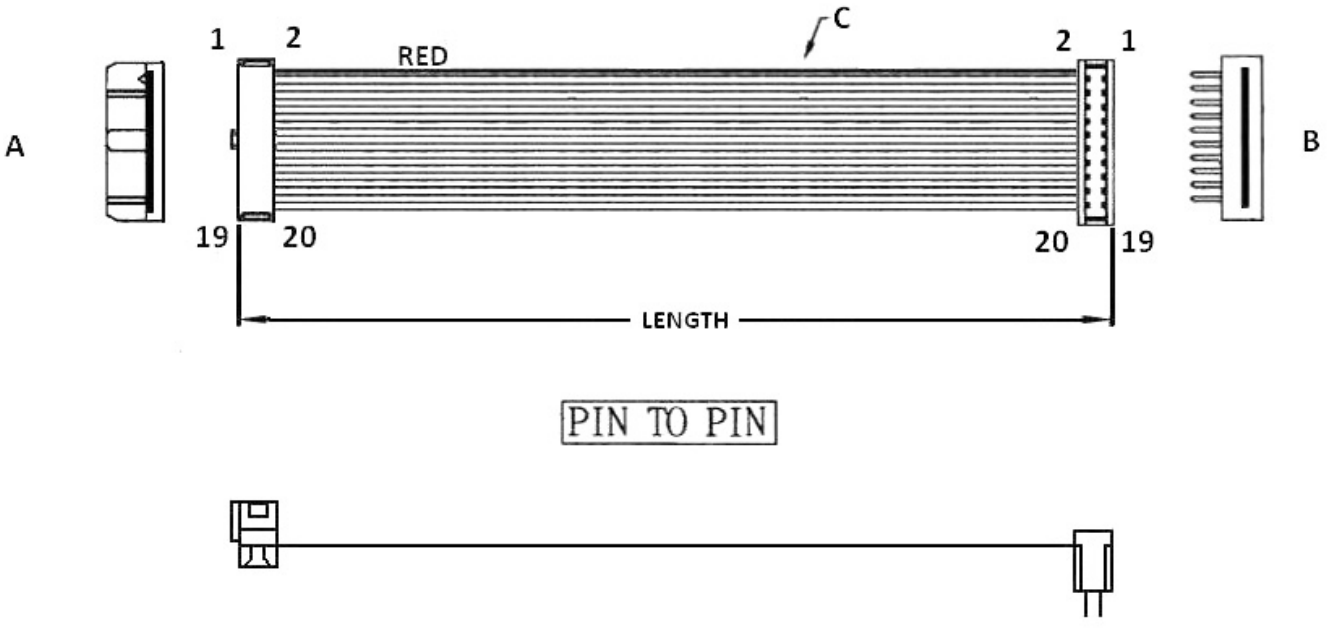

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{\text{K A}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{L P}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{x}}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LP" 2.54MM IDC SOCKET WITH NOSE WITHOUT S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=9.5MM) TO DIP PLUG (H=5.4MM) (E5)

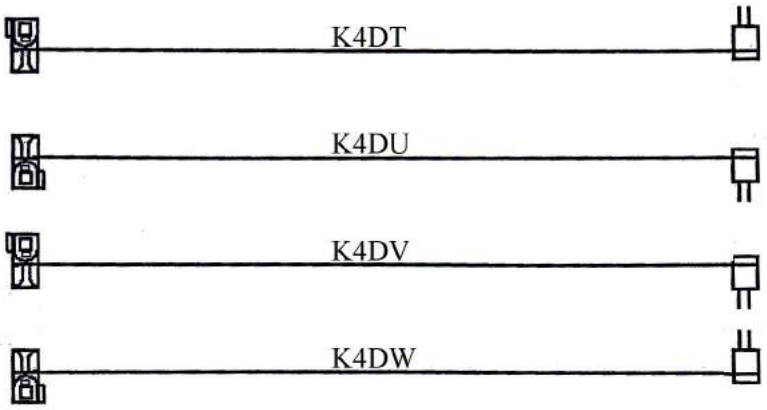


2.54MM LOW PROFILE IDC SOCKET
H=9.5MM

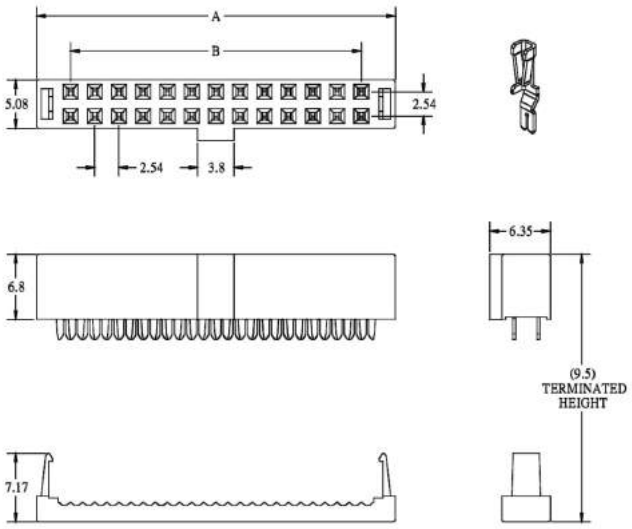

A=B+7.11
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM SUPER LOW PROFILE DIP PLUG
H=5.4MM

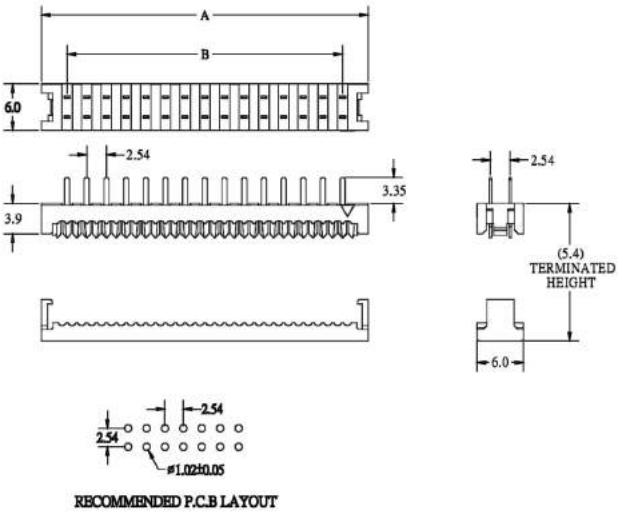

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4DT, 4DU, 4DV, 4DW
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET W/O S.R. (H=10.5MM) TO DIP PLUG (H=5.4MM) (E6)

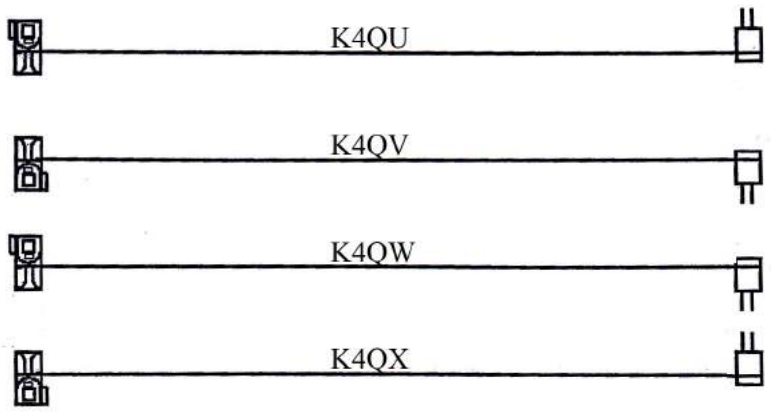


2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT

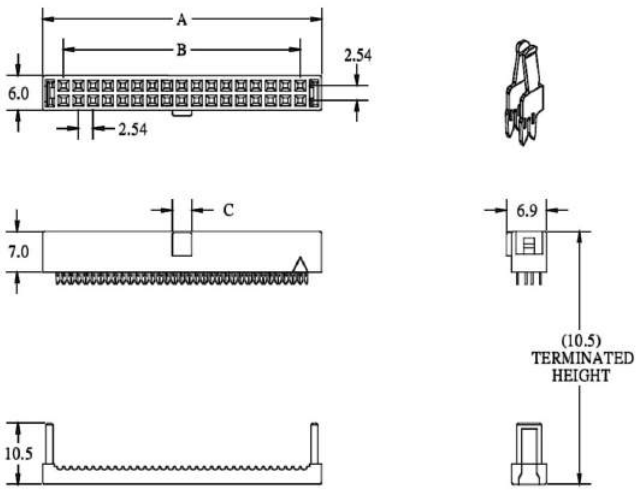

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM LOW PROFILE DIP PLUG

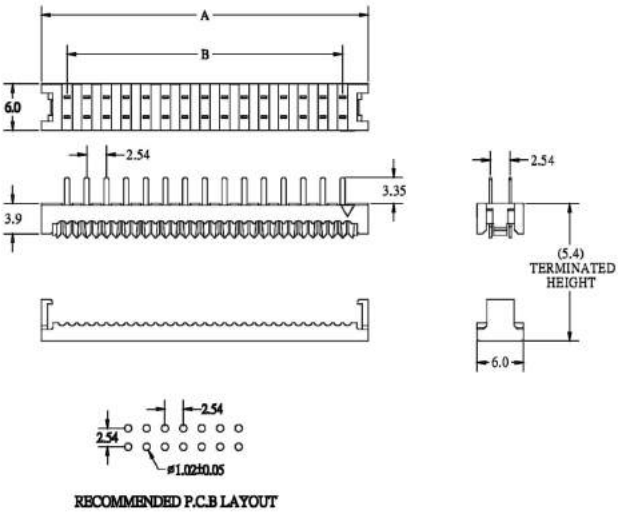

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4QU, 4QV, 4QW, 4QX
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=5.4MM) (E7)

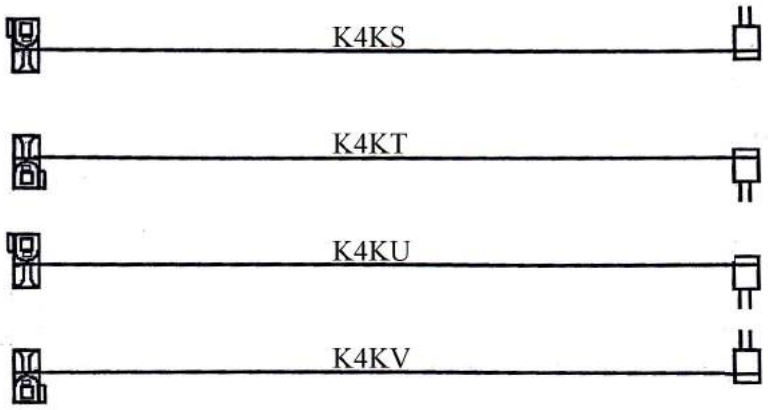


2.54MM IDC SOCKET WITH DUAL WIPE CONTACT & W/O STRAIN RELIEF

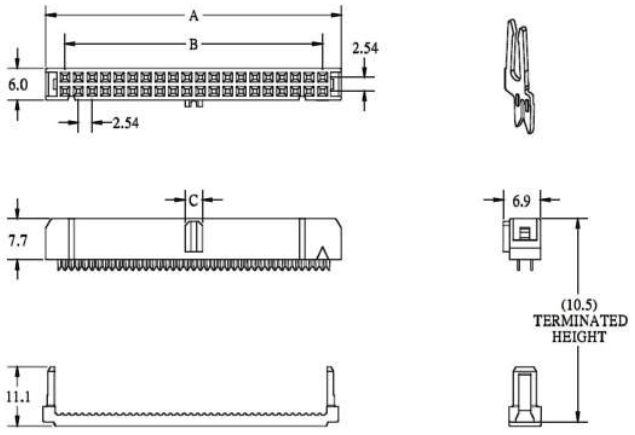

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 060, 064

2.54MM SUPER LOW PROFILE DIP PLUG H=5.4MM

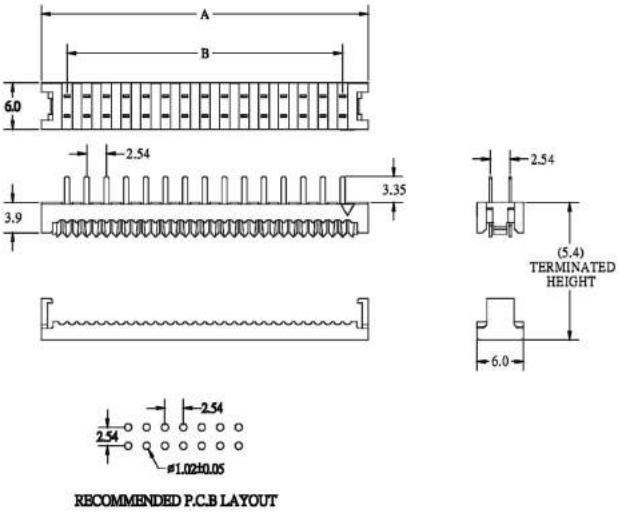

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ $\frac{x}{4}$

1. CONSTRUCTION TYPE:
   4KS, 4KT, 4KU, 4KV
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=5.4MM) (E8)

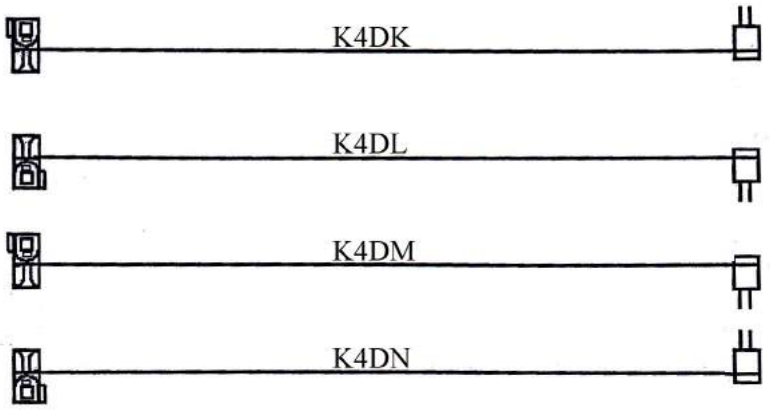


2.54MM IDC SOCKET W/O STRAIN RELIEF

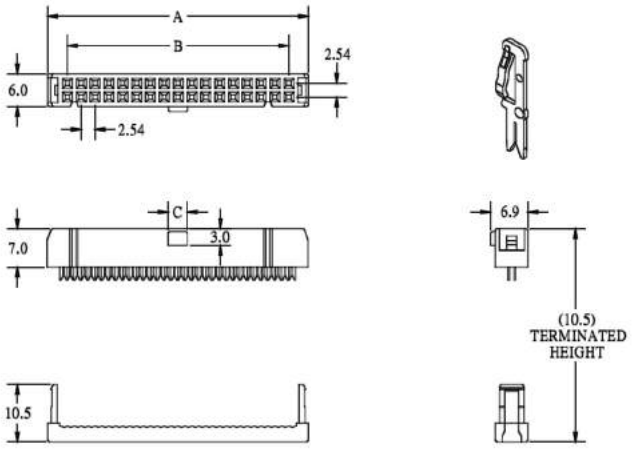

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM SUPER LOW PROFILE DIP PLUG H=5.4MM

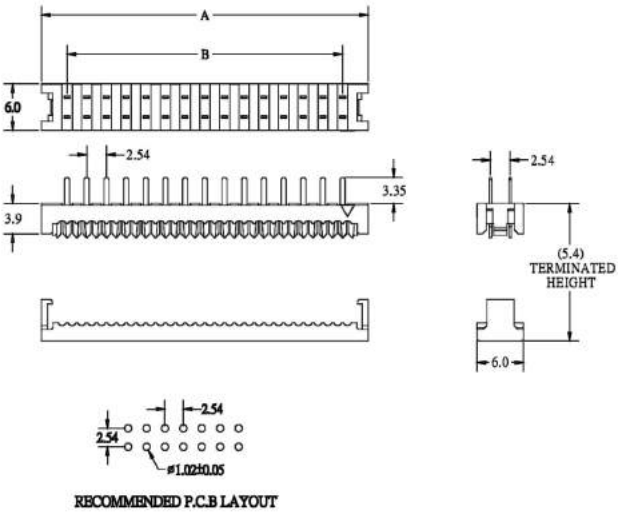

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ x

1. CONSTRUCTION TYPE:
   4DK, 4DL, 4DM, 4DN
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=9.5MM) TO DIP PLUG (H=6.0MM) (E9)

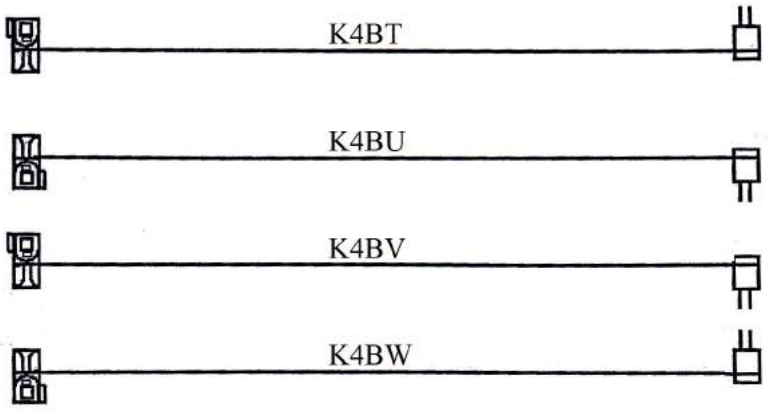


2.54MM LOW PROFILE IDC SOCKET H=9.5MM

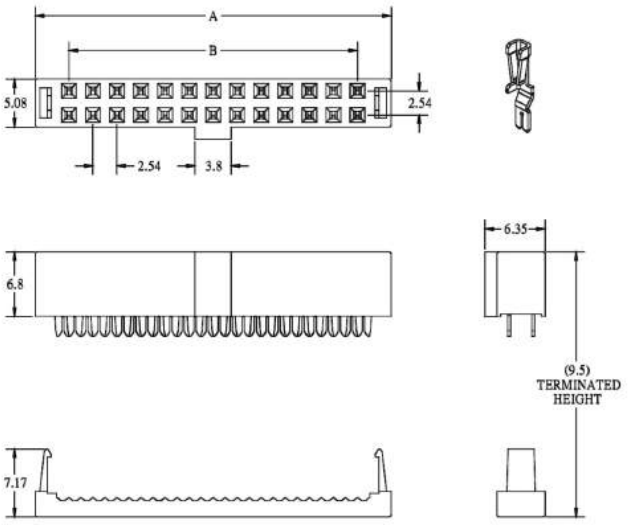

A=B+7.11
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM PITCH DIP PLUG H=6.0MM

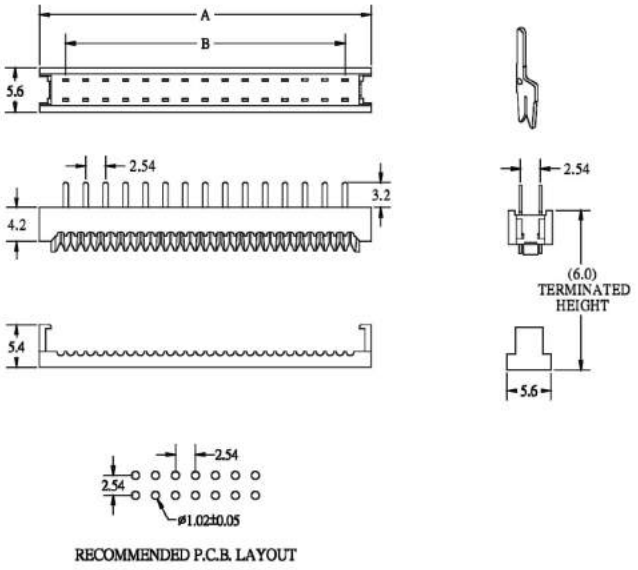

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4BT, 4BU, 4BV, 4BW
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=9.5MM) TO DIP PLUG (H=6.0MM) (E10)

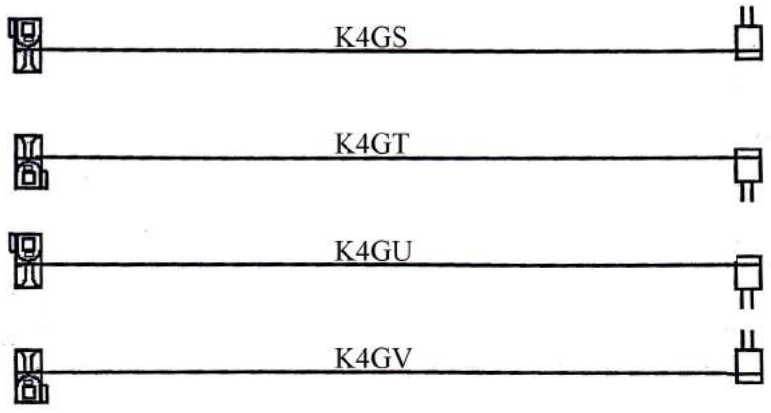


2.54MM LOW PROFILE IDC SOCKET W/O STRAIN RELIEF

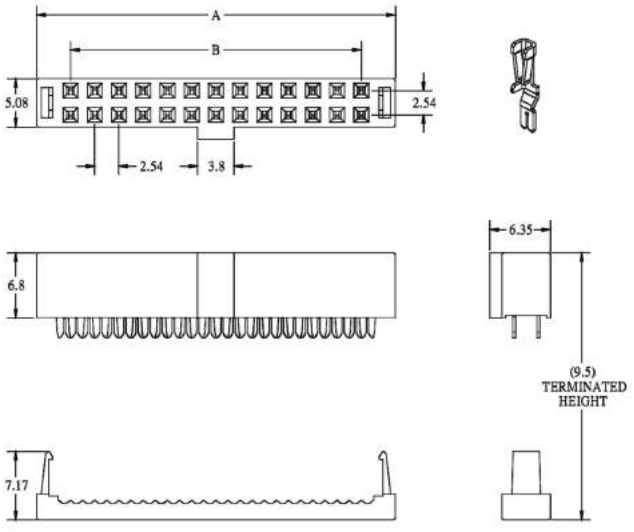

A=B+7.11
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=6.0MM

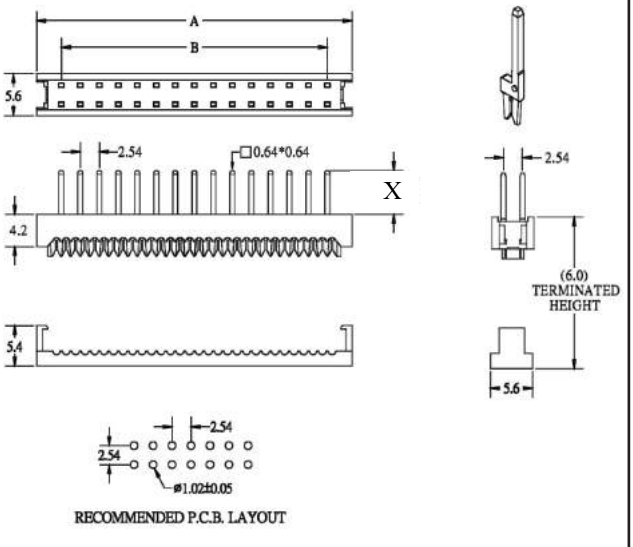

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4GS, 4GT, 4GU, 4GV
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=6.0MM) (E11)

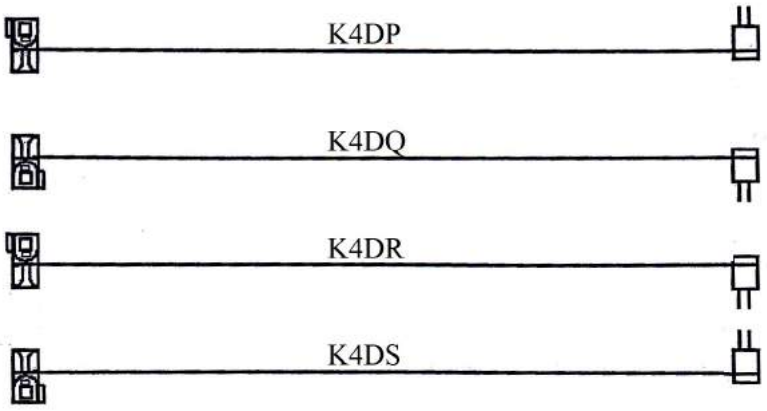


2.54MM IDC SOCKET W/O STRAIN RELIEF

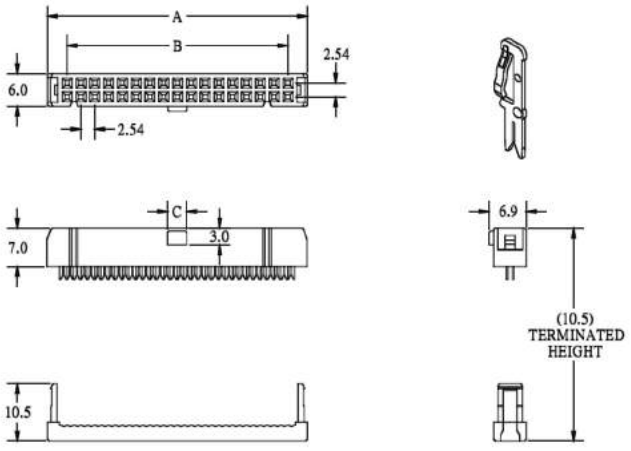

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM PITCH DIP PLUG H=6.0MM

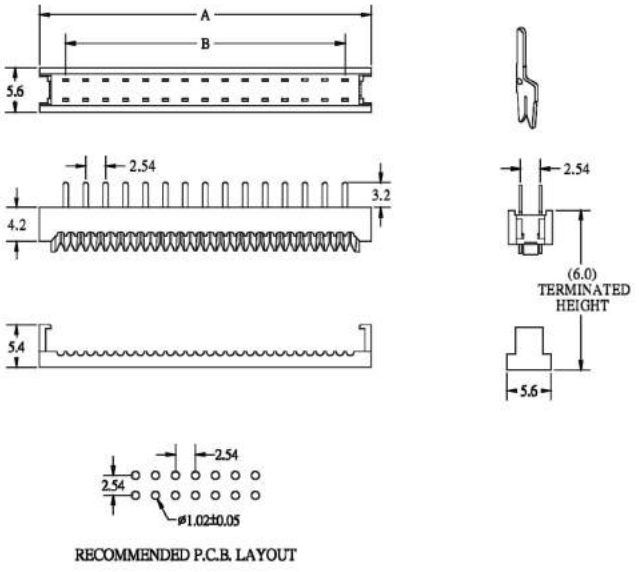

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M x
1 2 3 4

1. CONSTRUCTION TYPE:
   4DP, 4DQ, 4DR, 4DS
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=6.0MM) (E12)

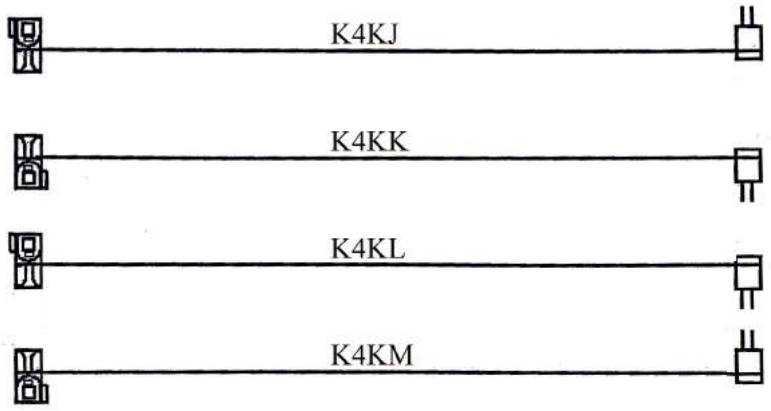


2.54MM IDC SOCKET WITH DUAL WIPE CONTACT & W/O STRAIN RELIEF

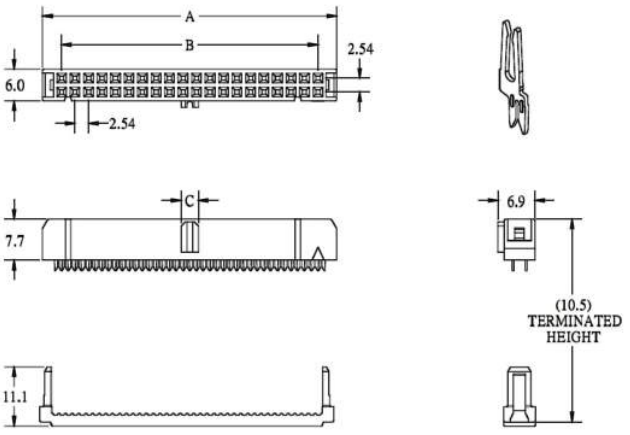

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 060, 064

2.54MM PITCH DIP PLUG H=6.0MM

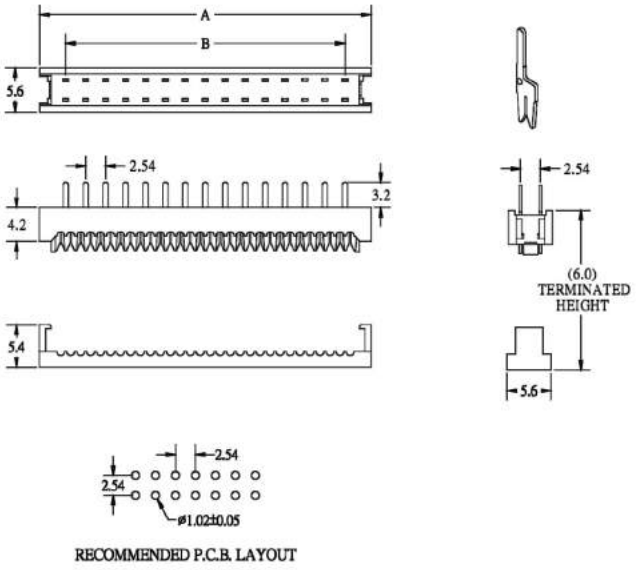

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4KJ, 4KK, 4KL, 4KM
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET W/O S.R. (H=10.5MM) TO DIP PLUG (H=6.0MM) (E13)

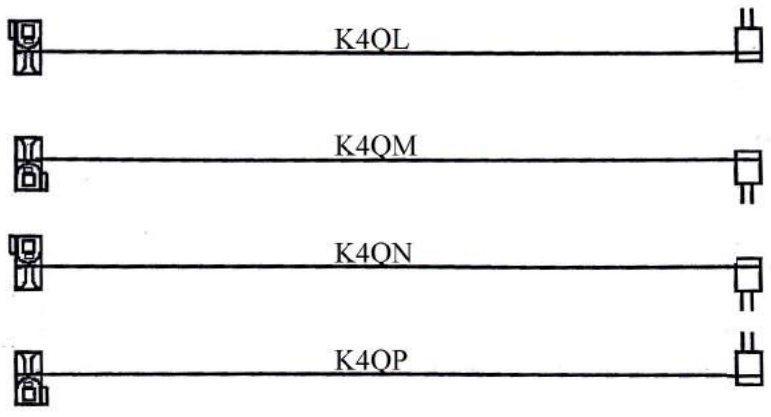


2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT

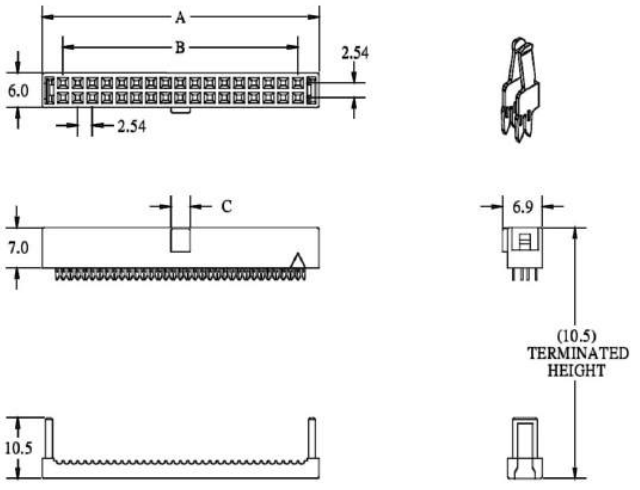

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM PITCH DIP PLUG H=6.0MM

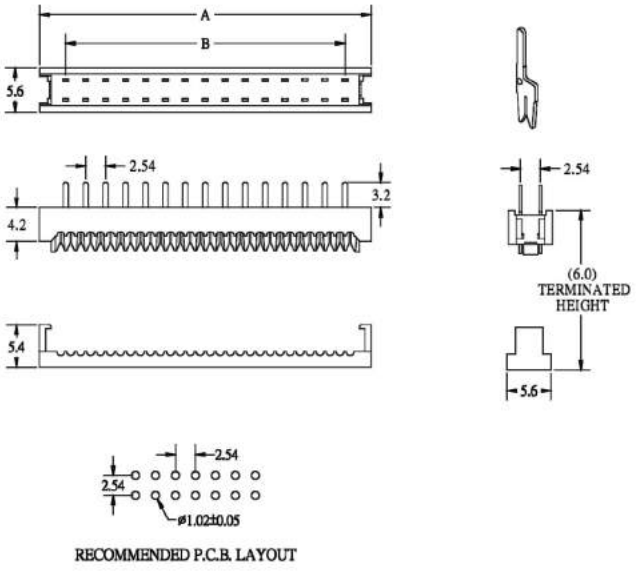

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4QL, 4QM, 4QN, 4QP
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET W/O S.R. (H=10.5MM) TO DIP PLUG (H=6.0MM) (E14)

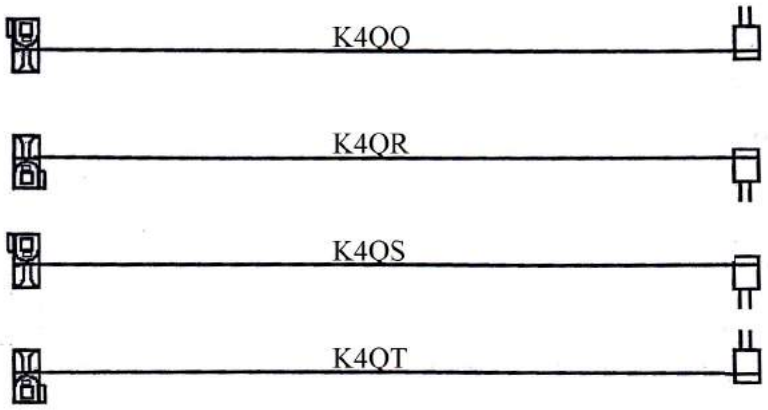


2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT

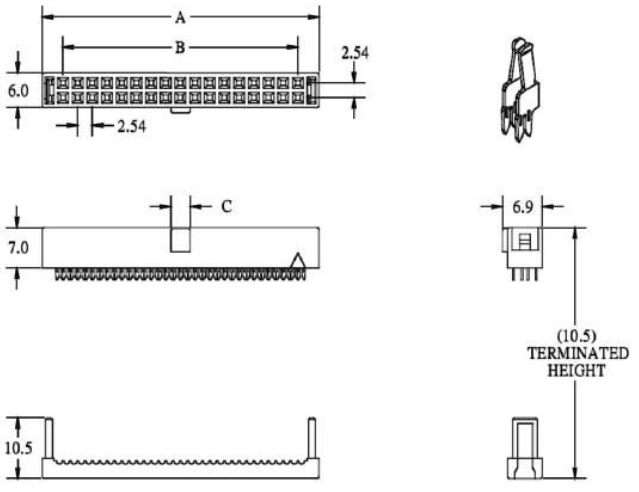

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE SOLDER TAIL

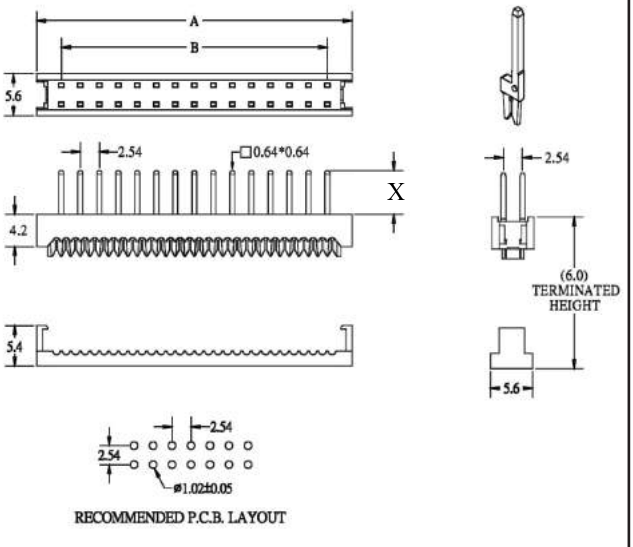

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4QQ, 4QR, 4QS, 4QT
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=6.0MM) (E15)

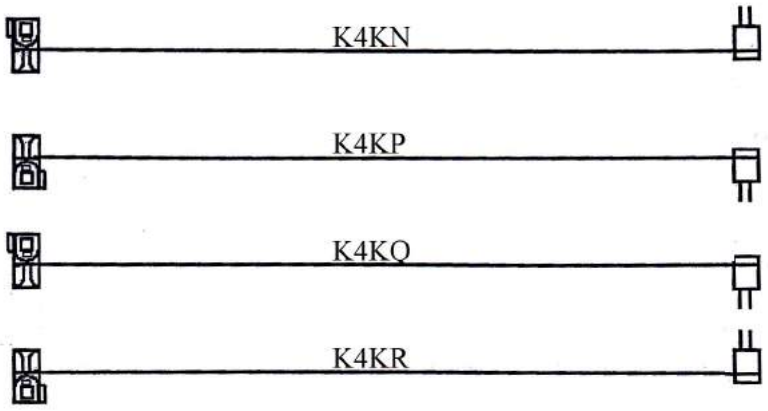


2.54MM IDC SOCKET WITH DUAL WIPE CONTACT & W/O STRAIN RELIEF

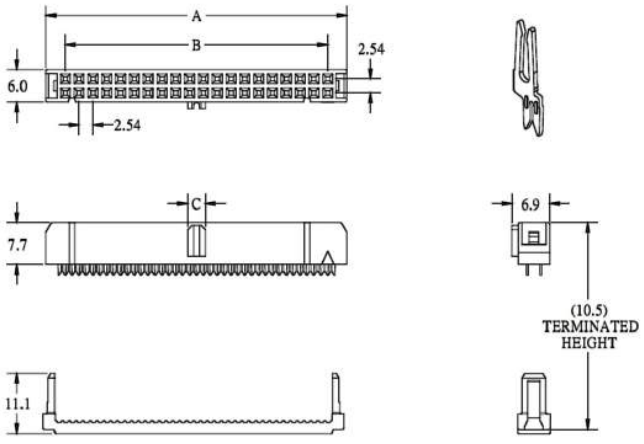

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=6.0MM

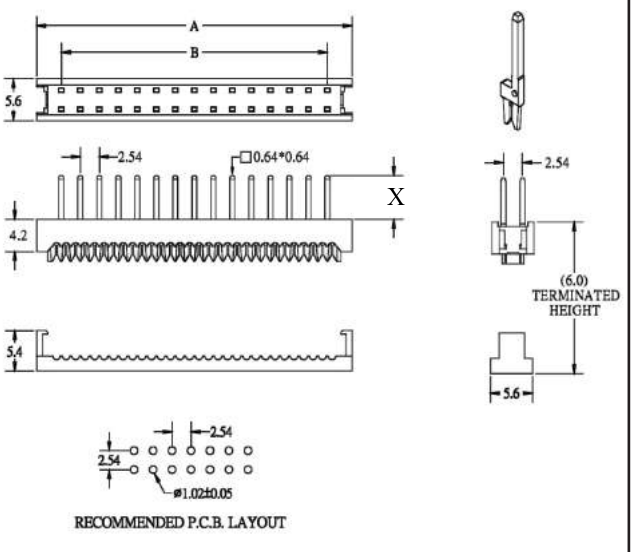

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4KN, 4KP, 4KQ, 4KR
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=6.0MM) (E16)

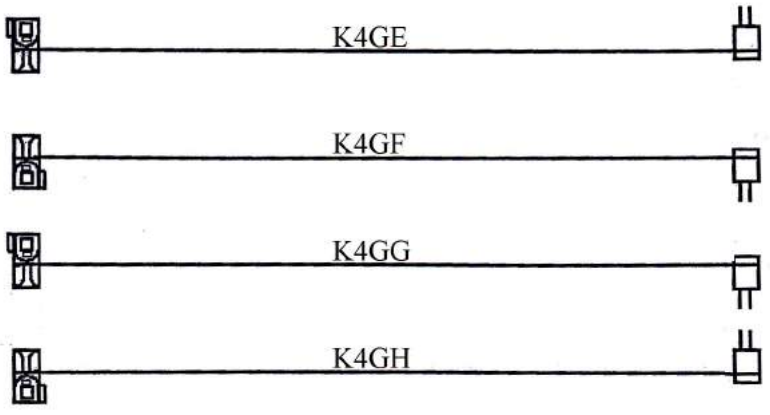


2.54MM IDC SOCKET W/O STRAIN RELIEF

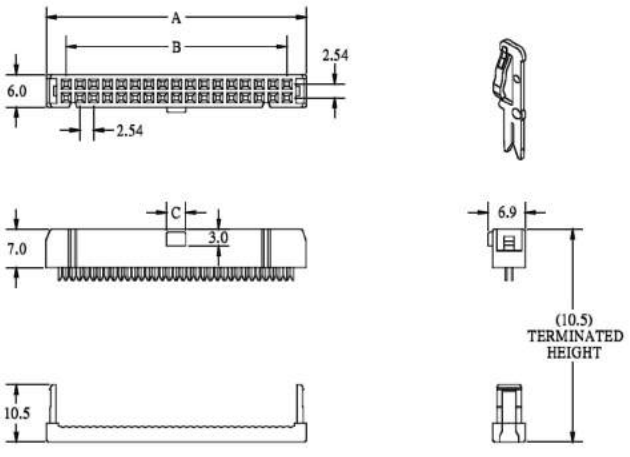

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=6.0MM

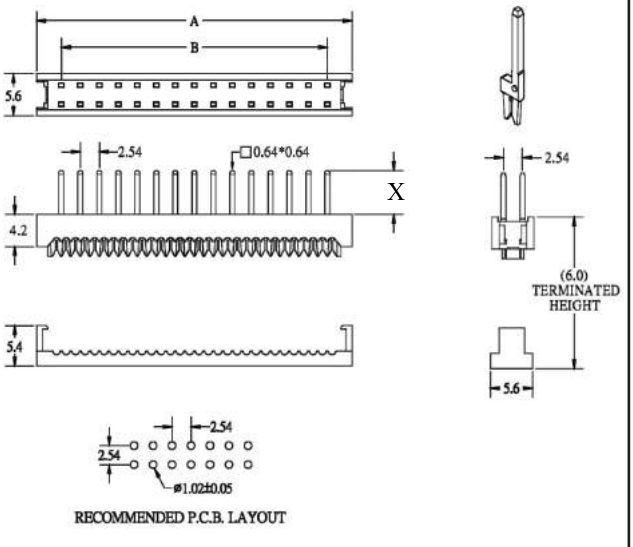

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4GE, 4GF, 4GG, 4GH
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM SHRUNK IDC SOCKET (H=11.4MM) TO SHRUNK DIP PLUG (H=6.1MM) (E17)

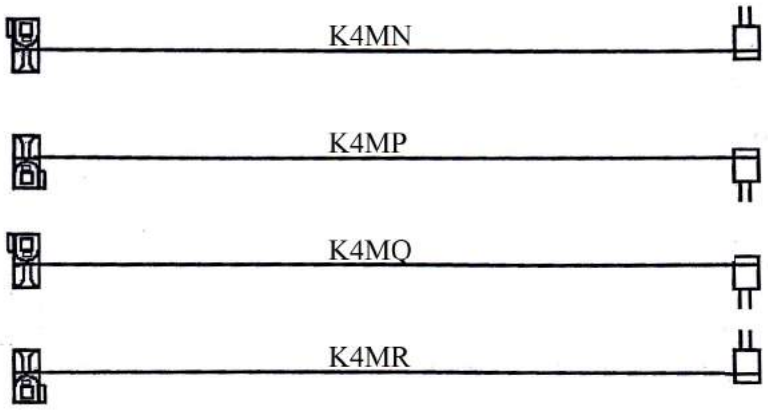


2.54MM SHRUNK IDC SOCKET

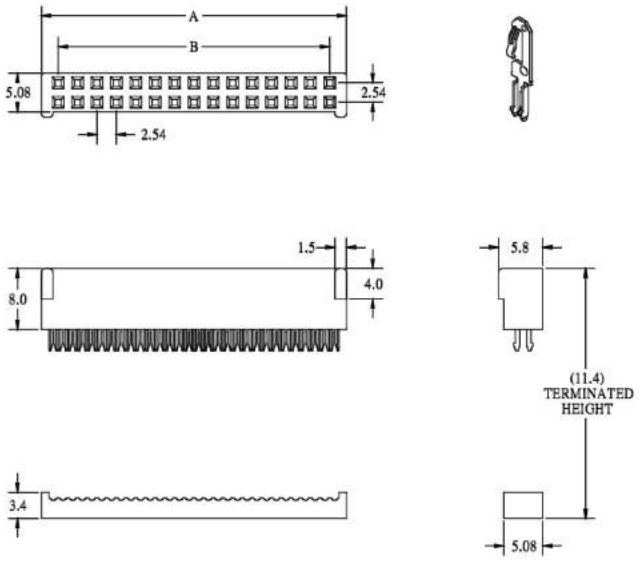

A=B+4.40
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM SHRUNK DIP PLUG

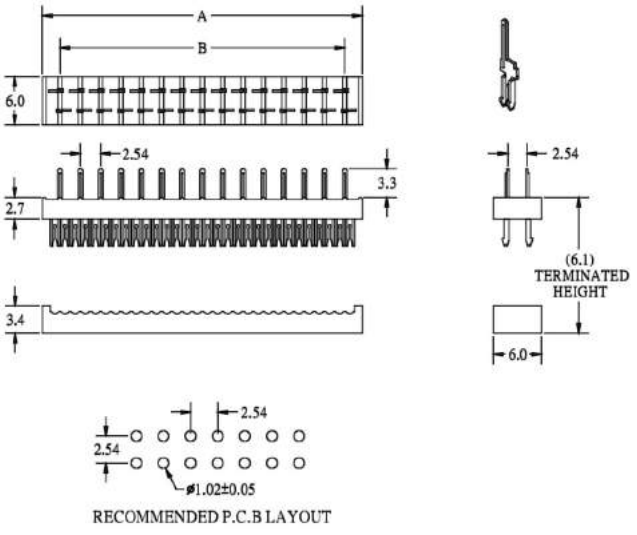

A=B+4.40
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 028, 030, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4MN, 4MP, 4MQ, 4MR
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=9.5MM) TO DIP PLUG (H=7.85MM) (E18)

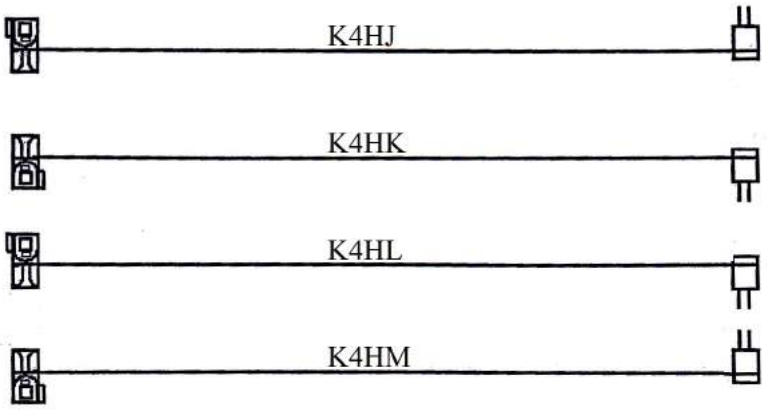


2.54MM LOW PROFILE IDC SOCKET W/O STRAIN RELIEF H=9.5MM

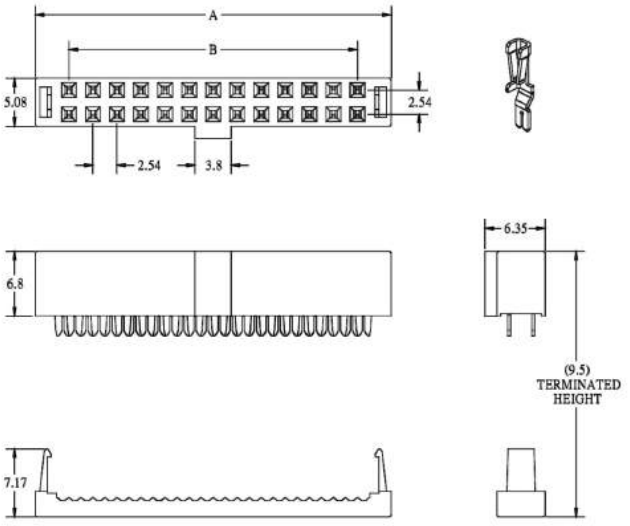

A=B+7.11
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=7.85MM

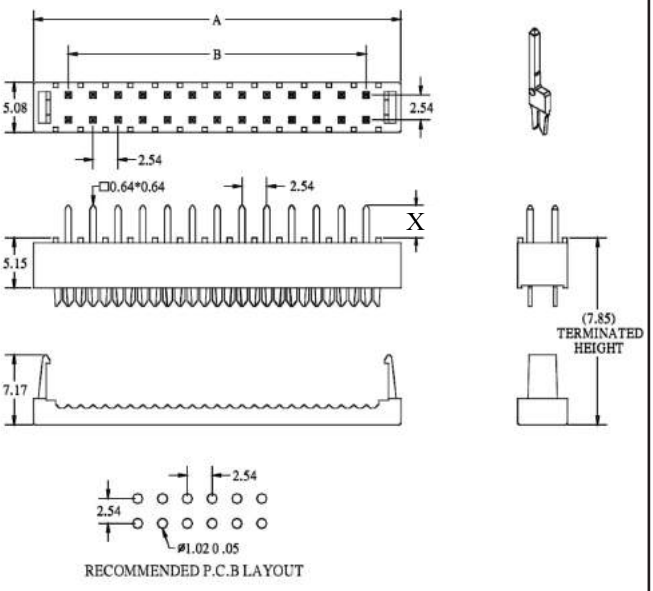

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{}\frac{B}{4}\frac{x}{5}$

1. CONSTRUCTION TYPE:
   4HJ, 4HK, 4HL, 4HM
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET W/O S.R. (H=10.5MM) TO DIP PLUG (H=7.85MM) (E19)

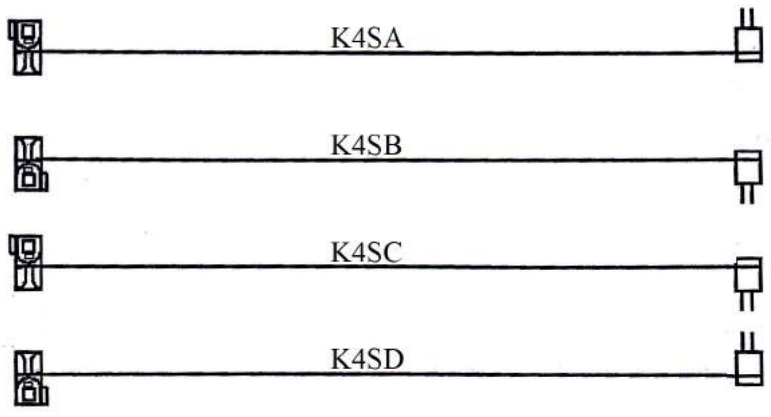


2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT

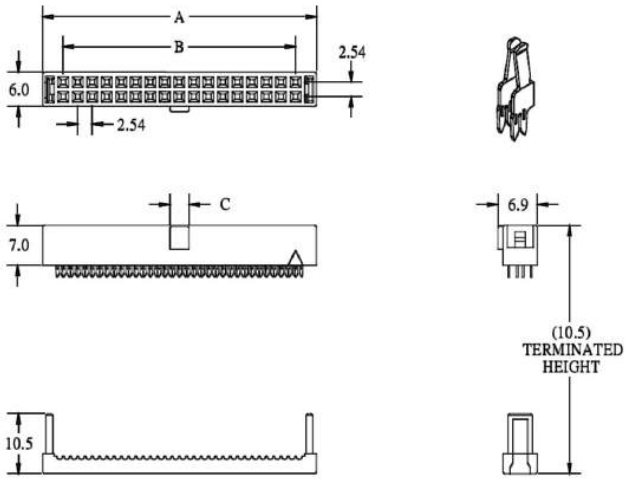

A=B+
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE SOLDER TAIL

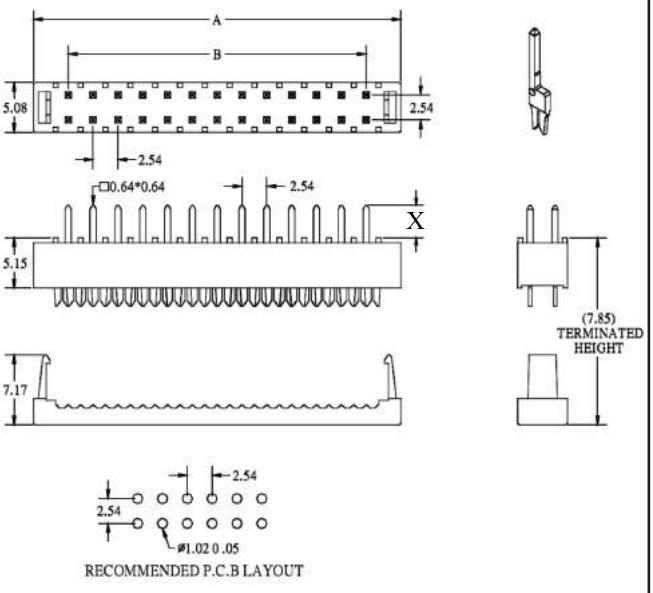

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4SA, 4SB, 4SC, 4SD
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM) TO DIP PLUG (H=7.85MM) (E20)

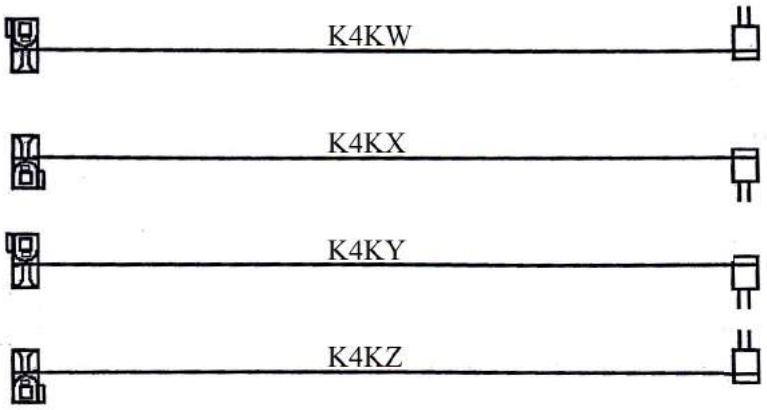


2.54MM IDC SOCKET WITH DUAL WIPE CONTACT & W/O STRAIN RELIEF

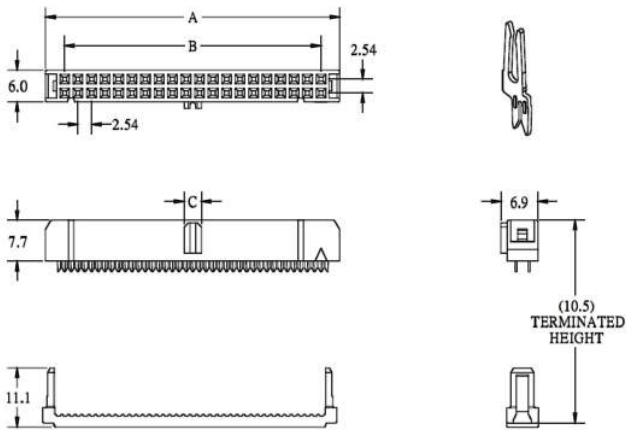

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=7.85MM

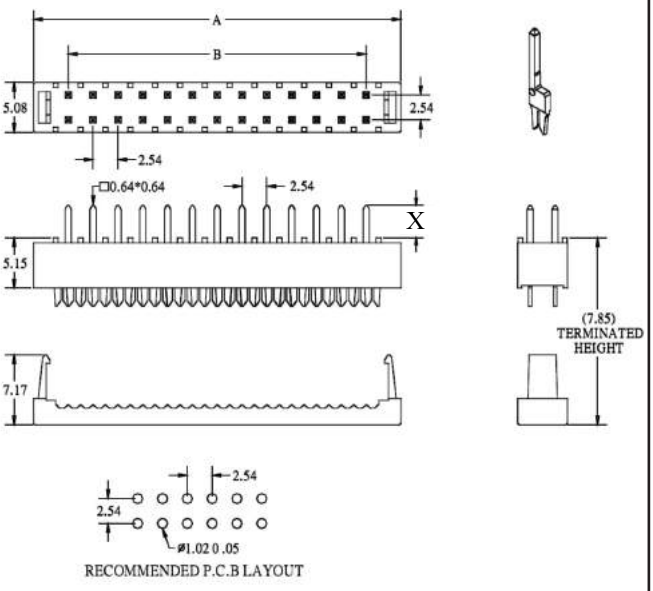

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4KW, 4KX, 4KY, 4KZ
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=1.05MM) TO DIP PLUG (H=7.85MM) (E21)

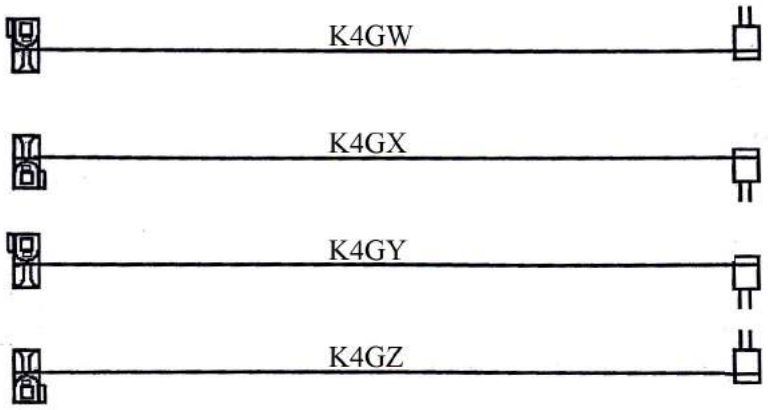


2.54MM IDC SOCKET W/O STRAIN RELIEF

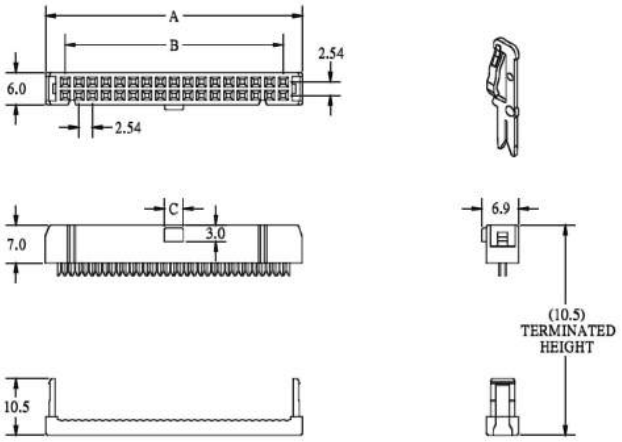

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=7.85MM

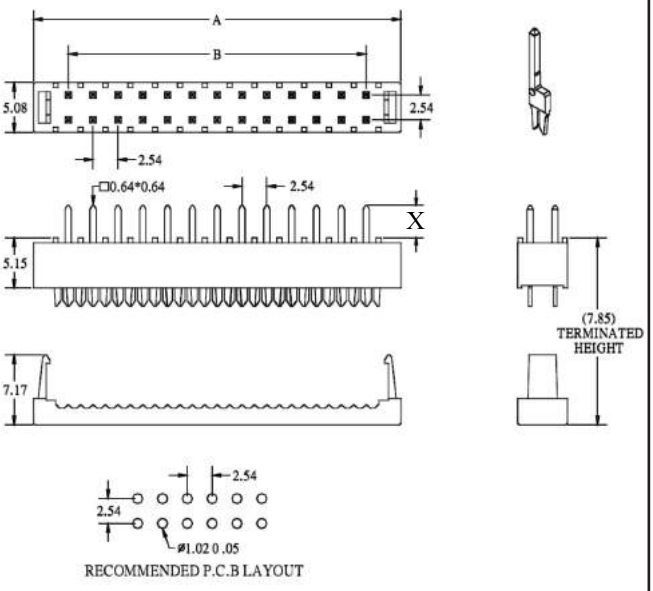

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4GW, 4GX, 4GY, 4GZ
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET W/O NOSE (H=11.0MM) TO DIP PLUG (H=7.6MM) (F1)

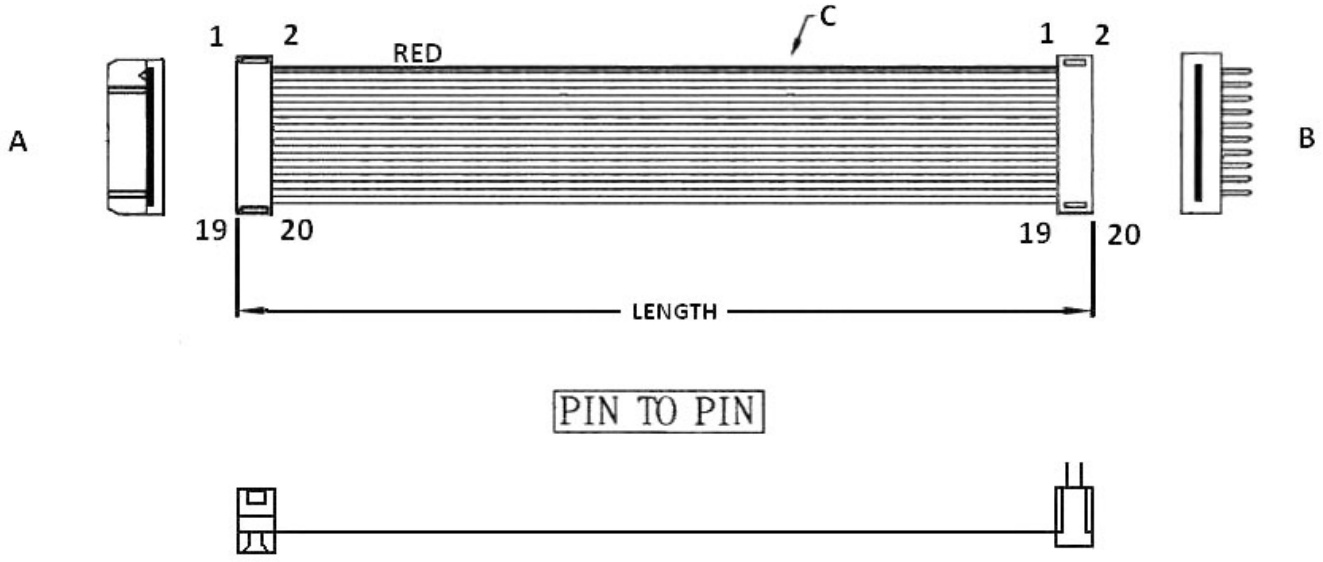

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{AD}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AD" 2.54MM IDC SOCKET W/O NOSE & W/O S.R.
   TO DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET W/O NOSE (H=11.0MM) TO DIP PLUG (H=7.6MM) (F2)

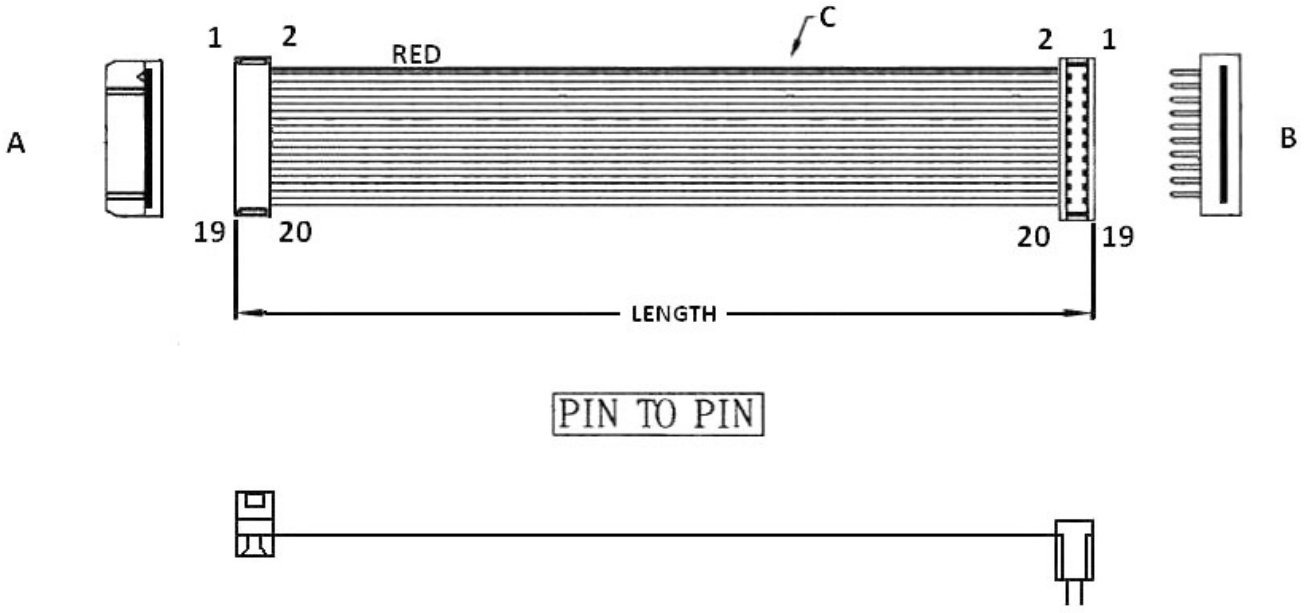

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{AP}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AP" 2.54MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET W/O NOSE (H=11.0MM) TO DIP PLUG (H=7.6MM) (F3)

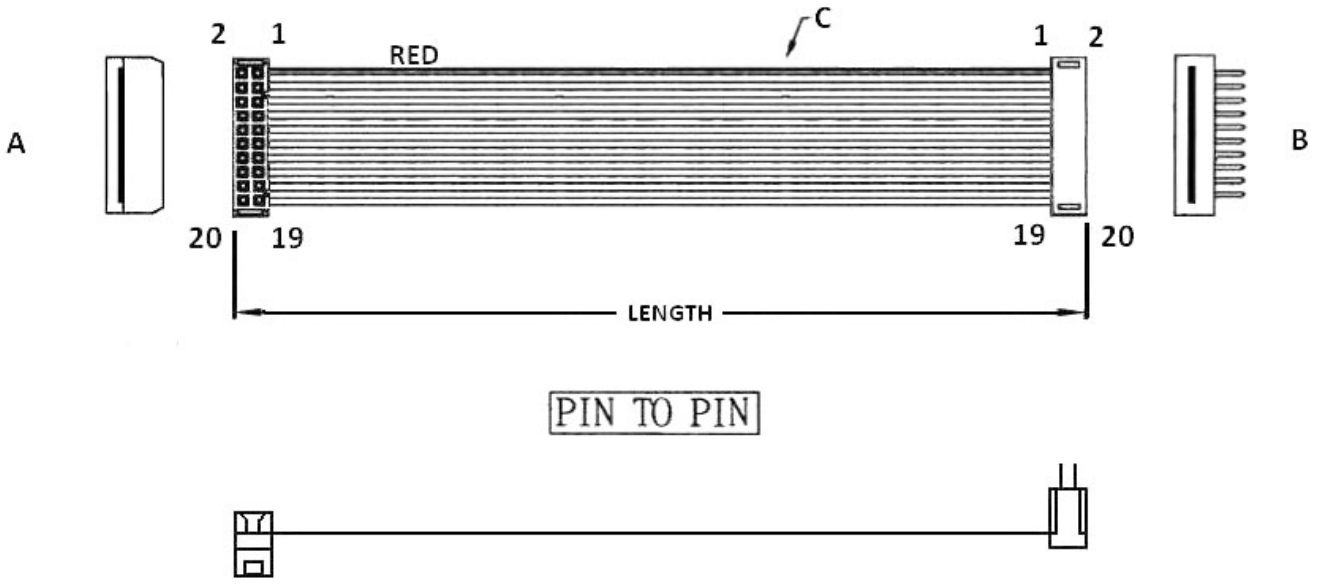

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VD}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "VD" 2.54MM IDC SOCKET W/O NOSE & W/O S.R.
   TO DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET W/O NOSE (H=11.0MM) TO DIP PLUG (H=7.6MM) (F4)

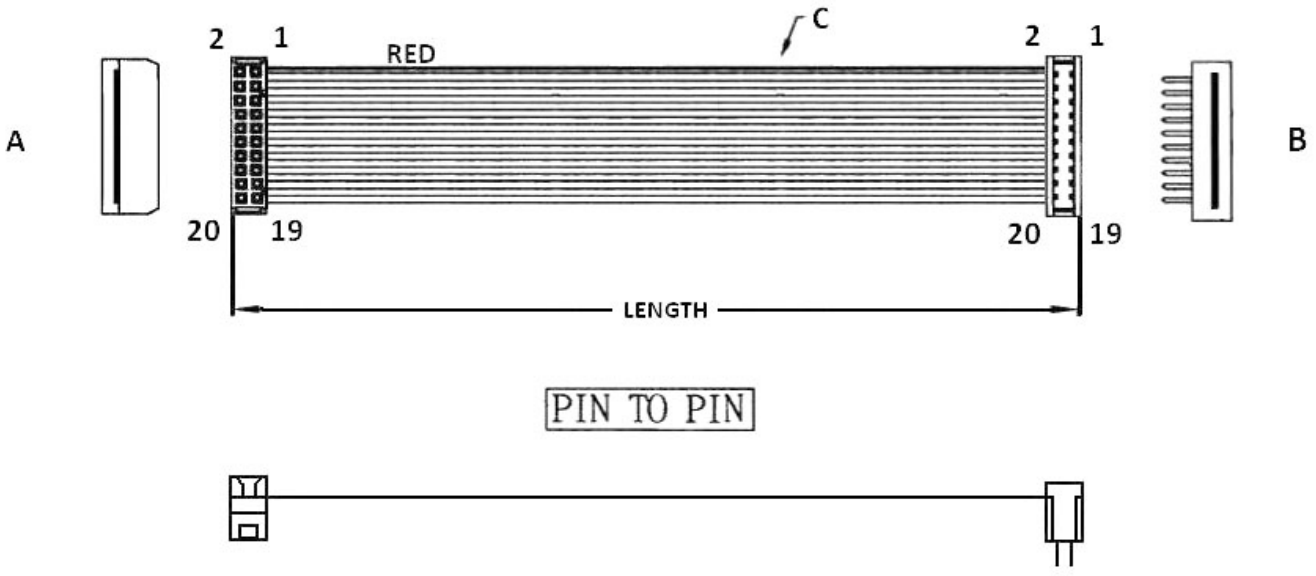


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VP}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "VP" 2.54MM IDC SOCKET W/O NOSE & W/O S.R.
   TO 2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM SHRUNK LOW PROFILE IDC SOCKET W/O NOSE (H=9.3MM) TO SHRUNK DIP PLUG (H=6.1MM) (F5)

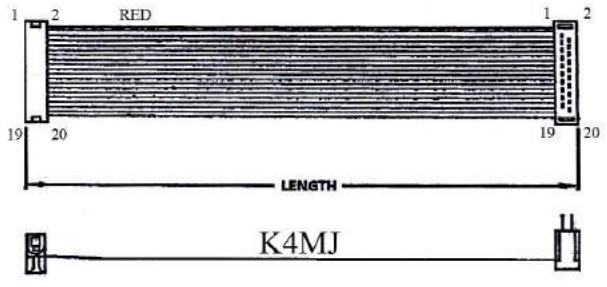


K4MJ

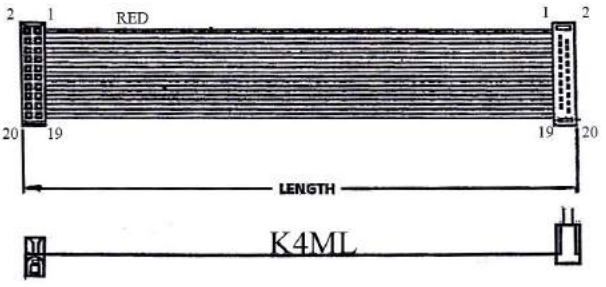

K4ML

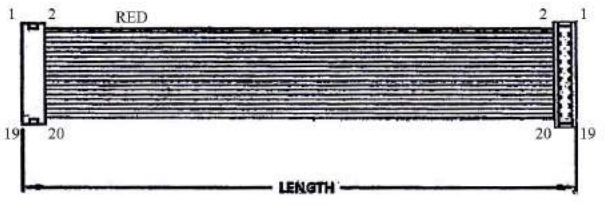

K4MK

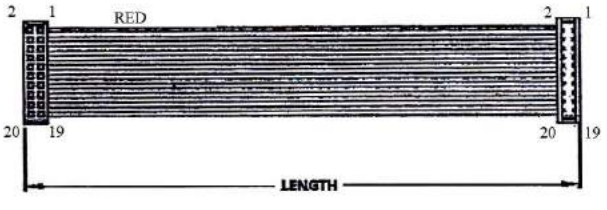

K4MM


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   4MJ, 4MK, 4ML, 4MM
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO DIP PLUG (H=7.6MM) (G1)

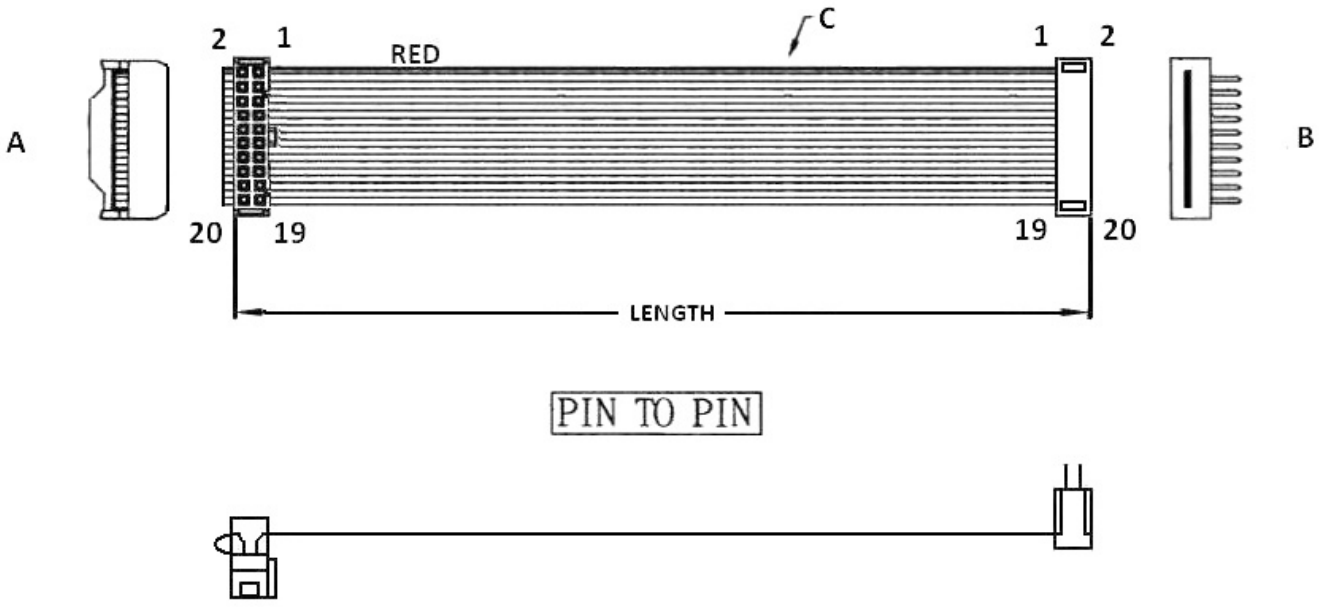

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MD}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MD" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO DIP PLUG (H=7.6MM) (G2)

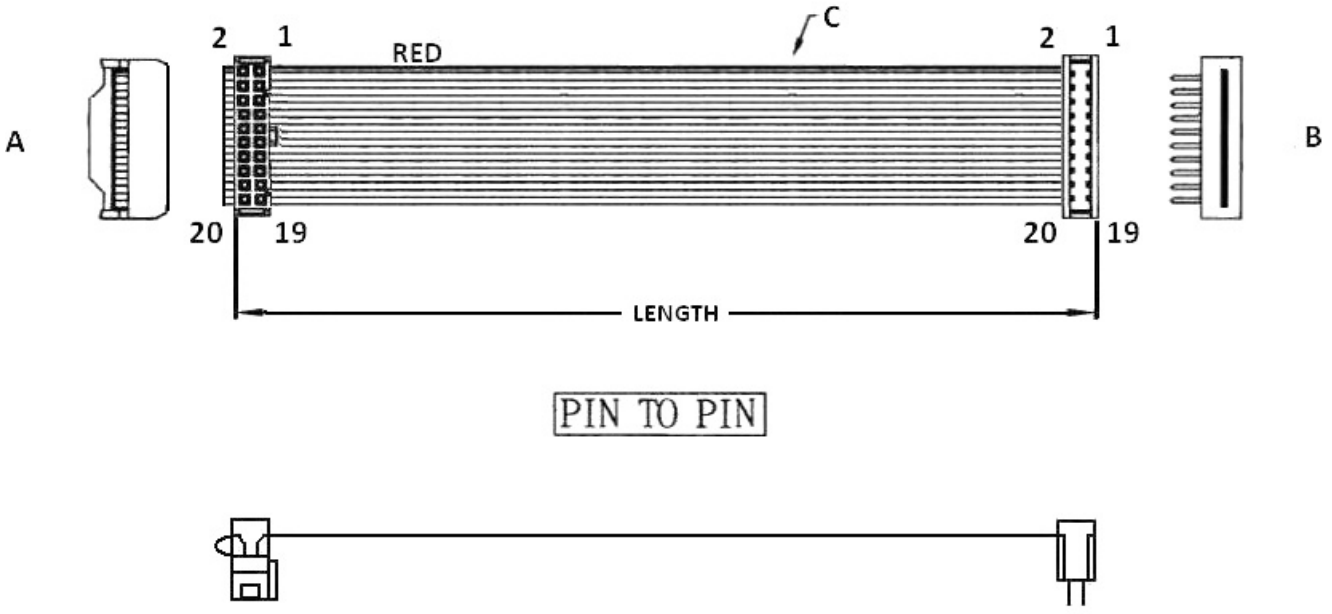

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MP}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MP" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO DIP PLUG (H=7.6MM) (G3)

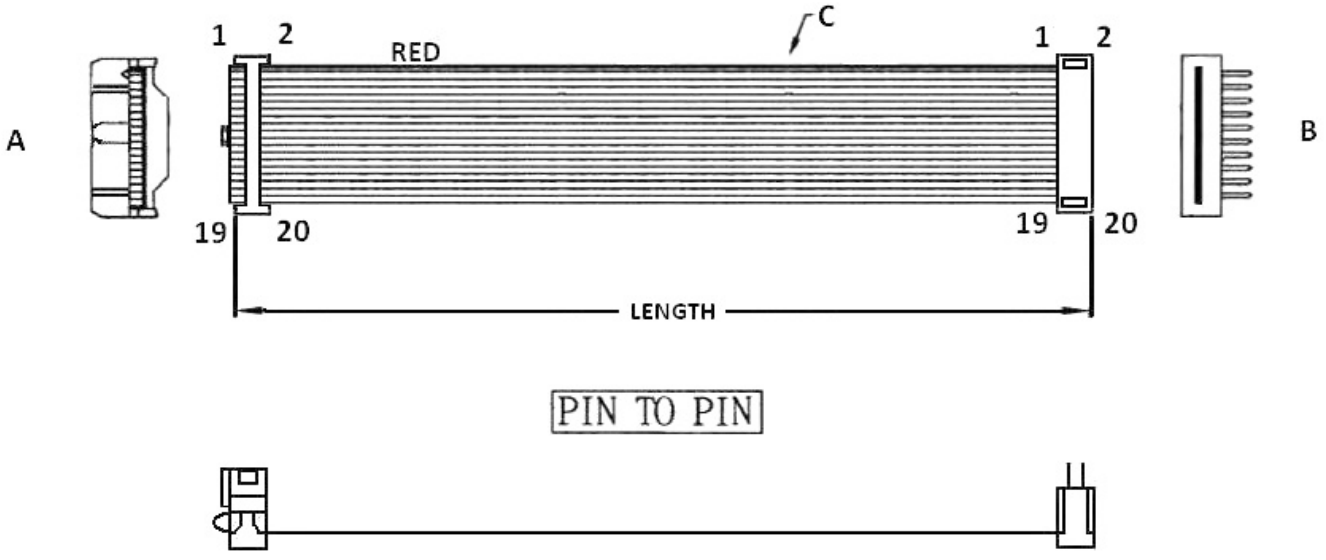


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{ND}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "ND" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO DIP PLUG (H=7.6MM) (G4)

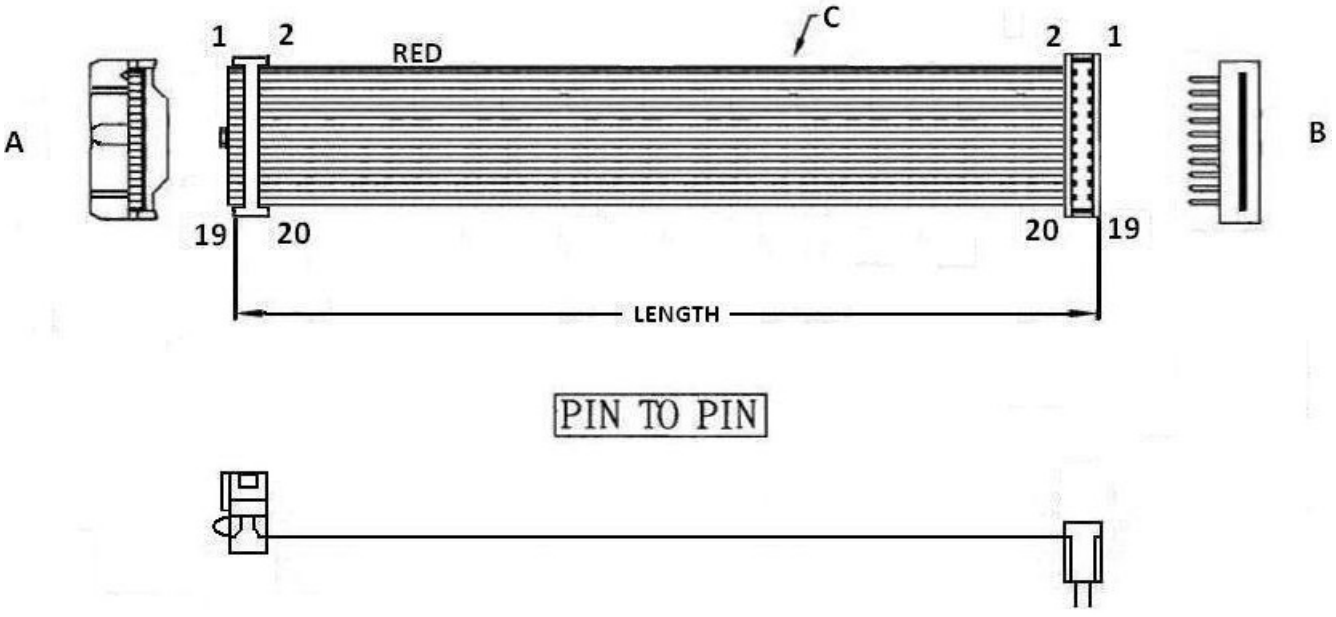

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{NP}{3}-\frac{xx}{4}CM\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NP" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET WITH S.R. (H=14.4MM) TO DIP PLUG (H=5.4MM) (G5)

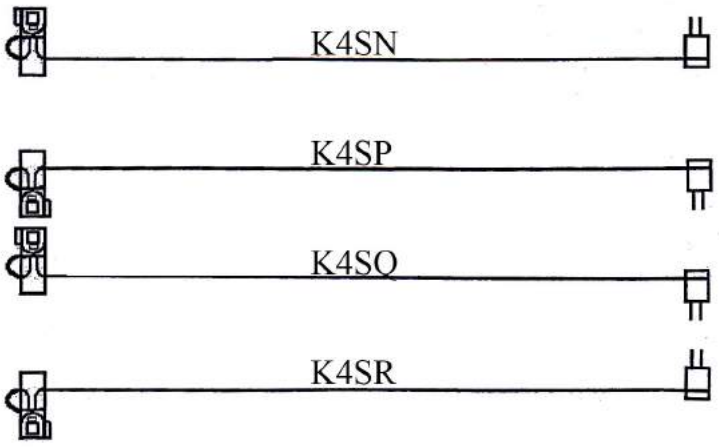


2.54MM IDC SOCKET
WITH DUAL U-SLOT & DUAL CONTACT

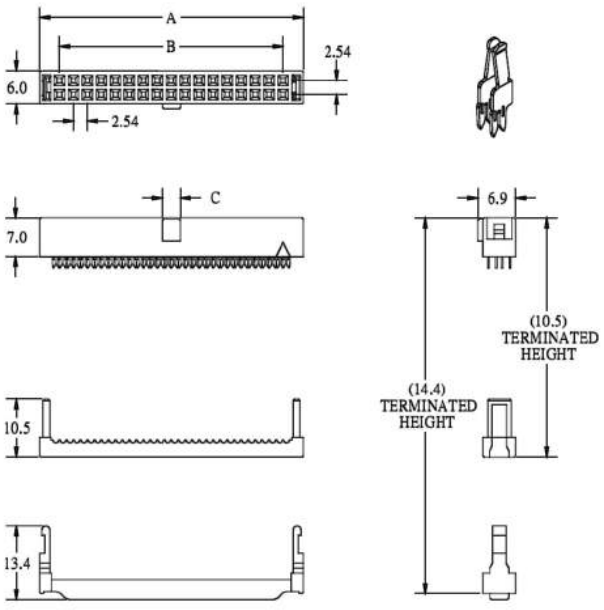

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM LOW PROFILE DIP PLUG

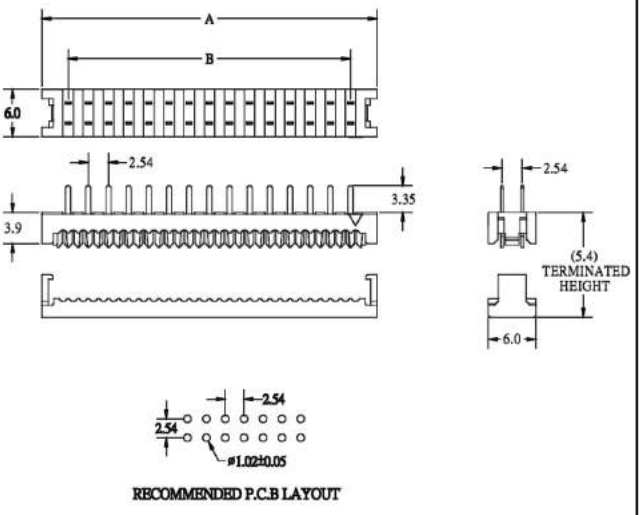

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4SN, 4SP, 4SQ, 4SR
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=14.4MM) TO DIP PLUG (H=5.4MM) (G6)

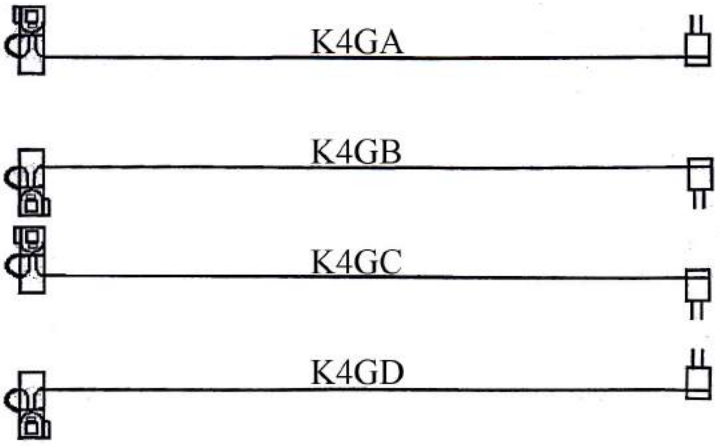


2.54MM IDC SOCKET
WITH SLIM STRAIN RELIEF H=14.4MM

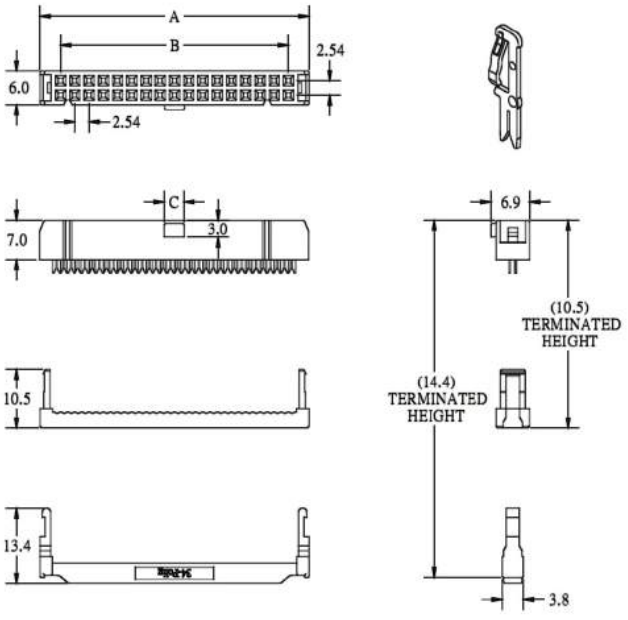

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM SUPER LOW PROFILE DIP PLUG
H=5.4MM

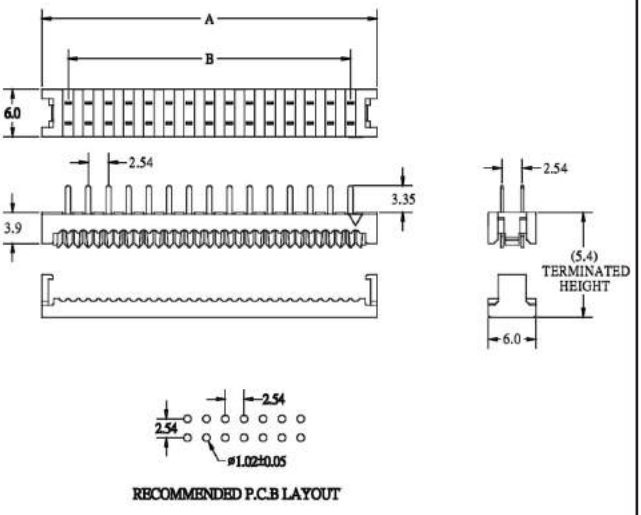

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx}{3}\ \frac{CM}{}\ \frac{x}{4}$

1. CONSTRUCTION TYPE:
   4GA, 4GB, 4GC, 4GD
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=17.0MM) TO DIP PLUG (H=5.4MM) (G7)

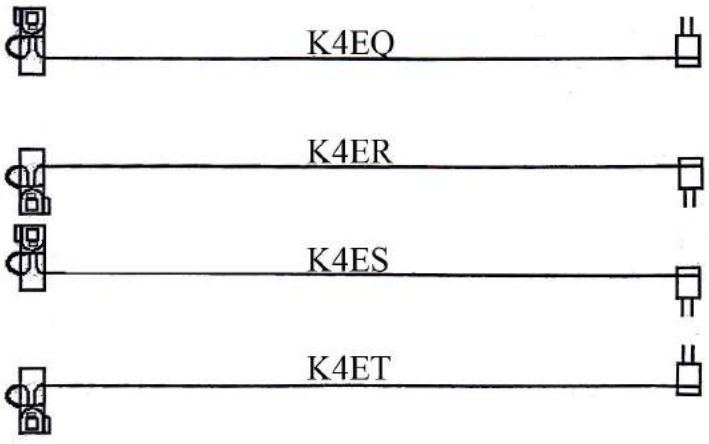


2.54MM IDC SOCKET
WITH SPRING LATCH & STRAIN RELIEF

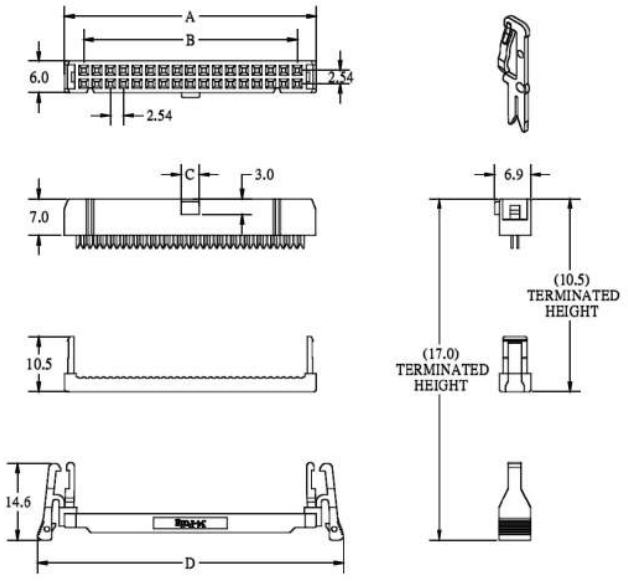

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM SUPER LOW PROFILE DIP PLUG
H=5.4MM

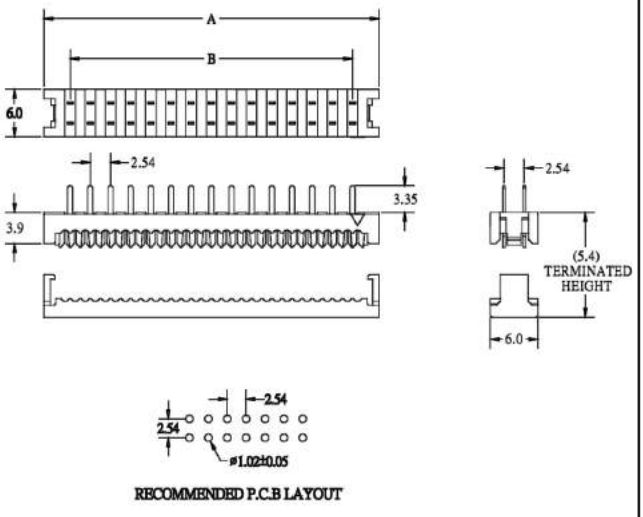

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   4EQ, 4ER, 4ES, 4ET
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=14.4MM) TO DIP PLUG (H=6.0MM) (G8)

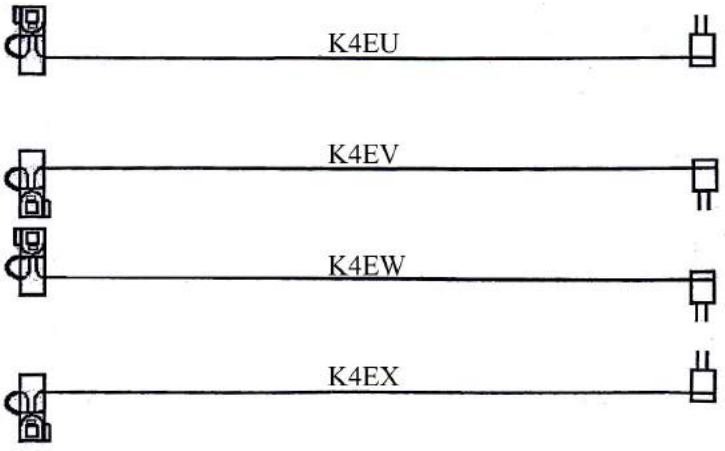


2.54MM IDC SOCKET
WITH SLIM STRAIN RELIEF H=14.4MM

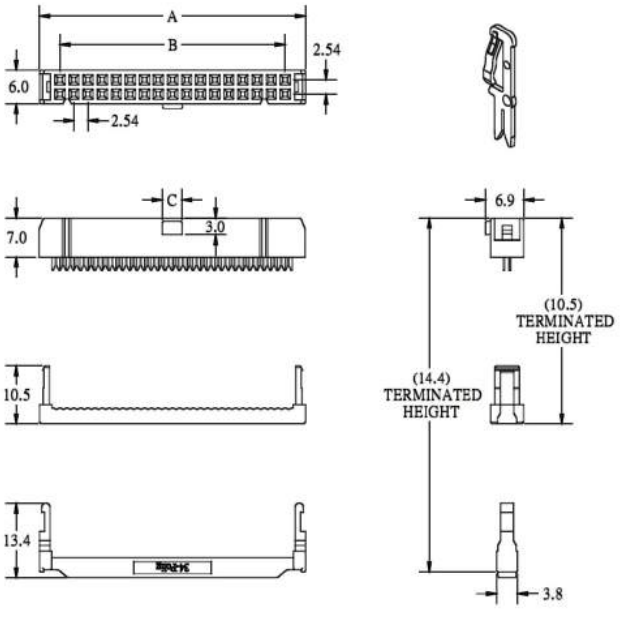

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM PITCH DIP PLUG H=6.0MM

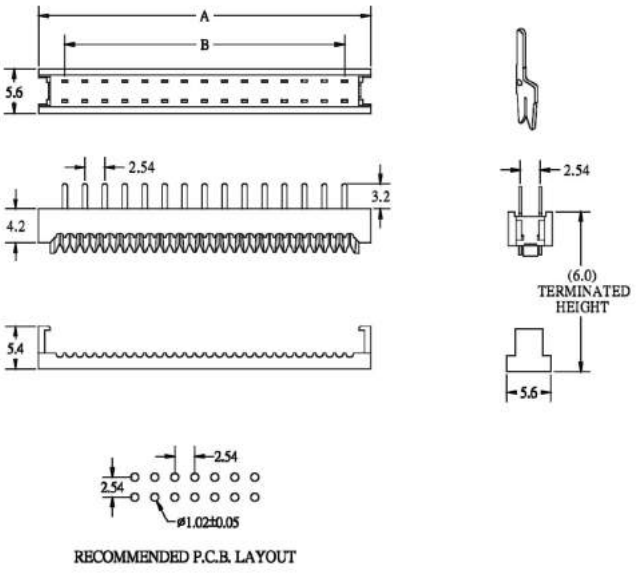

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K xxx xxx - xx C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   4EU, 4EV, 4EW, 4EX
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET WITH S.R. (H=14.4MM) TO DIP PLUG (H=6.0MM) (G9)

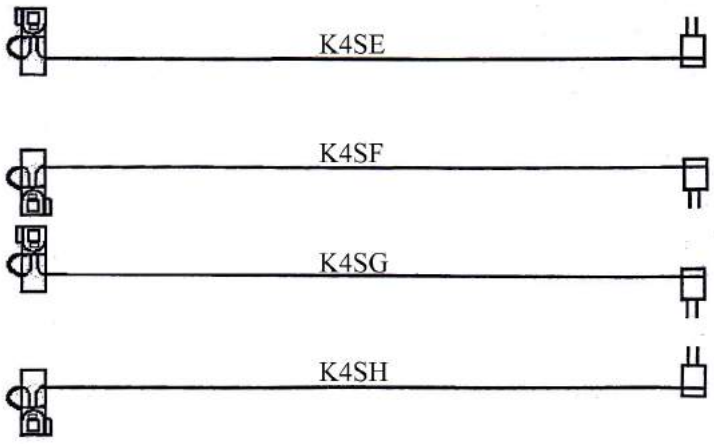


2.54MM IDC SOCKET
WITH DUAL U-SLOT & DUAL CONTACT

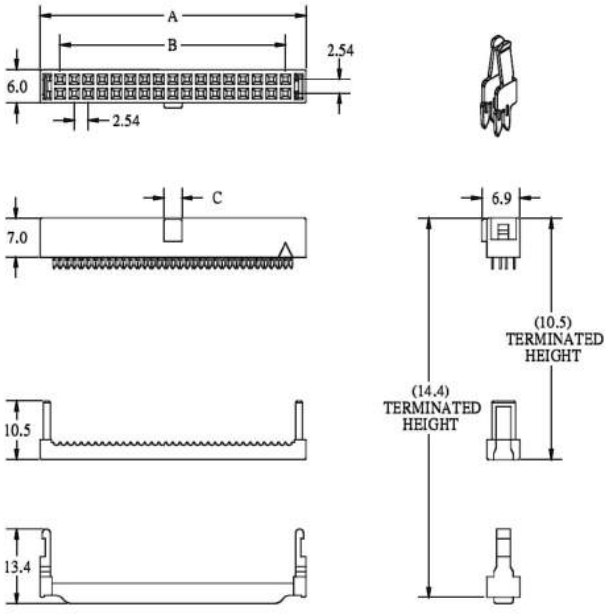

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM PITCH DIP PLUG H=6.0MM

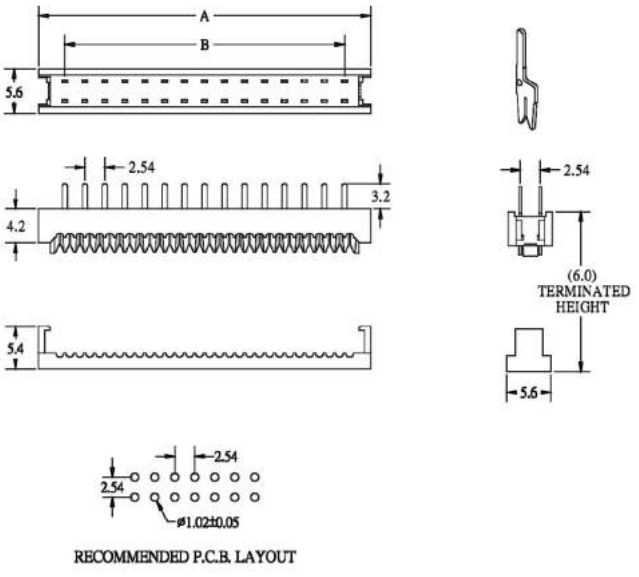

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K x x x x x x x - x x C M B
1 2 3 4

1. CONSTRUCTION TYPE:
   4SE, 4SF, 4SG, 4SH
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET WITH S.R. (H=14.4MM) TO DIP PLUG (H=6.0MM) (G10)

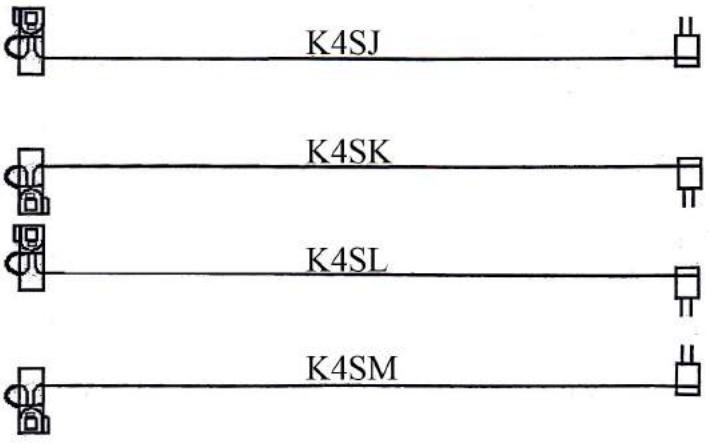


2.54MM IDC SOCKET
WITH DUAL U-SLOT & DUAL CONTACT

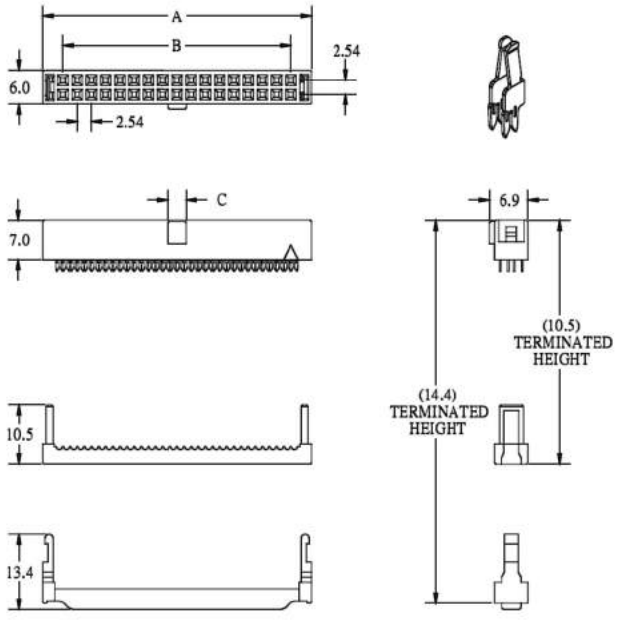

A=B+
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE SOLDER TAIL

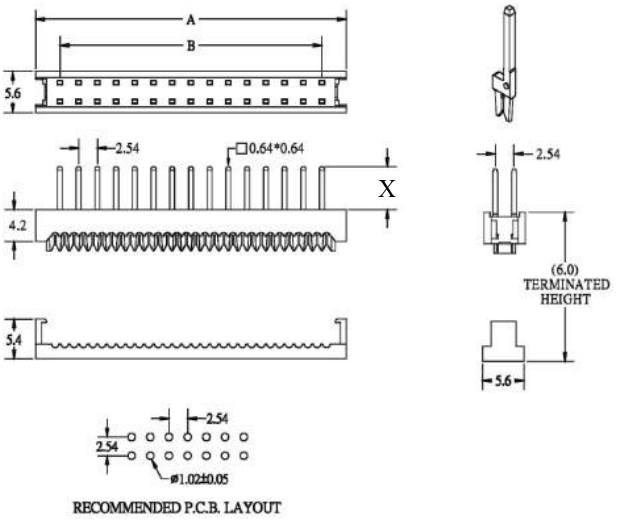

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4SJ, 4SK, 4SL, 4SM
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=14.4MM) TO DIP PLUG (H=6.0MM) (G11)

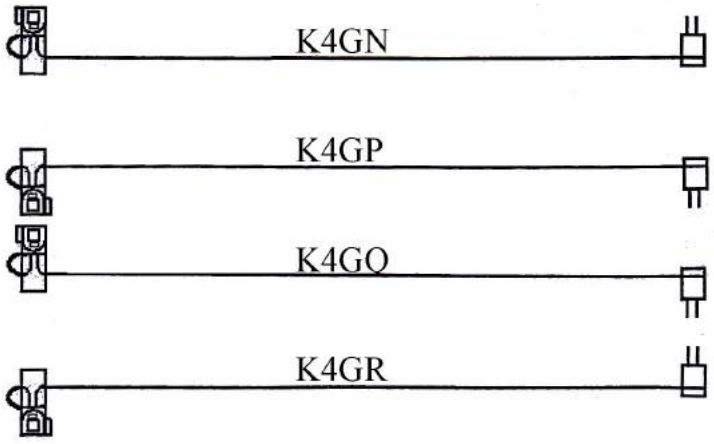


2.54MM IDC SOCKET WITH SLIM STRAIN RELIEF

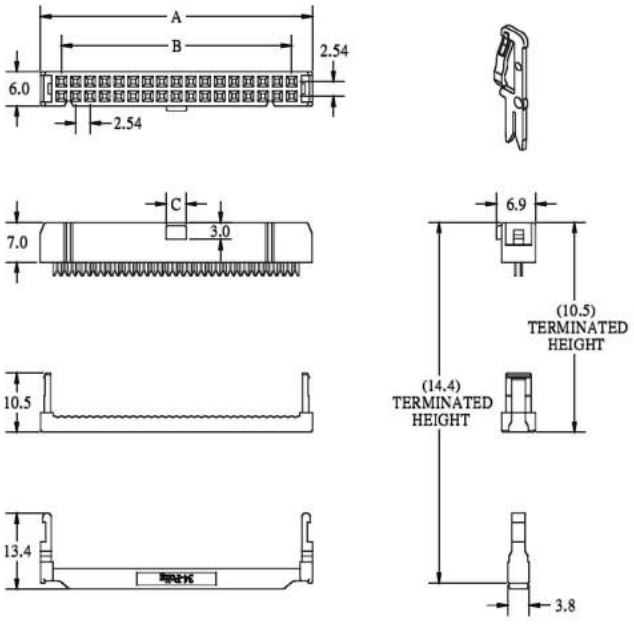

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=6.0MM

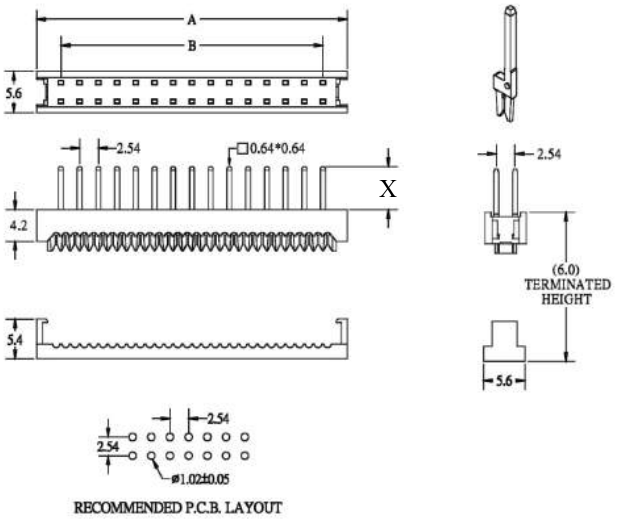

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4GN, 4GP, 4GQ, 4GR
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=17.0MM) TO DIP PLUG (H=6.0MM) (G12)

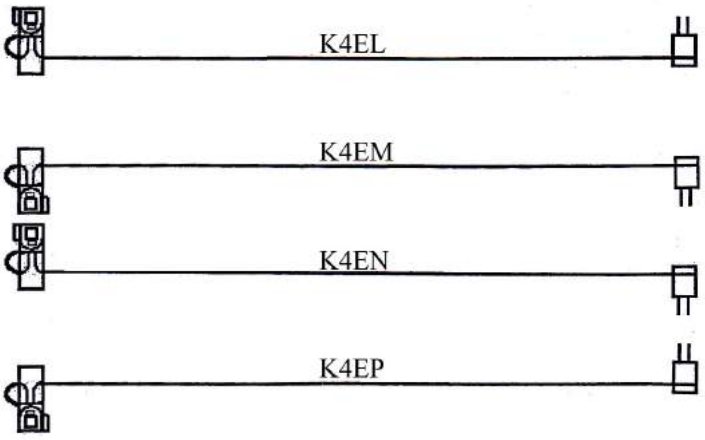


2.54MM IDC SOCKET
WITH SPRING LATCH & STRAIN RELIEF

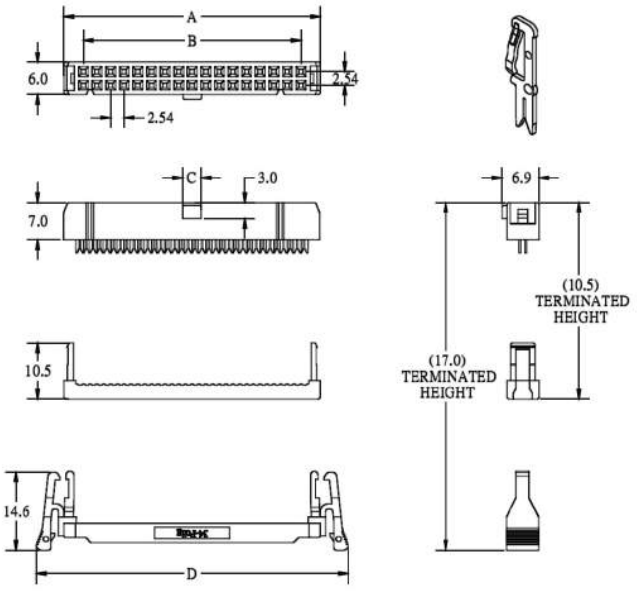

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
056, 060, 062, 064

2.54MM DIP PLUG H=6.0MM

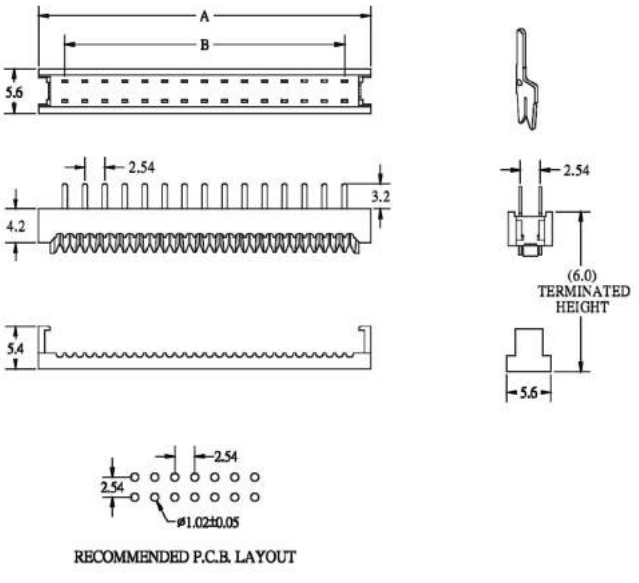

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
032, 034, 040, 050, 060,
064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4EL, 4EM, 4EN, 4EP
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=17.0MM) TO DIP PLUG (H=6.0MM) (G13)

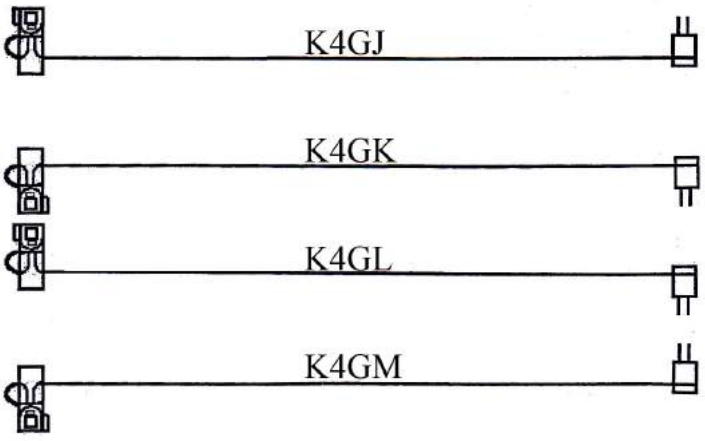


2.54MM IDC SOCKET
WITH SPRING LATCH & STRAIN RELIEF

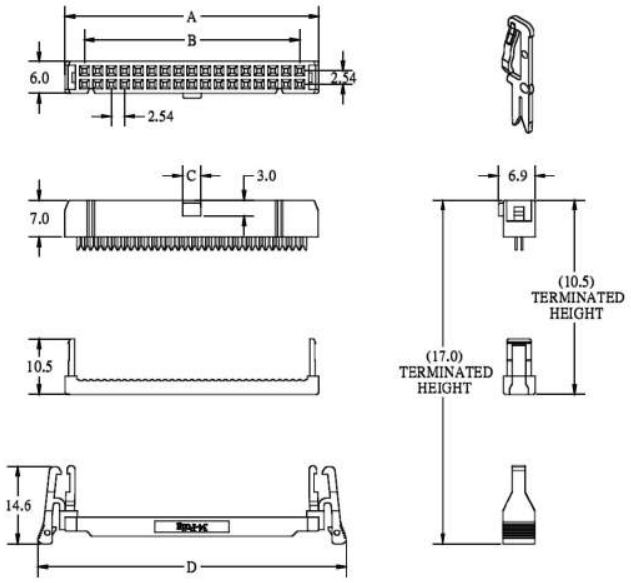

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE
TAIL H=6.0MM

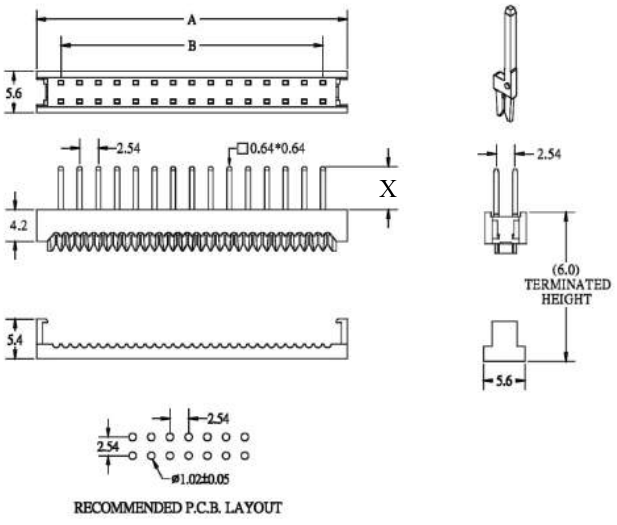

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4GJ, 4GK, 4GL, 4GM
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "6" X= 5.85MM (STANDARD)
   "T" X= 12.0MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=14.4MM) TO DIP PLUG (H=7.85MM) (G14)

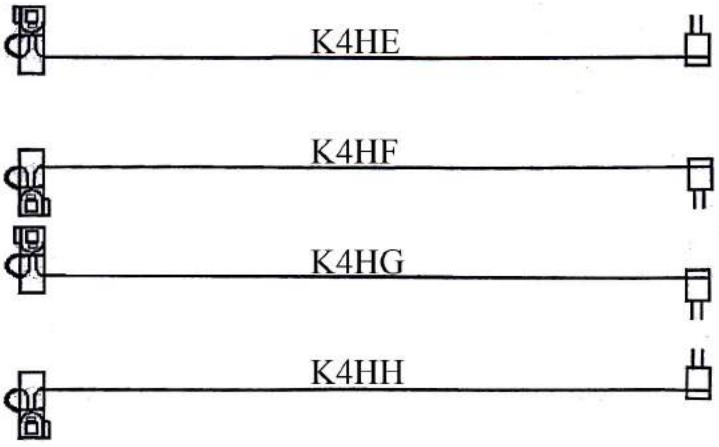


2.54MM IDC SOCKET
WITH SLIM STRAIN RELIEF H=14.4MM

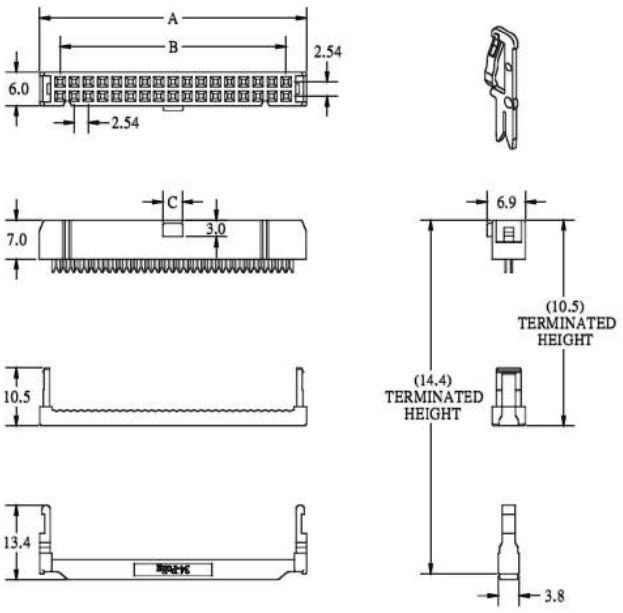

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE TAIL H=7.85MM

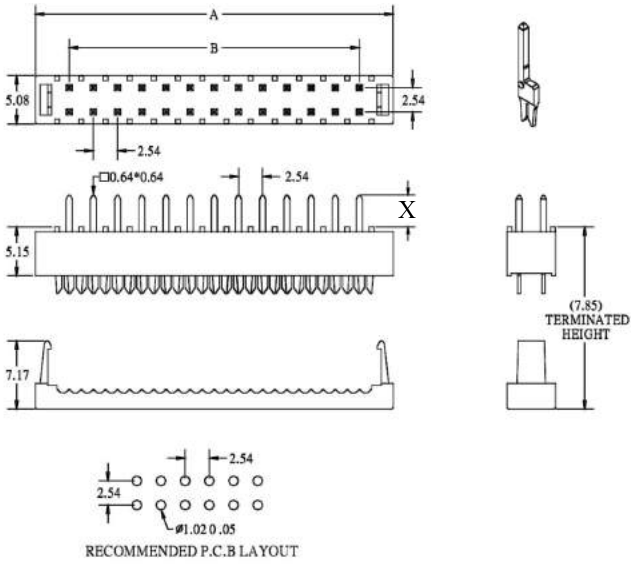

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{Bx}{5}$

1. CONSTRUCTION TYPE:
   4HE, 4HF, 4HG, 4HH
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET WITH S.R. (H=14.4MM) TO DIP PLUG (H=7.85MM) (G15)

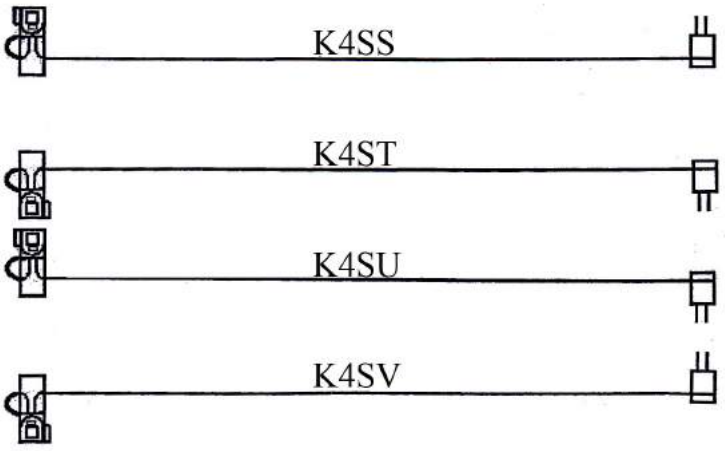


2.54MM IDC SOCKET
WITH DUAL U-SLOT & DUAL CONTACT

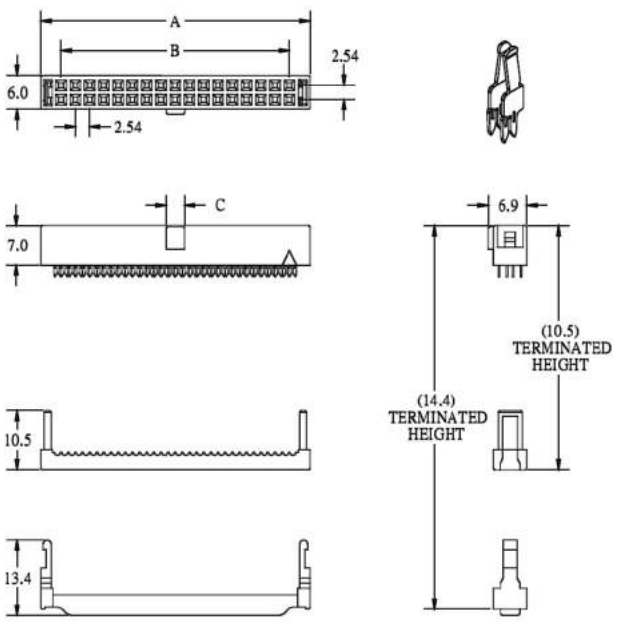

A=B+
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE SOLDER TAIL

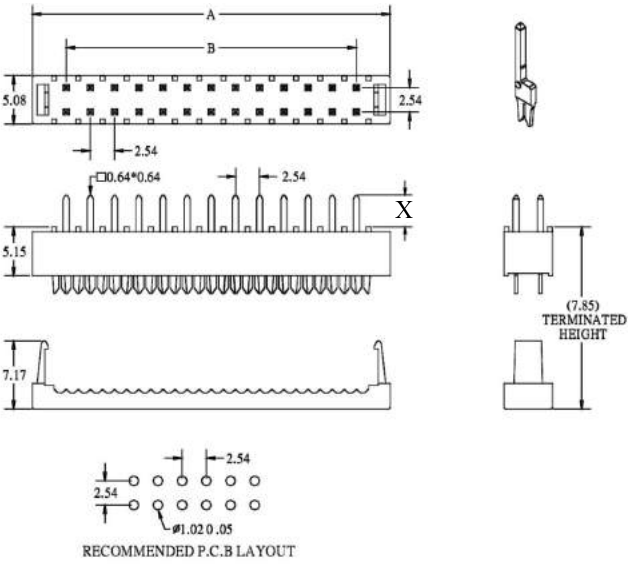

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{5}\frac{x}{}$

1. CONSTRUCTION TYPE:
   4SS, 4ST, 4SU, 4SV
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=17.0MM) TO DIP PLUG (H=7.85MM) (G16)

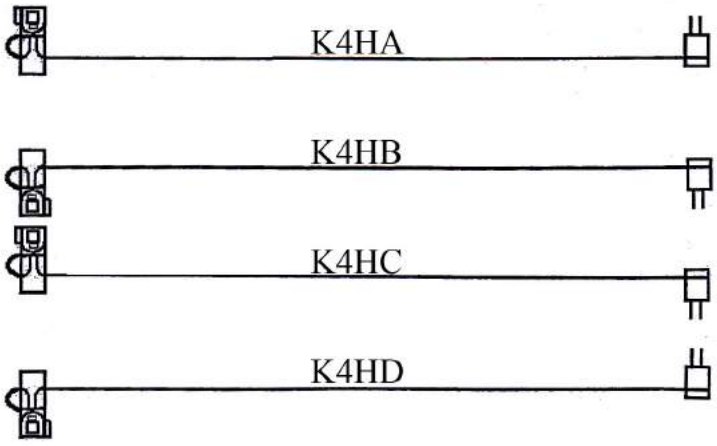


2.54MM IDC SOCKET
WITH SPRING LATCH & STRAIN RELIEF

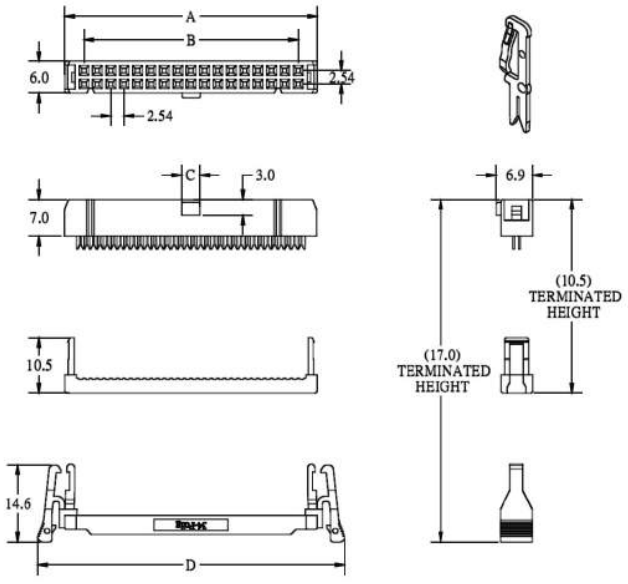

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 036, 040, 044, 050,
056, 060, 062, 064

2.54MM DIP PLUG WITH 0.64MM SQUARE
TAIL H=7.85MM

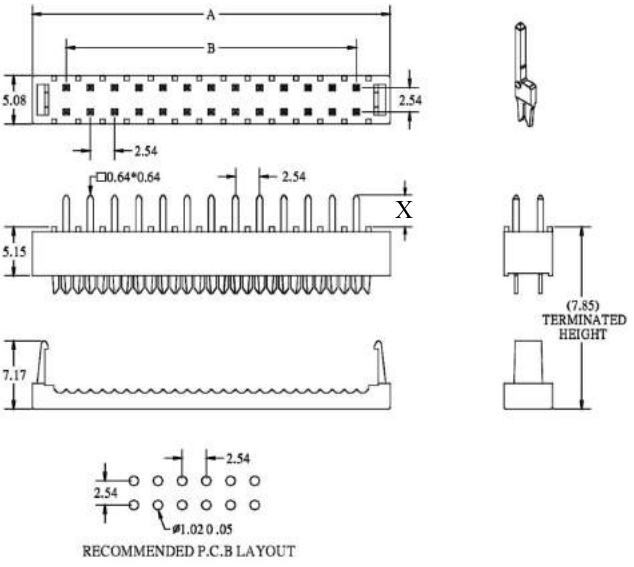

A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K x x x x x x - x x C M B x
1 2 3 4 5

1. CONSTRUCTION TYPE:
   4HA, 4HB, 4HC, 4HD
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=14.4MM) TO DIP PLUG (H=10.77MM) (G17)

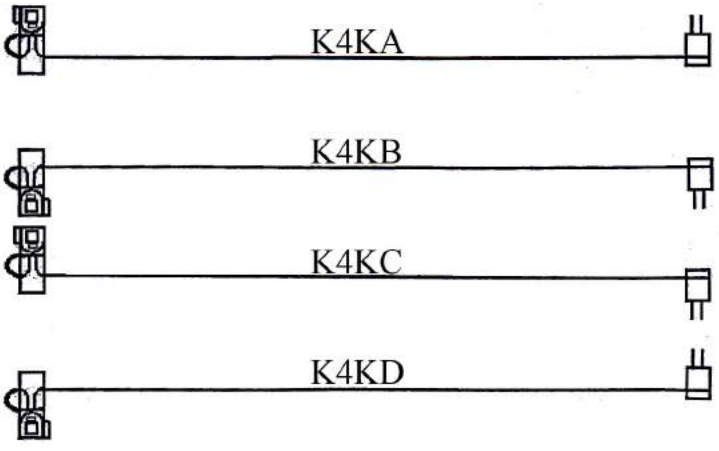


2.54MM IDC SOCKET WITH SLIM STRAIN RELIEF

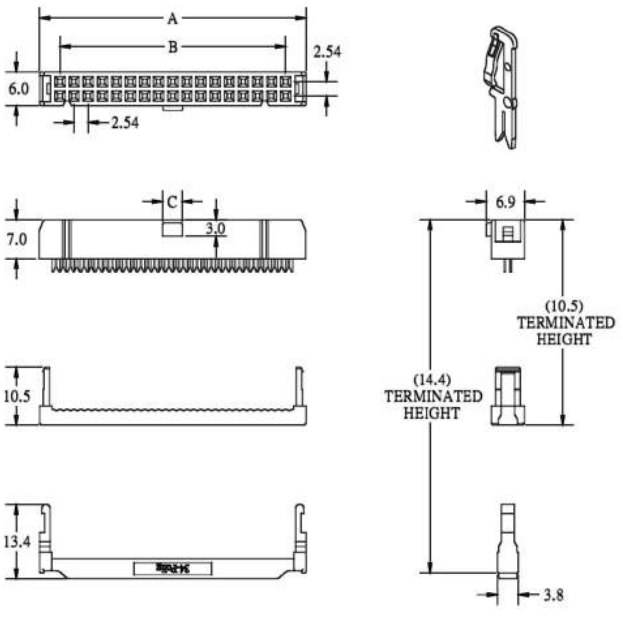

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 4~8 POSITIONS
C=3.50 FOR 10~64 POSITIONS

NO. OF CONTACTS:
004, 006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH STRAIN RELIEF DIP=3.2MM

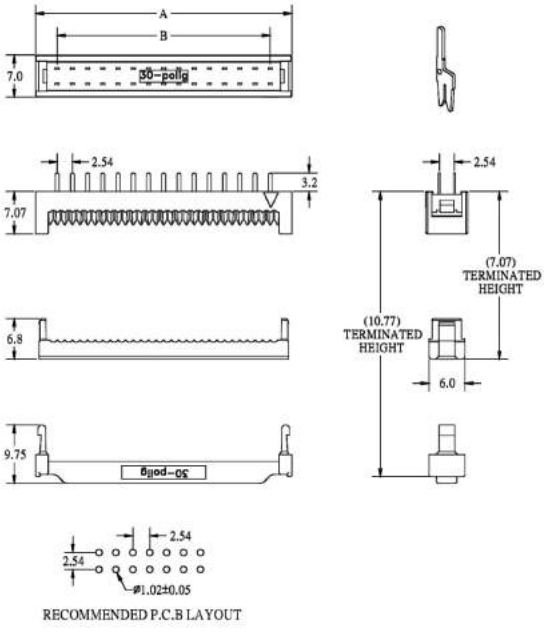

A=B+7.24
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMB}{4}$

1. CONSTRUCTION TYPE:
   4KA, 4KB, 4KC, 4KD
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET (DUAL WIPE CONTACT & H=14.4MM) TO DIP PLUG (H=10.77MM) (G18)

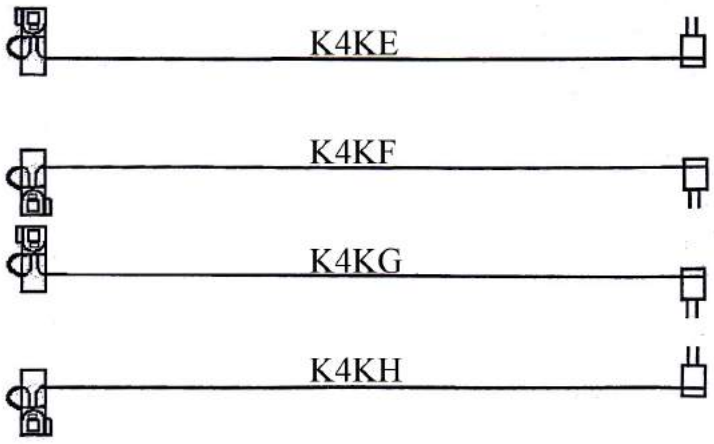


2.54MM IDC SOCKET WITH DUAL WIPE CONTACT & STRAIN RELIEF

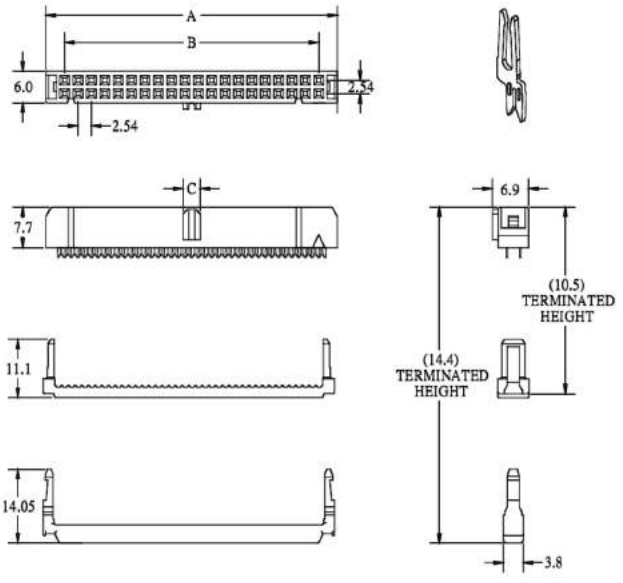

A=B+7.12
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.30 FOR 10~64 POSITIONS

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 040, 050, 060, 064

2.54MM DIP PLUG WITH STRAIN RELIEF DIP=3.2MM

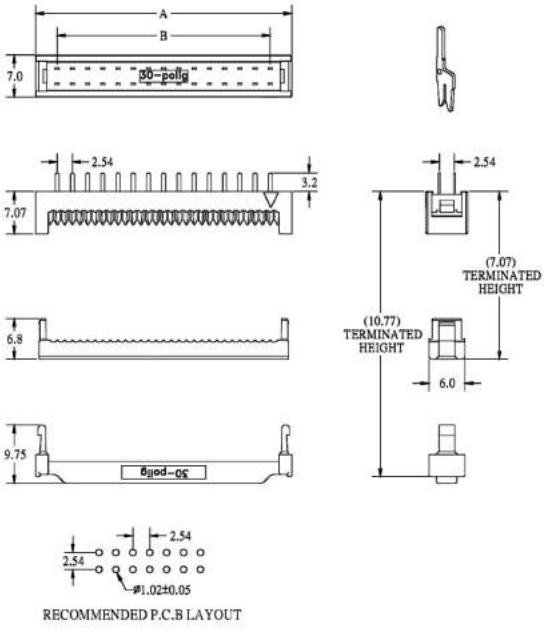

A=B+7.24
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 028, 030, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\ \frac{xxx}{2}$ - $\frac{xx\,C\,M}{3}\ \frac{B}{4}$

1. CONSTRUCTION TYPE:
   4KE, 4KF, 4KG, 4KH
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=17.0MM) TO DIP PLUG (H=10.77MM) (G19)

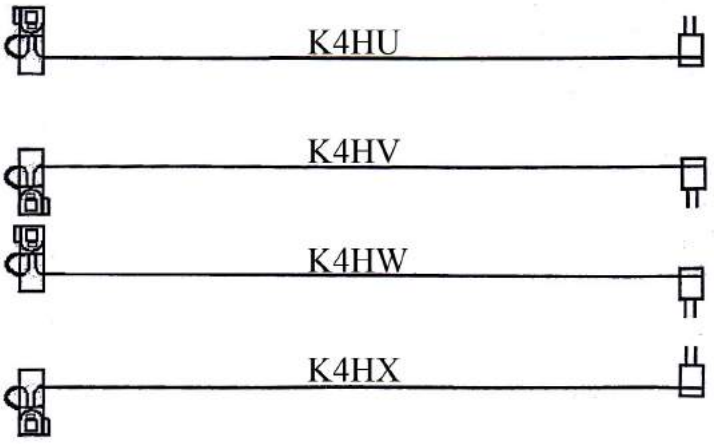


2.54MM IDC SOCKET
WITH SPRING LATCH & STRAIN RELIEF

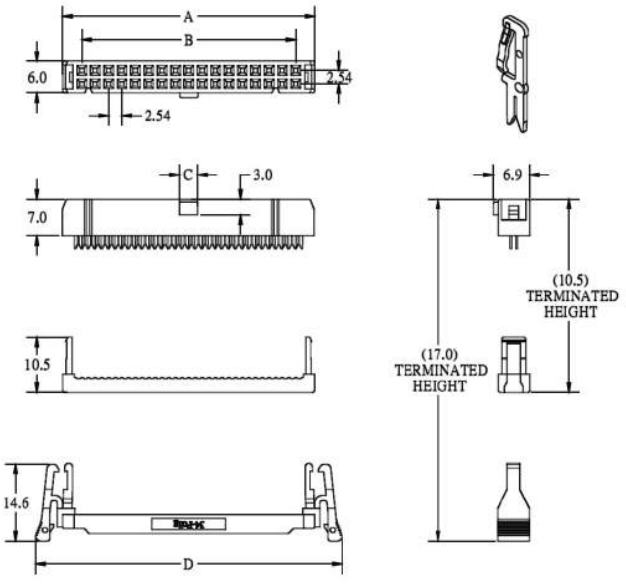

A=B+7.24
B=2.54*POSITIONS/2-2.54
C=1.85 FOR 6 & 8 POSITIONS
C=3.50 FOR 10~64 POSITIONS
D=B+17.62

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 034, 036, 040, 044, 050, 056, 060, 062, 064

2.54MM DIP PLUG WITH STRAIN RELIEF
DIP=3.2MM

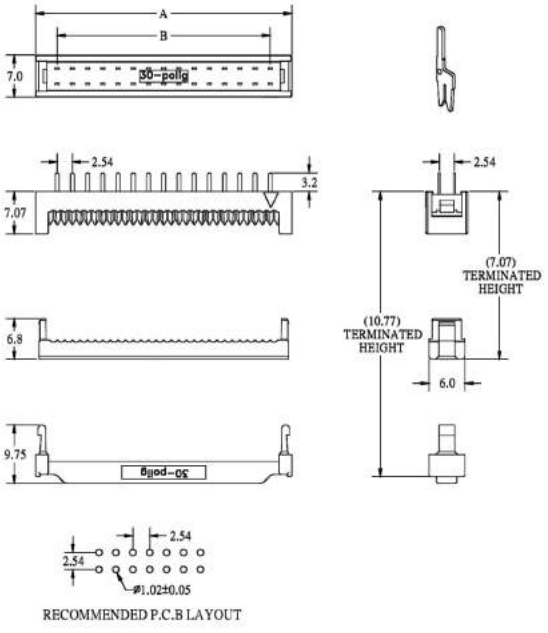

A=B+7.24
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014, 016, 020, 024, 026, 030, 032, 034, 040, 050, 060, 064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4HU, 4HV, 4HW, 4HX
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET & DIP PLUG

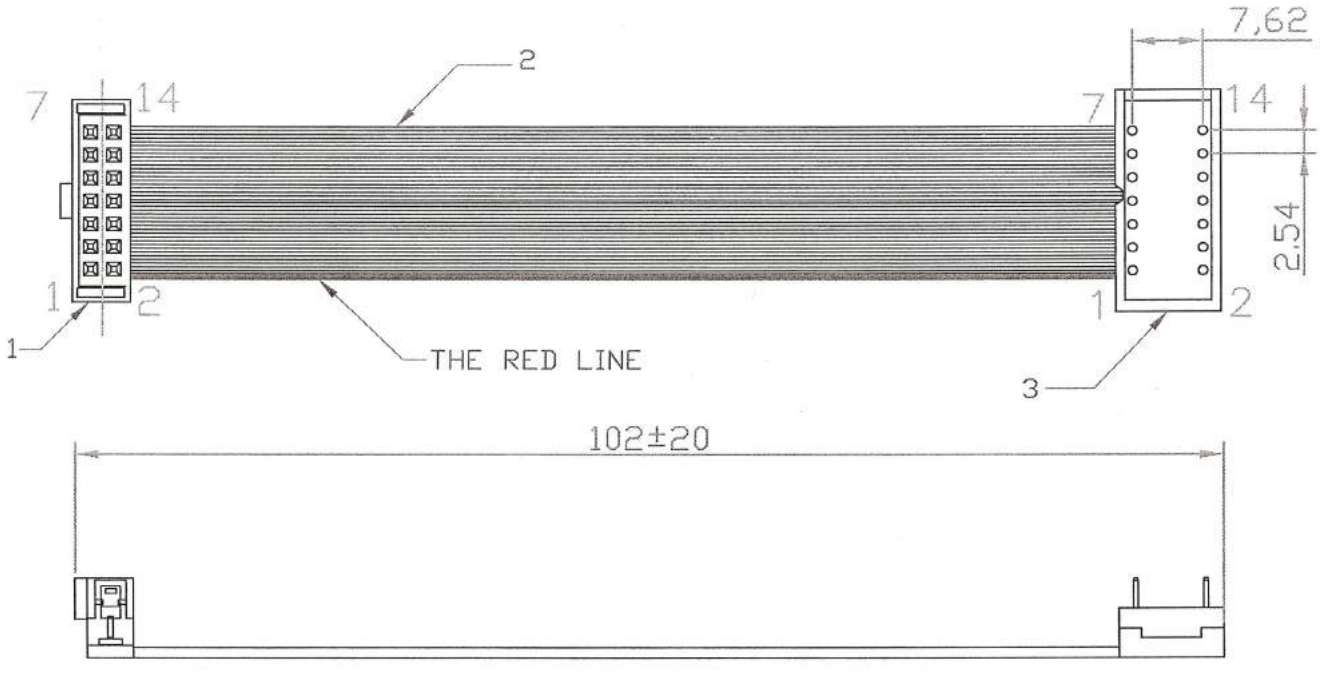

KA14LY-10CMB


ORDERING INFORMATION:

P/N K A $\frac{x\,x}{1}$ $\frac{x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{x}{4}$


1. NO. OF CONTACTS:
   08, 10, 14, 16, 18, 20, 24, 26, 28,
   32, 34, 36, 40
2. CONNECTORS AT 2 ENDS:
   "LY" 2.54MM IDC SOCKET TO
   2.54MM(0.1") x 7.62MM(0.3") DIP PLUG
   "LZ" 2.54MM IDC SOCKET TO
   2.54MM(0.1") x 15.24MM(0.6") DIP PLUG
3. CABLE LENGTH IN CM (CENTIMETERS)
4. COLOR OF 2 CONNECTORS:
   "B" BLACK (STANDARD)
   "A" GRAY (OPTIONAL)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH DIP PLUGS (H=7.6MM) (H1)

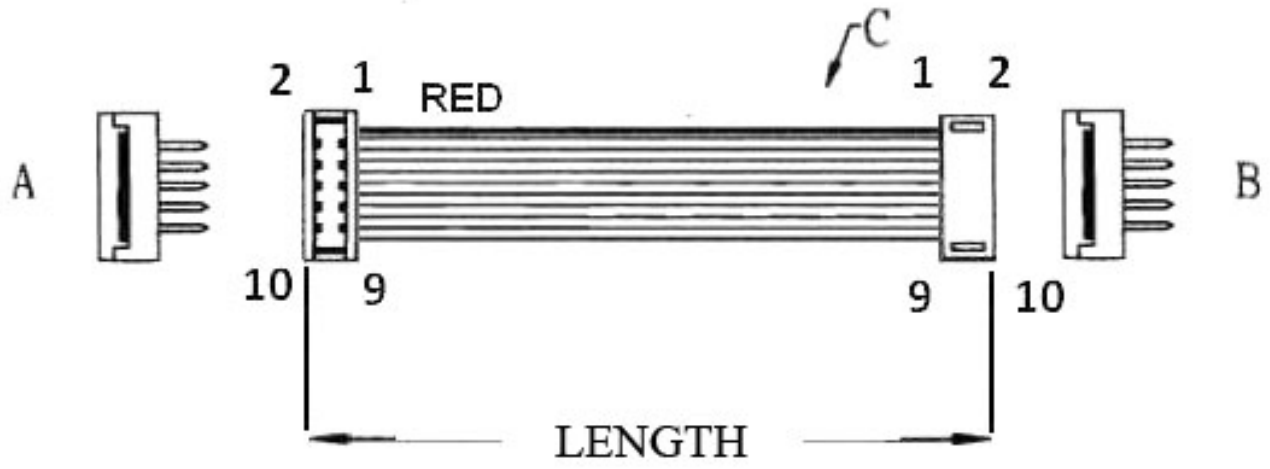

PIN TO PIN

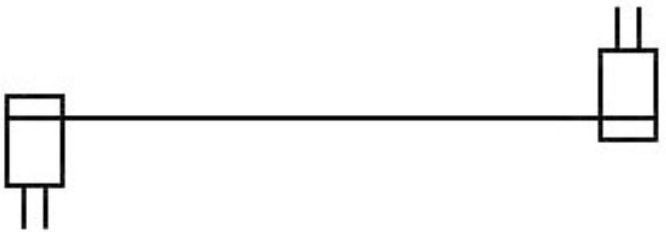


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{DD}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "DD" 2.54MM DIP PLUG
   TO 2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH DIP PLUGS (H=7.6MM) (H2)

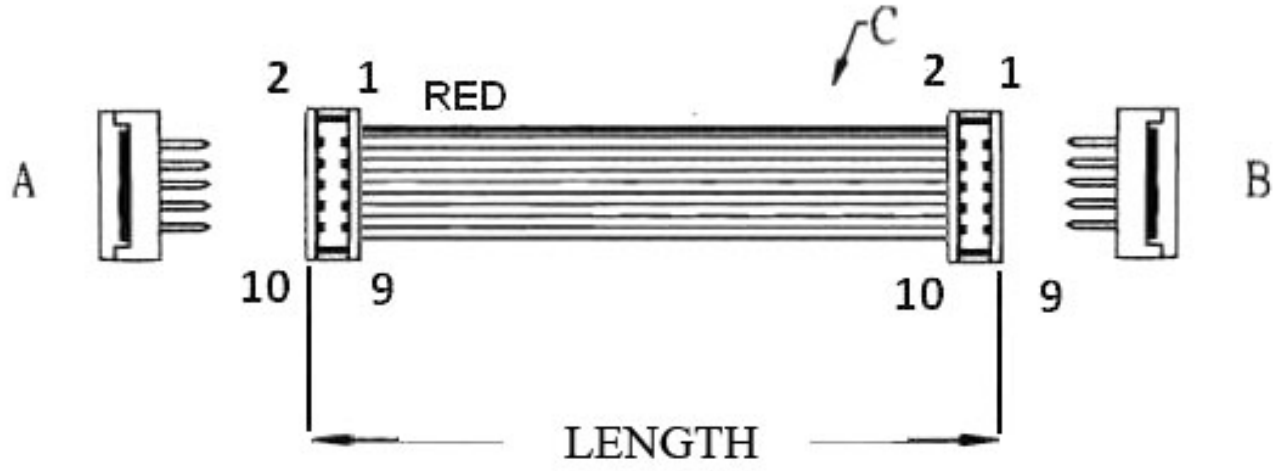

PIN TO PIN

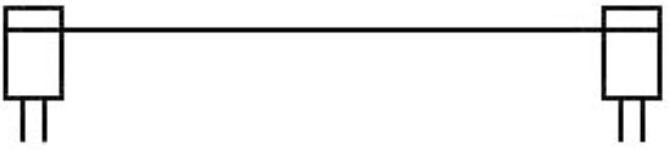


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{DP}{3}-\frac{xx}{4}CM\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "DP" 2.54MM DIP PLUG
   TO 2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2* 2.54MM PITCH DIP PLUGS (H=7.6MM) (H3)

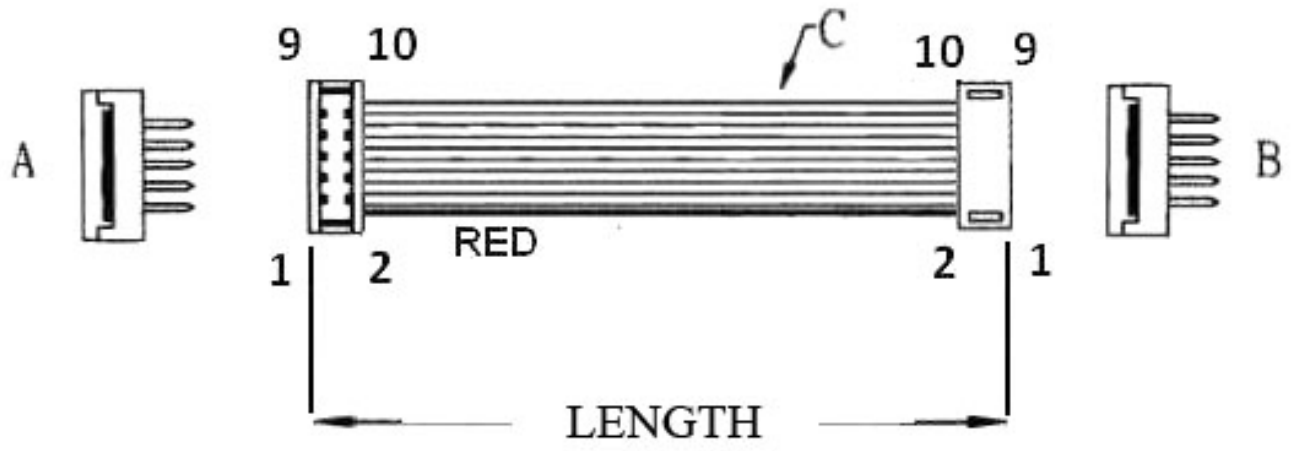

PIN TO PIN

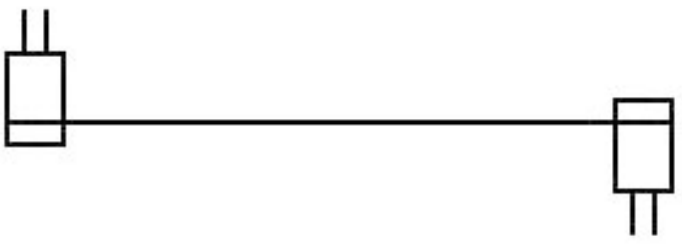


ORDERING INFORMATION:

P/N $\frac{K}{1}\frac{A}{}\frac{x}{2}\frac{x}{}\frac{P}{3}\frac{P}{}-\frac{x}{4}\frac{x}{}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "PP" 2.54MM DIP PLUG
   TO 2.54MM DIP PLUG
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS (H=5.4MM) (H4)

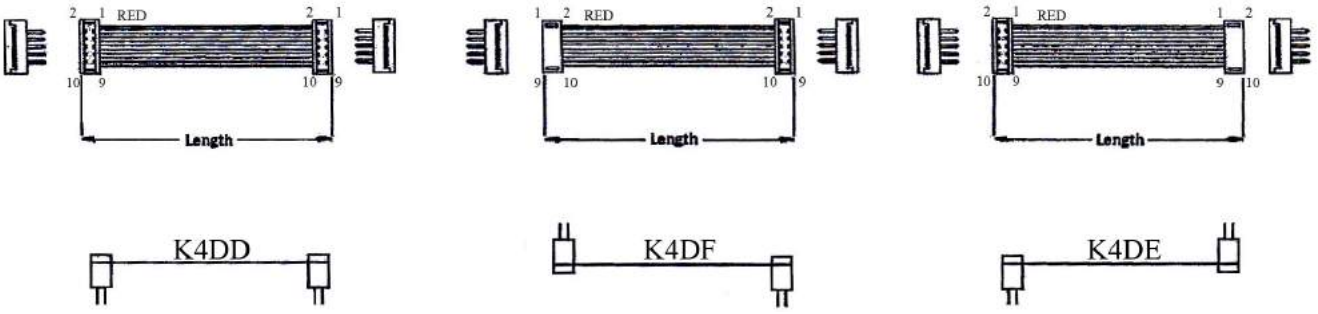

2.54MM PITCH SUPER LOW PROFILE DIP PLUG H=5.4MM

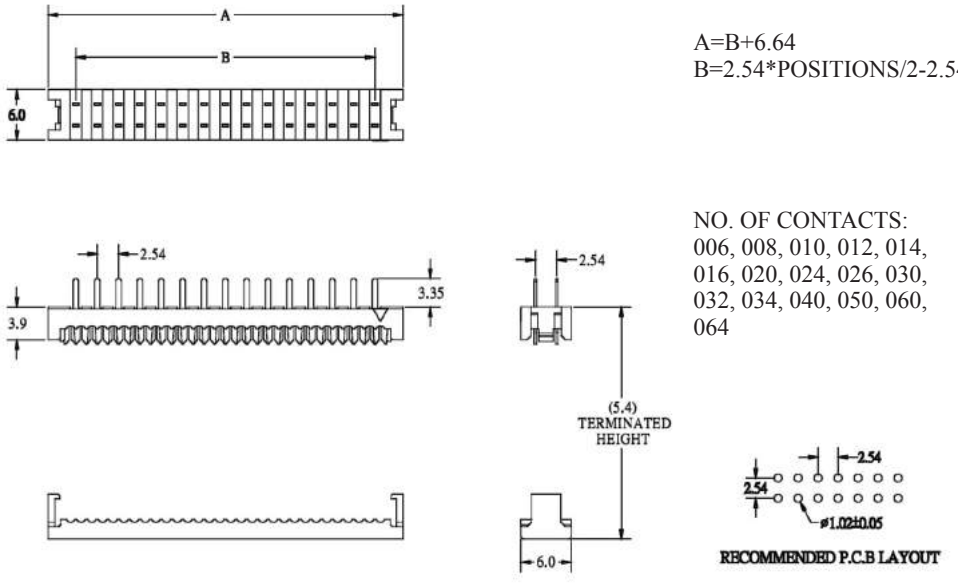

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
032, 034, 040, 050, 060,
064

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x}{3}$ $\frac{C\,M}{}$ $\frac{x}{4}$

1. CONSTRUCTION TYPE:
   4DD, 4DE, 4DF
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS (H=6.0MM) (H5)

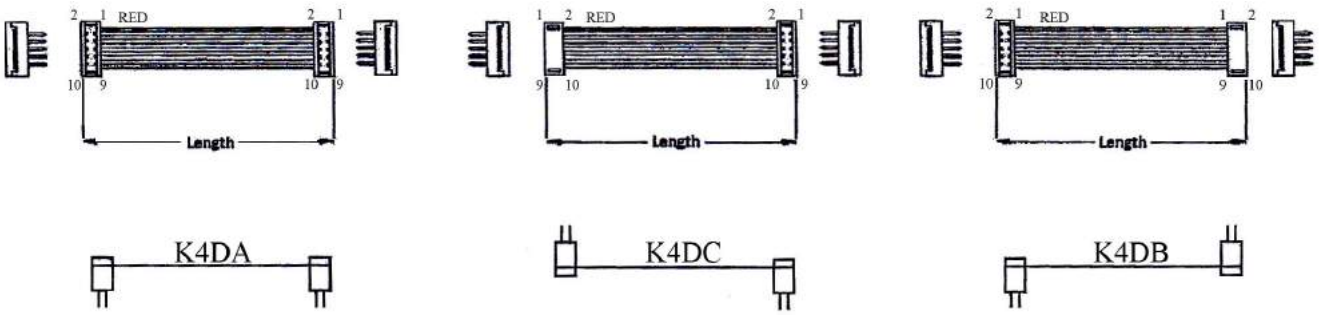

2.54MM PITCH DIP PLUG WITH 0.64MM SQUARE TAIL H=6.0MM

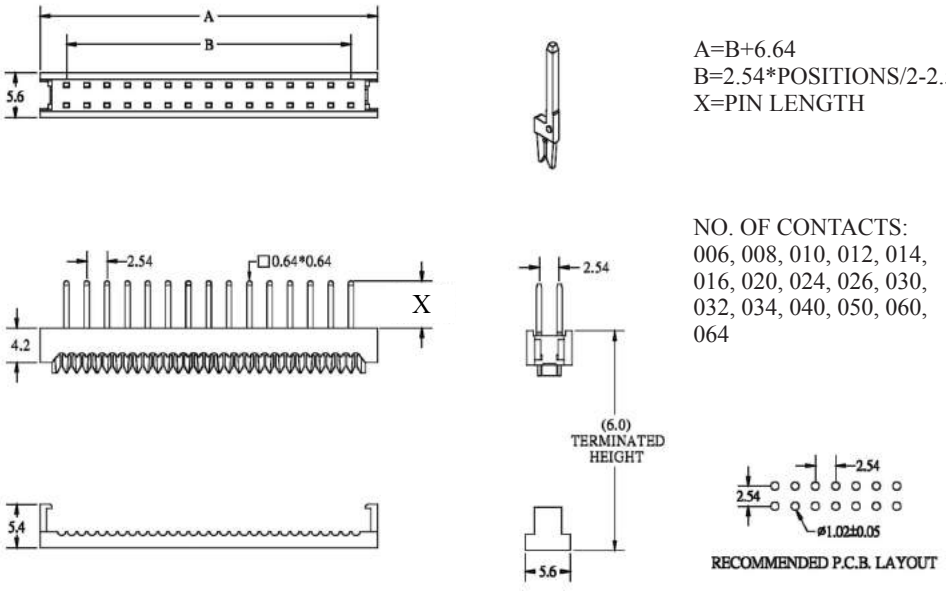

A=B+6.64
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
032, 034, 040, 050, 060,
064

ORDERING INFORMATION:

P/N K x x x x x x - x x C M B x
1 2 3 4 5


1. CONSTRUCTION TYPE:
   4DA, 4DB, 4DC
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.


5. PIN LENGTH OF DIP PLUG:
   "6" A= 5.85MM (STANDARD)
   "T" B= 12.0MM

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS (H=6.0MM) (H6)

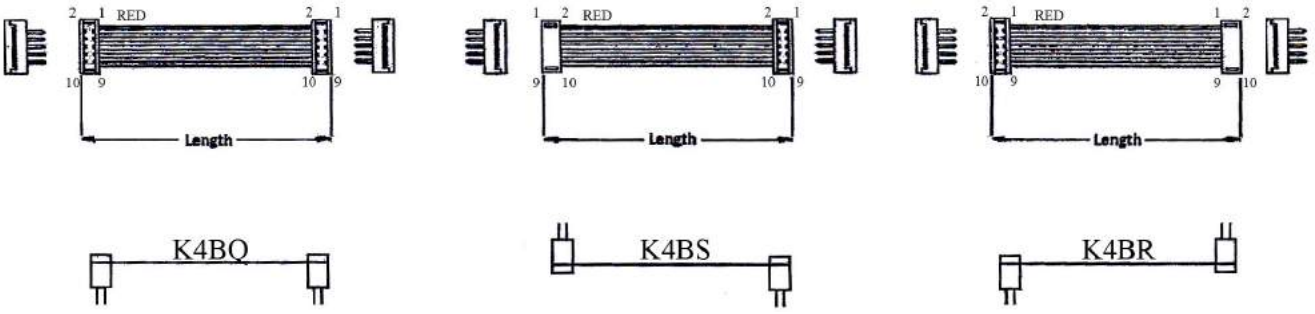

2.54MM PITCH DIP PLUG H=6.0MM

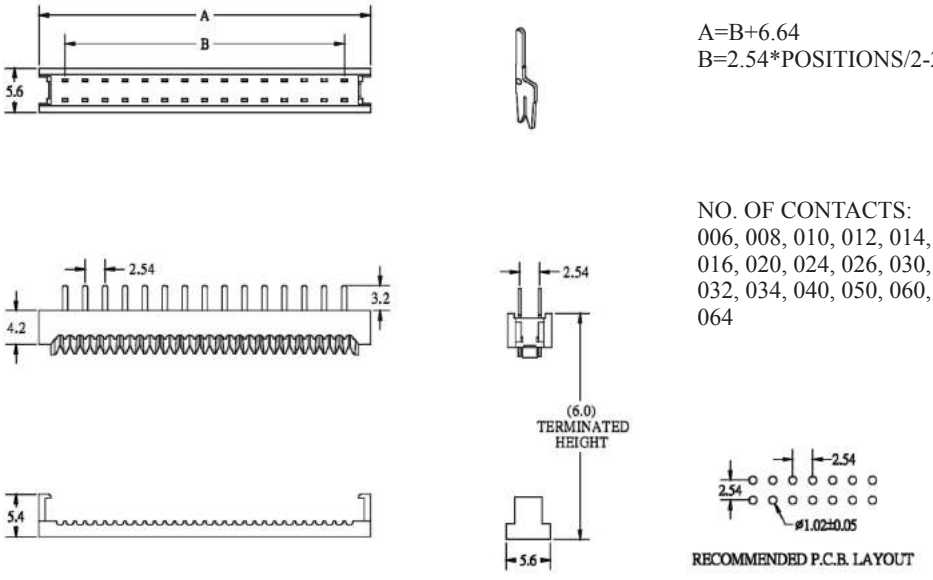

A=B+6.64
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
032, 034, 040, 050, 060,
064

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION:


P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x}{3}$ $\frac{C\,M}{}$ $\frac{x}{4}$

1. CONSTRUCTION TYPE:
   4BQ, 4BR, 4BS
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
   "A" GRAY


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM SHRUNK DIP PLUGS (H=6.1MM) (H7)

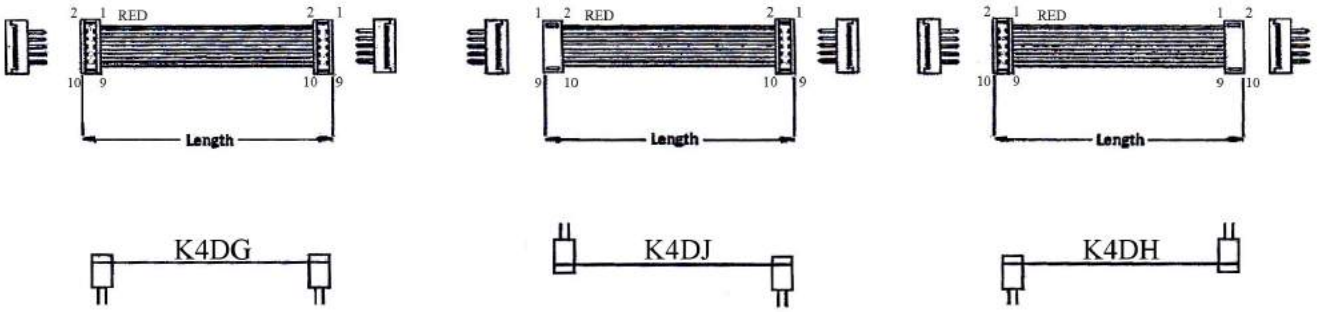

2.54MM PITCH SHRUNK DIP PLUG H=6.1MM

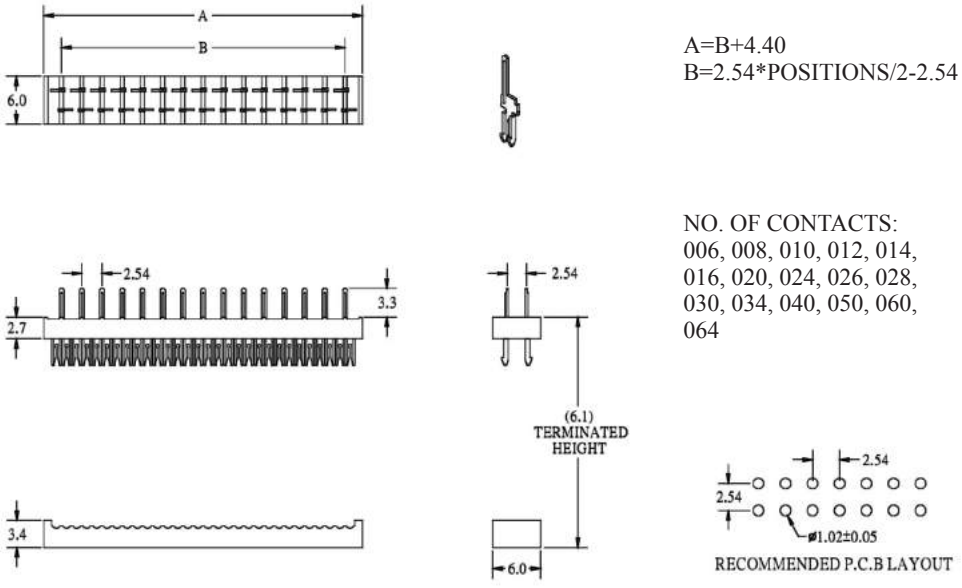

A=B+4.40
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 028,
030, 034, 040, 050, 060,
064

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ B

1. CONSTRUCTION TYPE:
   4DG, 4DH, 4DJ
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS WITH 0.64MM SQUARE SOLDER TAIL (H=7.85MM) (H8)

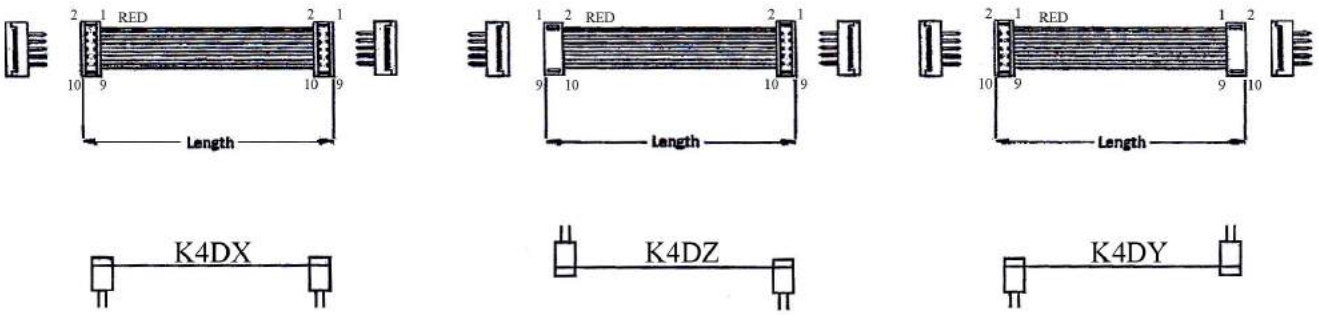


2.54MM PITCH DIP PLUG WITH 0.64MM SQUARE SOLDER TAIL H=7.85MM

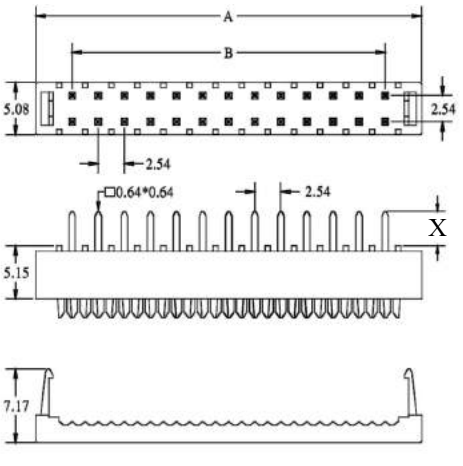



A=B+7.11
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 030,
034, 040, 050, 060, 064



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

P/N K x x x x x x - x x C M B x
1 2 3 4 5


1. CONSTRUCTION TYPE:
   4DX, 4DY, 4DZ
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.


5. PIN LENGTH OF DIP PLUG:
   "3" X= 3.10MM (STANDARD)
   "6" X= 5.95MM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS (H=10.77MM) (H9)

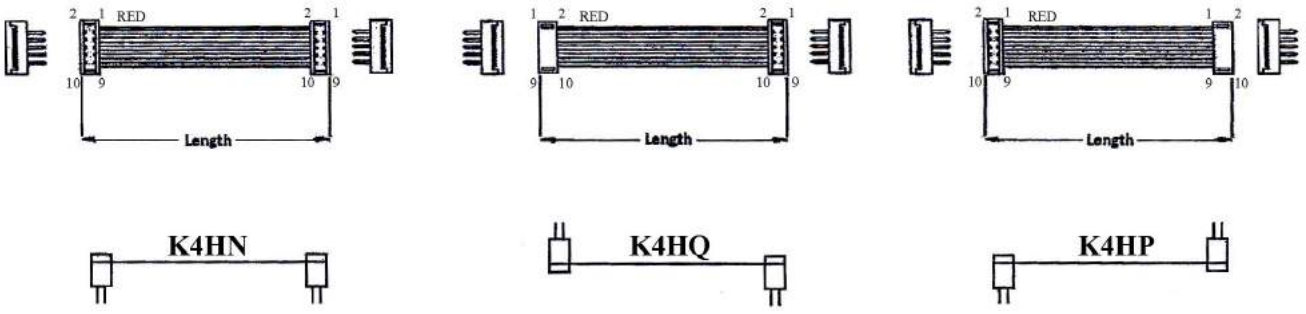

2.54MM PITCH DIP PLUG WITH STRAIN RELIEF DIP=3.2MM

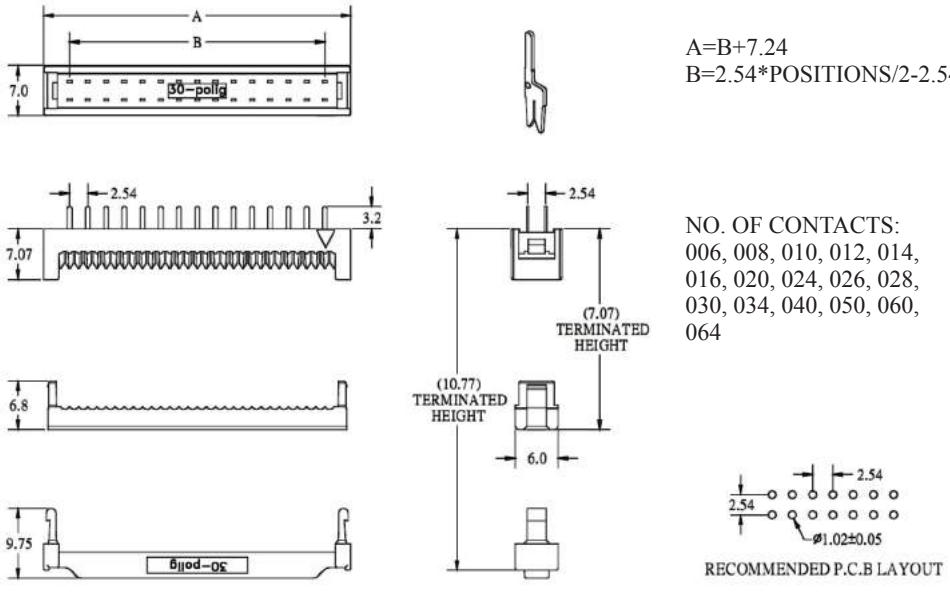

A=B+7.24
B=2.54*POSITIONS/2-2.54

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 028,
030, 034, 040, 050, 060,
064

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4HN, 4HP, 4HQ
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2* 2.54MM DIP PLUGS (H=10.77MM) (H10)

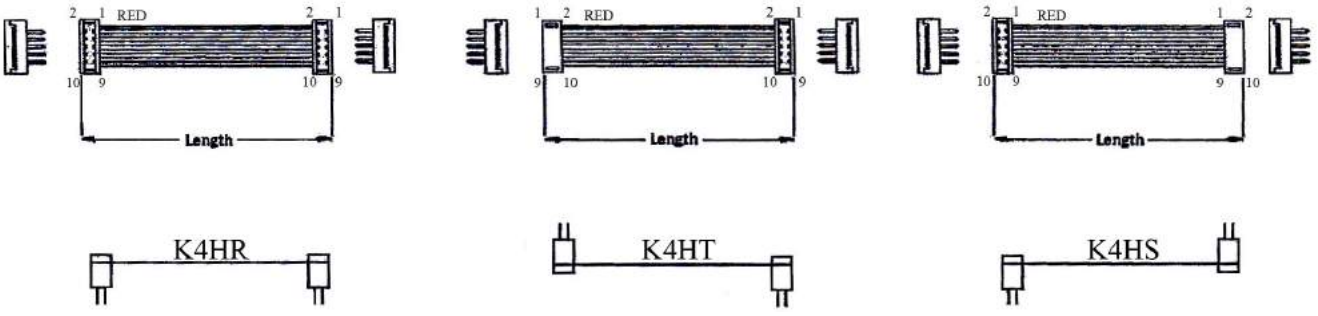

2.54MM DIP PLUG WITH STRAIN RELIEF & 0.64MM SQUARE TAIL DIP=6.0MM

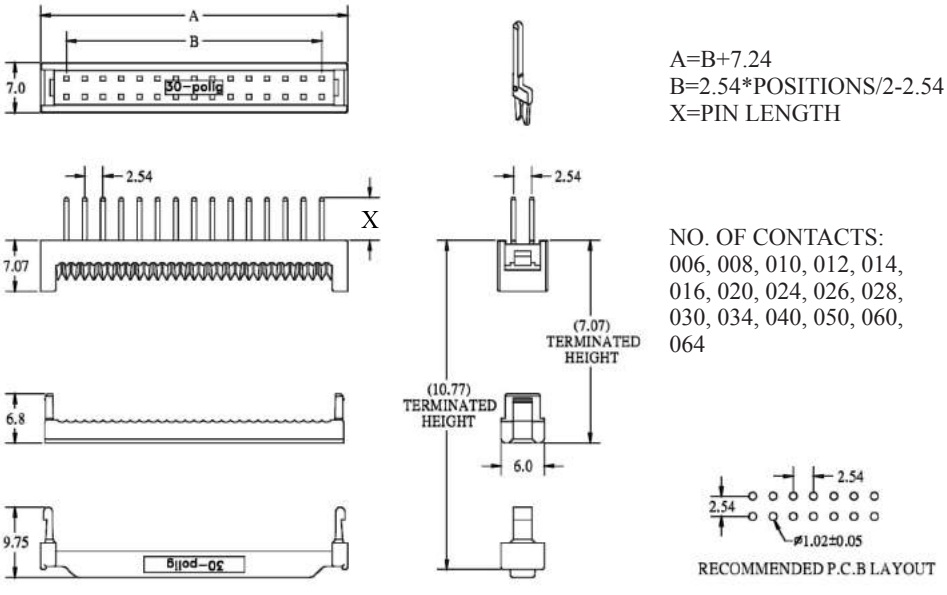

A=B+7.24
B=2.54*POSITIONS/2-2.54
X=PIN LENGTH

NO. OF CONTACTS:
006, 008, 010, 012, 014,
016, 020, 024, 026, 028,
030, 034, 040, 050, 060,
064

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

P/N K x x x x x x x - x x C M B x
1 2 3 4 5


1. CONSTRUCTION TYPE:
   4HR, 4HS, 4HT
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

5. PIN LENGTH OF DIP PLUG:
   "6" X= 6.0MM (STANDARD)
   "T" X= 12.1MM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC TYPE BOX HEADER (J1)

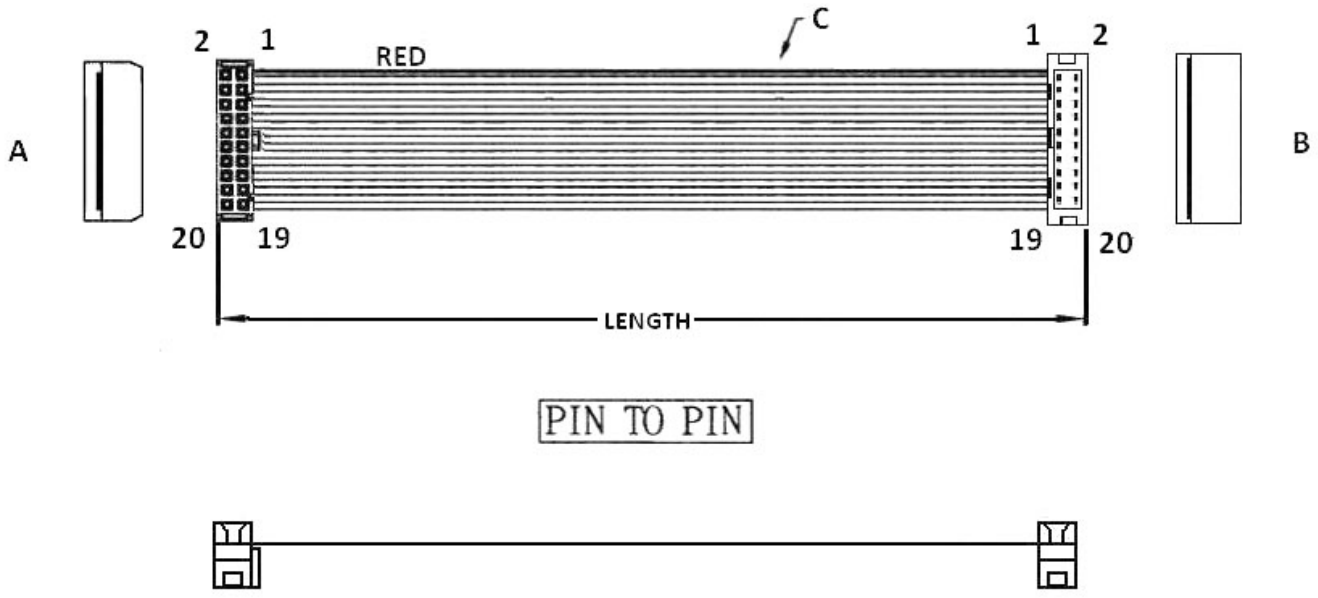


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KB}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "KB" 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF
   TO 2.54MM IDC TYPE BOX HEADER
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC TYPE BOX HEADER (J2)

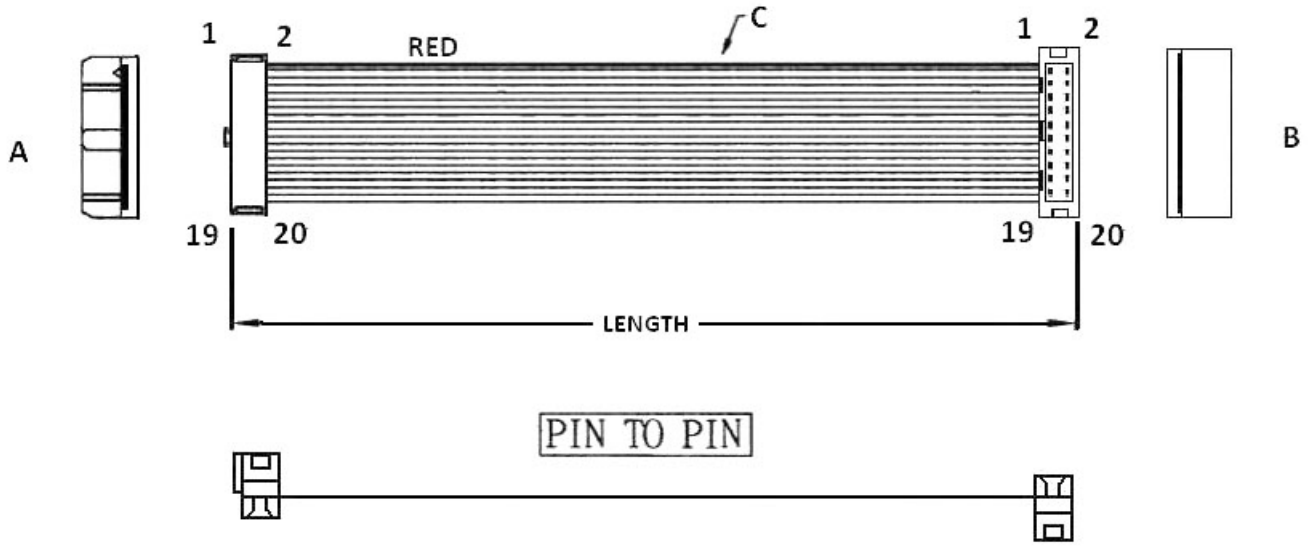


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LB}{3}$ - $\frac{xx}{4}$ **C M** $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "LB" 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF
   TO 2.54MM IDC TYPE BOX HEADER
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC TYPE BOX HEADER (J3)

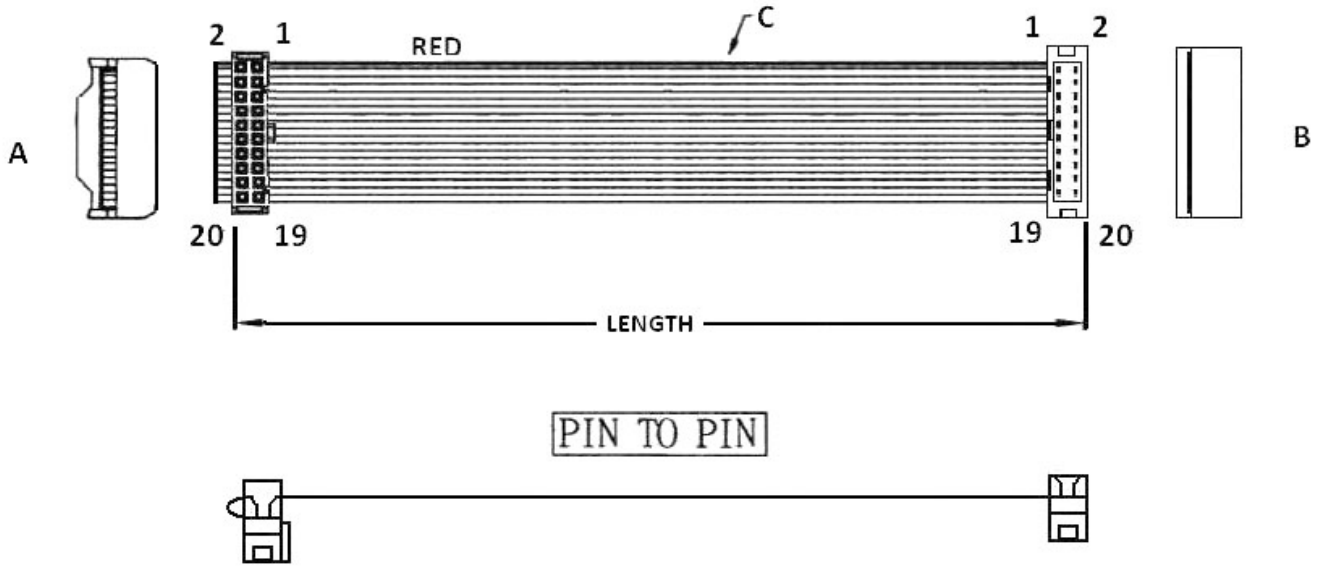


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MB}{3}$ - $\frac{xx}{4}$ **C M** $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "MB" 2.54MM IDC SOCKET WITH STRAIN RELIEF
   TO 2.54MM IDC TYPE BOX HEADER
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC TYPE BOX HEADER (J4)

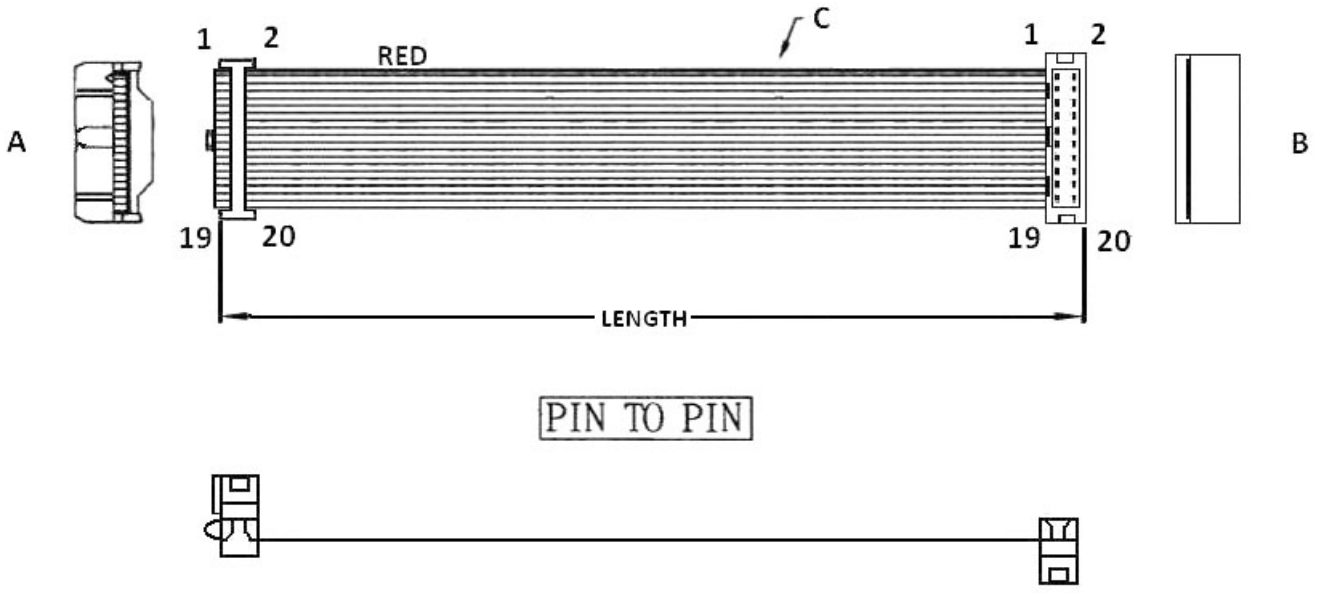

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NB}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "NB" 2.54MM IDC SOCKET WITH STRAIN RELIEF
   TO 2.54MM IDC TYPE BOX HEADER
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL WIPE CONTACTS (H=10.5MM & 14.4MM) TO BOX HEADER IDC TYPE (J5)

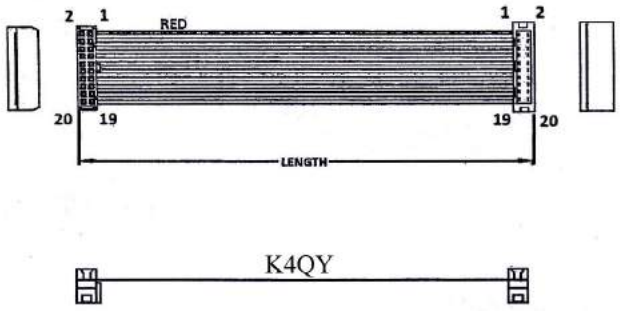


K4QY

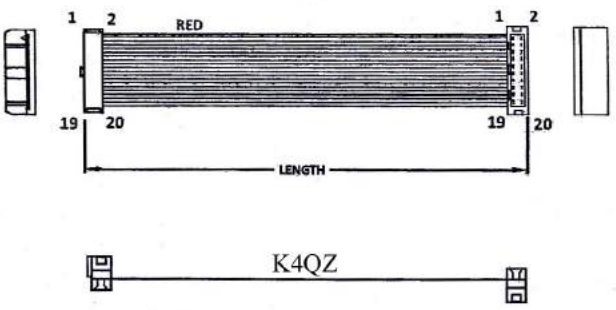

K4QZ

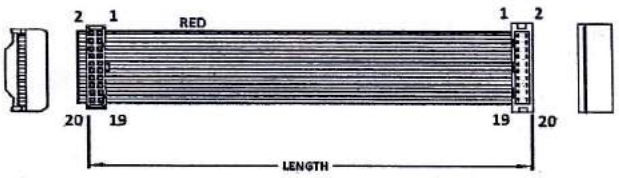

K4TY

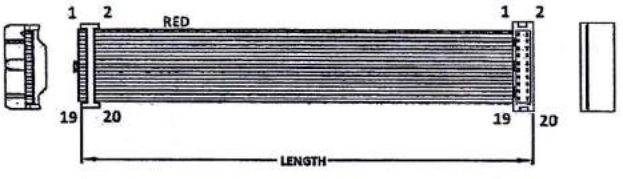

K4TZ


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{x}}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 4QY, 4QZ (H=10.5MM)
   IDC SOCKET WITH S.R. : 4TY, 4TZ (H=14.4MM)
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK (SOCKET) + GRAY (HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE
WITH 2.54MM IDC SOCKET (H=10.5MM & 14.4MM) TO BOX HEADER IDC TYPE (J6)

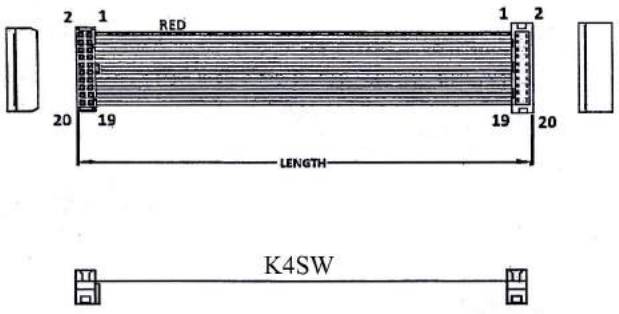


K4SW

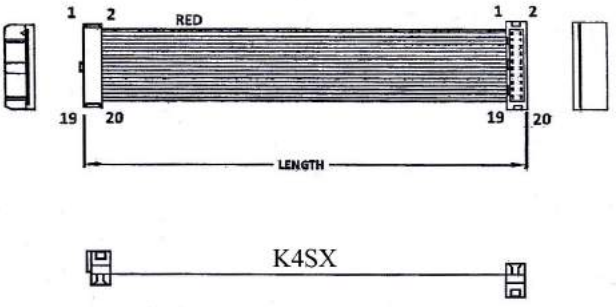

K4SX

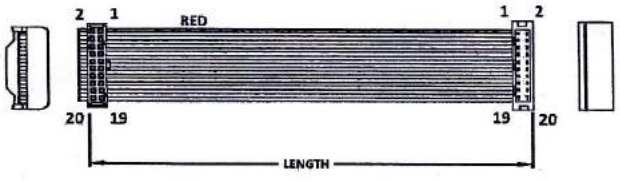

K4SY

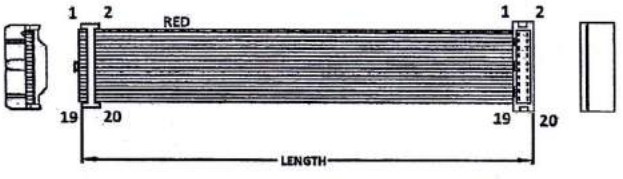

K4SZ


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x C M}}{3}$ $\frac{\text{x}}{4}$


1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 4SW, 4SX (H=10.5MM)
   IDC SOCKET WITH S.R. : 4SY, 4SZ (H=14.4MM)
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK (SOCKET) + GRAY (HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET (H=10.5MM) TO IDC TYPE BOX HEADER WITH EARS (J7)

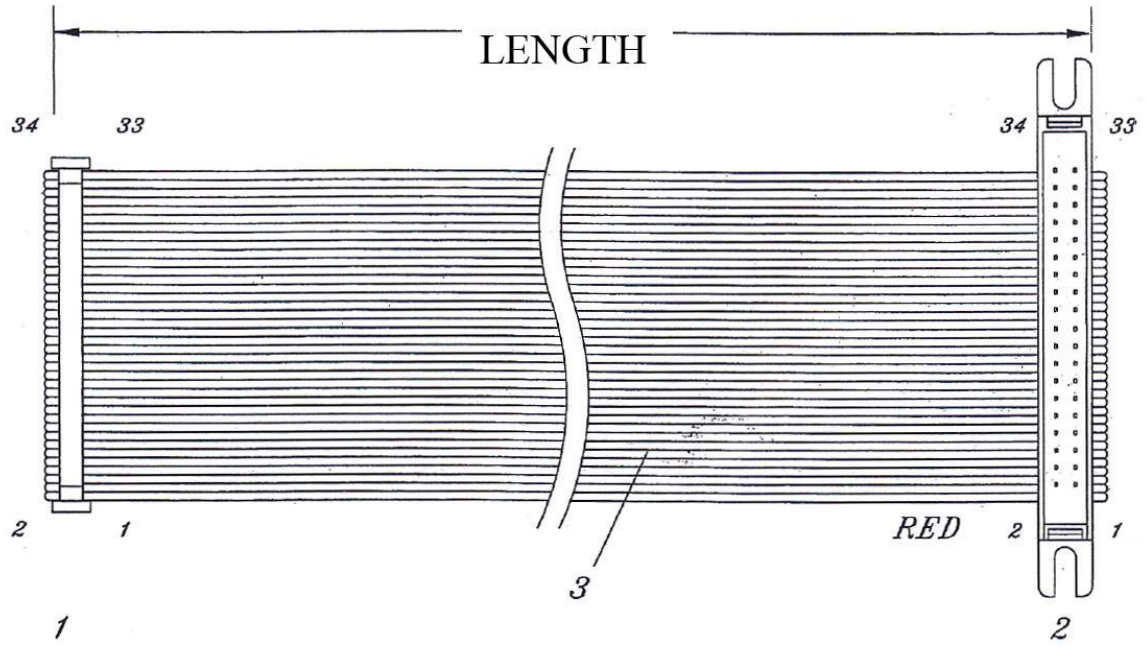

1.27MM PITCH IDC TYPE BOX HEADER WITH EARS

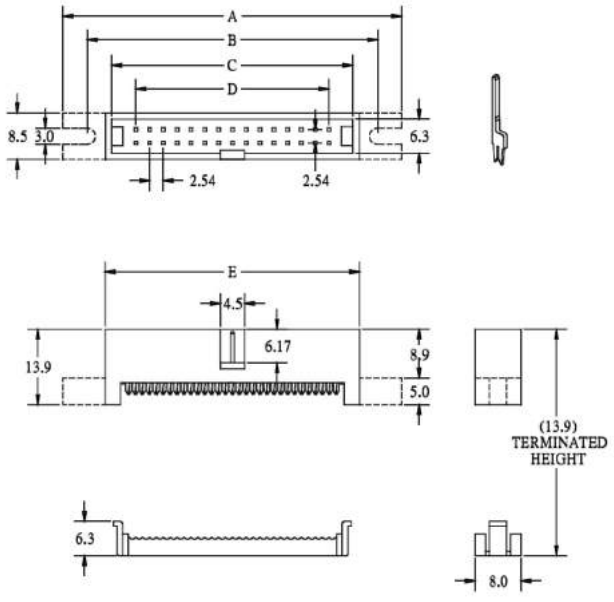

A=D+29.80
B=D+18.44
C=D+8.14
D=2.54*POSITIONS/2-2.54
E=D+11.26

NO. OF CONTACTS:
010, 014, 016, 020, 024,
026, 030, 034, 040, 050,
060, 064


ORDERING INFORMATION:

P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{x}{4}$


1. CONSTRUCTION TYPE:
   4BY
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)
   "A" GRAY+GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL WIPE CONTACTS (H=10.5MM) TO IDC TYPE BOX HEADER WITH EARS (J8)

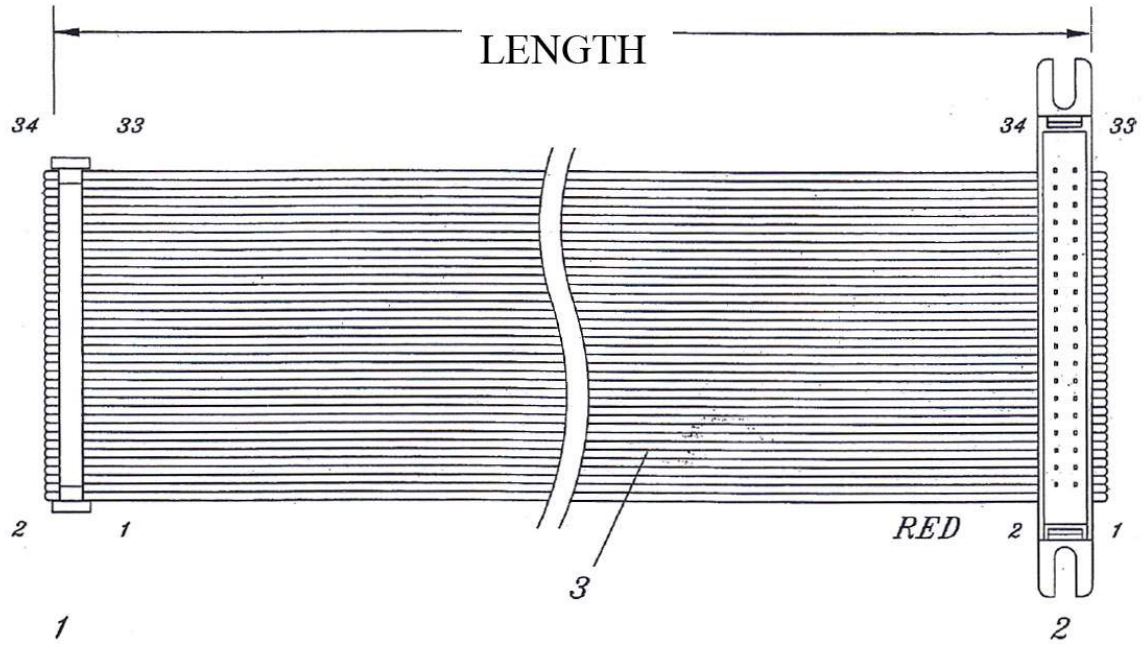

1.27MM PITCH IDC TYPE BOX HEADER WITH EARS

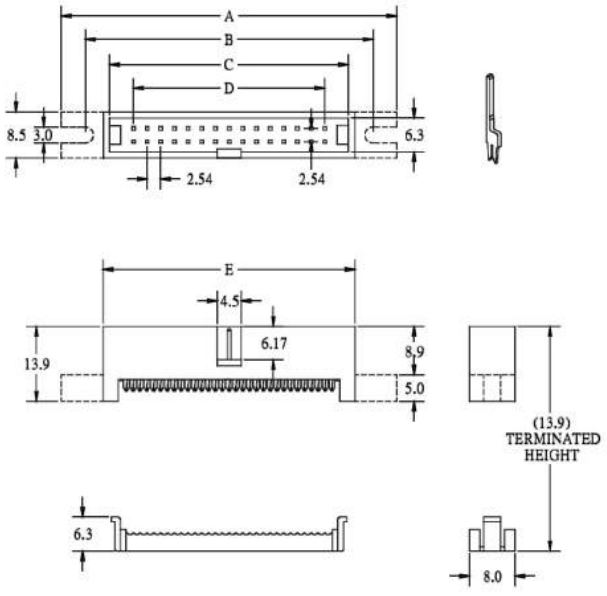

A=D+29.80
B=D+18.44
C=D+8.14
D=2.54*POSITIONS/2-2.54
E=D+11.26

NO. OF CONTACTS:
010, 014, 016, 020, 024,
026, 030, 034, 040, 050,
060, 064


ORDERING INFORMATION:

P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x\,C\,M}{3}$ $\frac{x}{4}$


1. CONSTRUCTION TYPE:
   4BZ
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)
   "A" GRAY+GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2*2.54MM IDC TYPE BOX HEADERS (K1)

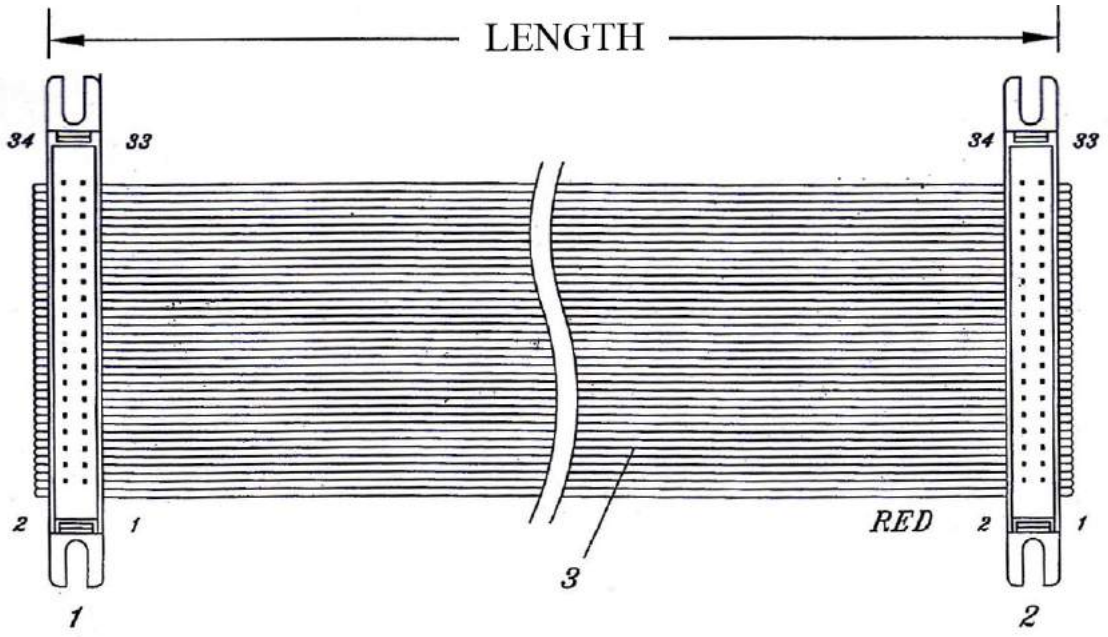

1.27MM PITCH BOX HEADER IDC TYPE WITH EARS

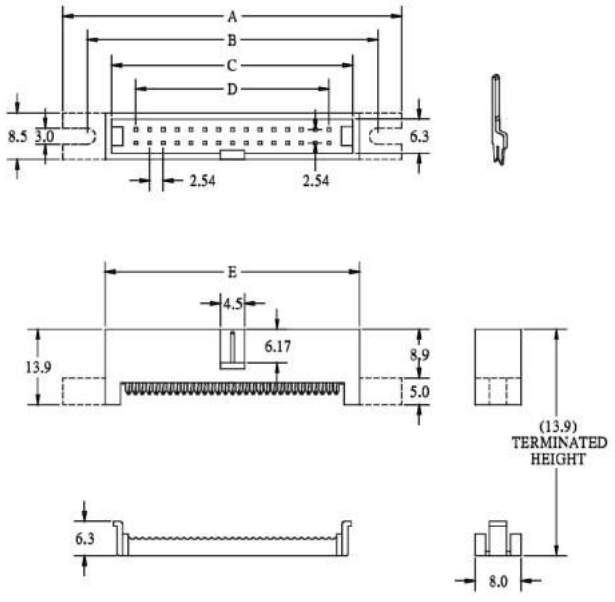

A=D+29.80
B=D+18.44
C=D+8.14
D=2.54*POSITIONS/2-2.54
E=D+11.26

NO. OF CONTACTS:
010, 014, 016, 020, 024,
026, 030, 034, 040, 050,
060, 064


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMA}{4}$

1. CONSTRUCTION TYPE:
   4BX
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH SHORT LATCHES (L1)

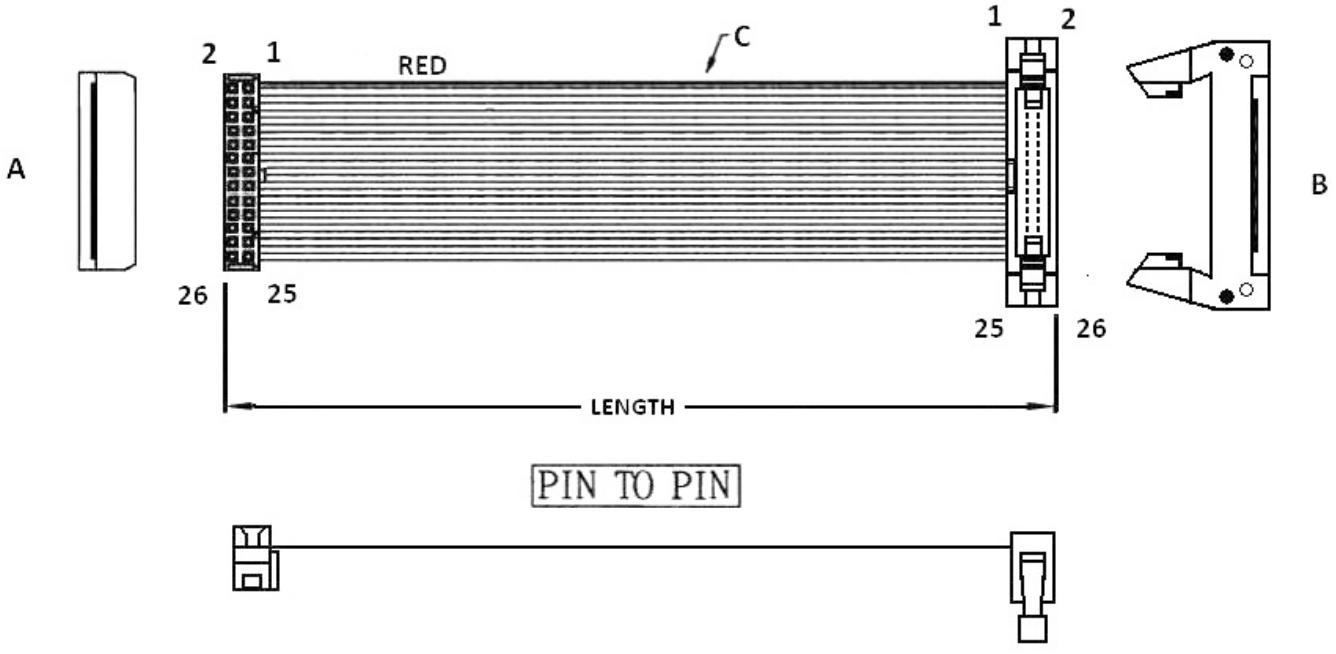


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KS}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "KS" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH SHORT LATCHES (L2)

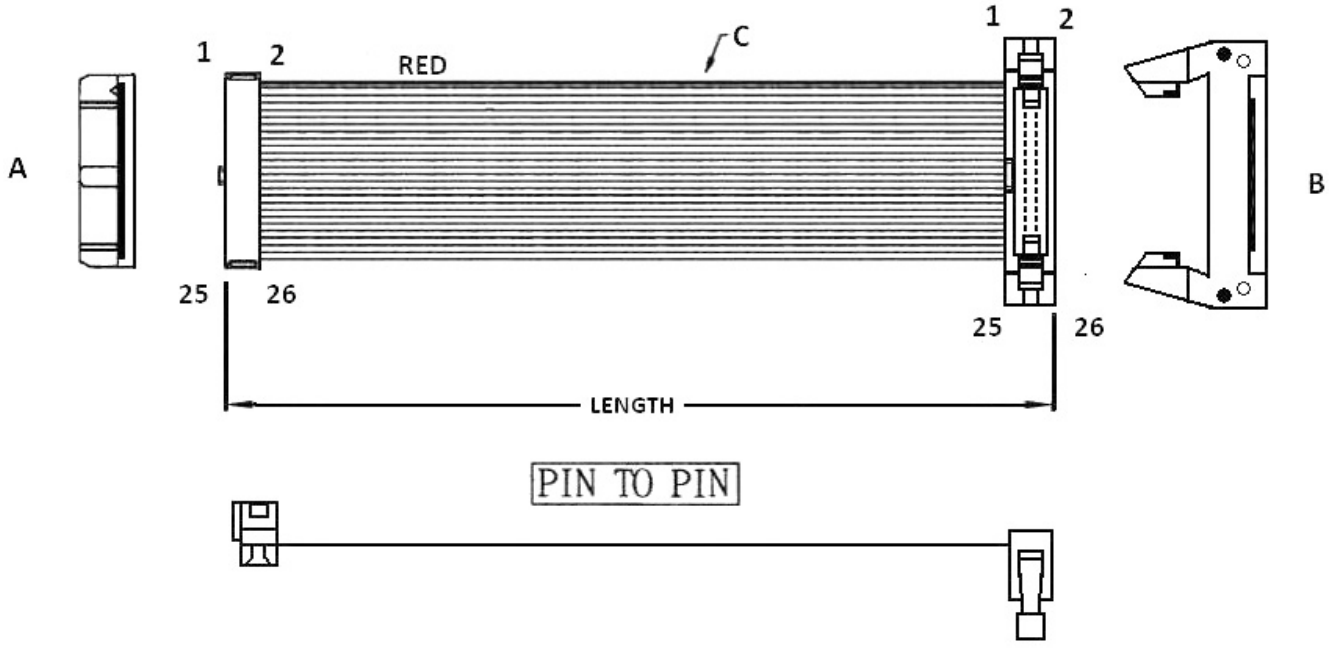


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LS}{3}$ - $\frac{xx}{4}$ **C M** $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "LS" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH SHORT LATCHES (L3)

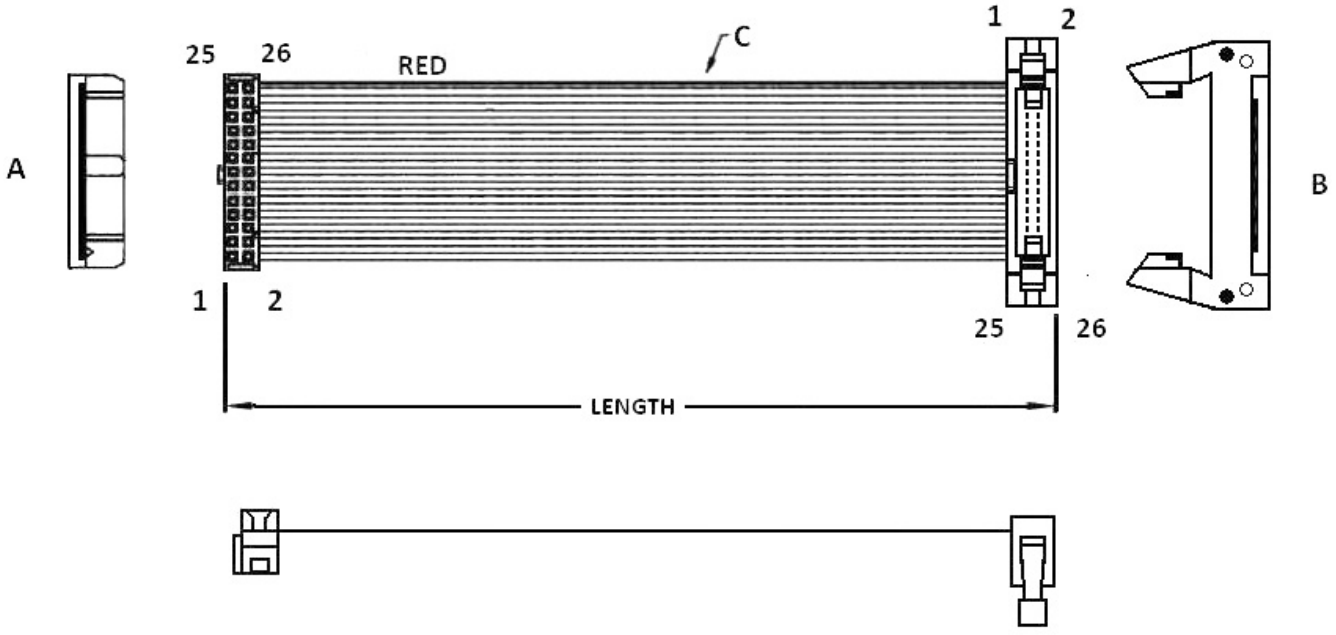


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{IS}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10
3. CONNECTORS AT TWO ENDS:
   "IS" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH SHORT LATCHES (L4)

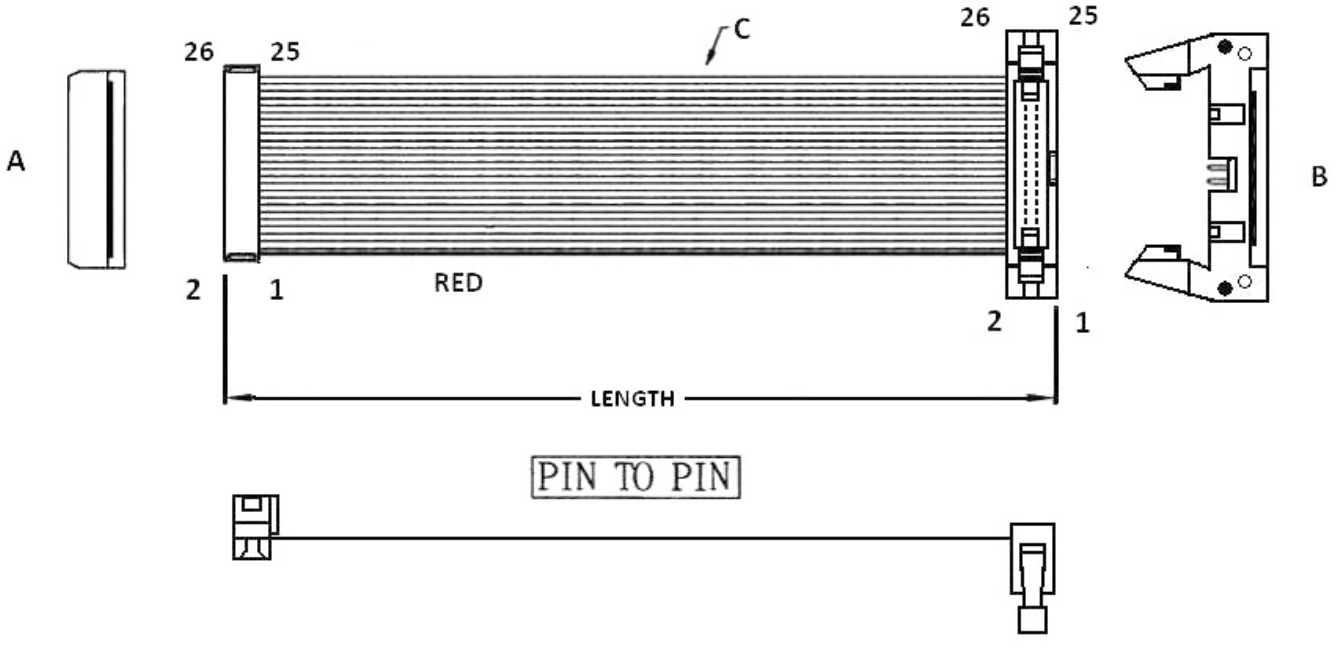


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KQ}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
1. NO. OF CONTACTS:
   10~64
2. CONNECTORS AT TWO ENDS:
   "KQ" 2.54MM IDC SOCKET WITH NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH SHORT LATCHES (L5)

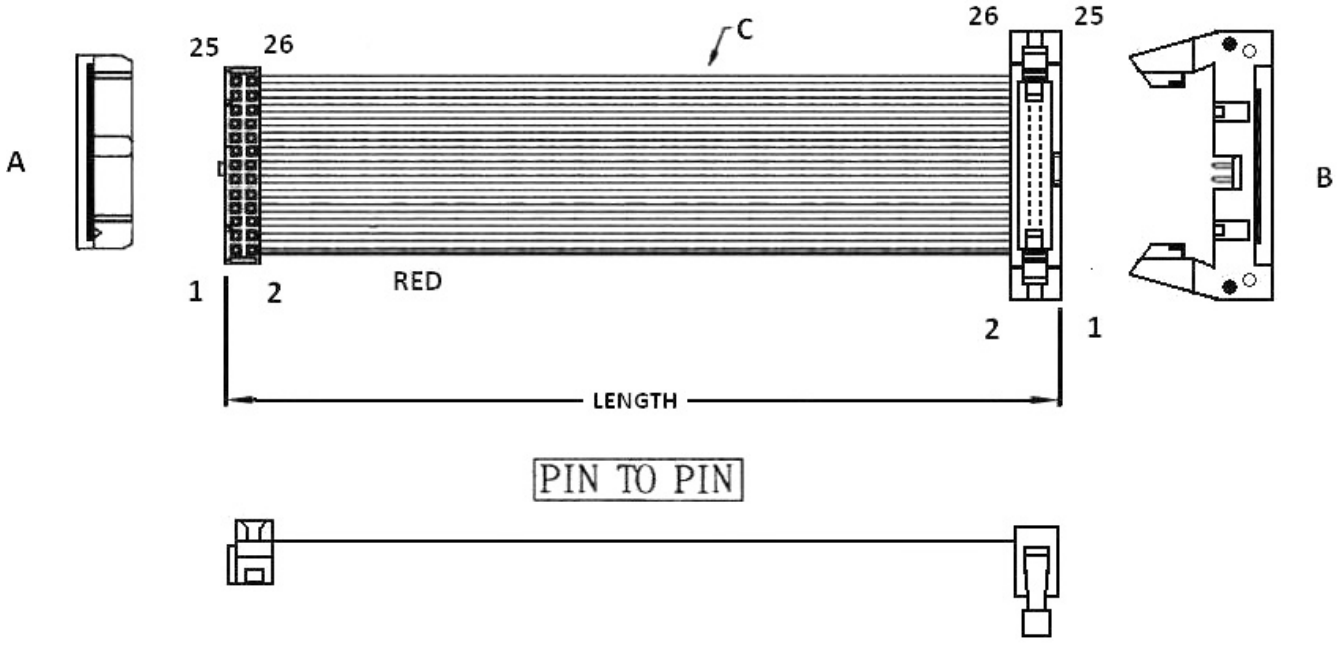


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LQ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "LQ" 2.54MM IDC SOCKET WITH NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH SHORT LATCHES (L6)

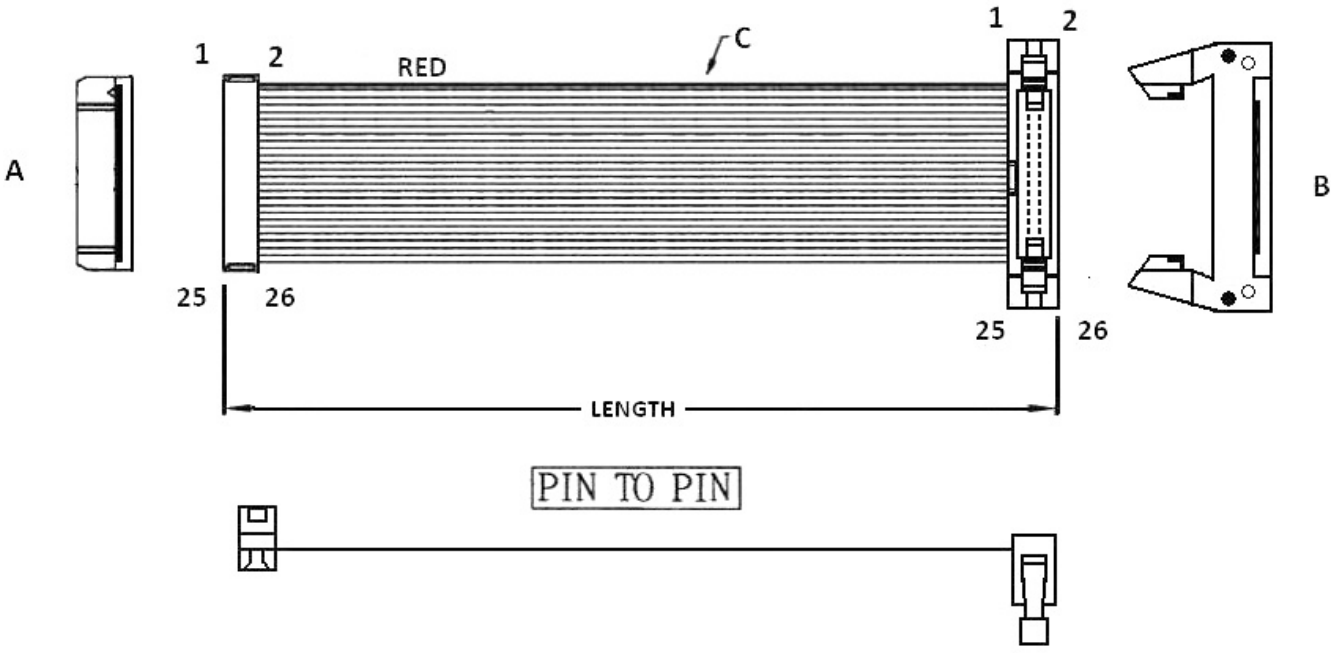


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AS}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "AS" 2.54MM IDC SOCKET W/O NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH SHORT LATCHES (L7)

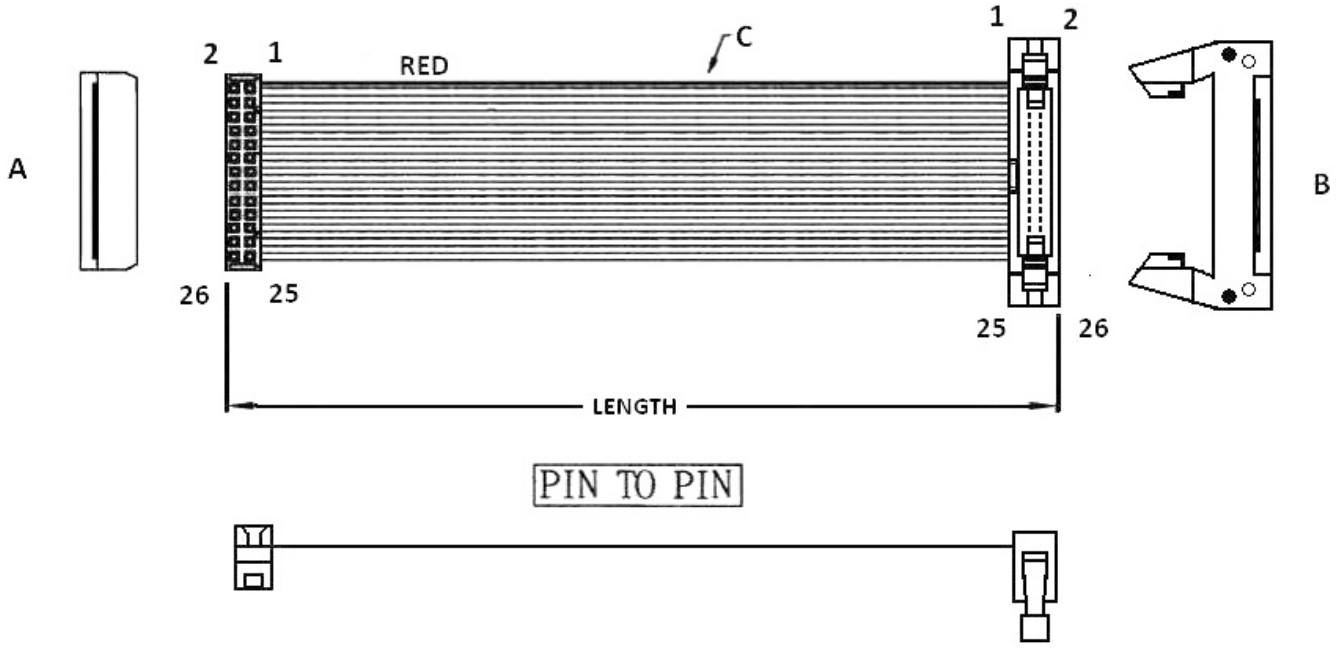


ORDERING INFORMATION:

P/N KA xx VS - xx C M A
1 2 3 4 5

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "VS" 2.54MM IDC SOCKET W/O NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH SHORT LATCHES (L8)

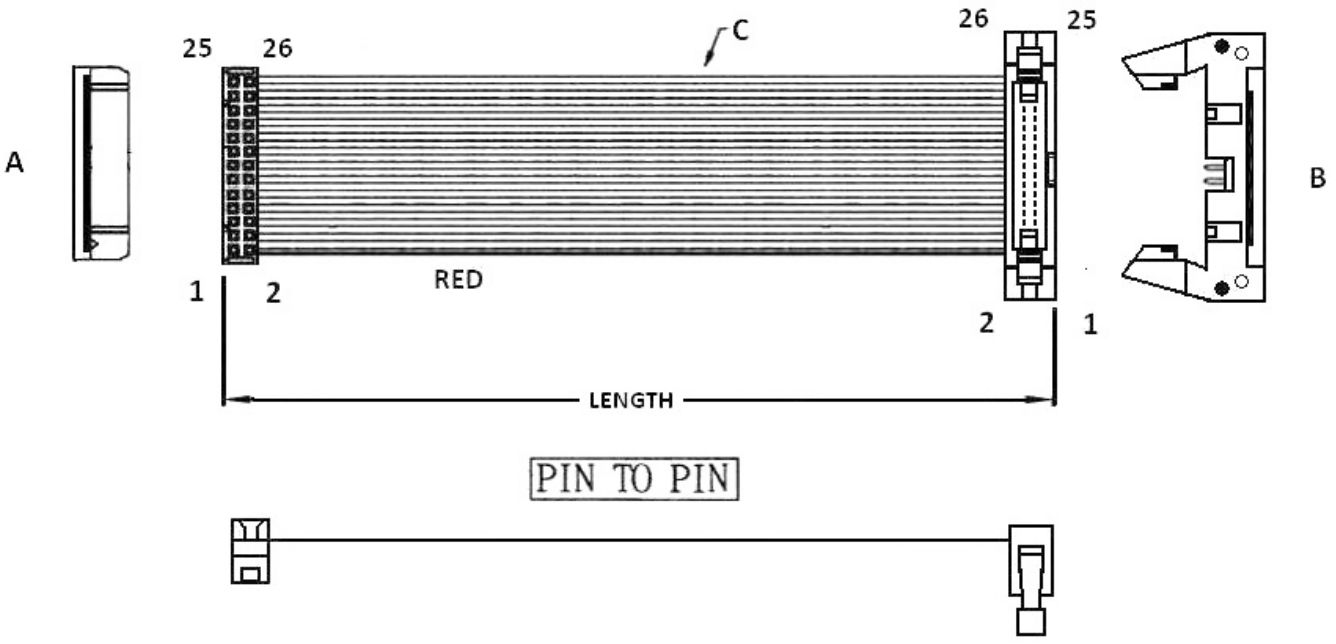

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AQ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "AQ" 2.54MM IDC SOCKET WITHOUT NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH SHORT LATCHES (L9)

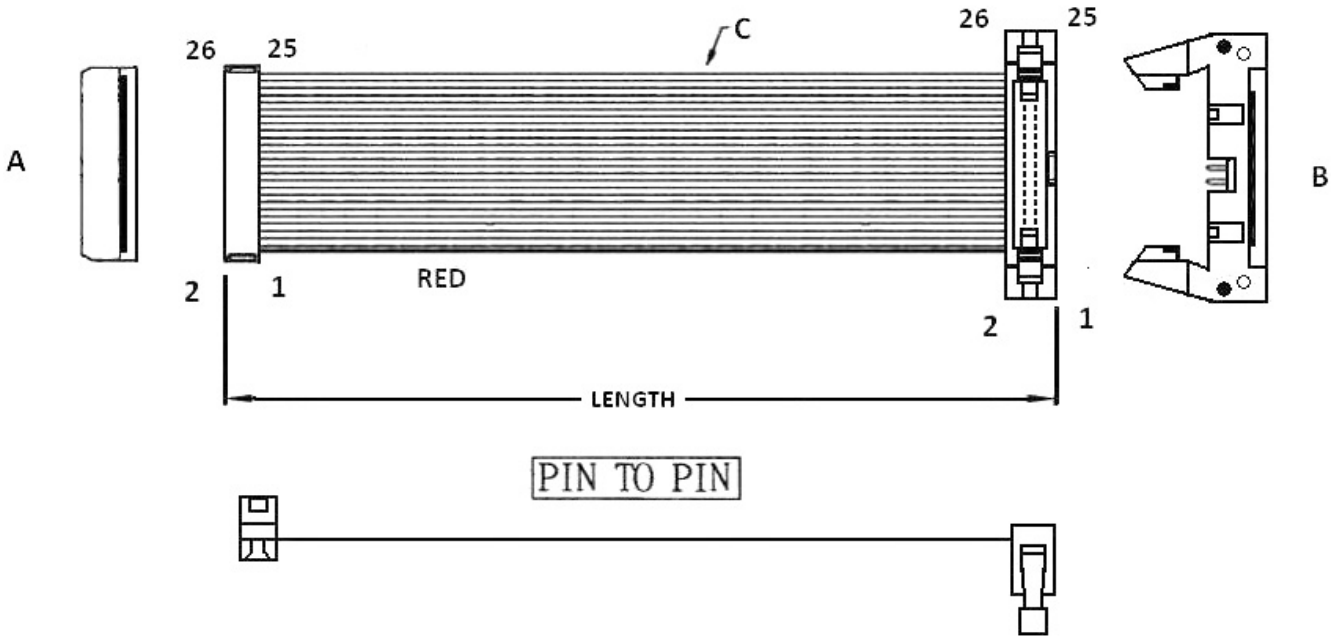

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VQ}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "VQ" 2.54MM IDC SOCKET WITHOUT NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC PLUG WITH SHORT LATCHES (L10)

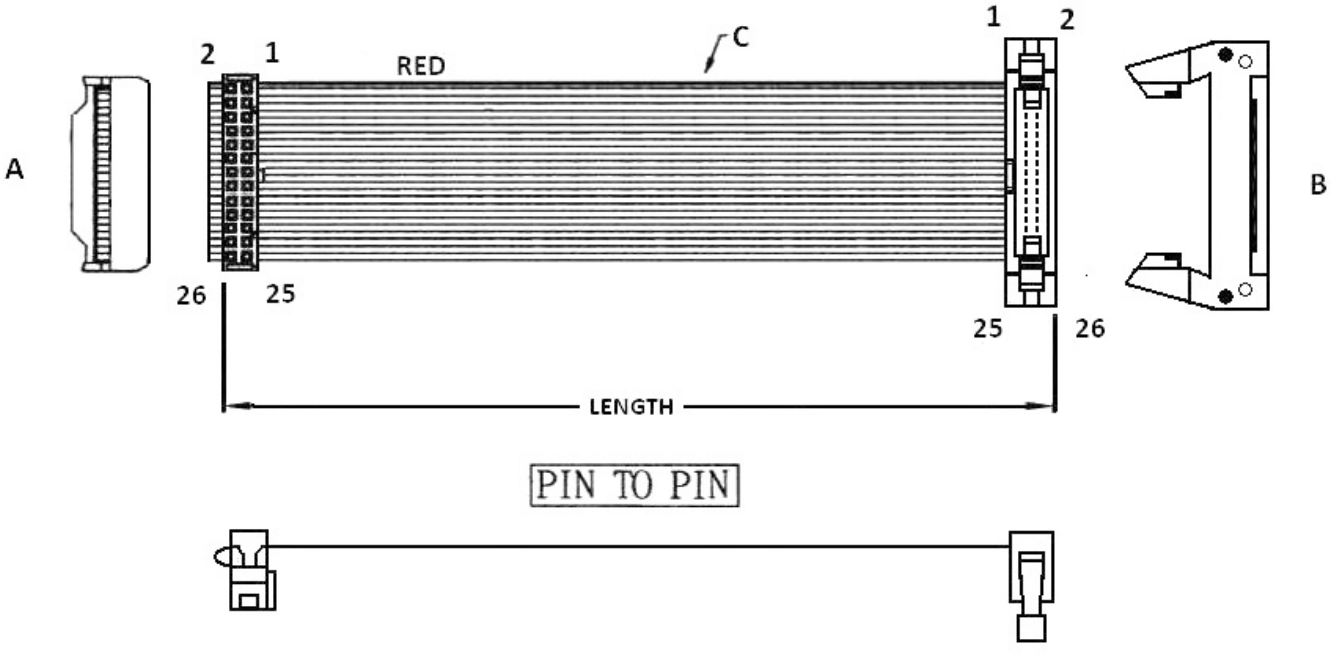


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MS}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "MS" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC PLUG WITH SHORT LATCHES (L11)

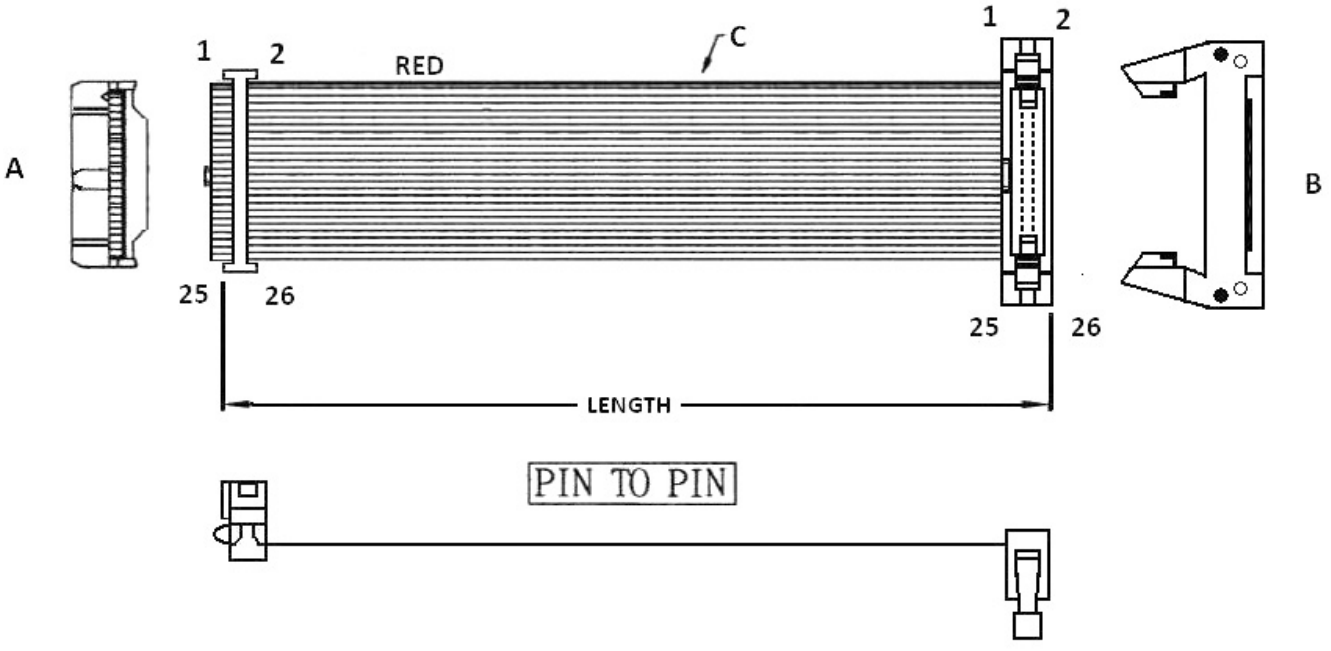


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{NS}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "NS" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO 2.54MM IDC PLUG WITH SHORT LATCHES (L12)

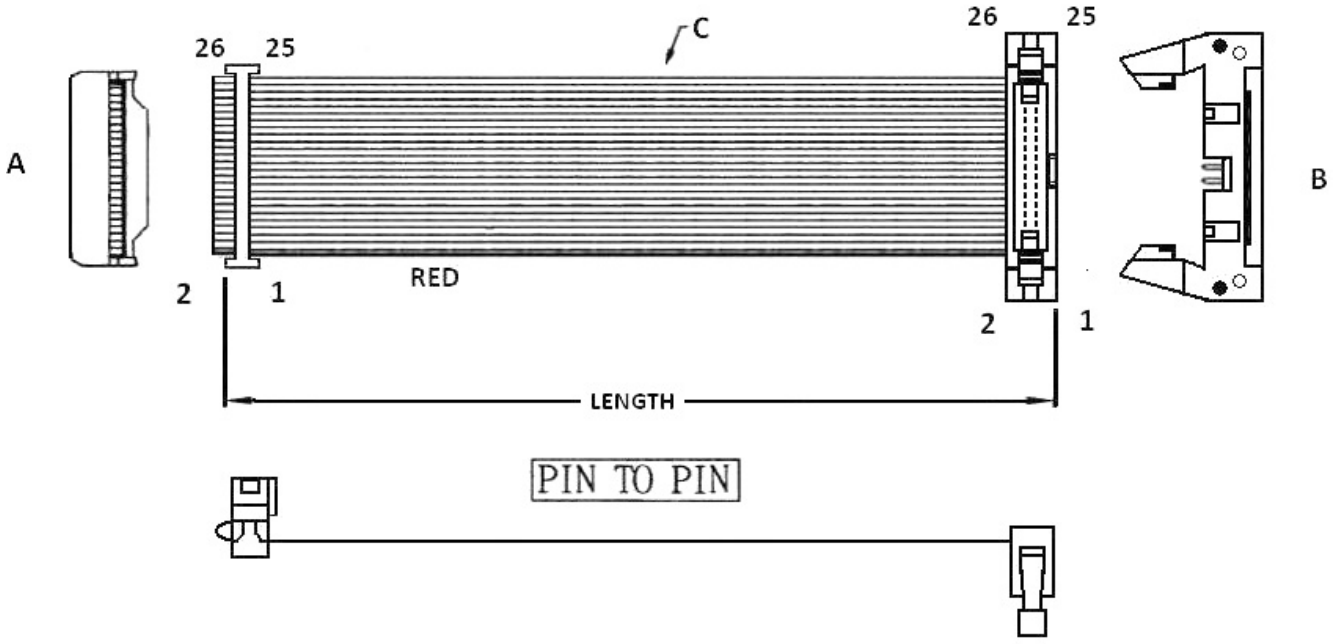


ORDERING INFORMATION:

P/N KA xx MQ - xx C M A
1 2 3 4 5

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "MQ" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO 2.54MM IDC PLUG WITH SHORT LATCHES (L13)

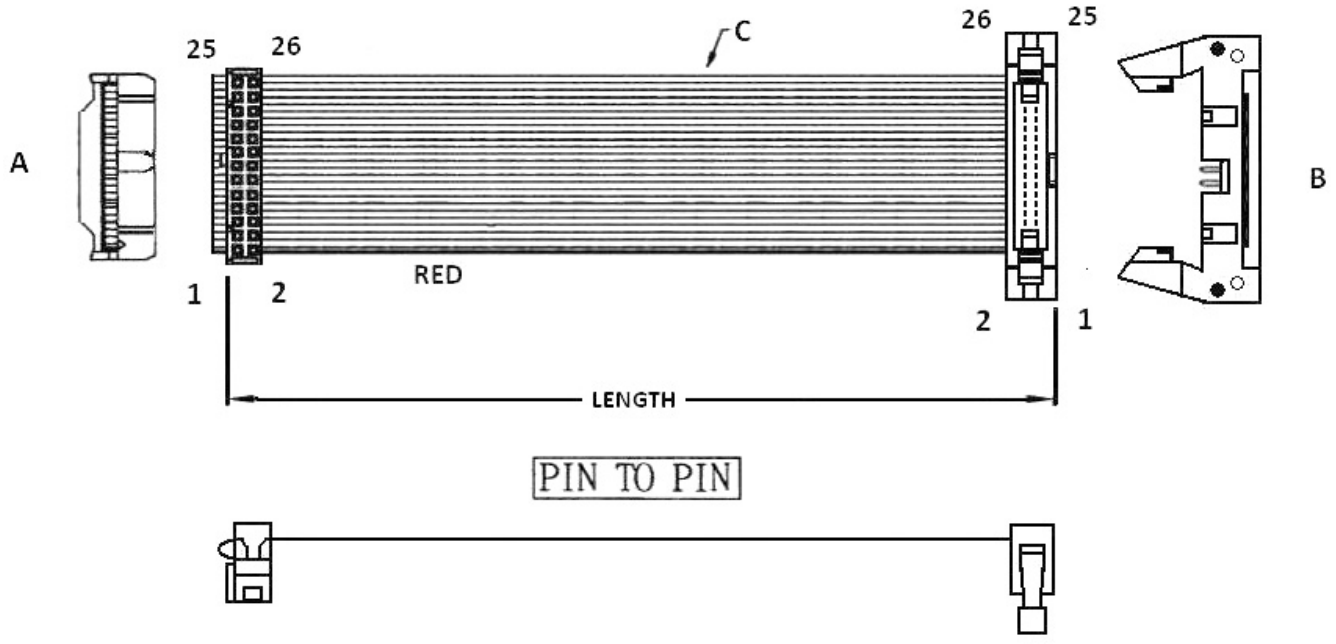

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NQ}{3}$ **-** $\frac{xx}{4}$ **C M** $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "NQ" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O S.R. (H=9.5MM) TO IDC PLUG WITH SHORT LATCHES (L14)

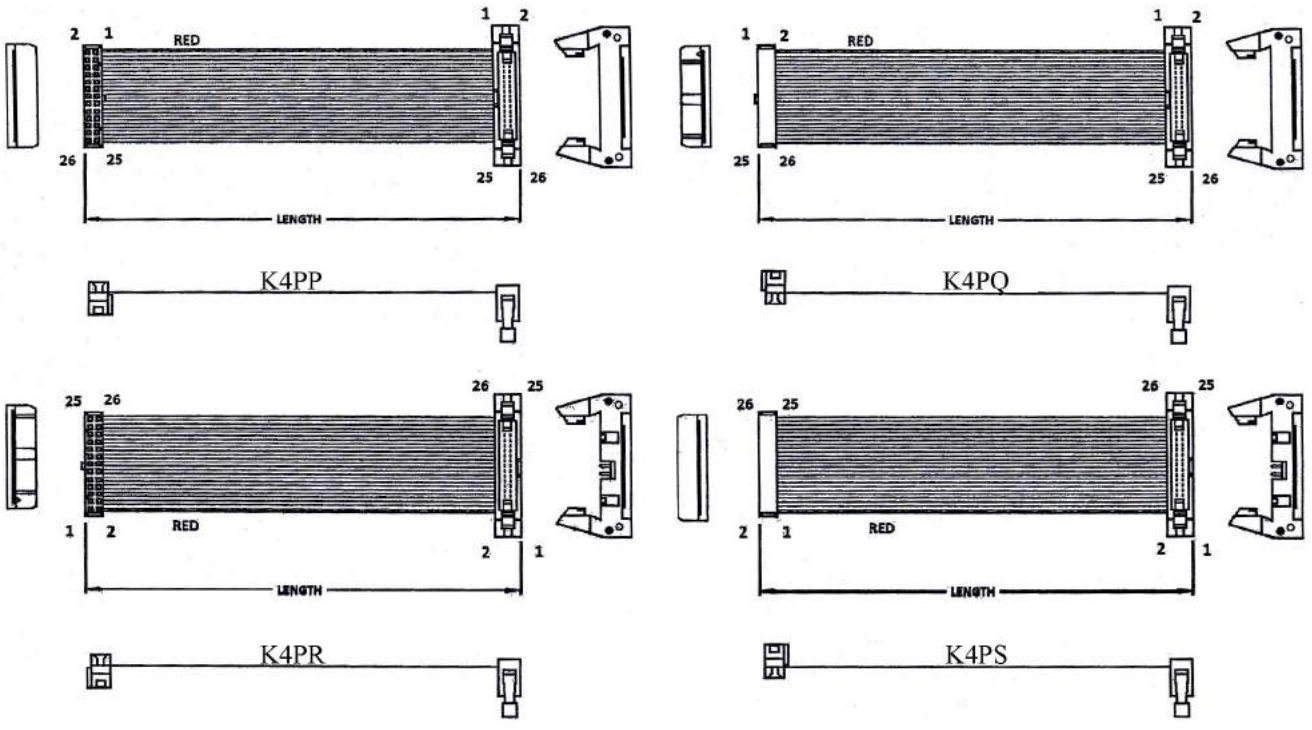


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMD}{4}$

1. CONSTRUCTION TYPE:
   4PP, 4PQ, 4PR, 4PS
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT (H=10.5MM) TO IDC PLUG WITH SHORT LATCHES (L15)

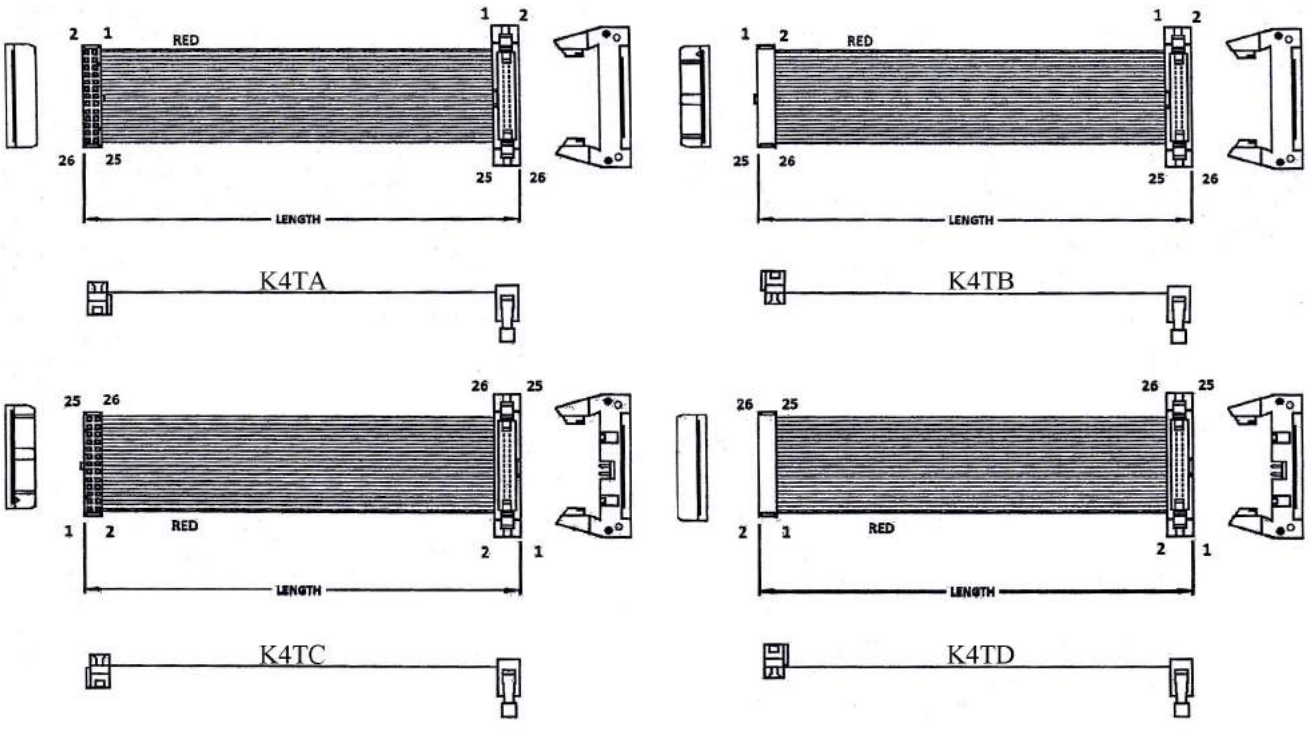


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{D}{4}$

1. CONSTRUCTION TYPE:
   4TA, 4TB, 4TC, 4TD
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O S.R. DUAL WIPE CONTACT TYPE (H=10.5MM) TO IDC PLUG WITH SHORT LATCHES (L16)

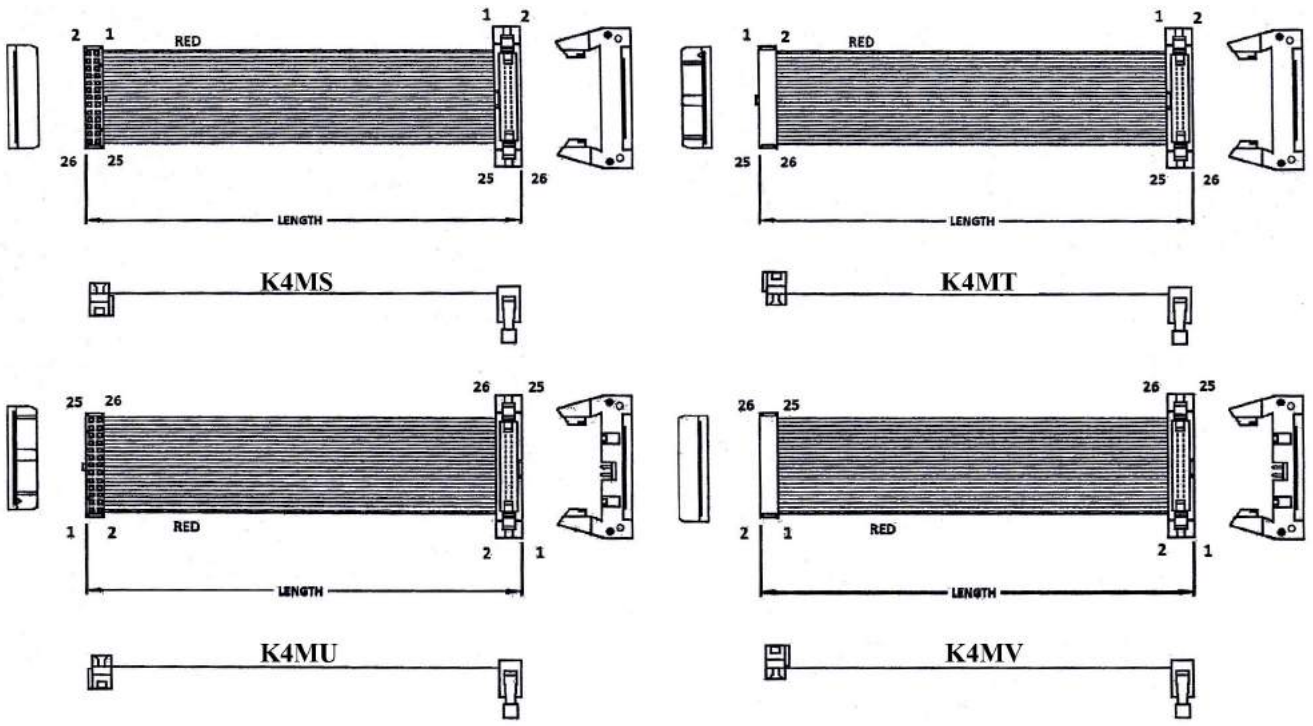


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M x
1 2 3 4

1. CONSTRUCTION TYPE:
   4MS, 4MT, 4MU, 4MV
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT (H=14.4MM) TO IDC PLUG WITH SHORT LATCHES (L17)

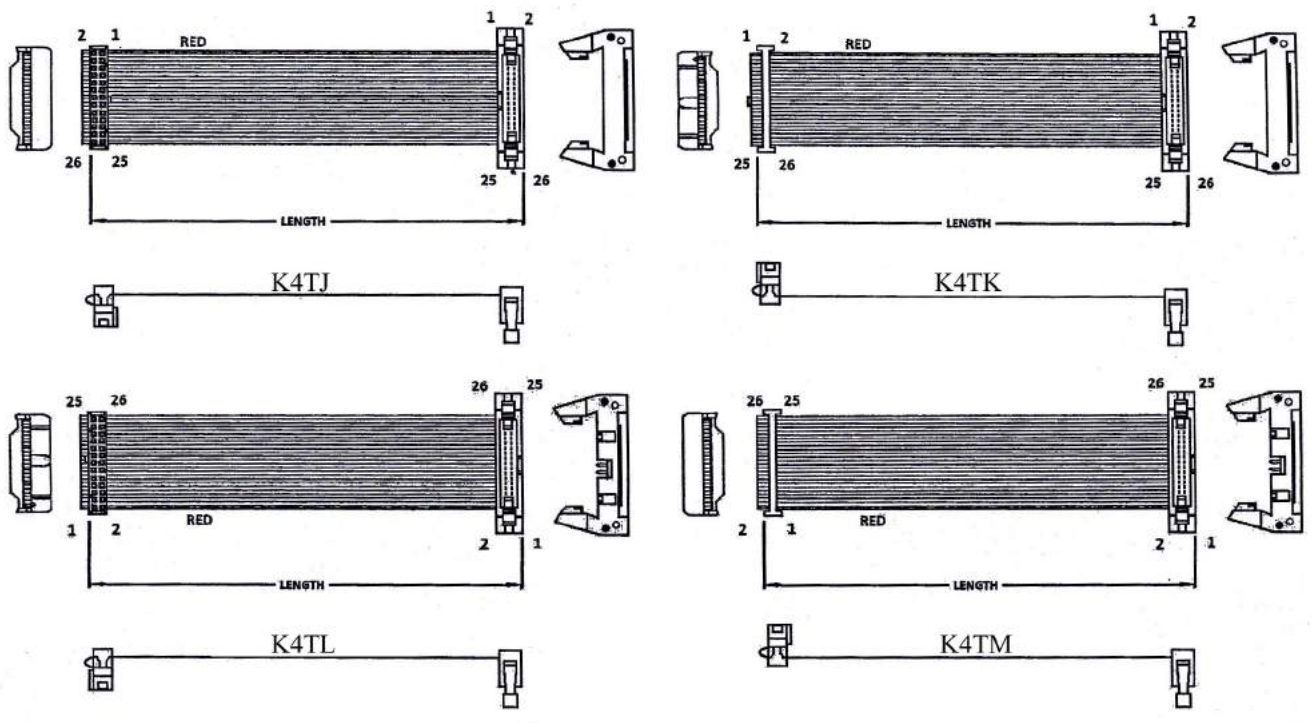


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}$ D


1. CONSTRUCTION TYPE:
   4TJ, 4TK, 4TL, 4TM
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH S.R. DUAL WIPE CONTACT TYPE (H=14.4MM) TO IDC PLUG WITH SHORT LATCHES (L18)

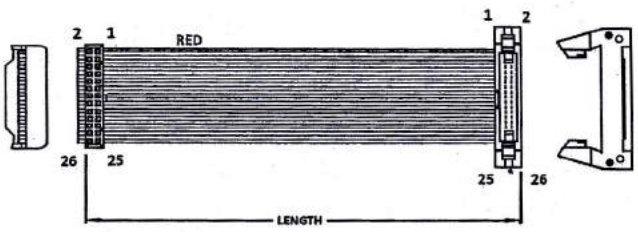


K4PE

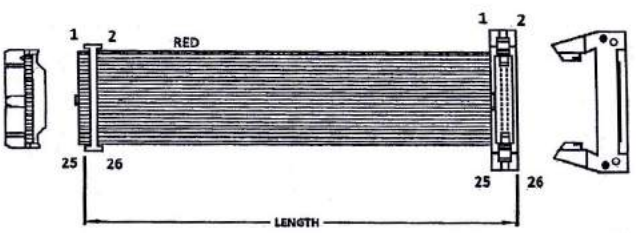

K4PF

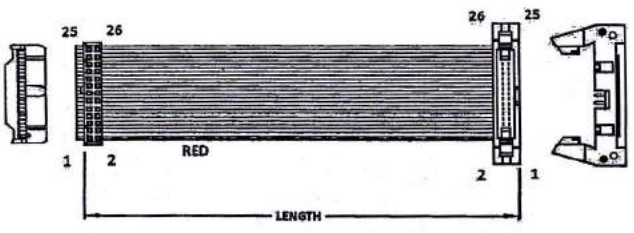

K4PG

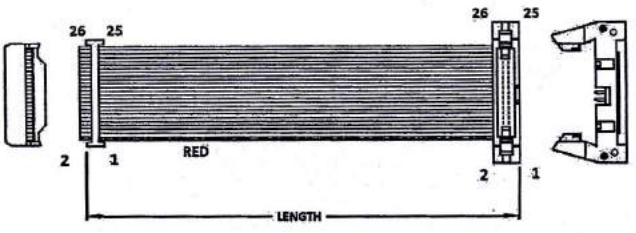

K4PH


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{x}}{4}$

1. CONSTRUCTION TYPE:
   4PE, 4PF, 4PG, 4PH
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH LONG LATCHES (M1)

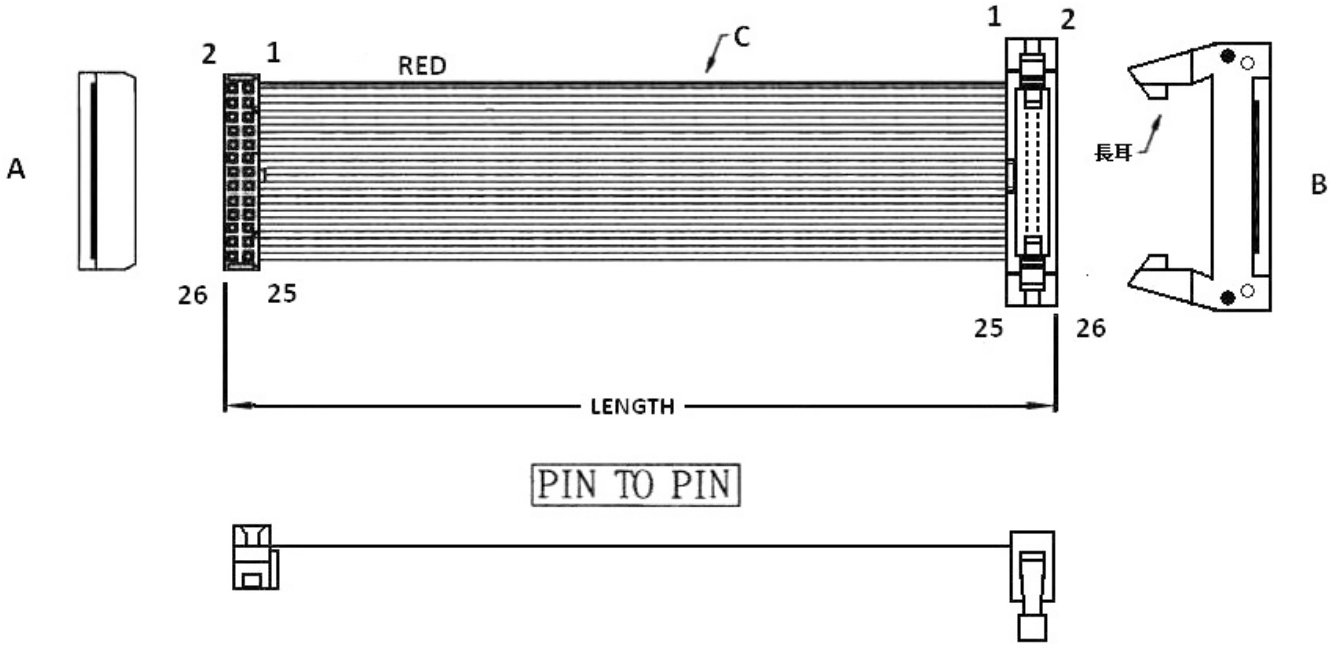


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KZ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "KZ" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH LONG LATCHES (M2)

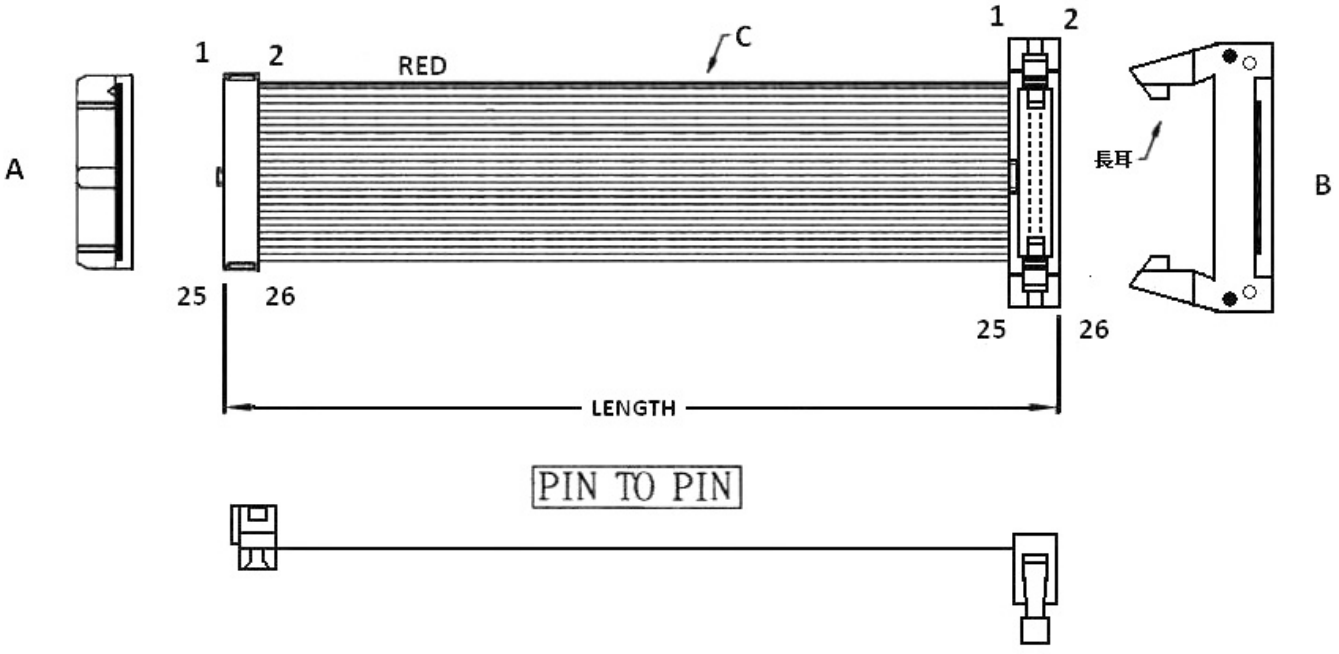

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LZ}{3}-\frac{xx}{4}$ **C M** $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "LZ" 2.54MM IDC SOCKET WITH NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M3)

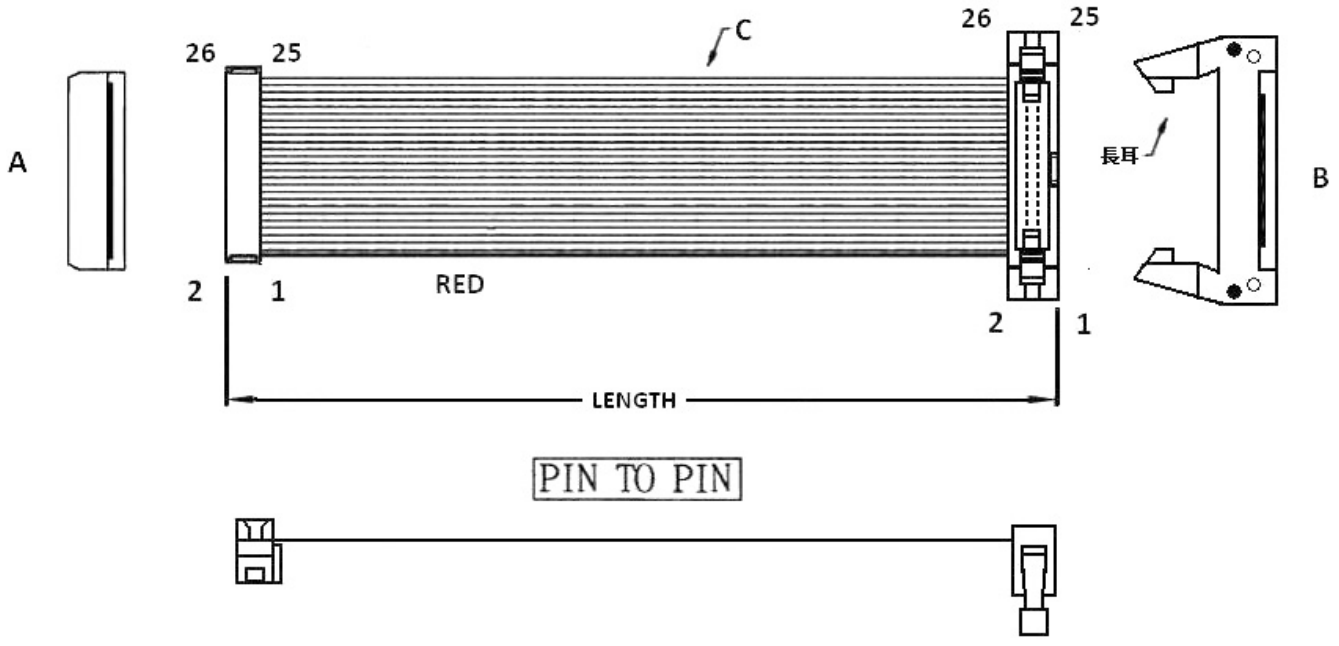


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{KW}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "KW" 2.54MM IDC SOCKET WITH NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M4)

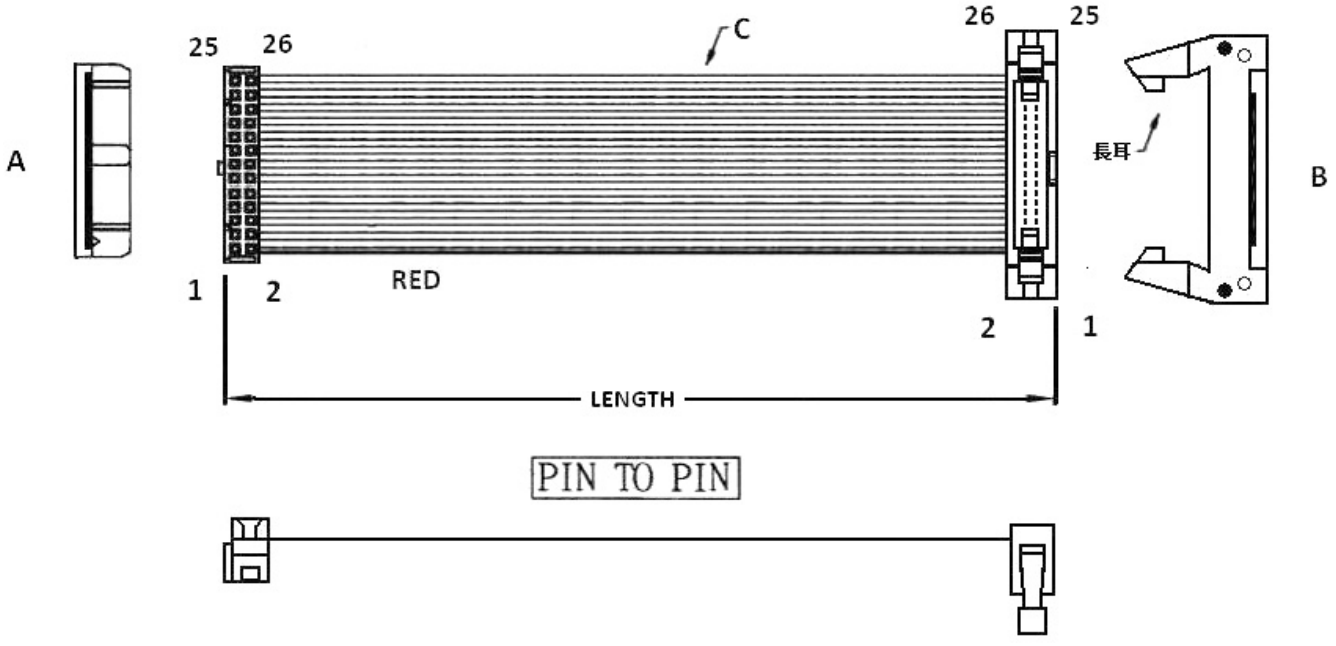


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LW}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "LW" 2.54MM IDC SOCKET WITH NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH LONG LATCHES (M5)

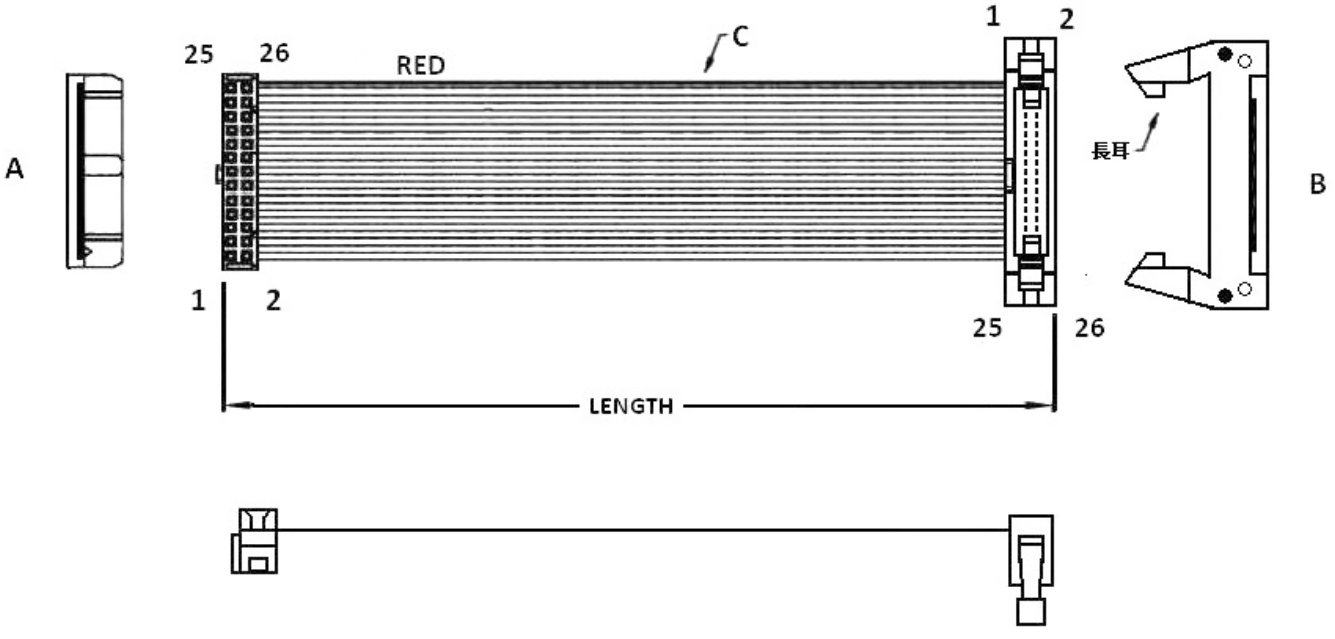


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{IZ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "IZ" 2.54MM IDC SOCKET WITH NOSE W/O S.R.
   TO 2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M6)

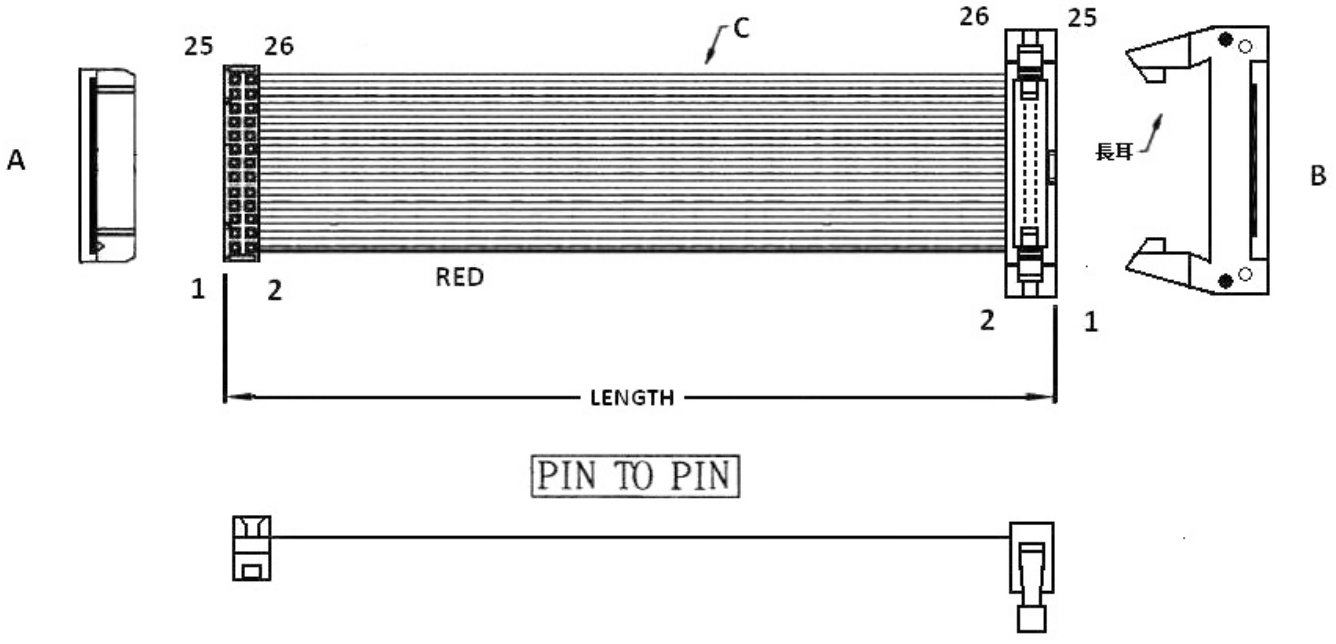

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AW}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "AW" 2.54MM IDC SOCKET WITHOUT NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M7)

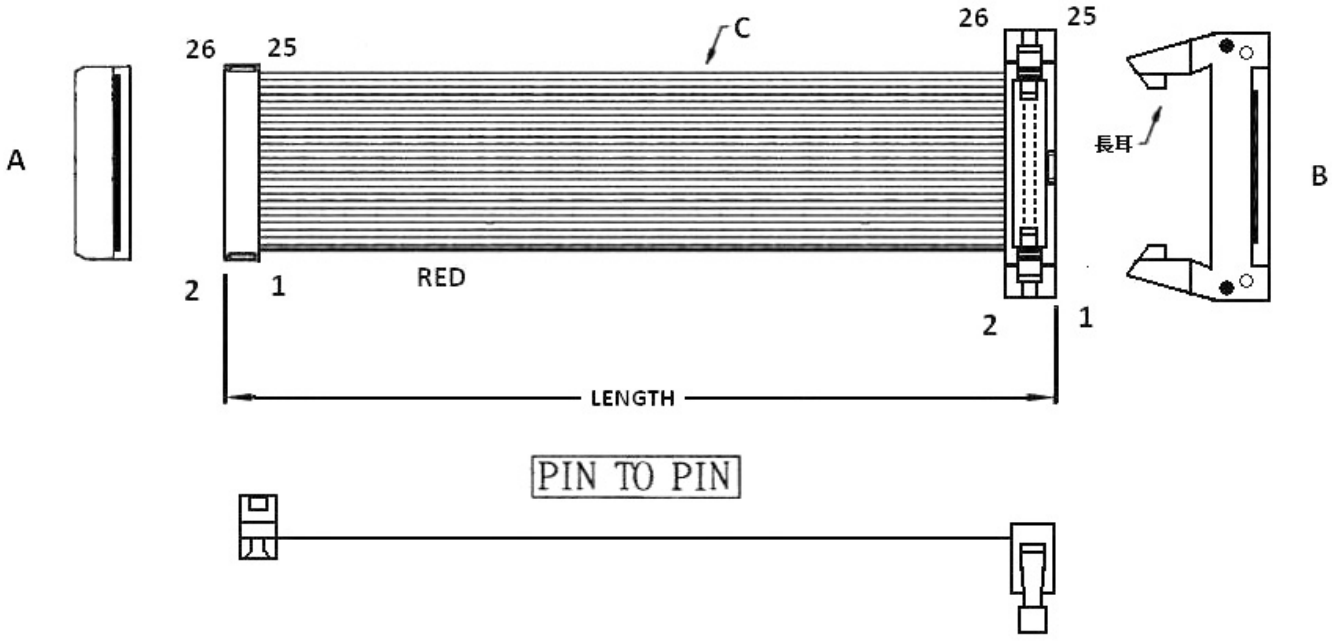

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{K\,A}{1}\,\frac{x\,x}{2}\,\frac{V\,W}{3}$ - $\frac{x\,x}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "VW" 2.54MM IDC SOCKET WITHOUT NOSE & WITHOUT S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH LONG LATCHES (M8)

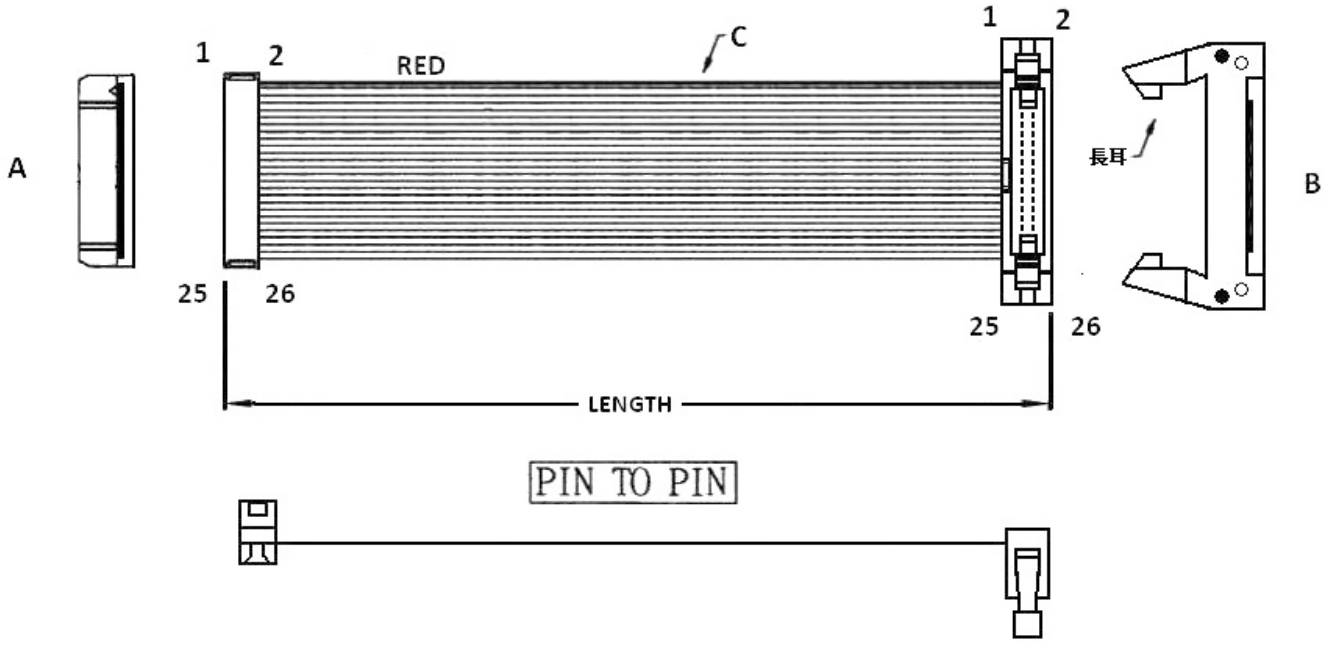


ORDERING INFORMATION:

P/N $\frac{K}{1}\frac{A}{}\frac{x}{2}\frac{x}{}\frac{A}{3}\frac{Z}{}$ - $\frac{x}{4}\frac{x}{}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "AZ" 2.54MM IDC SOCKET W/O NOSE W/O S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO IDC PLUG WITH LONG LATCHES (M9)

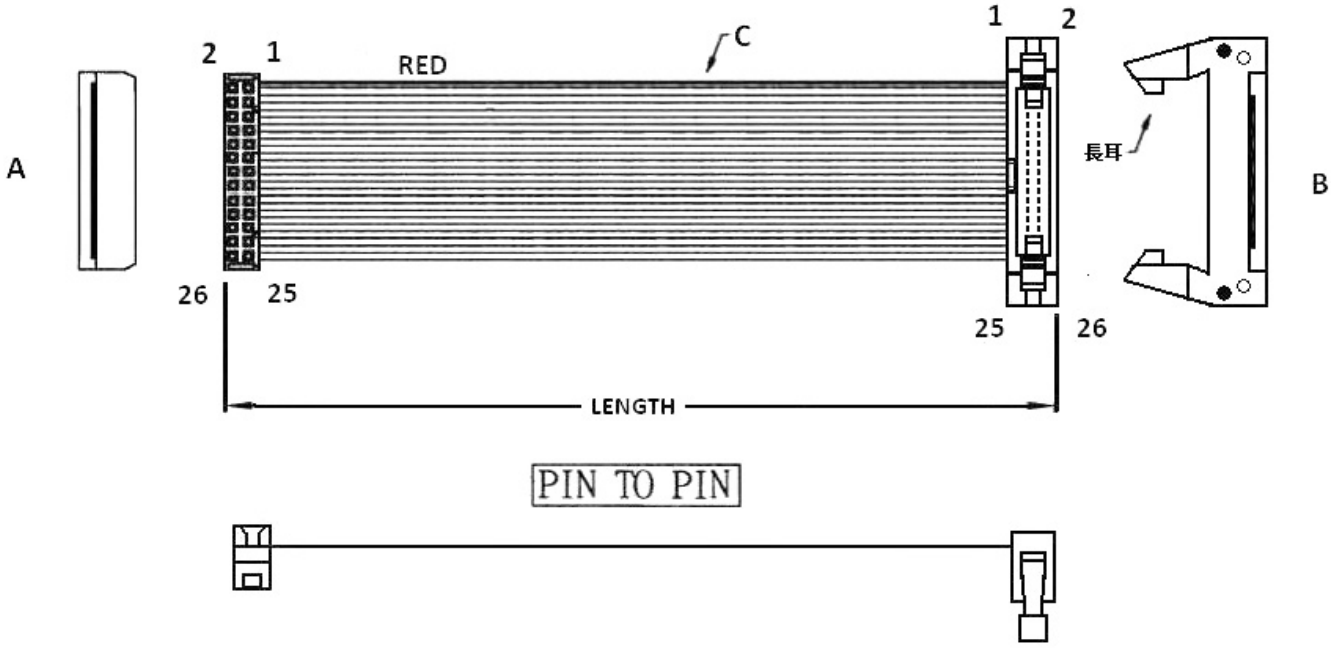


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{VZ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "VZ" 2.54MM IDC SOCKET W/O NOSE W/O S.R.
   TO 2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC PLUG WITH LONG LATCHES (M10)

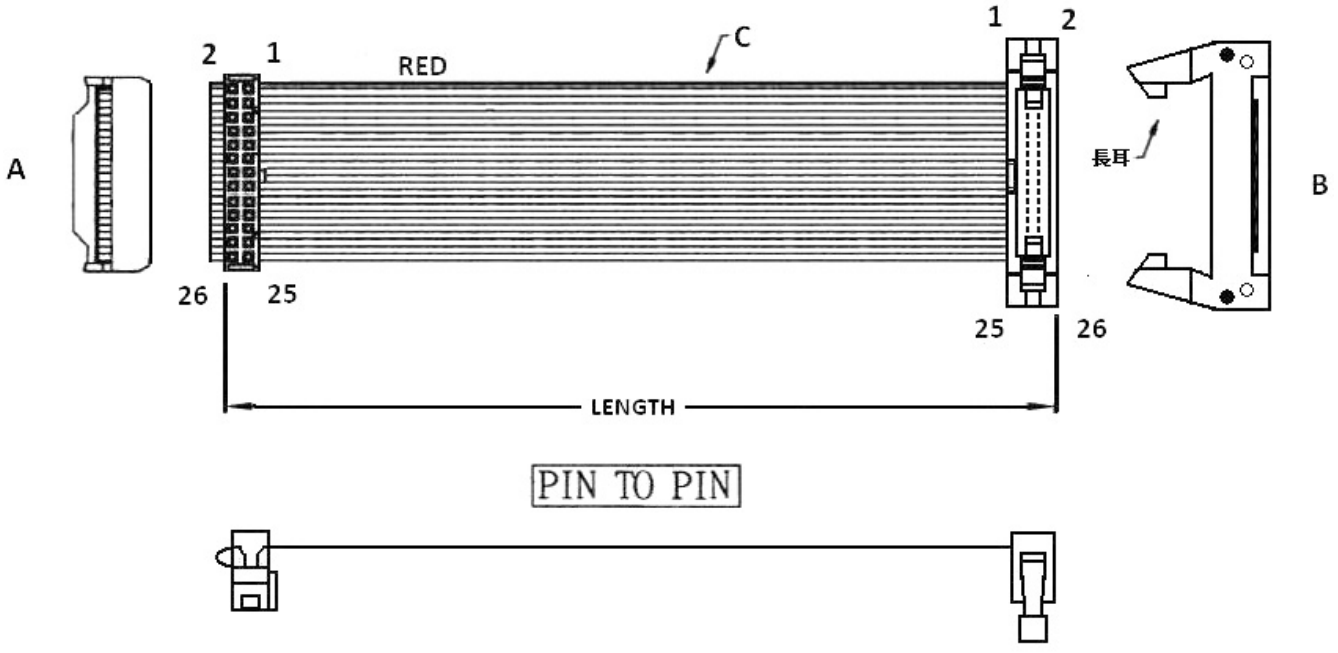


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{MZ}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "MZ" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO IDC PLUG WITH LONG LATCHES (M11)

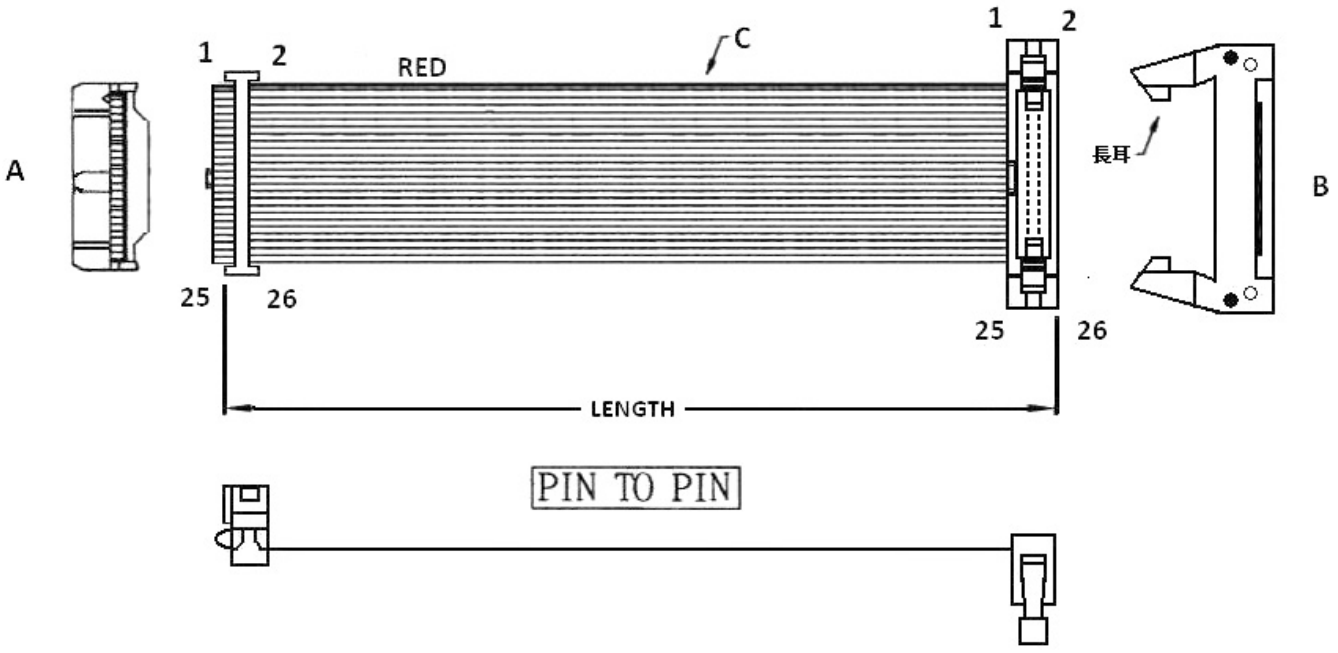


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{NZ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "NZ" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M12)

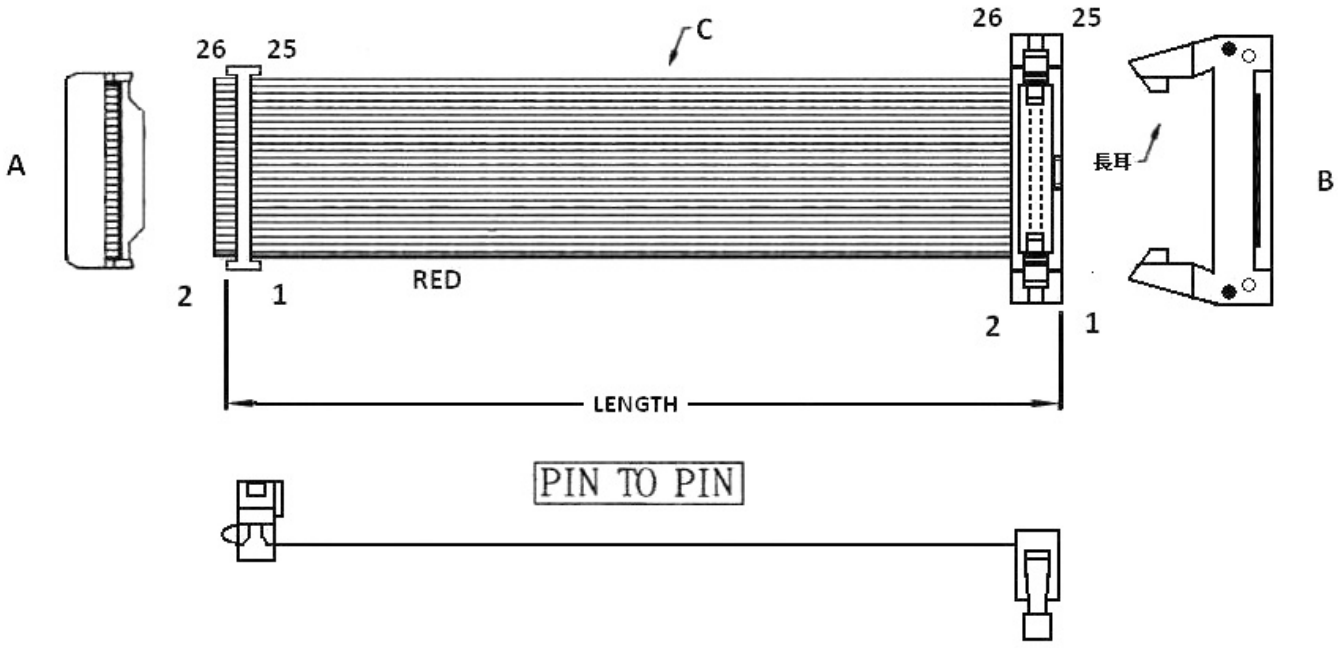


ORDERING INFORMATION:

P/N KA(1) xx(2) MW(3) - xx(4) C M A(5)

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "MW" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) & 2.54MM IDC PLUG WITH LONG LATCHES (M13)

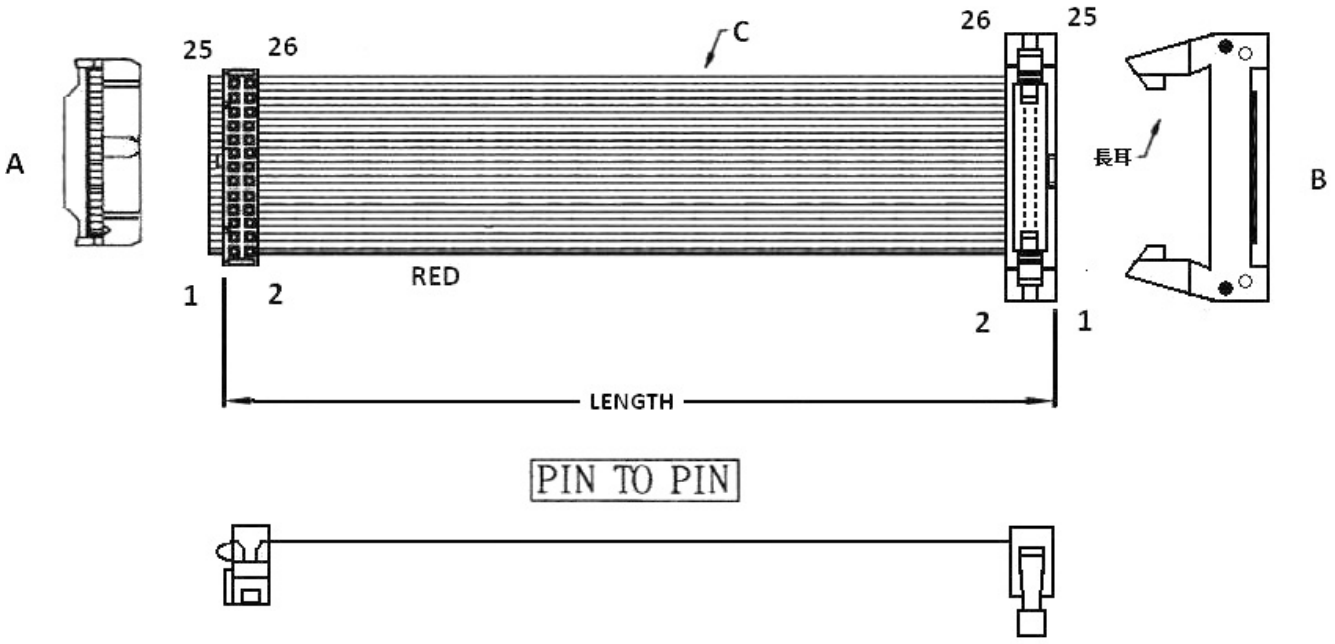


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{NW}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "NW" 2.54MM IDC SOCKET WITH NOSE & S.R. TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITHOUT S.R. (H=9.5MM) TO IDC PLUG WITH LONG LATCHES (M14)

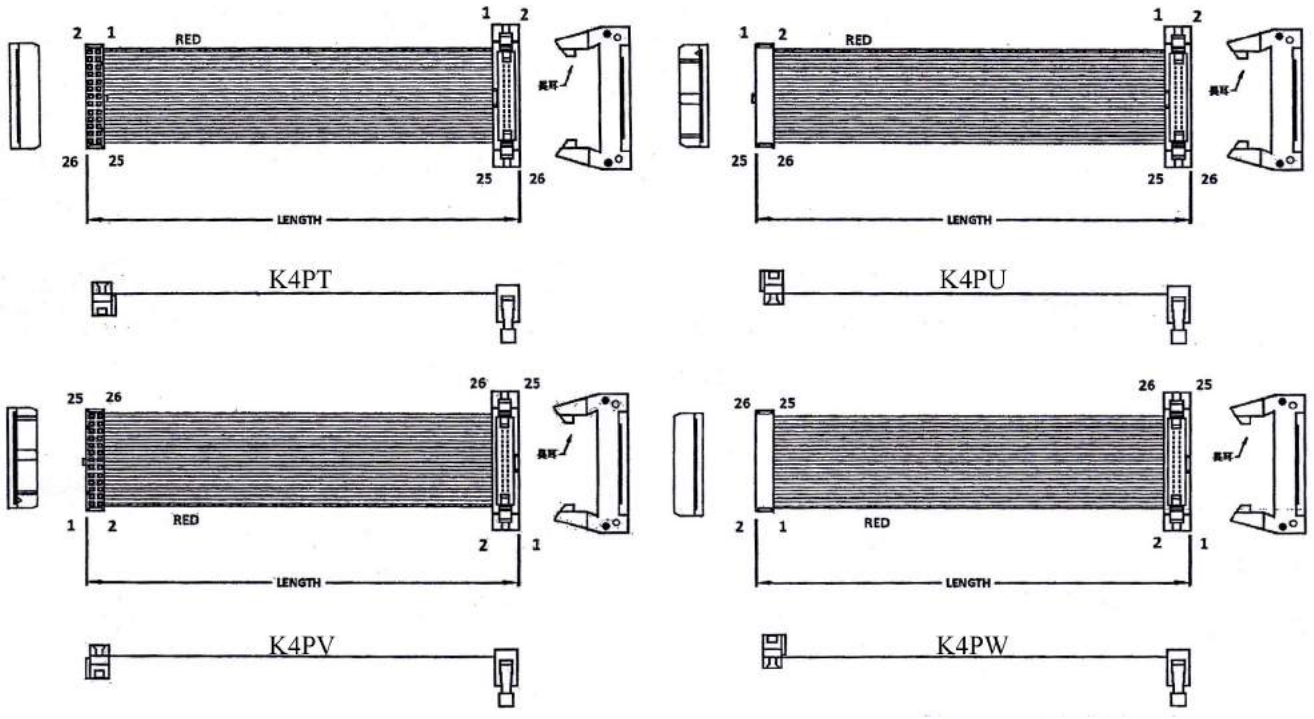


ORDERING INFORMATION:

P/N K x x x x x x - x x C M D
1 2 3 4


1. CONSTRUCTION TYPE:
   4PT, 4PU, 4PV, 4PW
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT (H=10.5MM) TO IDC PLUG WITH LONG LATCHES (M15)

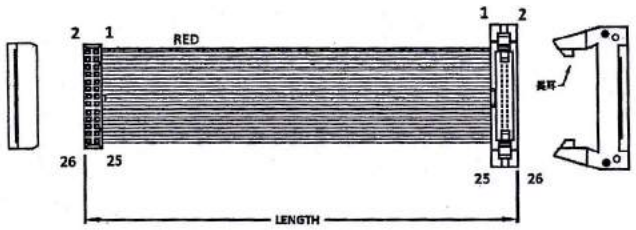


K4TE

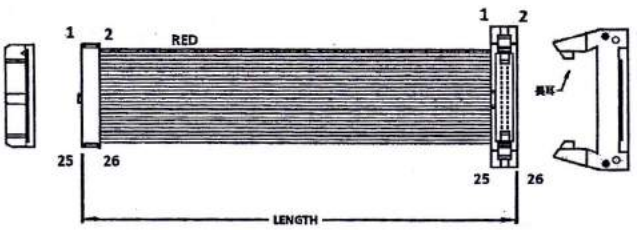

K4TF

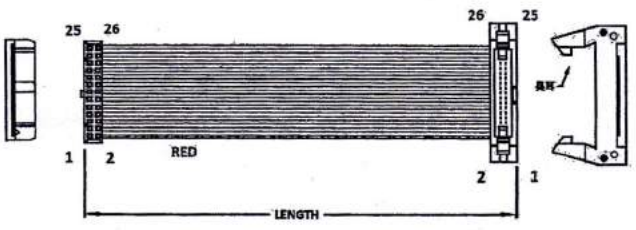

K4TG

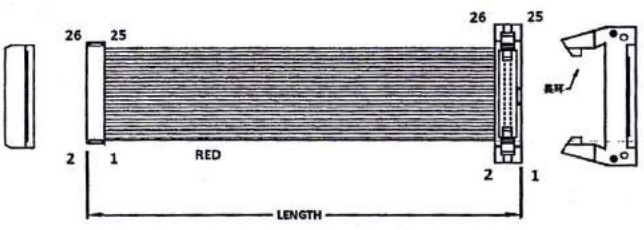

K4TH


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CMD}{4}$

1. CONSTRUCTION TYPE:
   4TE, 4TF, 4TG, 4TH
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET W/O S.R. DUAL WIPE CONTACT TYPE (H=10.5MM) TO IDC PLUG WITH LONG LATCHES (M16)

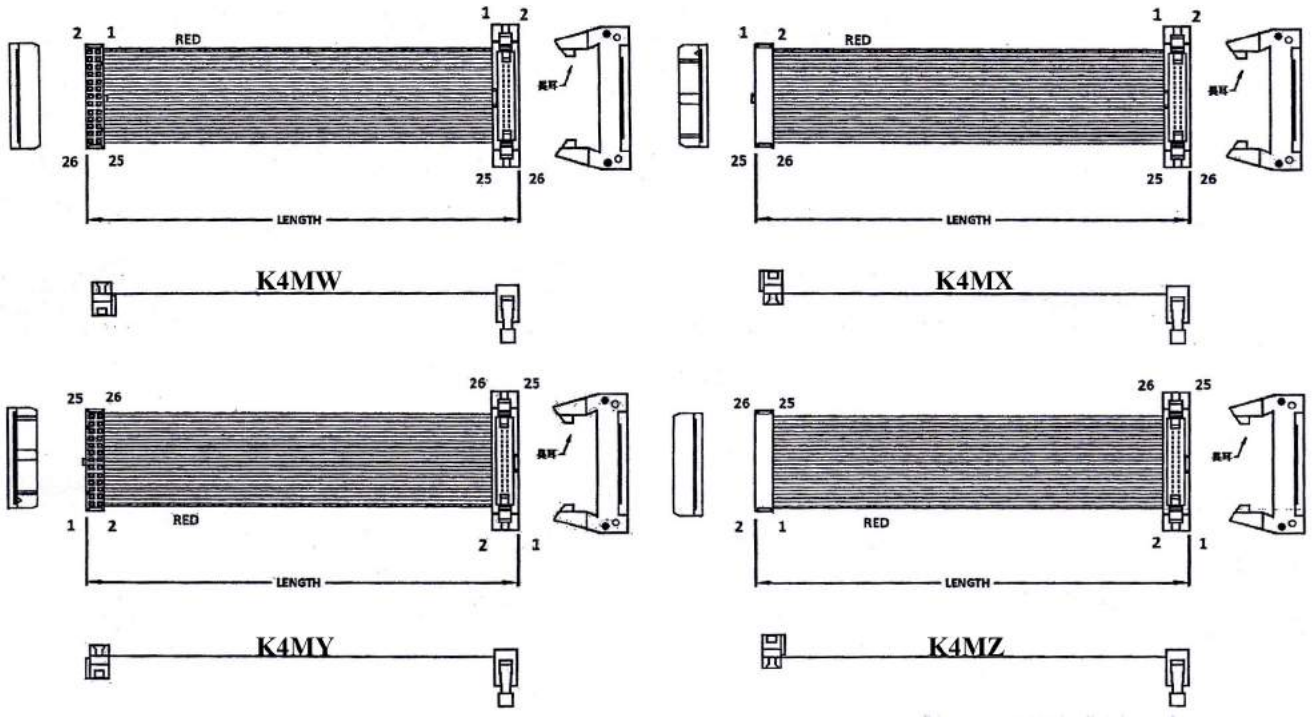


ORDERING INFORMATION:

P/N K x x x x x x x - x x C M x
1 2 3 4

1. CONSTRUCTION TYPE:
   4MW, 4MX, 4MY, 4MZ
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACT (H=14.4MM) TO IDC PLUG WITH LONG LATCHES (M17)

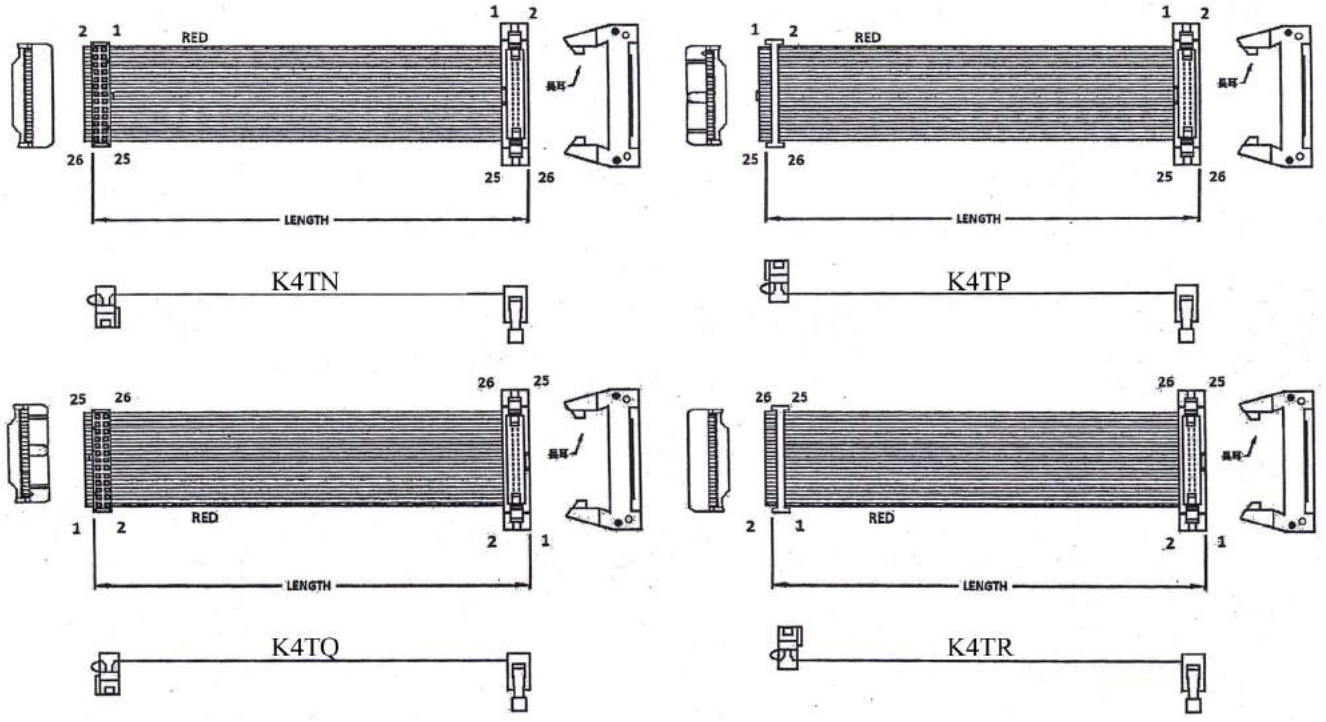


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{D}}{4}$

1. CONSTRUCTION TYPE:
   4TN, 4TP, 4TQ, 4TR
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH S.R. DUAL WIPE CONTACT TYPE (H=14.4MM) TO IDC PLUG WITH LONG LATCHES (M18)

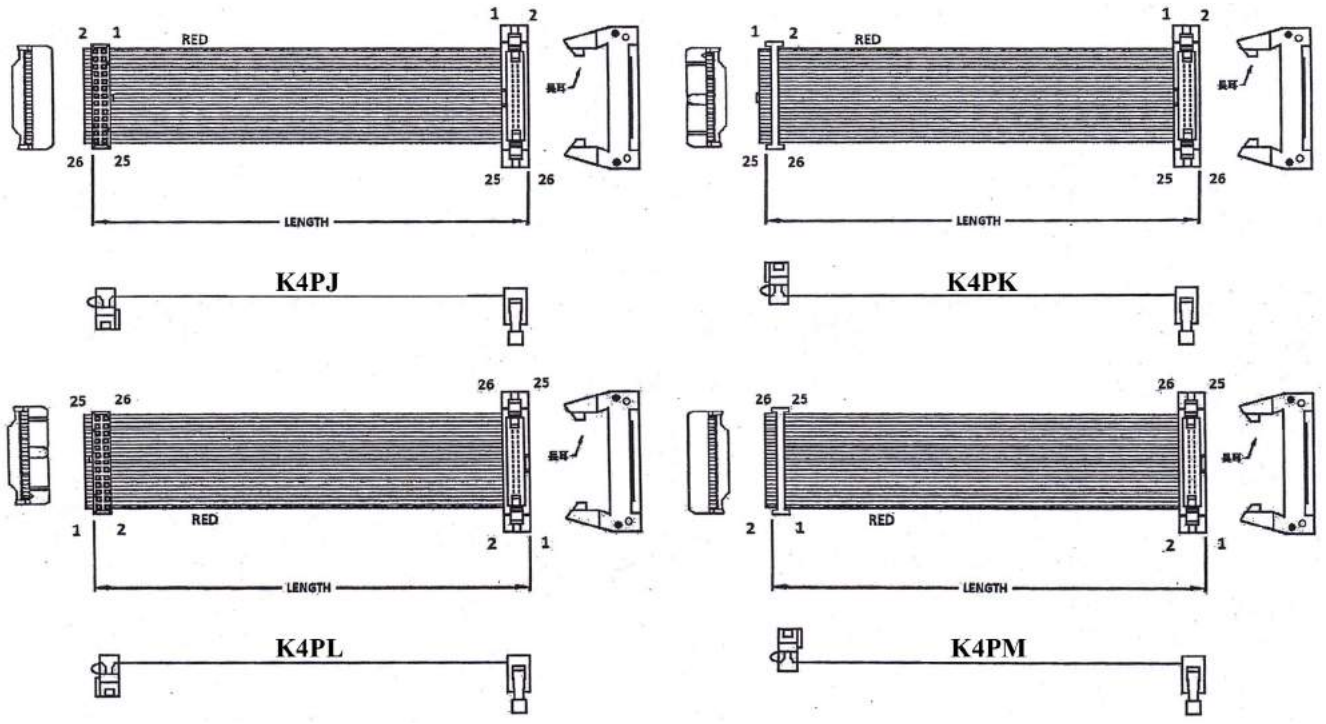


ORDERING INFORMATION:

P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{}$ $\frac{x}{4}$

1. CONSTRUCTION TYPE:
   4PJ, 4PK, 4PL, 4PM
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY+GRAY
   "D" BLACK(SOCKET)+GRAY(HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM DIP PLUG (H=7.6MM) TO IDC PLUG WITH SHORT LATCHES (N1)

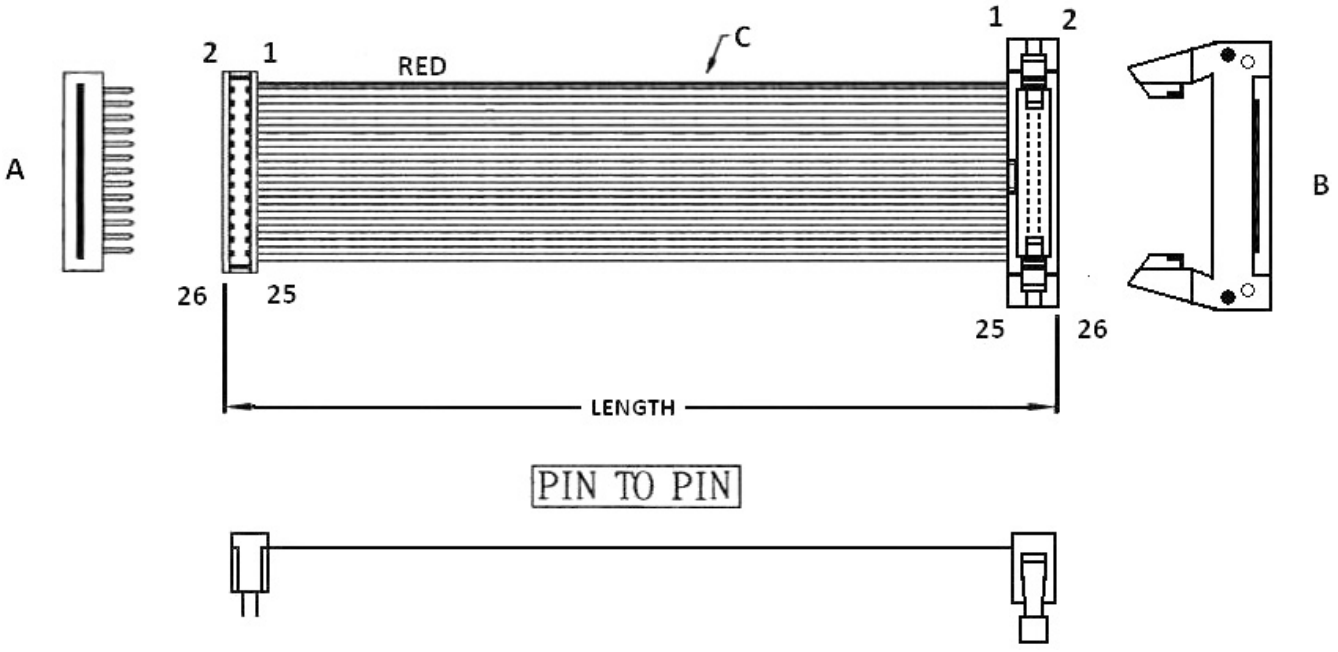


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{DS}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "DS" 2.54MM DIP PLUG TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=7.6MM) TO 2.54MM IDC PLUG WITH SHORT LATCHES (N2)

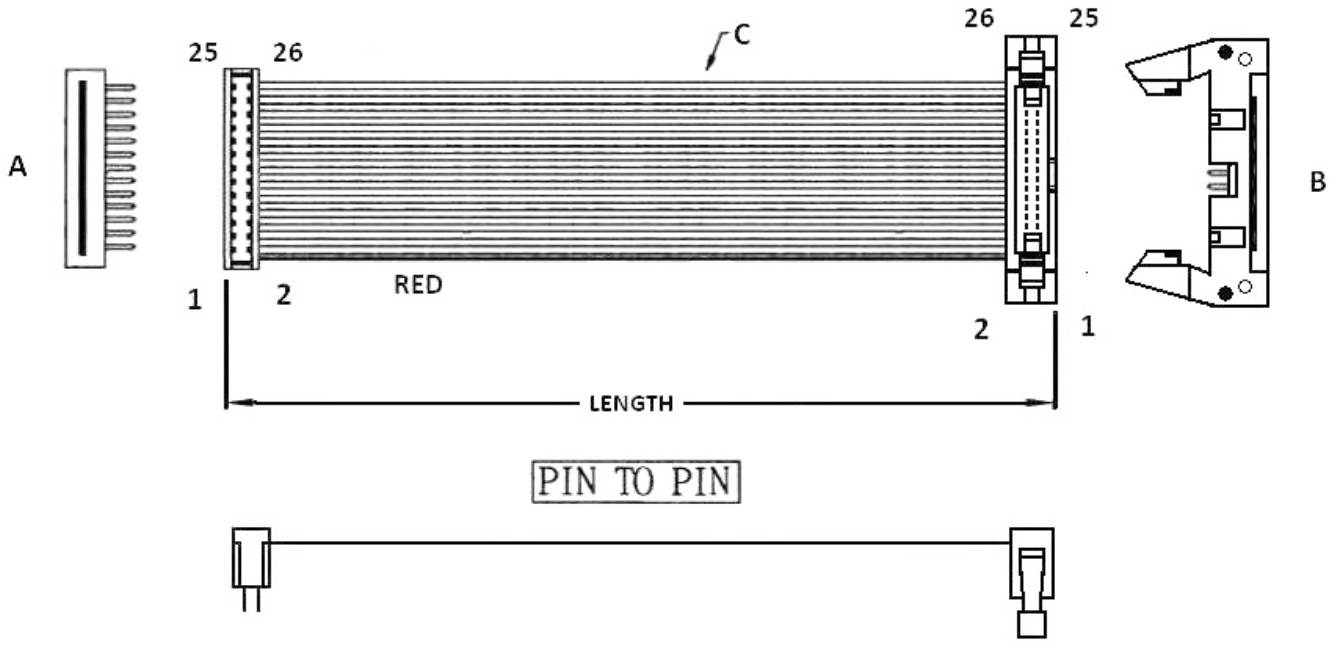

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{PQ}{3}-\frac{xx}{4}CM\frac{A}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "PQ" 2.54MM DIP PLUG TO
   2.54MM IDC PLUG WITH SHORT LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=5.4MM) TO 2.54MM IDC PLUG WITH SHORT LATCHES (N3)

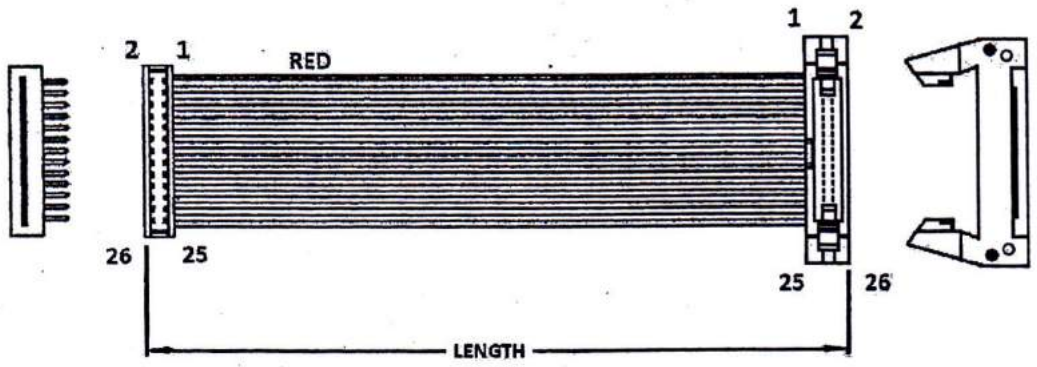

K4MG

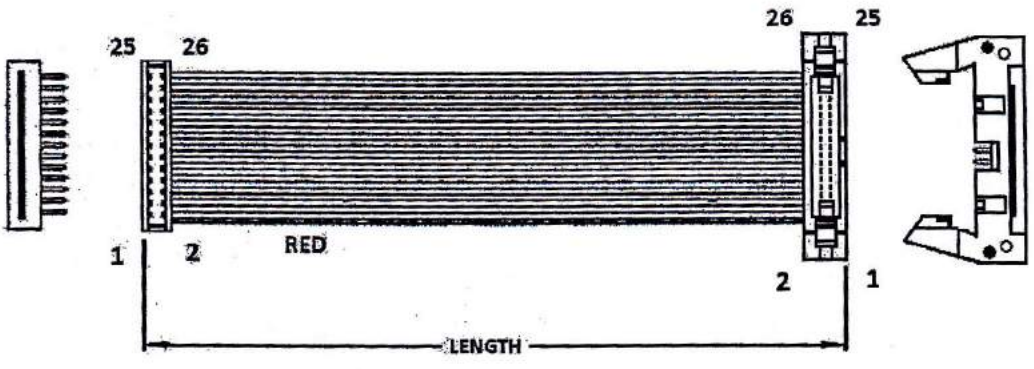

K4MH


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x}}{3}$ **C M** $\frac{\text{A}}{4}$

1. CONSTRUCTION TYPE:
   4MG, 4MH
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=6.0MM) TO IDC TYPE IDC PLUG WITH SHORT LATCHES (N4)

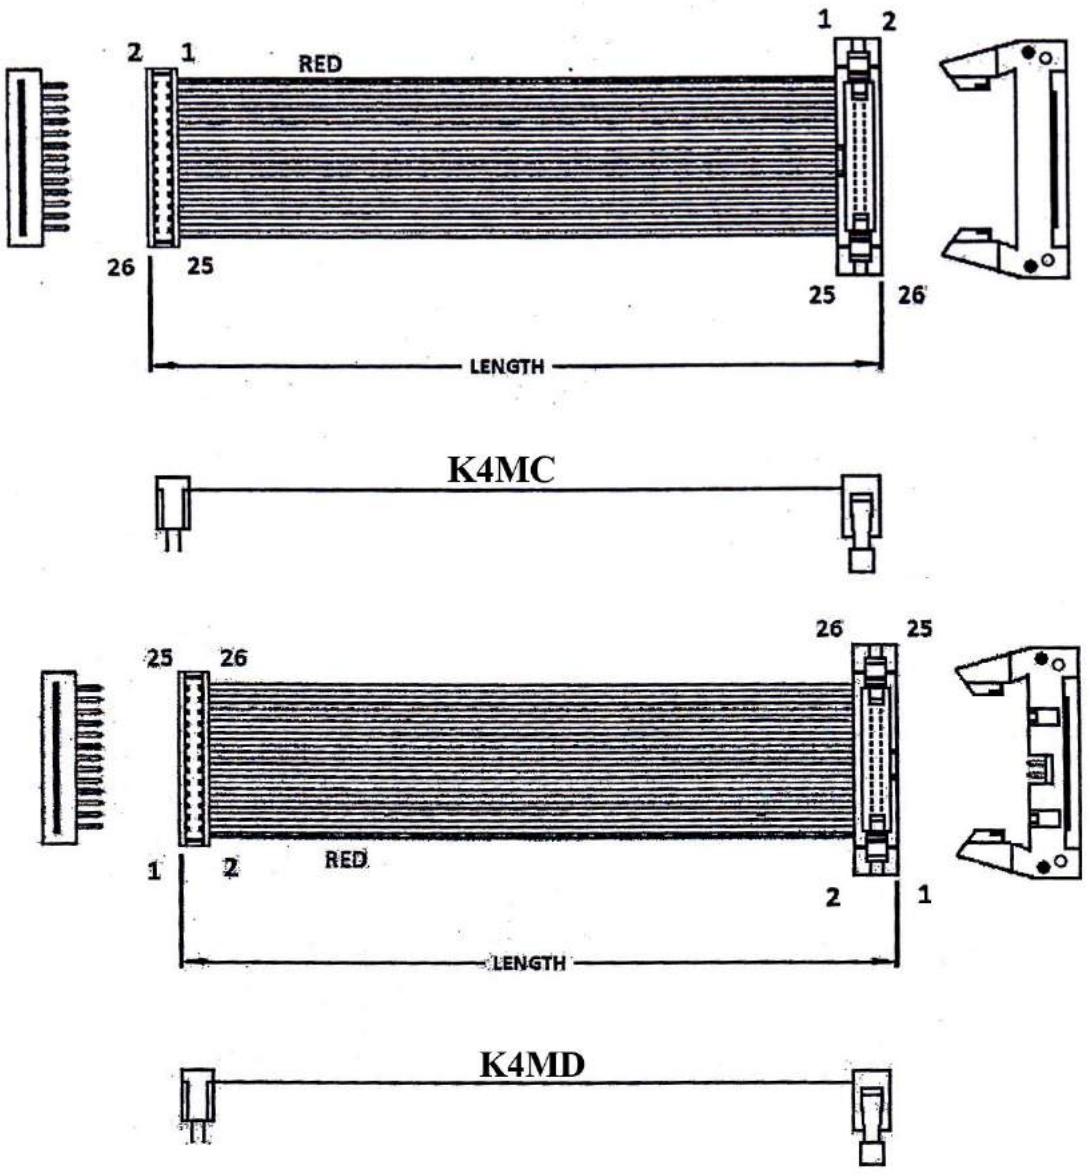


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x C M}}{3}$ $\frac{\text{A}}{4}$

1. CONSTRUCTION TYPE:
   4MC, 4MD
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH DIP PLUG TO 2.54MM IDC PLUG WITH SHORT LATCHES (N5)

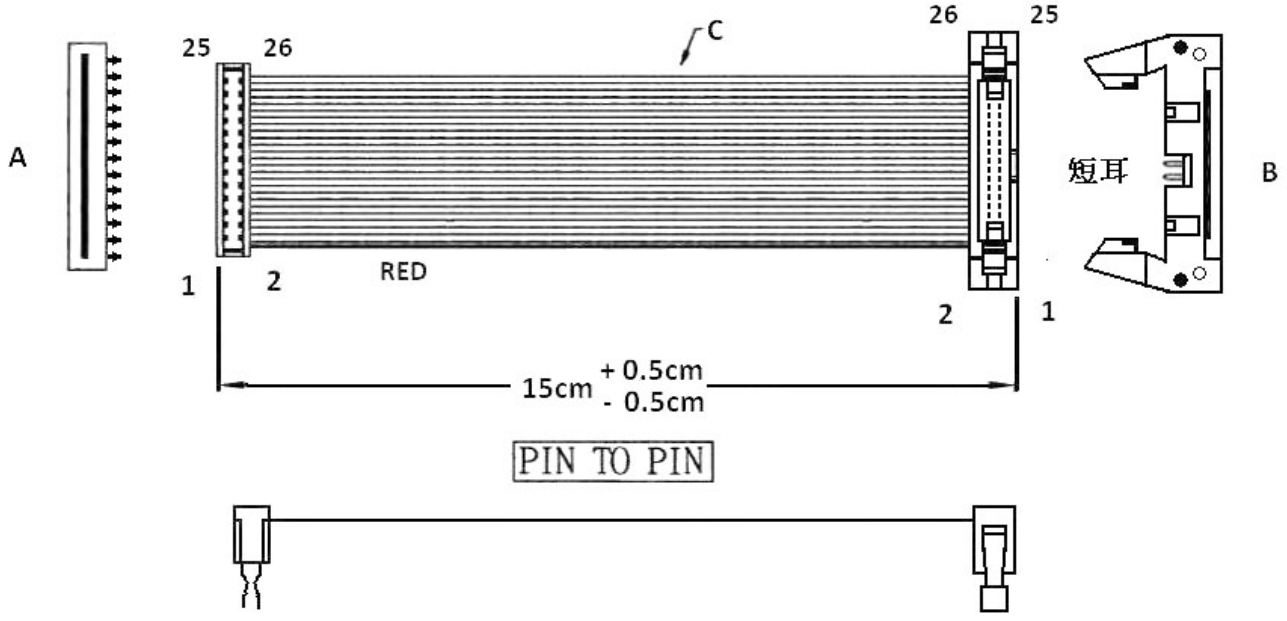


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{PZ}{3}$ - $\frac{xx}{4}$ C M $\frac{D}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "PZ" 2.54MM DIP PLUG WITH KINKED PINS BLACK
   TO 2.54MM IDC PLUG WITH SHORT LATCHES GRAY
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "D" BLACK (DIP PLUG) + GRAY (SHROUDED HEADER)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM DIP PLUG (H=7.6MM) TO IDC PLUG WITH LONG LATCHES (P1)

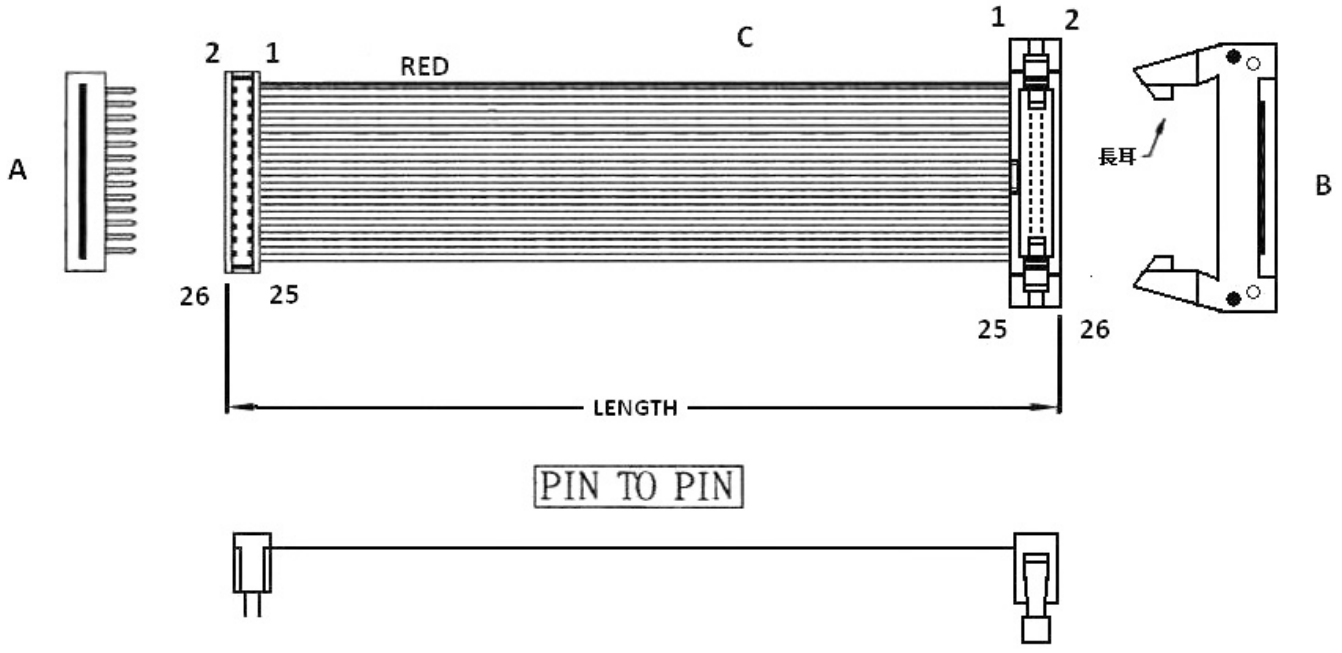

PIN TO PIN


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{DZ}{3}-\frac{xx}{4}CM\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "DZ" 2.54MM DIP PLUG TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=7.6MM) & 2.54MM IDC PLUG WITH LONG LATCHES (P2)

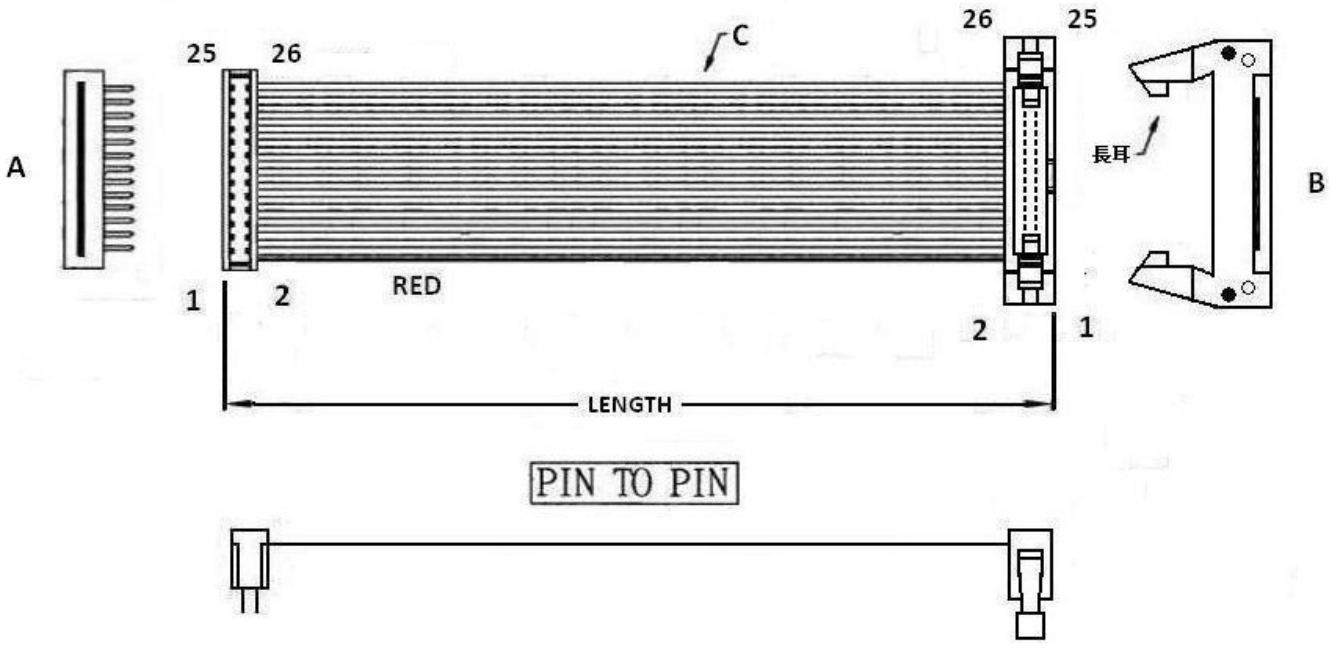


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{PW}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1 PVC
   INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "PW" 2.54MM DIP PLUG TO
   2.54MM IDC PLUG WITH LONG LATCHES
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=5.4MM) TO 2.54MM IDC PLUG WITH LONG LATCHES (P3)

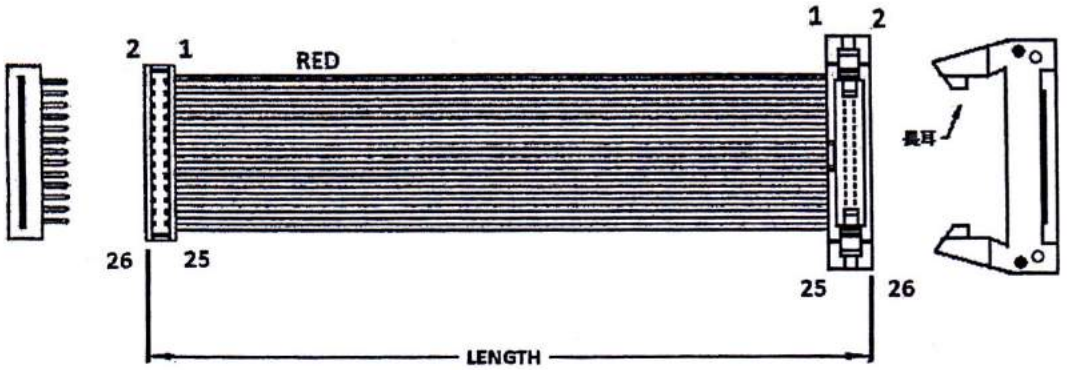

K4ME

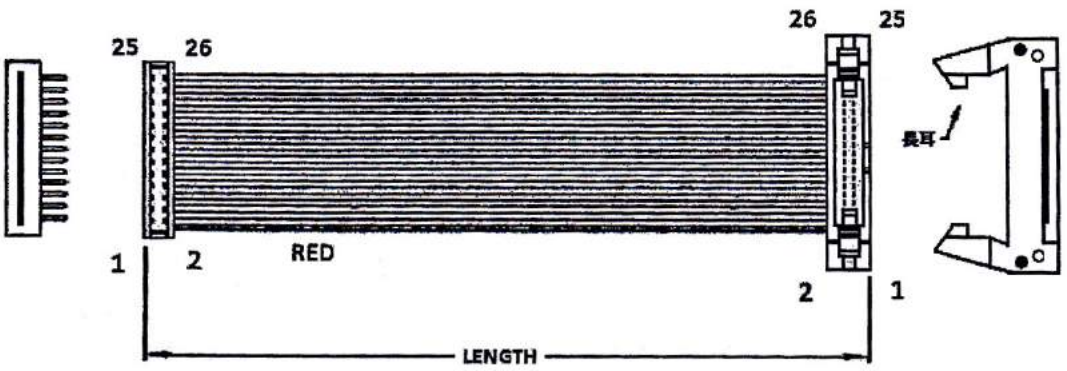

K4MF


ORDERING INFORMATION:

P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ **-** $\frac{\text{x x C M}}{3}$ $\frac{\text{A}}{4}$


1. CONSTRUCTION TYPE:
   4ME, 4MF
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM DIP PLUG (H=6.0MM) TO 2.54MM IDC PLUG WITH LONG LATCHES (P4)

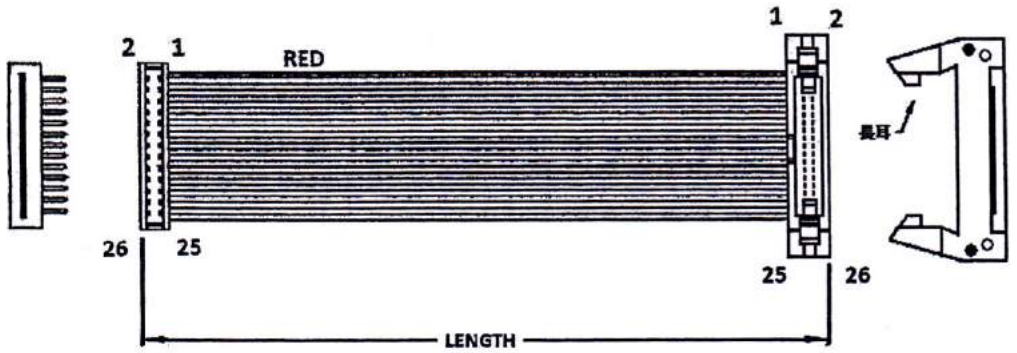

K4MA

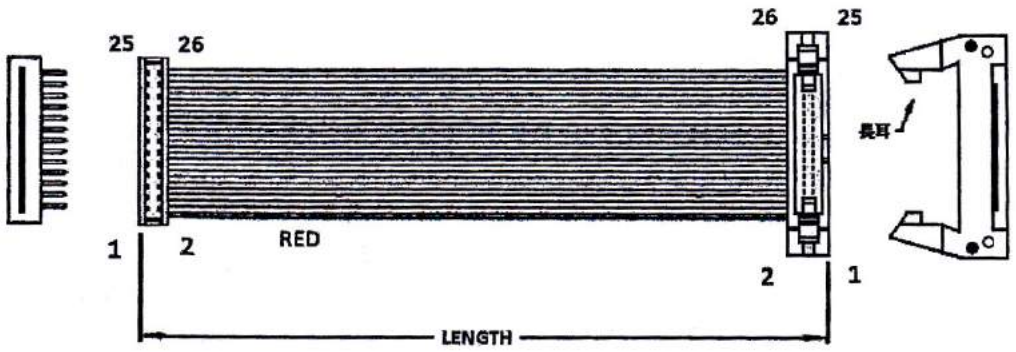

K4MB


ORDERING INFORMATION:

P/N K $\frac{x\,x\,x}{1}$ $\frac{x\,x\,x}{2}$ - $\frac{x\,x}{3}$ $\frac{C\,M}{4}$ $\frac{A}{4}$

1. CONSTRUCTION TYPE:
   4MA, 4MB
2. NO. OF CONTACTS:
   010~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO OPEN END (1)

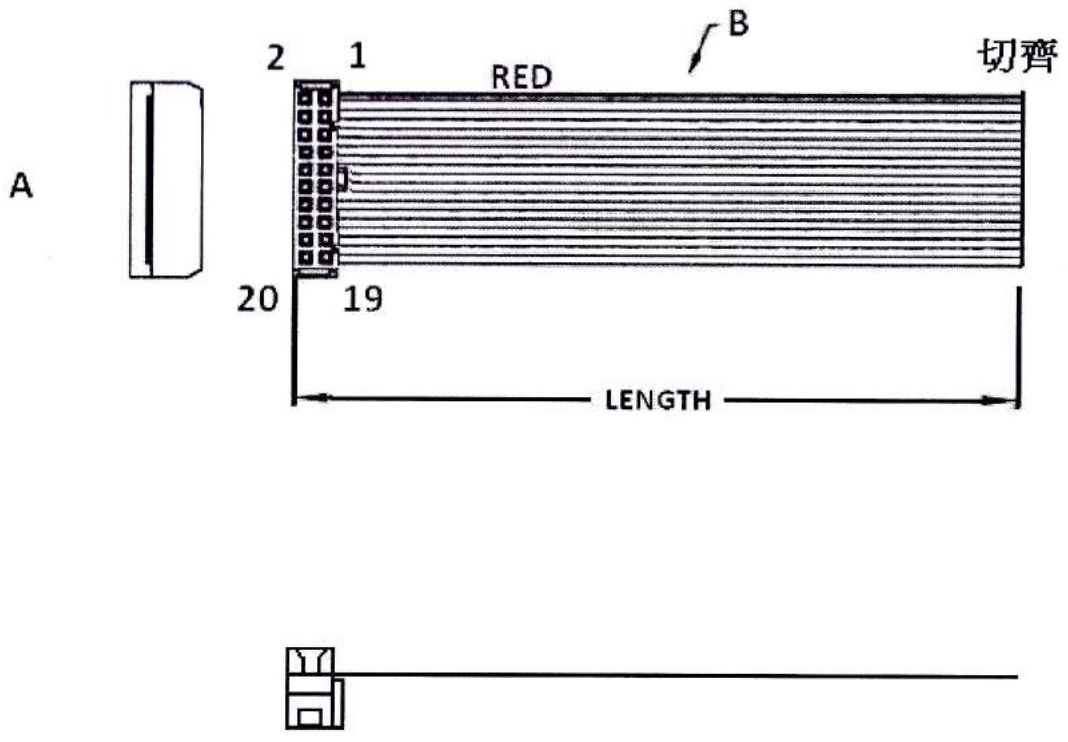


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KO}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KO" 2.54MM IDC SOCKET W/O S.R. & WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO OPEN END (2)

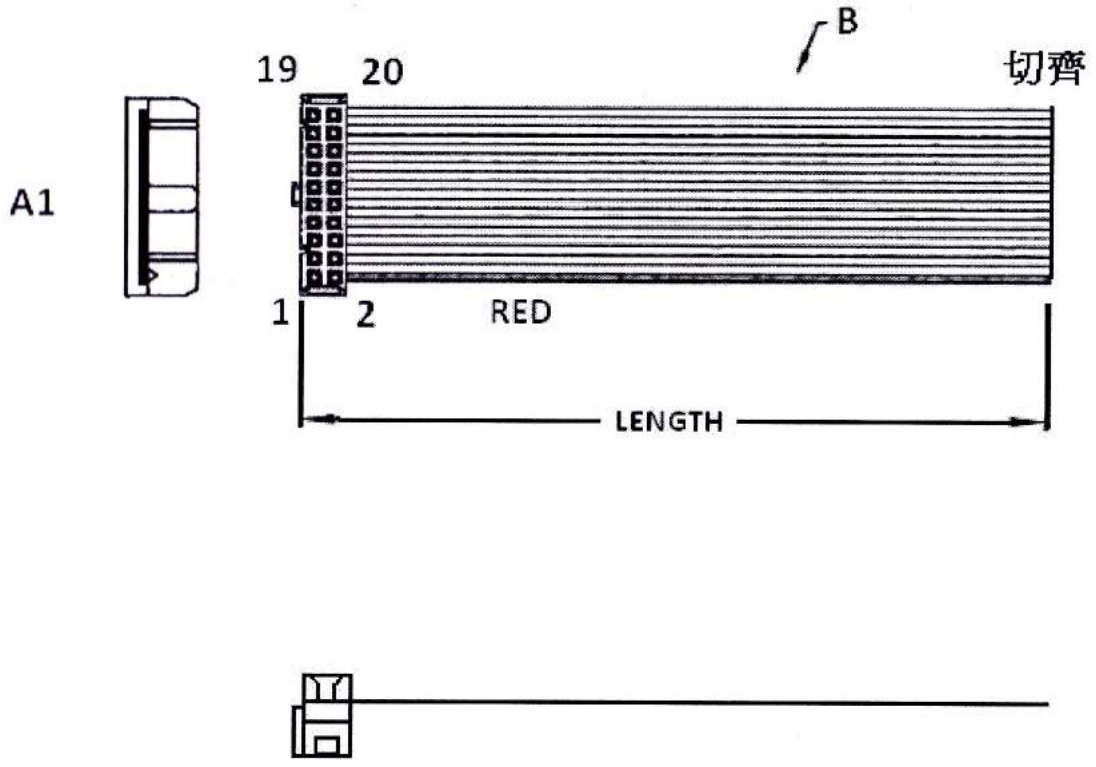


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{LO}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LO" 2.54MM IDC SOCKET W/O S.R. & WITH NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO OPEN END (1)

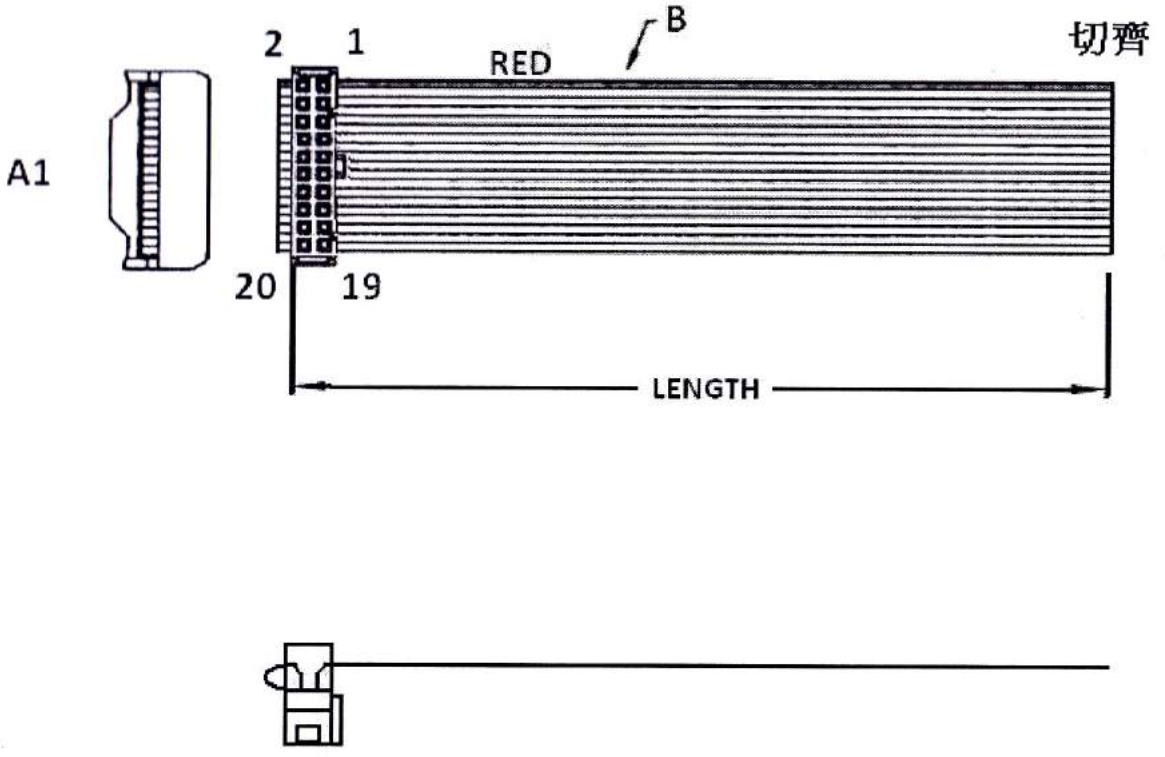


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MO}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MO" 2.54MM IDC SOCKET WITH S.R. & NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO OPEN END (2)

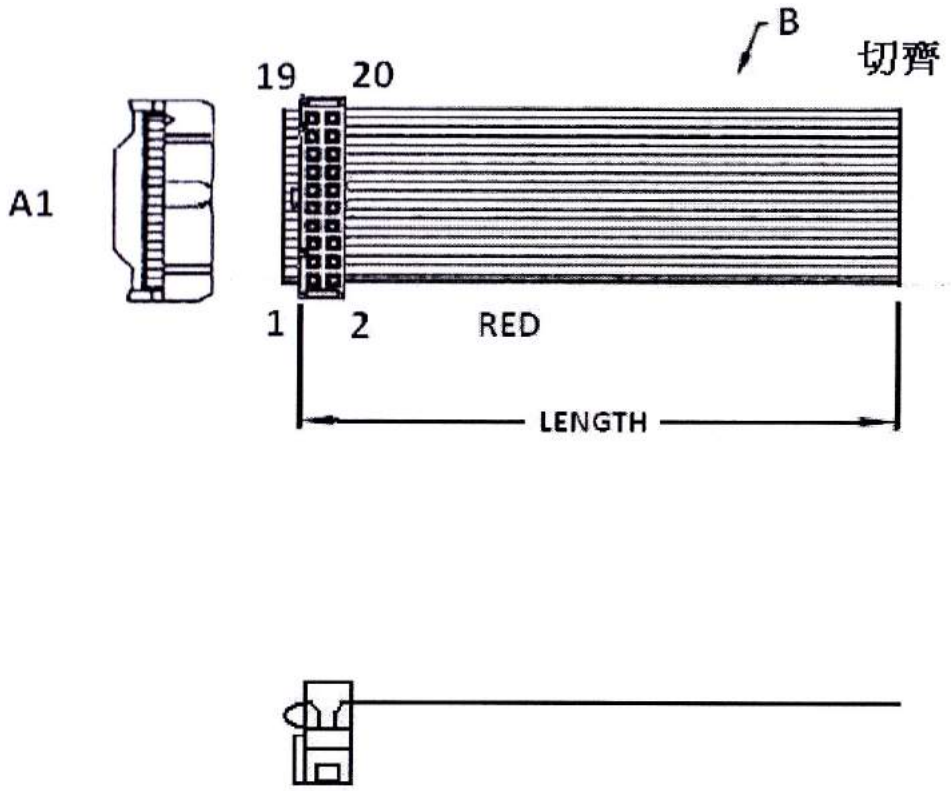


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NO}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NO" 2.54MM IDC SOCKET WITH S.R. & NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT NOSE (H=11.0MM) TO OPEN END (1)

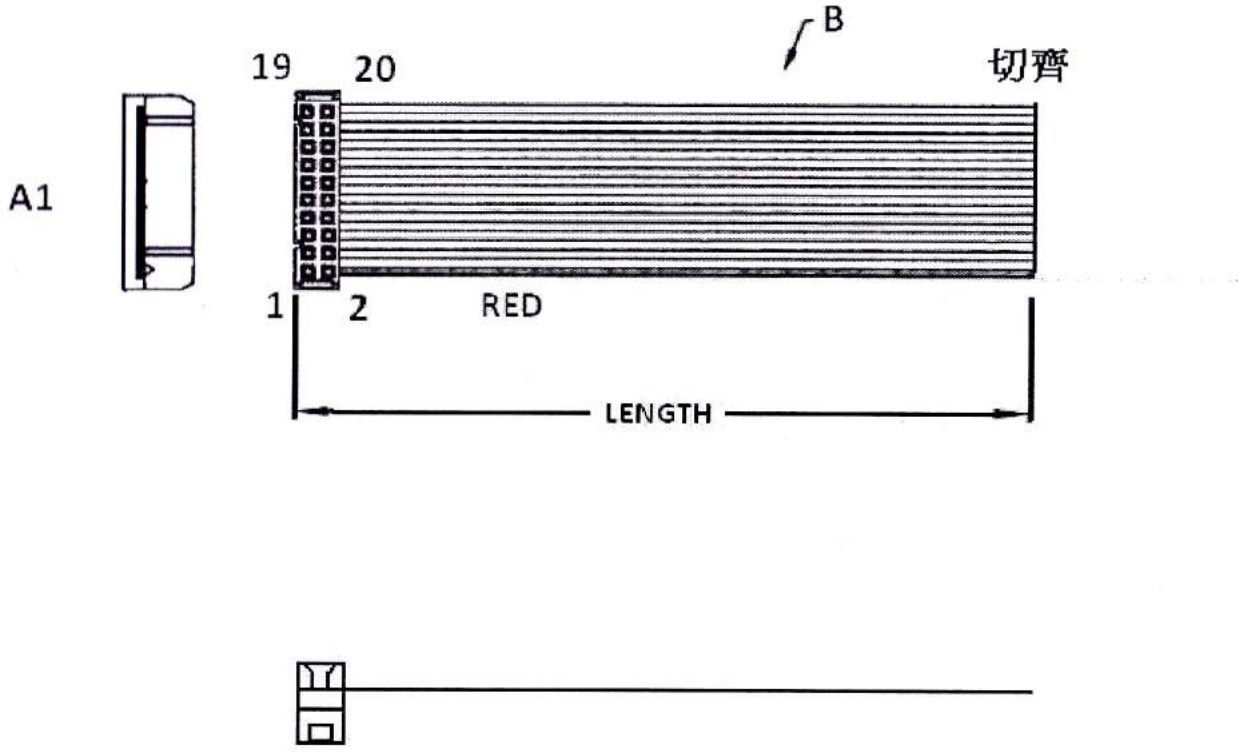


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{AO}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AO" 2.54MM IDC SOCKET W/O S.R. & W/O NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT NOSE (H=11.0MM) TO OPEN END (2)

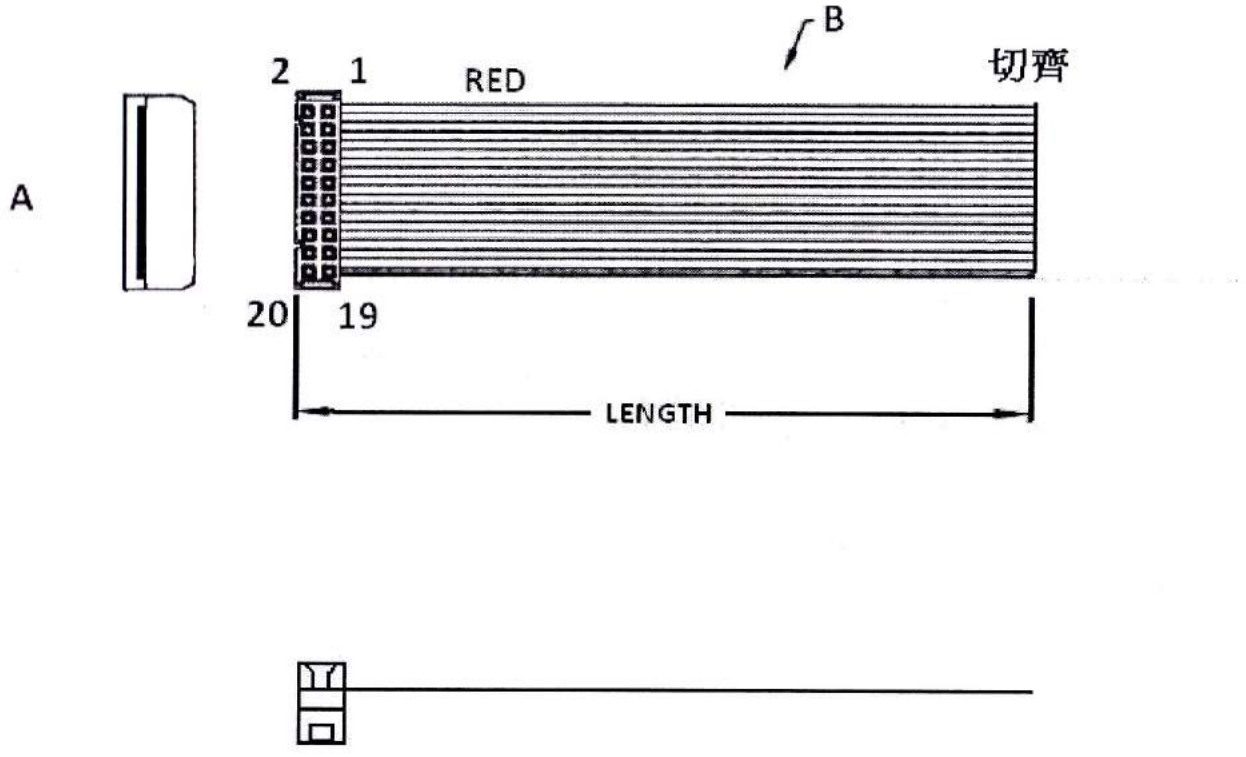


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VO}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "VO" 2.54MM IDC SOCKET W/O S.R. & W/O NOSE
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL U-SLOT & DUAL CONTACTS (H=10.5MM & 14.4MM) TO OPEN END

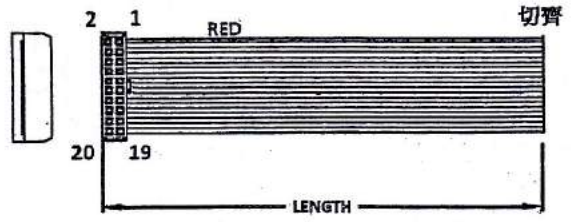


K4VJ

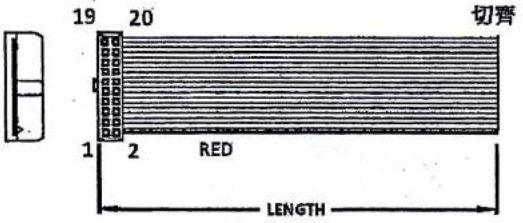

K4VK

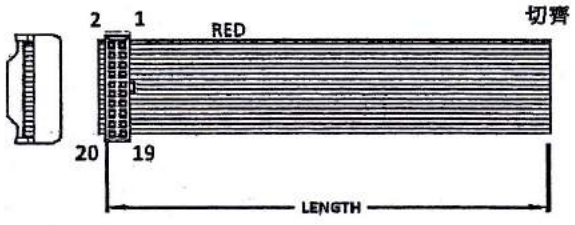

K4VL

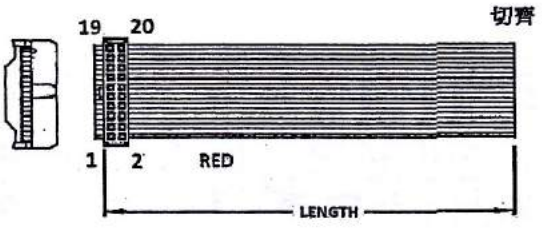

K4VM

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{4}\frac{B}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 4VJ, 4VK (H=10.5MM)
   IDC SOCKET WITH S.R. : 4VL, 4VM (H=14.4MM)
2. NO. OF CONTACTS:
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET WITH DUAL WIPE CONTACTS (H=10.5MM & 14.4MM) TO OPEN END

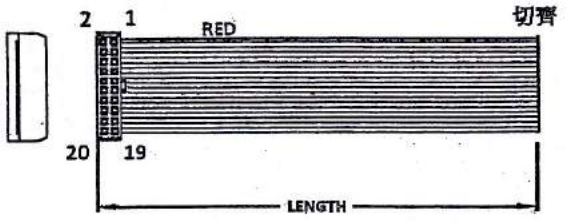


K4VE

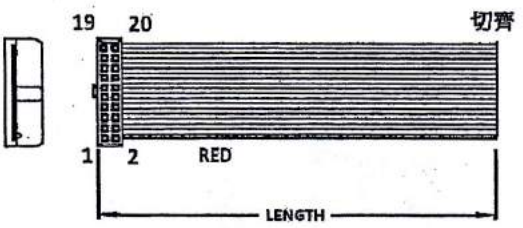

K4VF

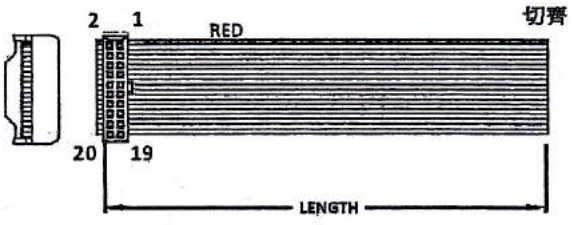

K4VG

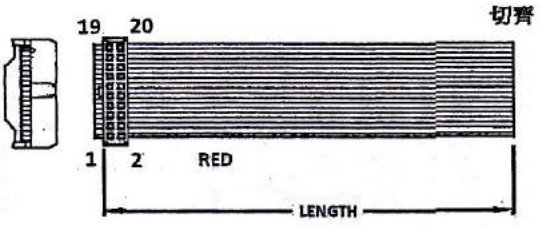

K4VH

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}\frac{xxx}{2}$ - $\frac{xx}{3}\frac{CM}{}\frac{x}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 4VE, 4VF (H=10.5MM)
   IDC SOCKET WITH S.R. : 4VG, 4VH (H=14.4MM)
2. NO. OF CONTACTS:
   006~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM IDC SOCKET (H=10.5MM & 14.4MM) TO OPEN END

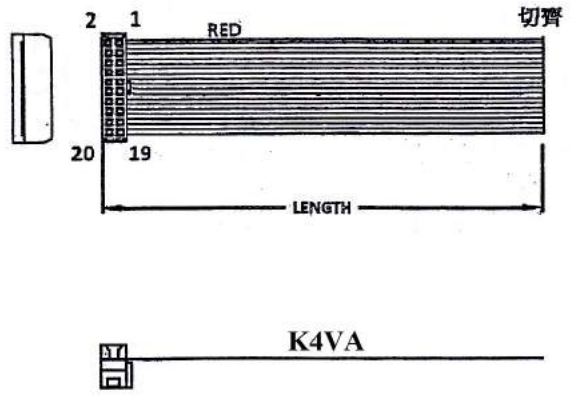


K4VA

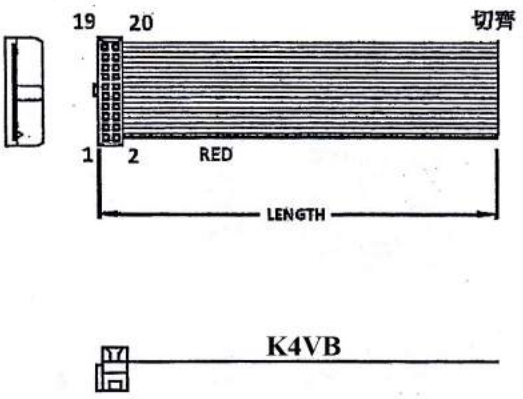

K4VB

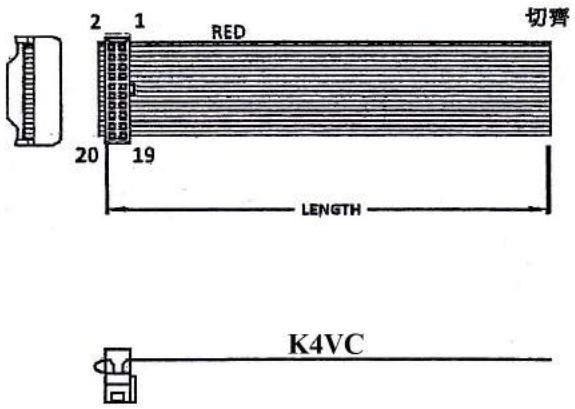

K4VC

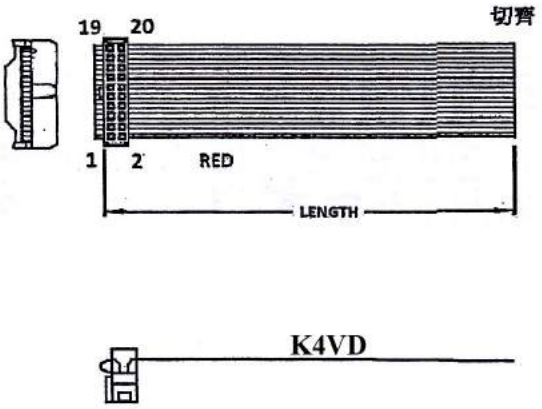

K4VD

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{x}}{4}$

1. CONSTRUCTION TYPE:
   IDC SOCKET W/O S.R. : 4VA, 4VB (H=10.5MM)
   IDC SOCKET WITH S.R. : 4VC, 4VD (H=14.4MM)
2. NO. OF CONTACTS:
   004~064
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH DIP PLUG (H=7.6MM) TO OPEN END (1)

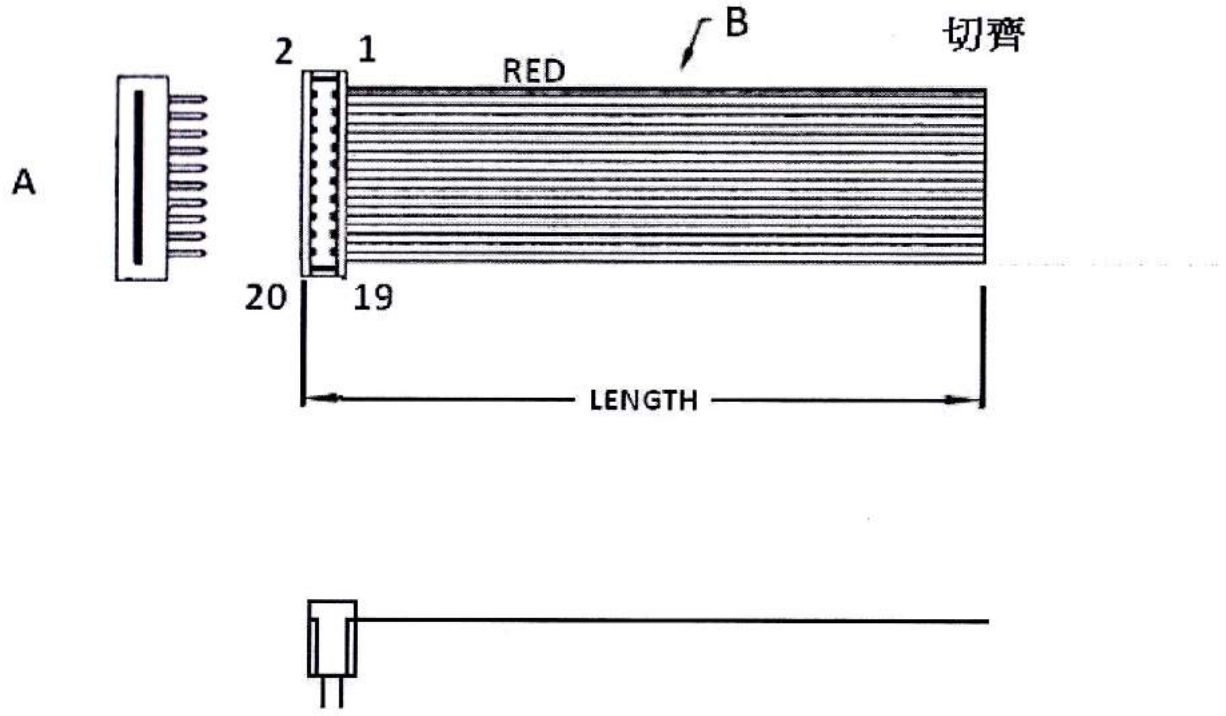


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{DO}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "DO" 2.54MM DIP PLUG
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH DIP PLUG (H=7.6MM) TO OPEN END (2)

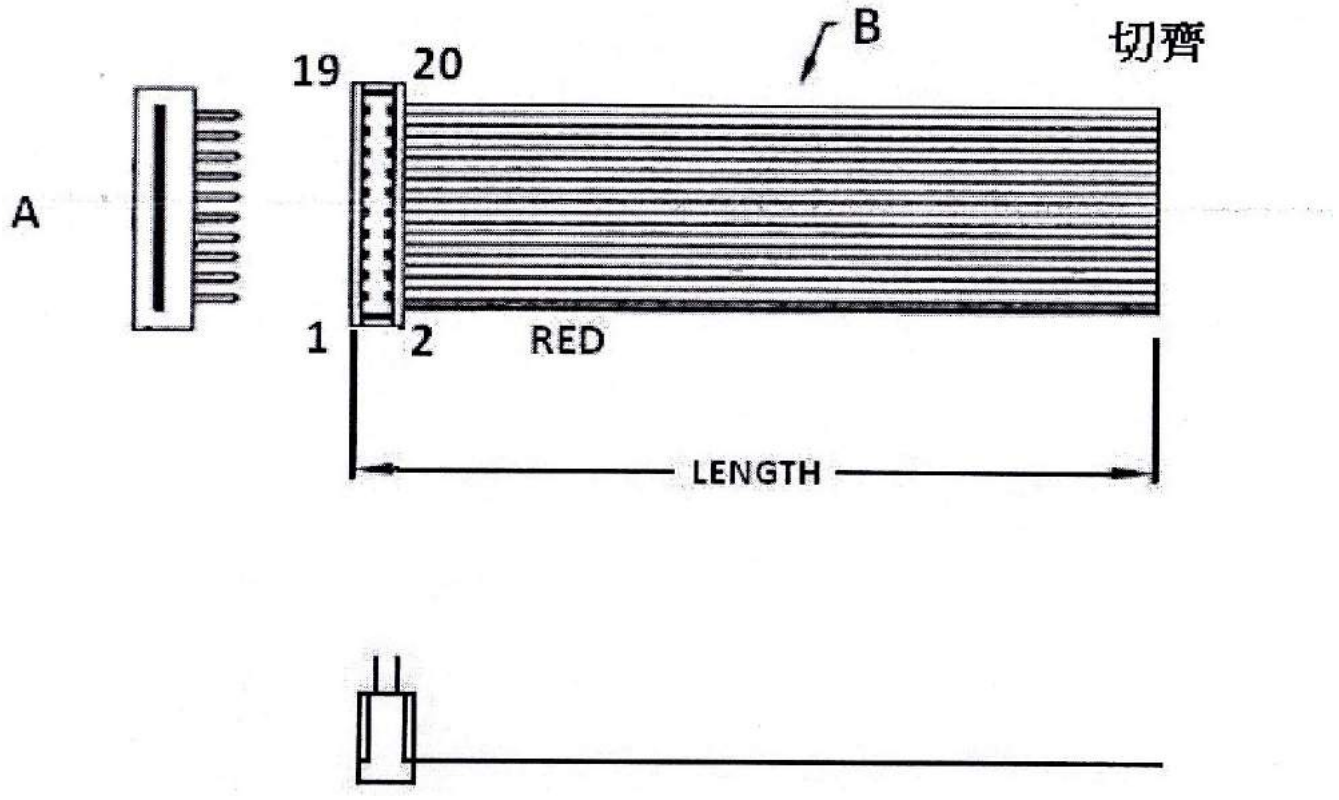


ORDERING INFORMATION:

P/N $\underset{1}{\mathbf{KA}}\ \underset{2}{\mathbf{x\,x}}\ \underset{3}{\mathbf{PO}}\ \mathbf{-}\ \underset{4}{\mathbf{x\,x}}\ \mathbf{C\ M}\ \underset{5}{\mathbf{x}}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "PO" 2.54MM DIP PLUG
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC TYPE BOX HEADER TO OPEN END

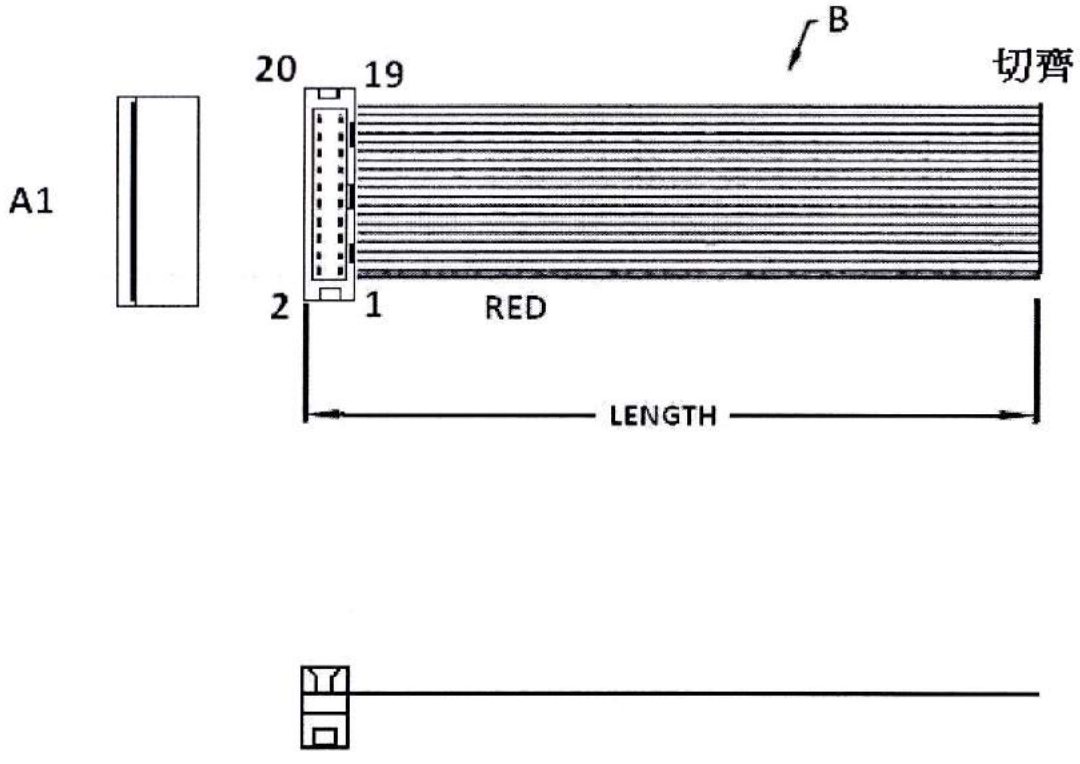


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{BO}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "BO" 2.54MM IDC TYPE BOX HEADER
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC PLUG WITH SHORT LATCHES TO OPEN END

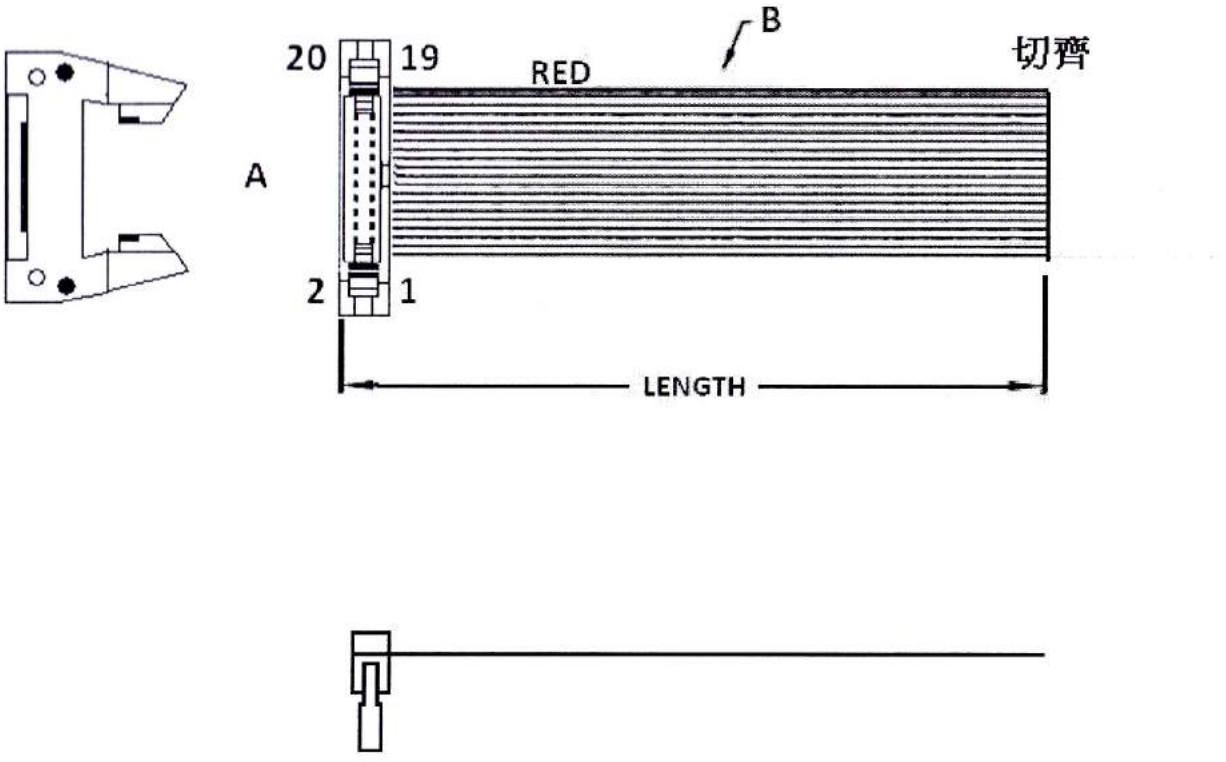


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{SO}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "SO" 2.54MM IDC PLUG WITH SHORT LATCHES
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC PLUG WITH LONG LATCHES TO OPEN END

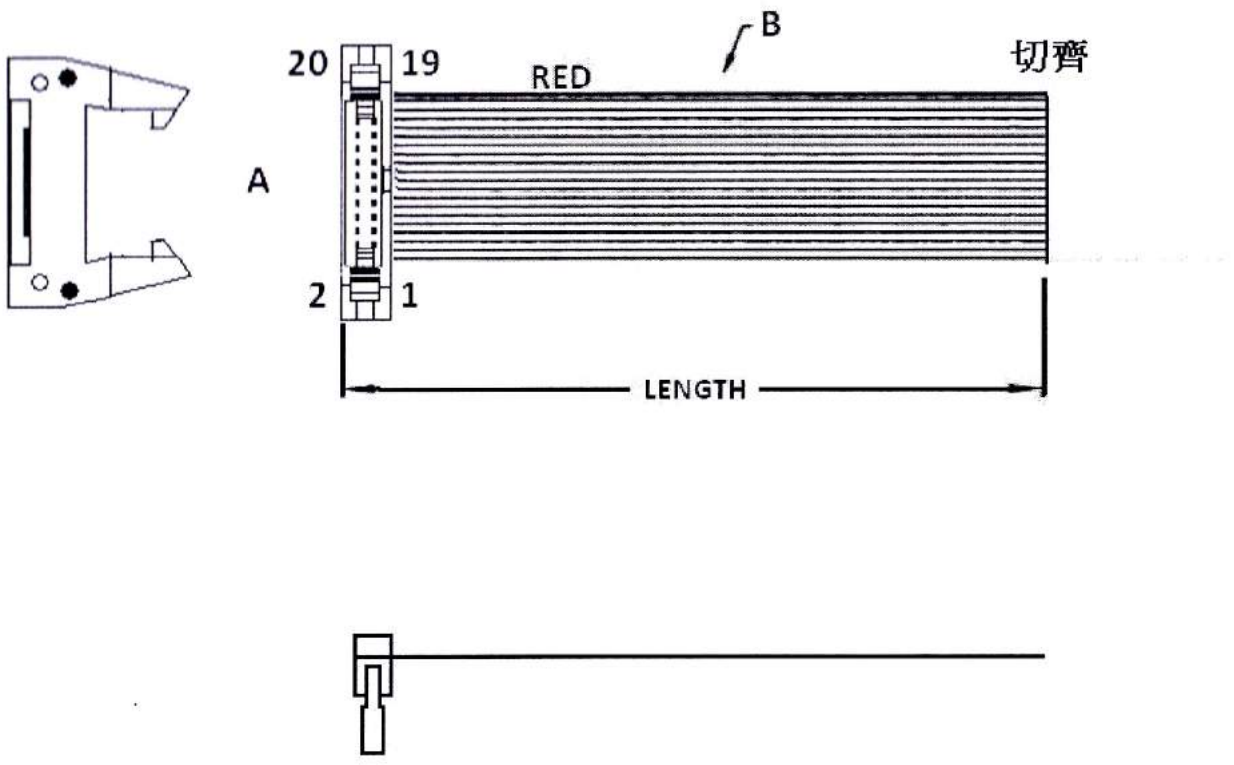


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{ZO}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "ZO" 2.54MM IDC PLUG WITH LONG LATCHES
   TO OPEN END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO TINNED END (1)

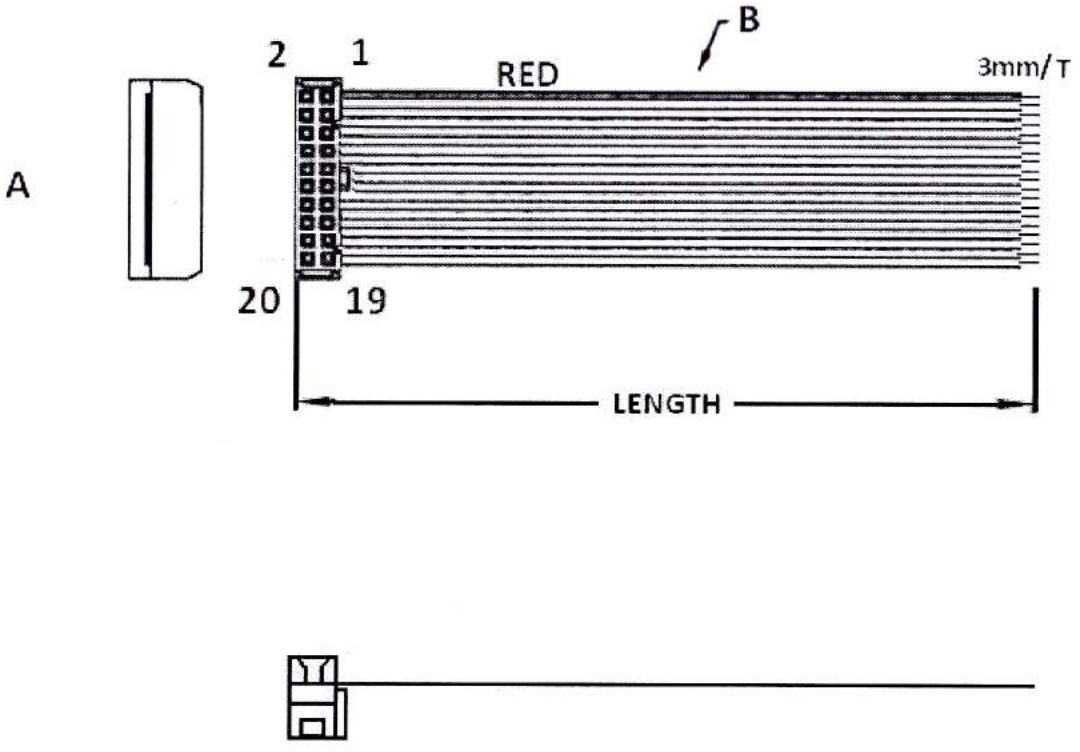


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{KT}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KT" 2.54MM IDC SOCKET W/O S.R. WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH IDC SOCKET WITHOUT STRAIN RELIEF (H=11.0MM) TO TINNED END (2)

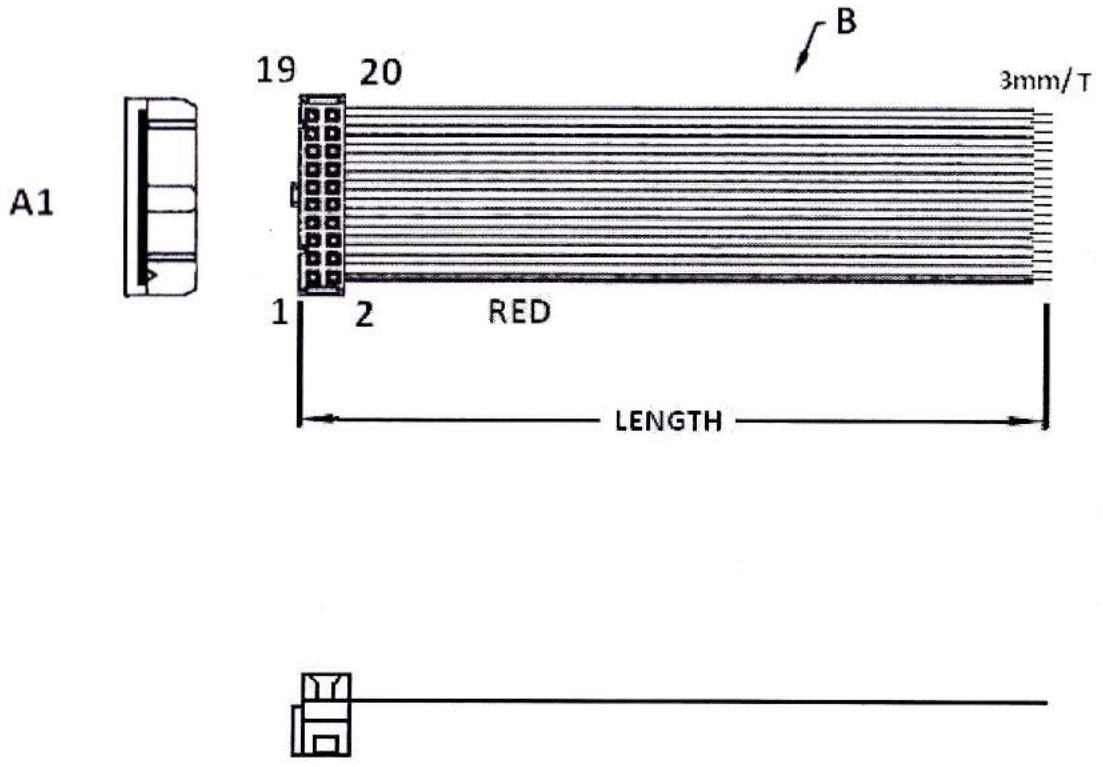

ORDERING INFORMATION:


NEW

P/N $\frac{KA}{1}\frac{xx}{2}\frac{LT}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "LT" 2.54MM IDC SOCKET W/O S.R. WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT NOSE (H=11.0MM) TO TINNED END (1)

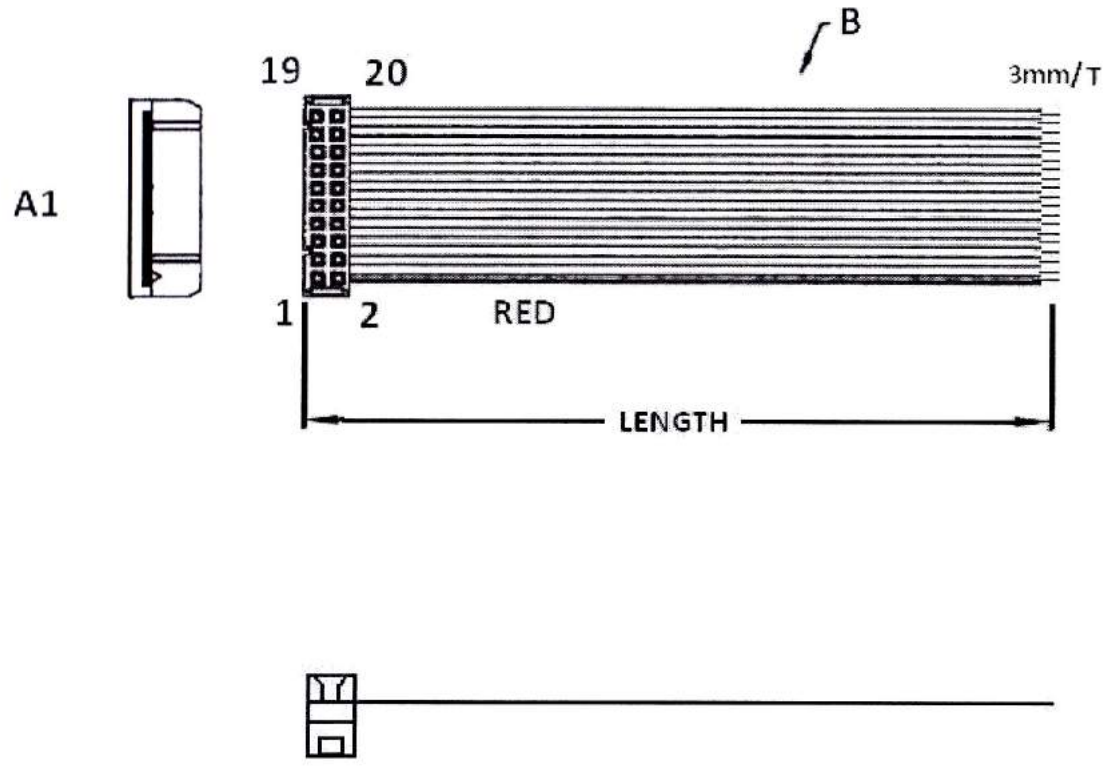


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{AT}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "AT" 2.54MM IDC SOCKET W/O S.R. W/O NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITHOUT NOSE (H=11.0MM) TO TINNED END (2)

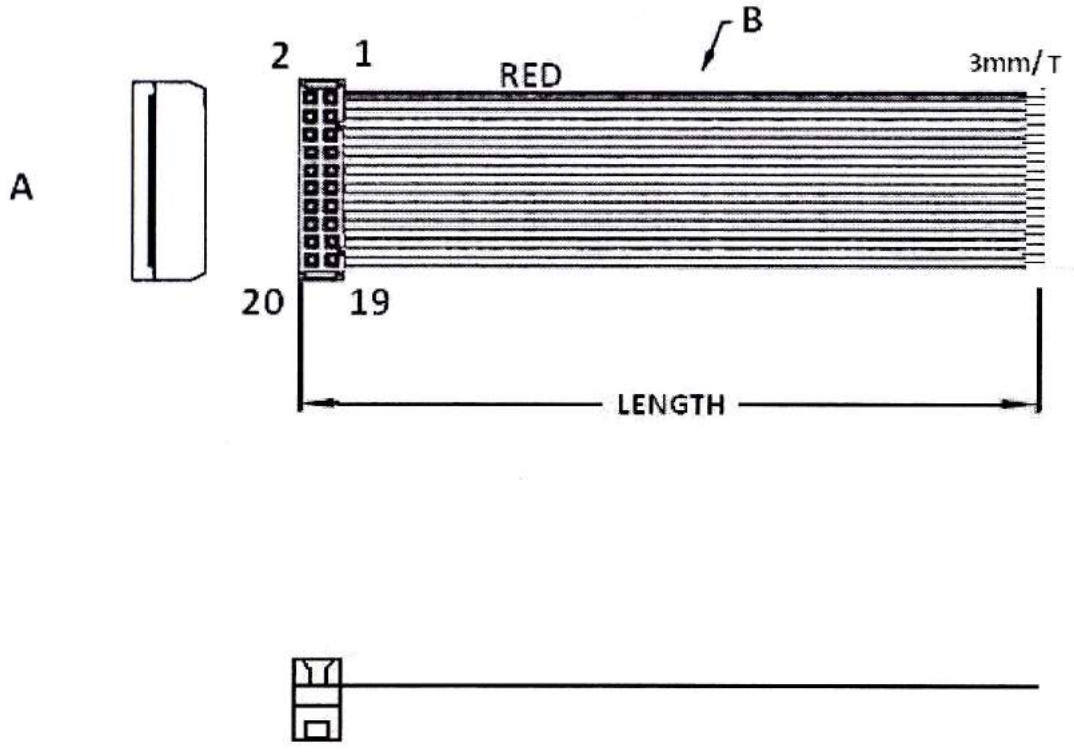


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{VT}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "VT" 2.54MM IDC SOCKET W/O S.R. W/O NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO TINNED END (1)

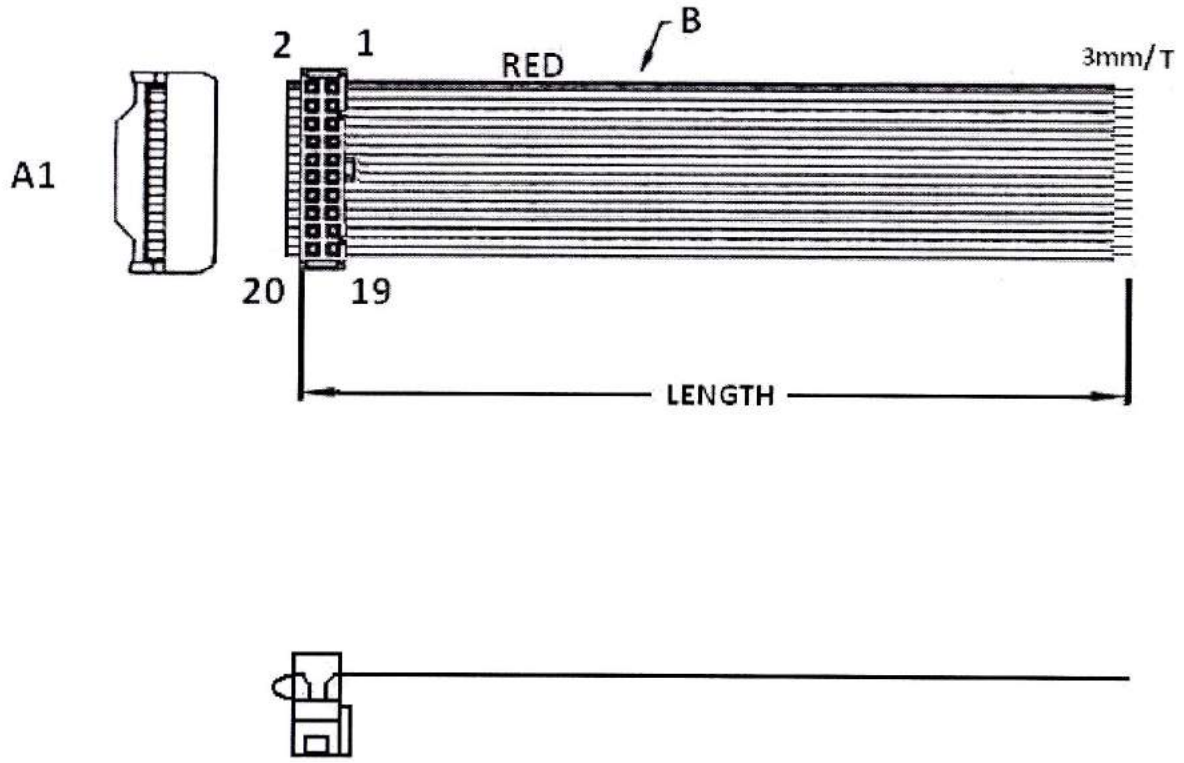


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{MT}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "MT" 2.54MM IDC SOCKET WITH S.R. WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC SOCKET WITH STRAIN RELIEF (H=16.0MM) TO TINNED END (2)

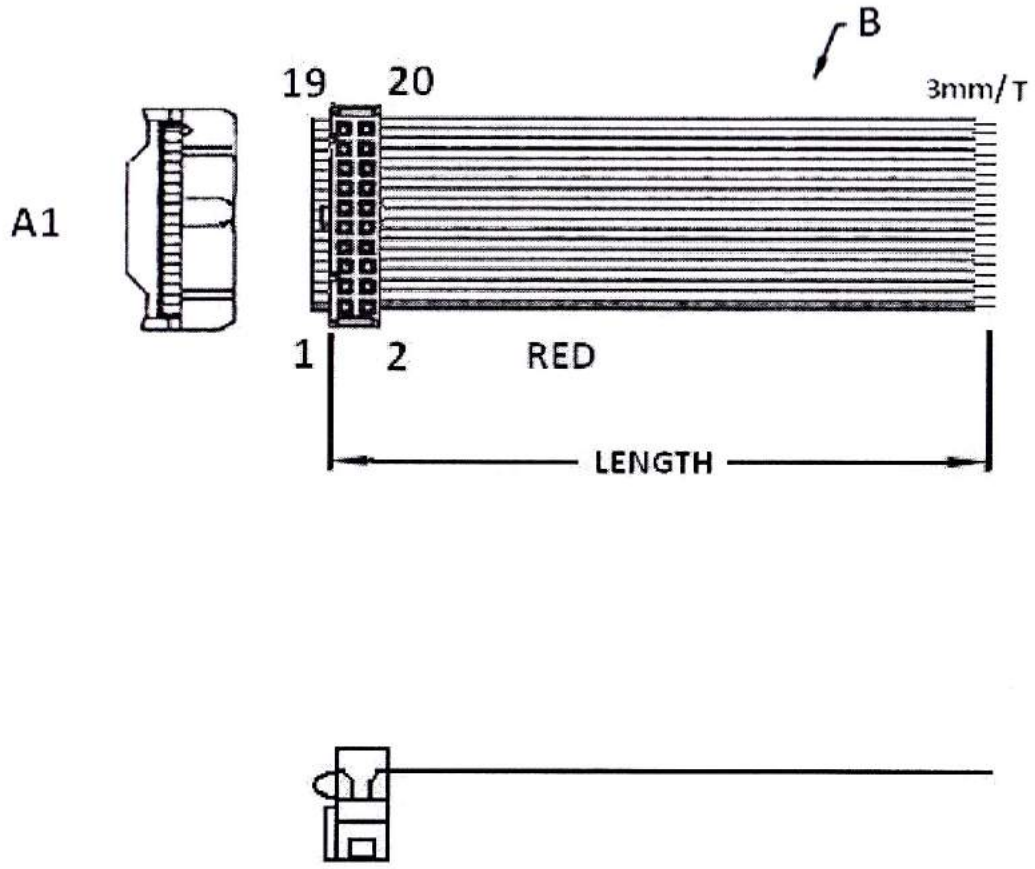


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{NT}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "NT" 2.54MM IDC SOCKET WITH S.R. WITH NOSE
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH DIP PLUG (H=7.6MM) TO TINNED END (1)

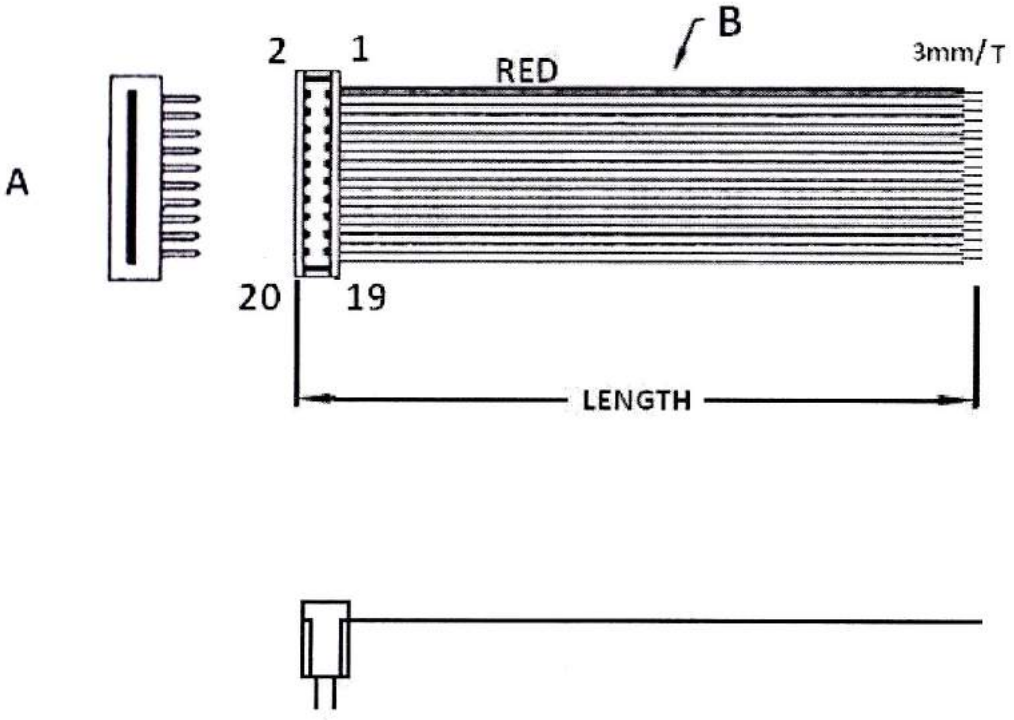


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{DT}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "DT" 2.54MM DIP PLUG
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH DIP PLUG (H=7.6MM) TO TINNED END (2)

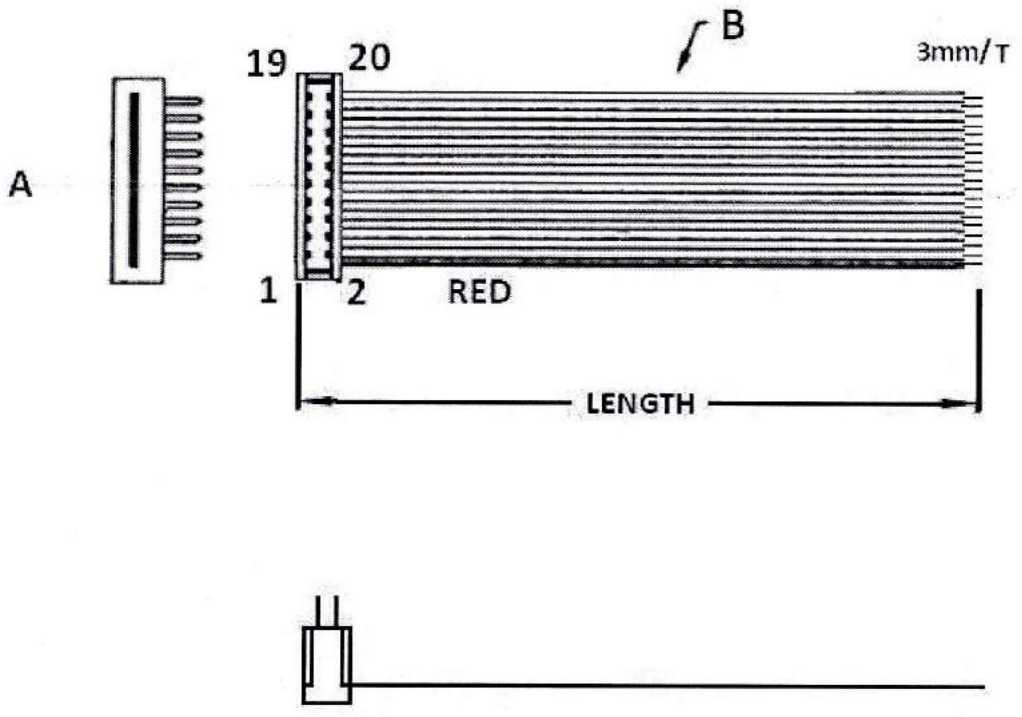


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{PT}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "PT" 2.54MM DIP PLUG
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "B" BLACK
   "A" GRAY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC TYPE BOX HEADER TO TINNED END

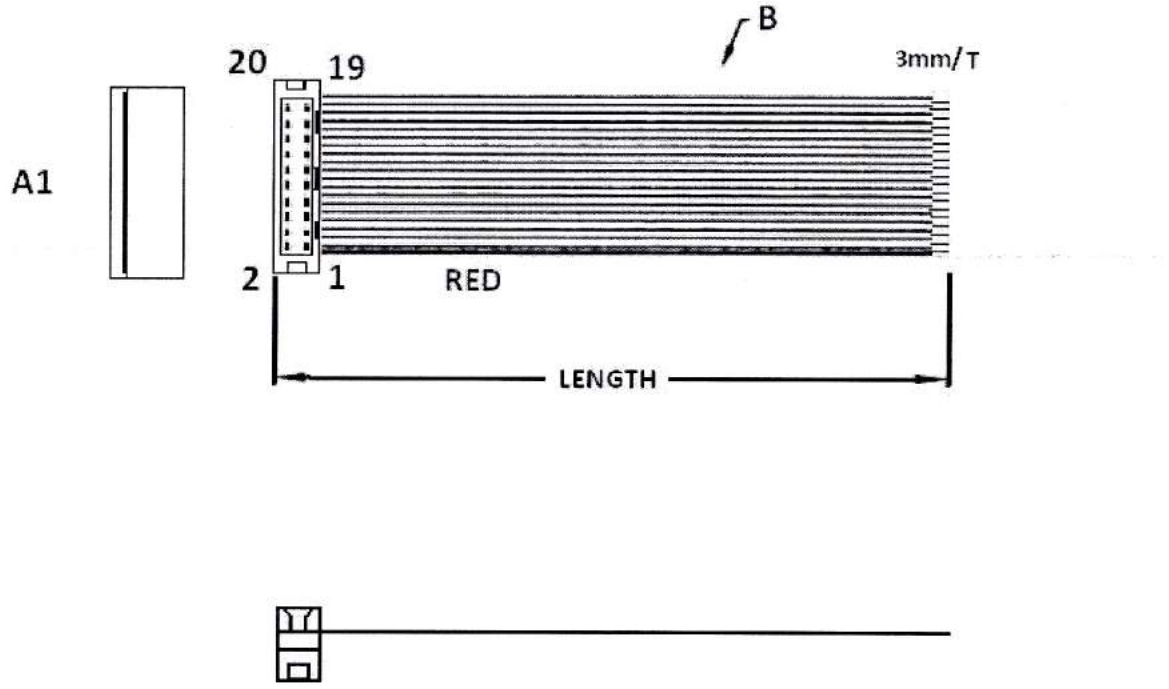


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{BT}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "BT" 2.54MM IDC TYPE BOX HEADER
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC PLUG HEADER WITH SHORT LATCHES TO TINNED END

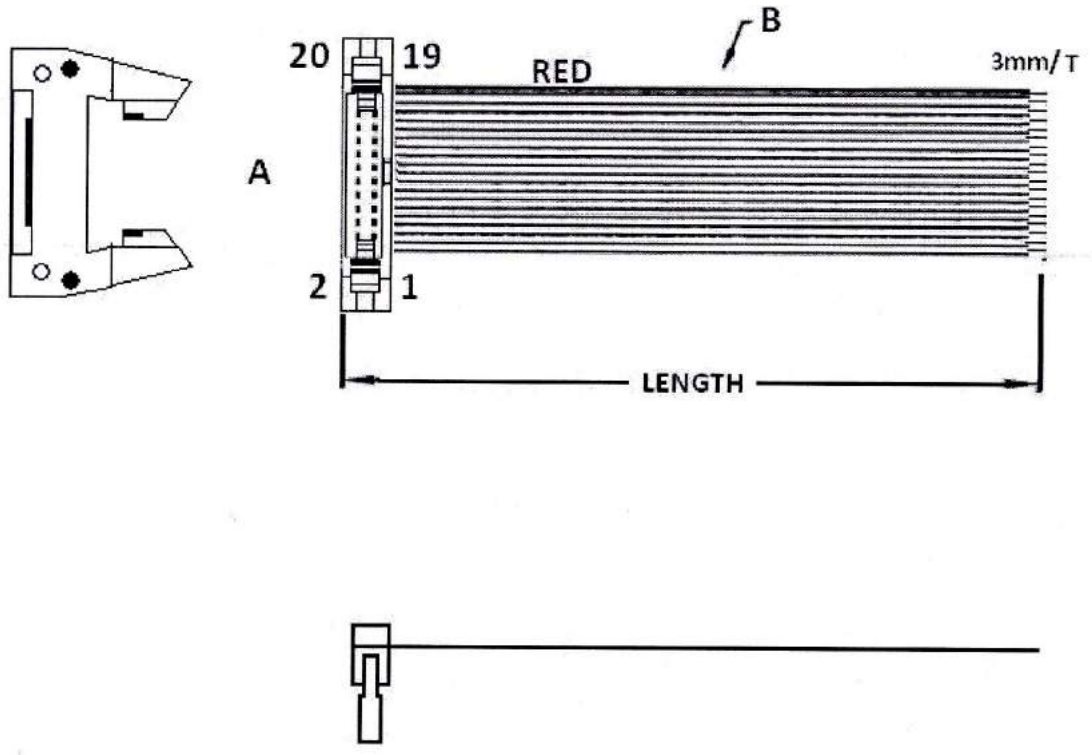


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{ST}{3}$ - $\frac{xx}{4}$ C M $\frac{A}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "ST" 2.54MM IDC PLUG WITH SHORT LATCHES
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH
2.54MM PITCH IDC PLUG WITH LONG LATCHES TO TINNED END

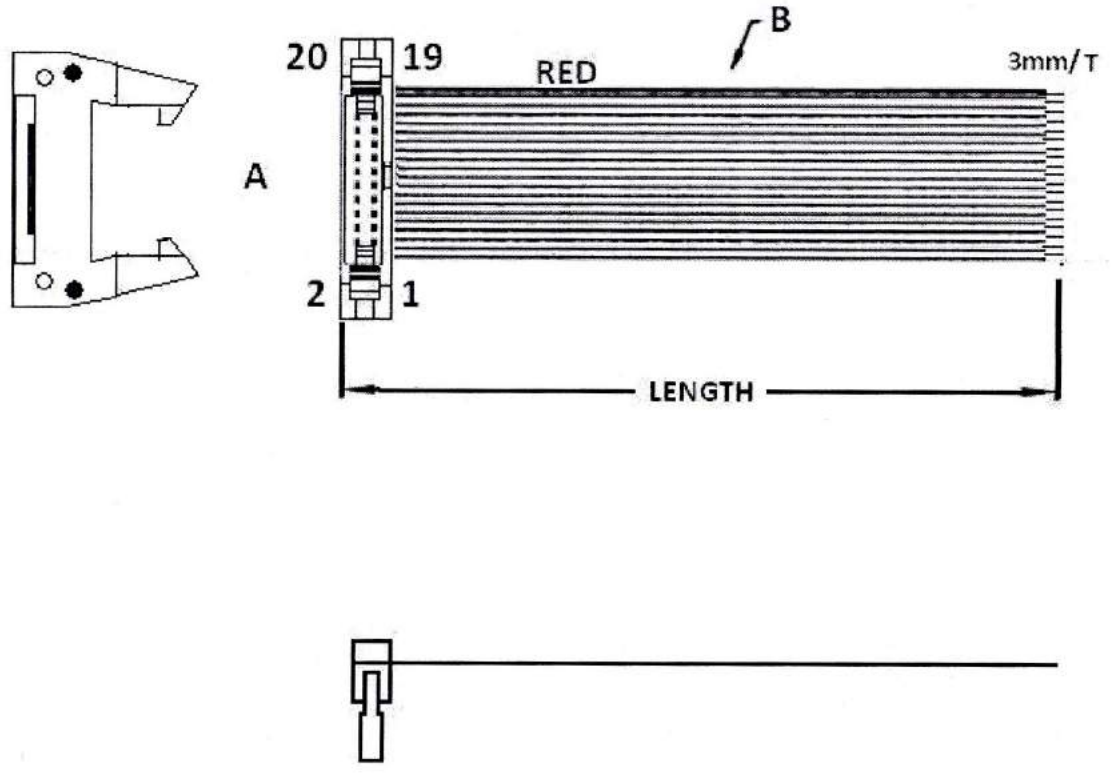


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{ZT}{3}$ - $\frac{xx}{4}$ **C M** $\frac{A}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10~64
3. CONNECTORS AT TWO ENDS:
   "ZT" 2.54MM IDC PLUG WITH LONG LATCHES
   TO 3MM TIN PLATED END
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC CONNECTOR:
   "A" GRAY ONLY

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH PLUG TO PLUG (A1)

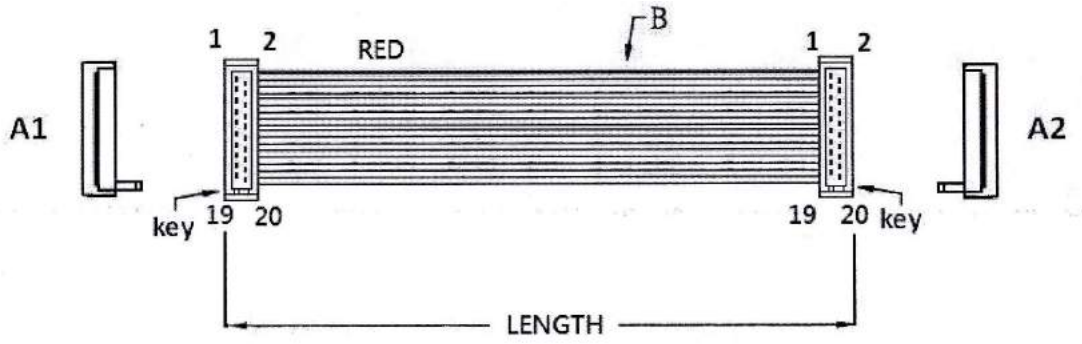

PIN TO PIN



KMxxMM-xxCMR

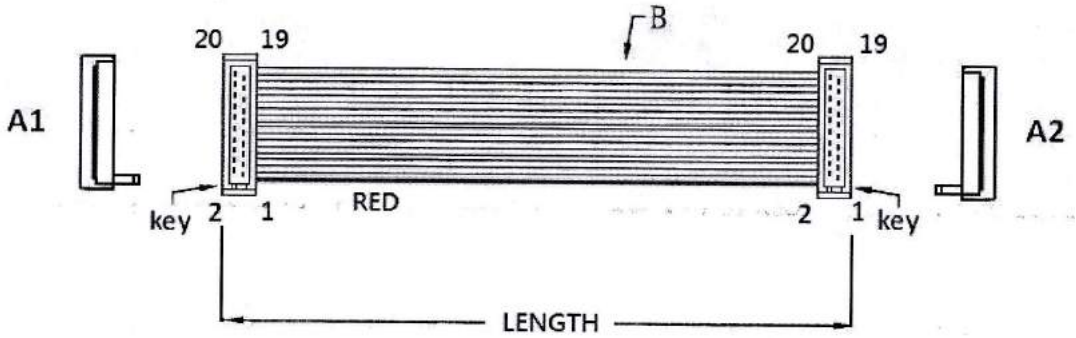

PIN TO PIN



KMxxPP-xxCMR


ORDERING INFORMATION:

P/N $\frac{KM}{1}\ \frac{xx}{2}\ \frac{xx}{3}$ - $\frac{xx}{4}$ C M $\frac{R}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "MM" MALE TO MALE TYPE1
   "PP" MALE TO MALE TYPE2
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH PLUG TO PLUG (A2)

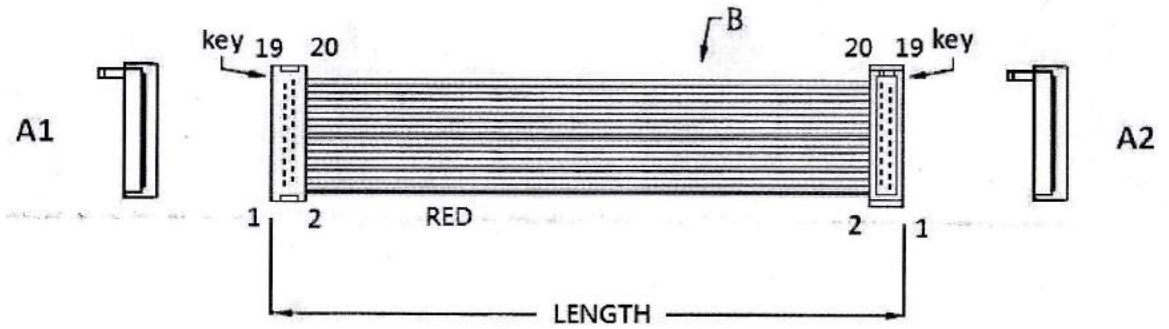


PIN TO PIN

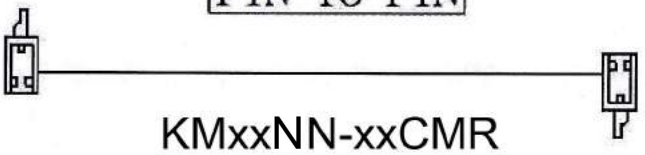

KMxxNN-xxCMR

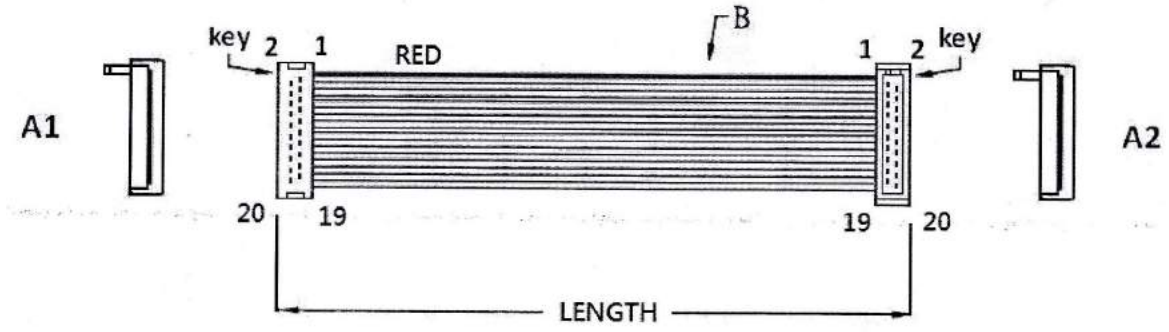

PIN TO PIN

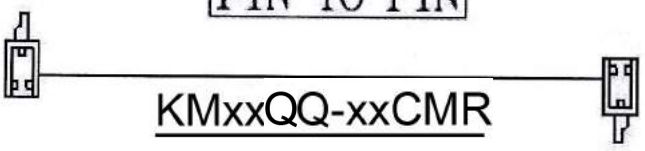

KMxxQQ-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ **C M** $\frac{\text{R}}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "NN" MALE TO MALE TYPE3
   "QQ" MALE TO MALE TYPE4
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH JACK TO JACK (B1)

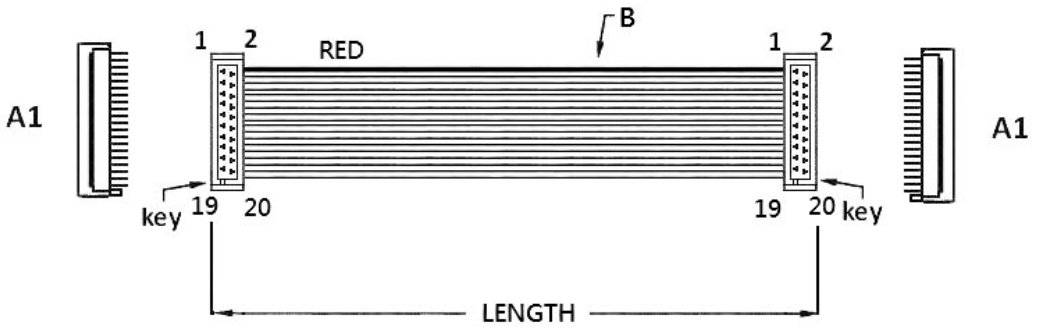


PIN TO PIN



KM20FF-xxCMR

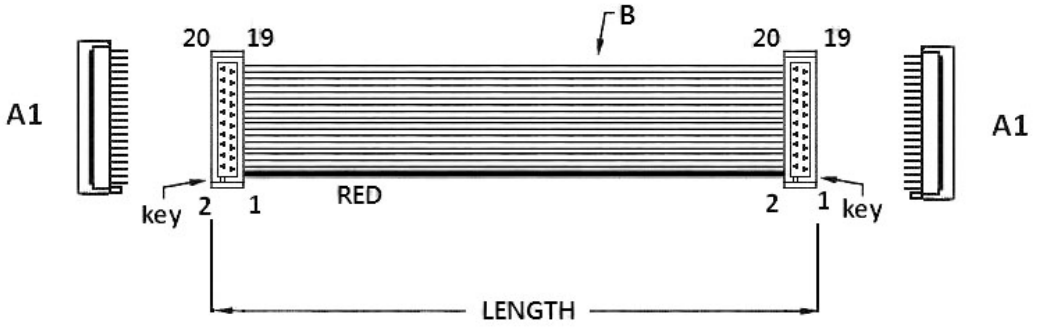

PIN TO PIN



KM20HH-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{R}}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "FF" FEMALE TO FEMALE TYPE1
   "HH" FEMALE TO FEMALE TYPE2
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH JACK TO JACK (B2)

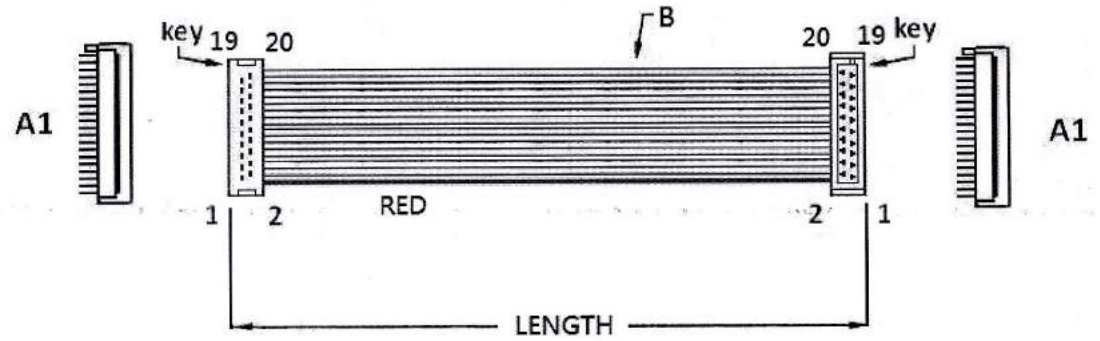


PIN TO PIN

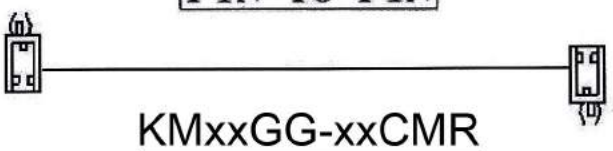

KMxxGG-xxCMR

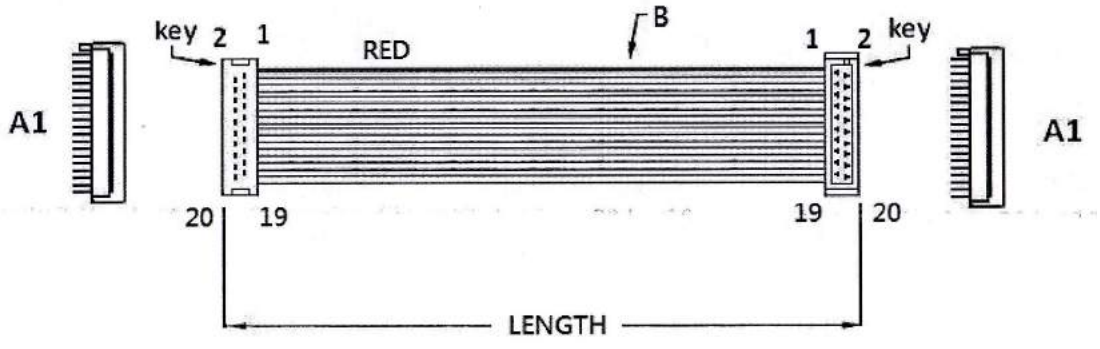

PIN TO PIN

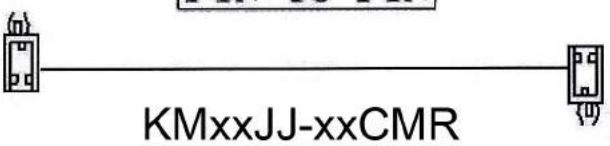

KMxxJJ-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{R}}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "GG" FEMALE TO FEMALE TYPE3
   "JJ" FEMALE TO FEMALE TYPE4
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH PLUG TO JACK (C1)

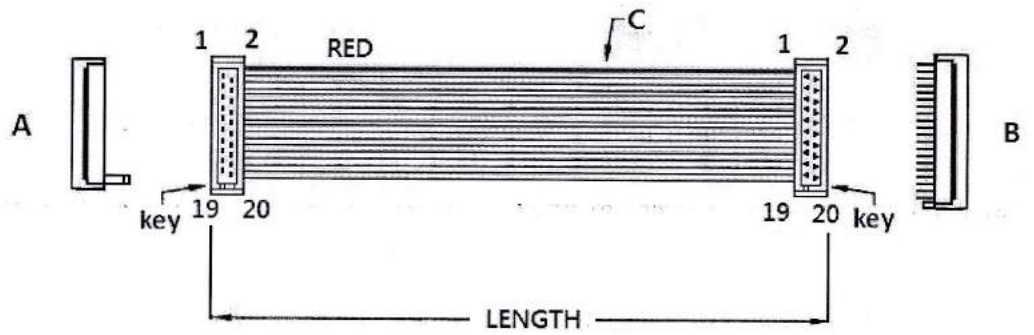


PIN TO PIN



KMxxMF-xxCMR

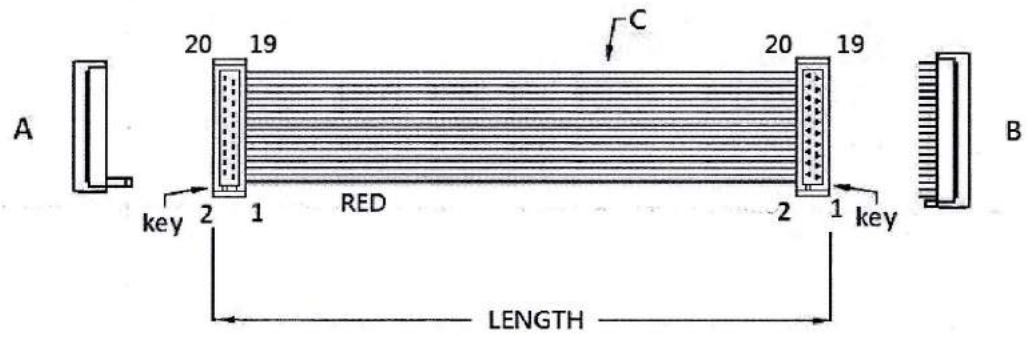

PIN TO PIN



KMxxPH-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{R}}{5}$

1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "MF" MALE TO FEMALE TYPE1
   "PH" MALE TO FEMALE TYPE2
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH PLUG TO JACK (C2)

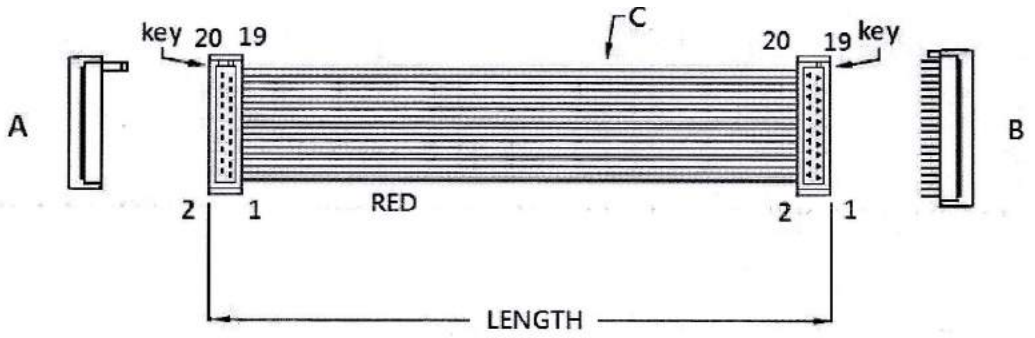


PIN TO PIN



KMxxNG-xxCMR

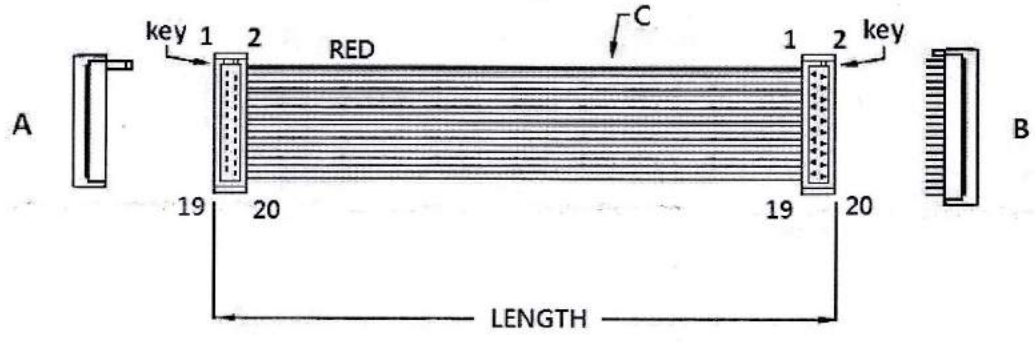

PIN TO PIN



KMxxQJ-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{R}}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "NG" MALE TO FEMALE TYPE3
   "QJ" MALE TO FEMALE TYPE4
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH JACK TO PLUG (D1)

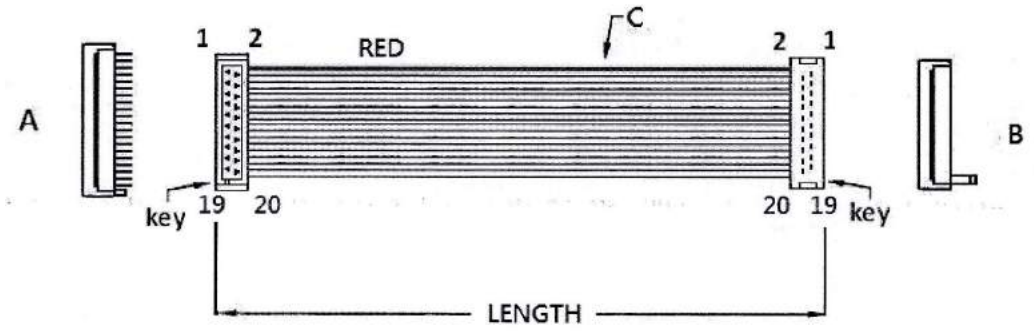


PIN TO PIN



KMxxFM-xxCMR

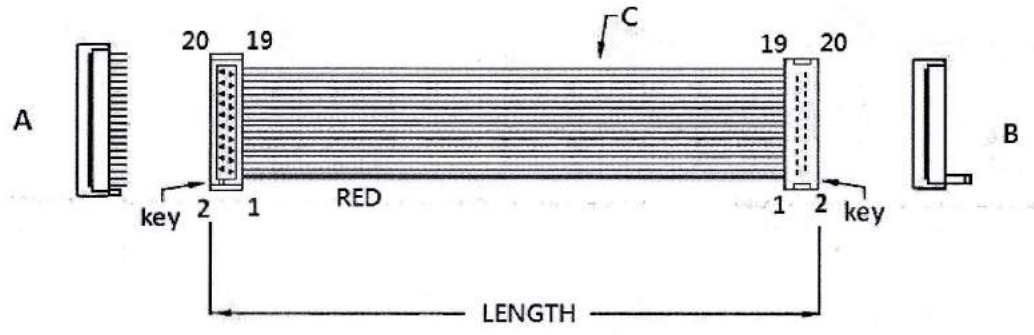

PIN TO PIN

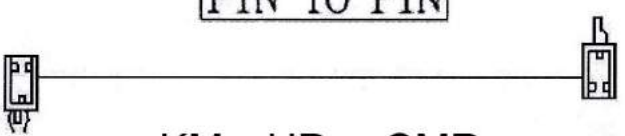

KMxxHP-xxCMR


ORDERING INFORMATION:

P/N $\frac{\text{K M}}{1}\ \frac{\text{x x}}{2}\ \frac{\text{x x}}{3}$ - $\frac{\text{x x}}{4}$ C M $\frac{\text{R}}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "FM" FEMALE TO MALE TYPE1
   "HP" FEMALE TO MALE TYPE2
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH JACK TO PLUG (D2)

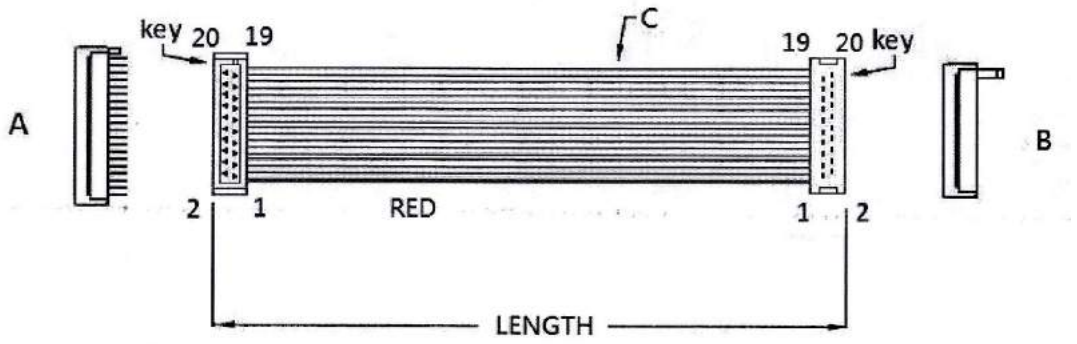


PIN TO PIN

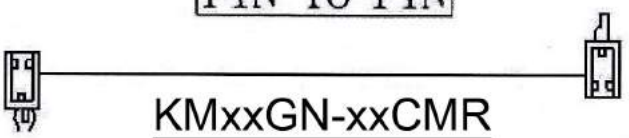

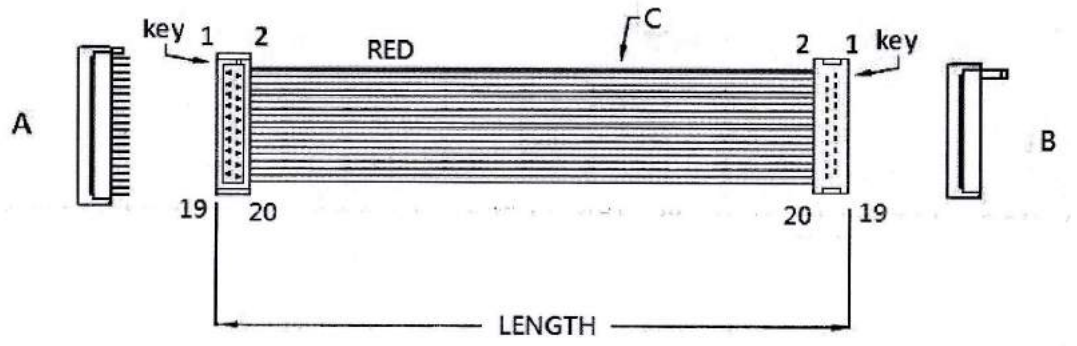

PIN TO PIN

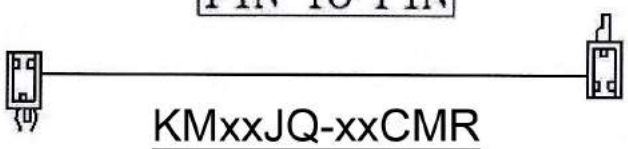


ORDERING INFORMATION:


P/N $\frac{KM}{1}\ \frac{xx}{2}\ \frac{xx}{3}$ - $\frac{xx}{4}$ C M $\frac{R}{5}$

1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "GN" FEMALE TO MALE TYPE3
   "JQ" FEMALE TO MALE TYPE4
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE WITH 2.54MM PITCH MICRO MATCH PLUG TO OPEN END

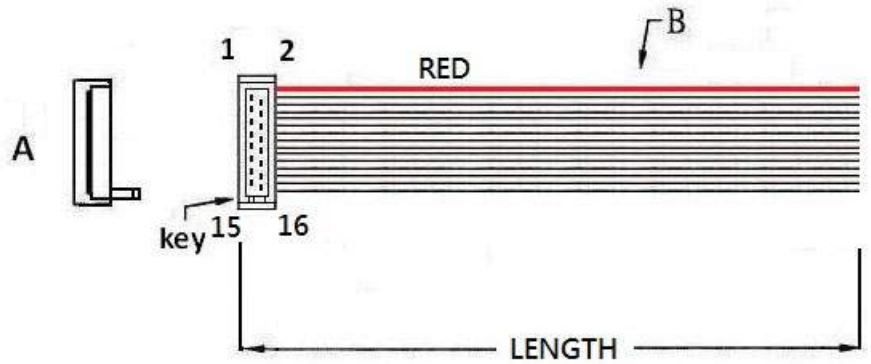



KMxxMO-xxCMR

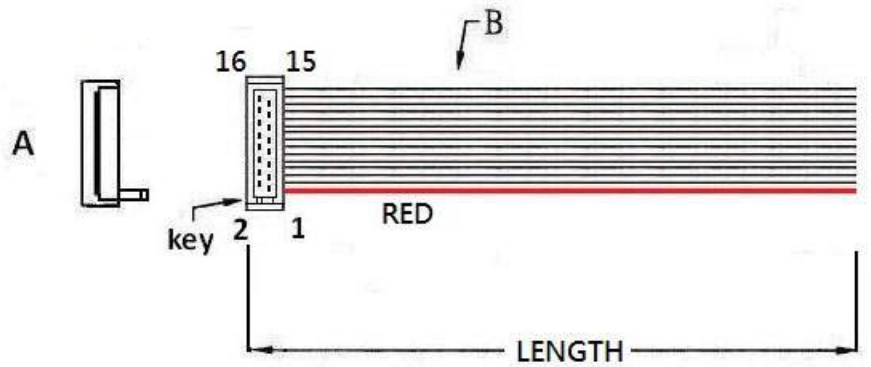



KMxxPO-xxCMR


ORDERING INFORMATION:

P/N $\frac{KM}{1}\ \frac{xx}{2}\ \frac{xx}{3}$ - $\frac{xx}{4}$ C M $\frac{R}{5}$


1. FLAT CABLE TYPE:
   "KM" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   04, 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26
3. CONNECTORS AT TWO ENDS:
   "MO" MALE TO OPEN END TYPE1
   "PO" MALE TO OPEN END TYPE2
4. LENGTH IN CM(CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "R" RED

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE
WITH 2*2.54MM FEMALE ON WIRE TYPE CONNECTORS

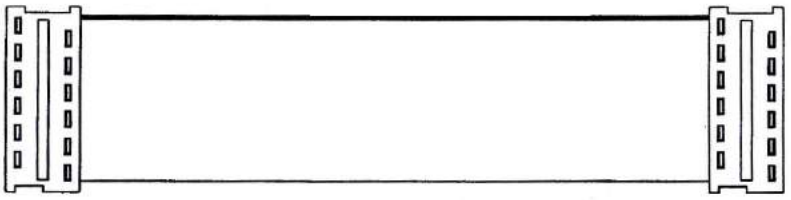

P/N K4PA012-100CMW

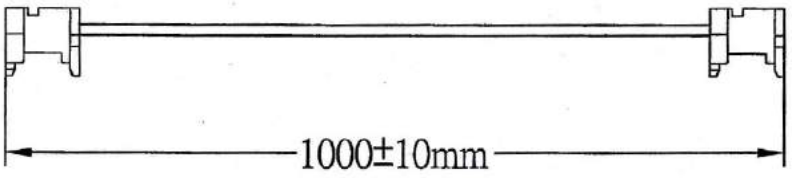


2.54MM PITCH FEMALE ON WIRE TYPE CONNECTOR INSULATOR COLOR: WHITE






A=B+3.78
B=2.54*POSITIONS/2-1.27





NO. OF CONTACTS:
004, 006, 008, 010, 012,
014, 016, 018, 020, 022,
024, 026



ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ W


1. CONSTRUCTION TYPE:
   4PA
2. NO. OF CONTACTS:
   004~026
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "W" WHITE

NOTE: FEMALE ON WIRE TYPE CONNECTOR CAN'T BE SUPPLIED ALONE.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE
WITH 2*2.54MM DIP PLUG ON WIRE TYPE CONNECTORS

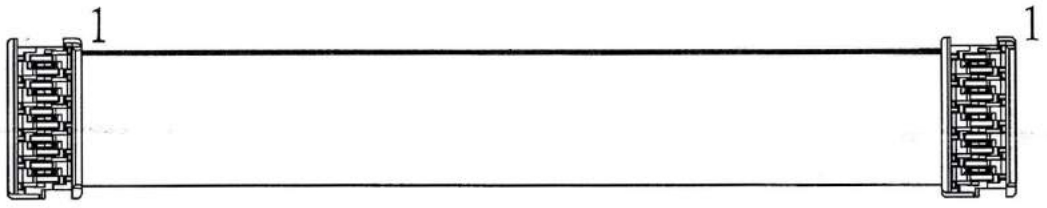

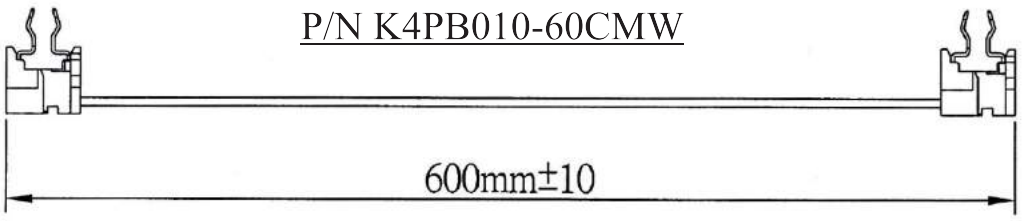



2.54MM PITCH DIP PLUG ON WIRE TYPE CONNECTOR INSULATOR COLOR: WHITE






A=B+3.38
B=2.54*POSITIONS/2-1.27
C=B-1.27





NO. OF CONTACTS:
004, 006, 008, 010, 012,
014, 016, 018, 020, 022,
024, 026



ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ C M $\frac{W}{4}$

1. CONSTRUCTION TYPE:
   4PB
2. NO. OF CONTACTS:
   004~026
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "W" WHITE


NOTE: DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM PITCH FLAT CABLE
WITH 2*2.54MM WIRE TO BOARD HOUSINGS

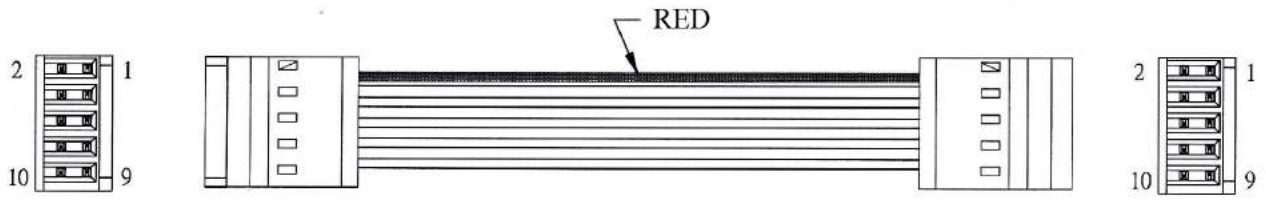

P/N K4AM010-10CMB

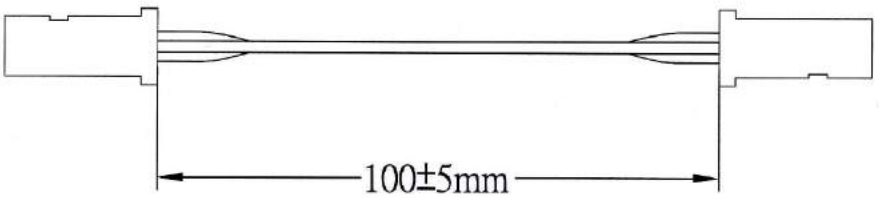

2.54MM PITCH WIRE TO BOARD DOUBLE ROW HOUSING

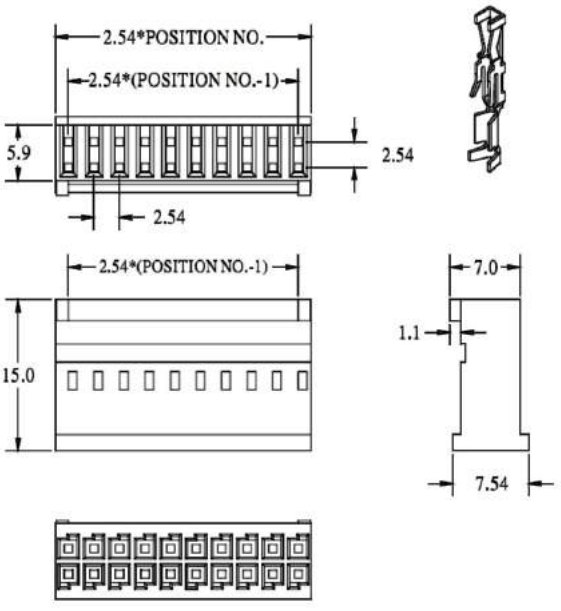

ORDERING INFORMATION:


P/N K $\frac{\text{x x x}}{1}$ $\frac{\text{x x x}}{2}$ - $\frac{\text{x x C M}}{3}$ $\frac{\text{B}}{4}$

1. CONSTRUCTION TYPE:
   4AM
2. NO. OF CONTACTS:

3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO HOUSINGS:
   "B" BLACK

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (1)

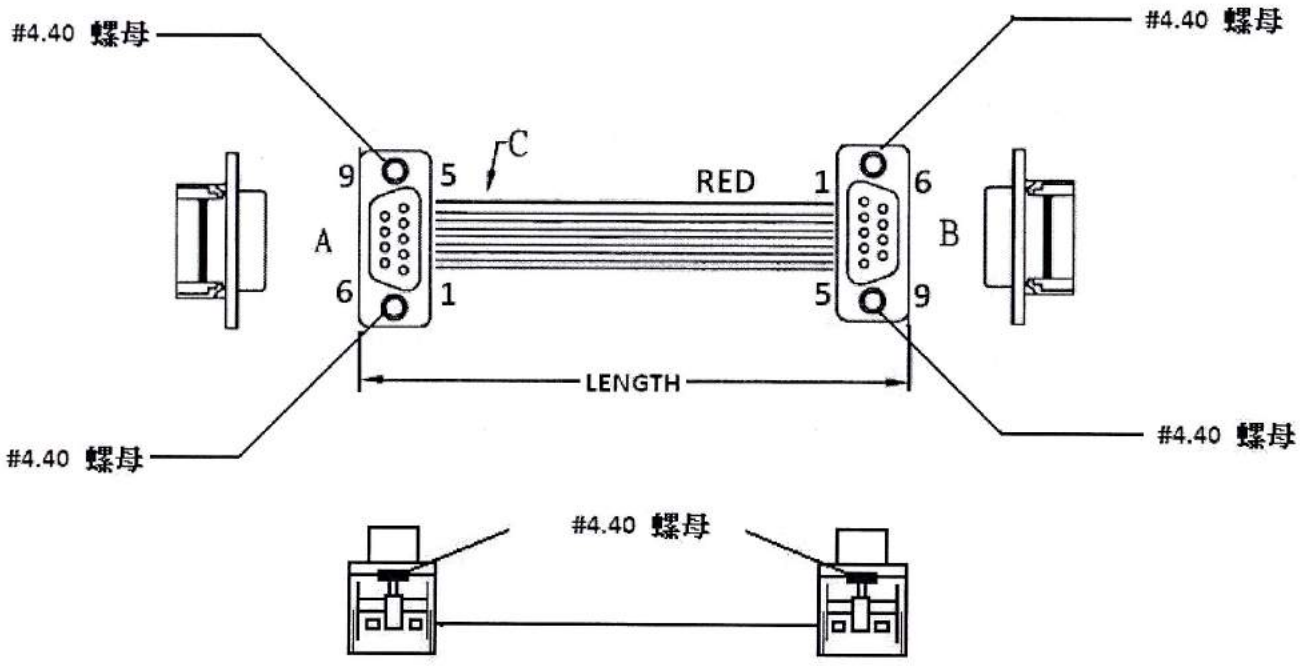

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FA}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FA" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (2)

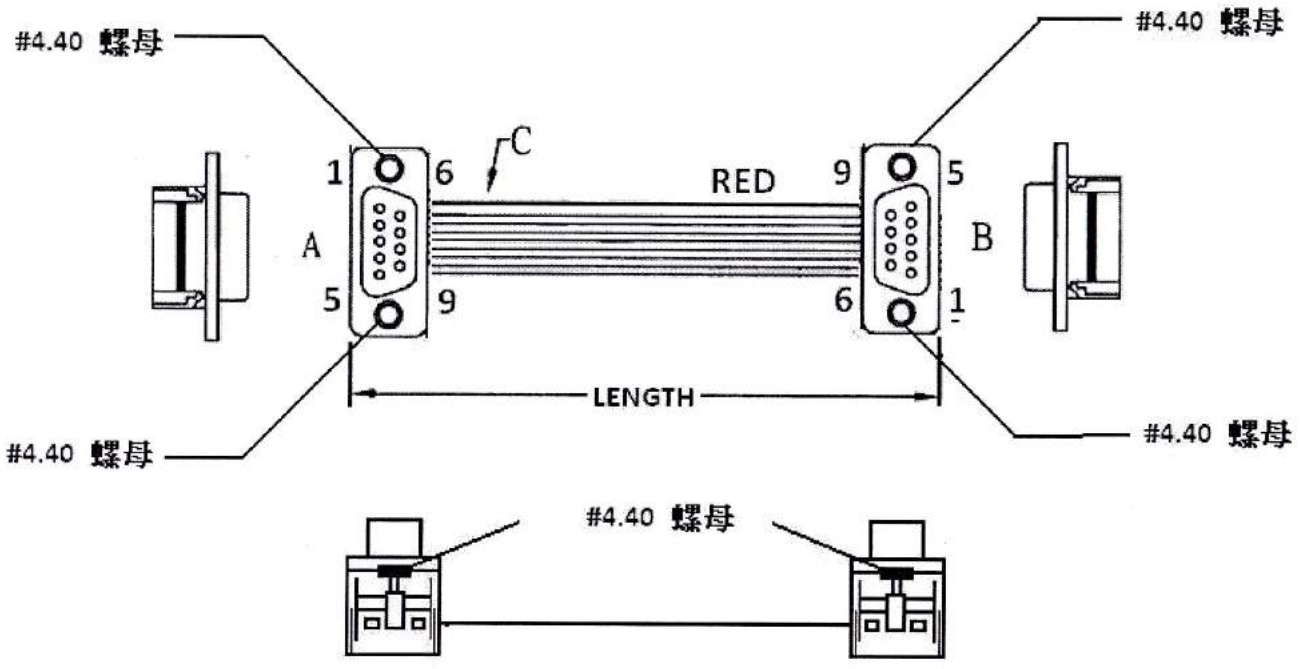

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FC}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FC" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (3)

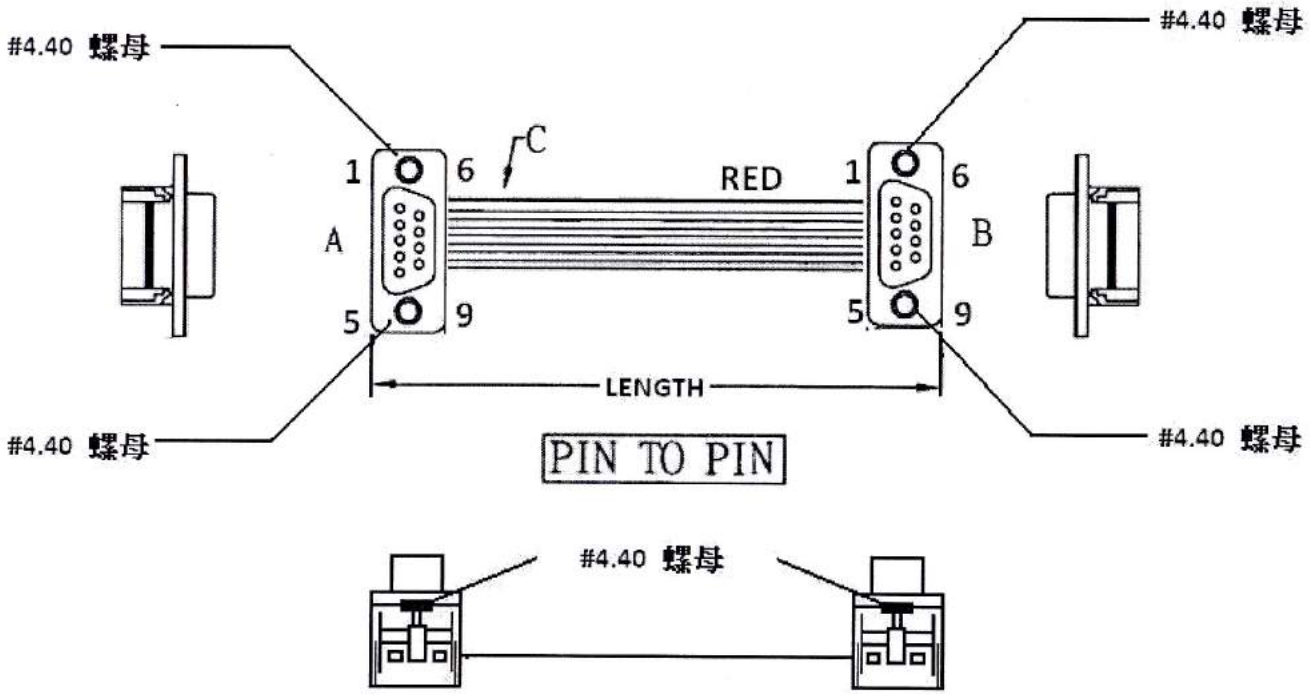


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FG}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FG" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (4)

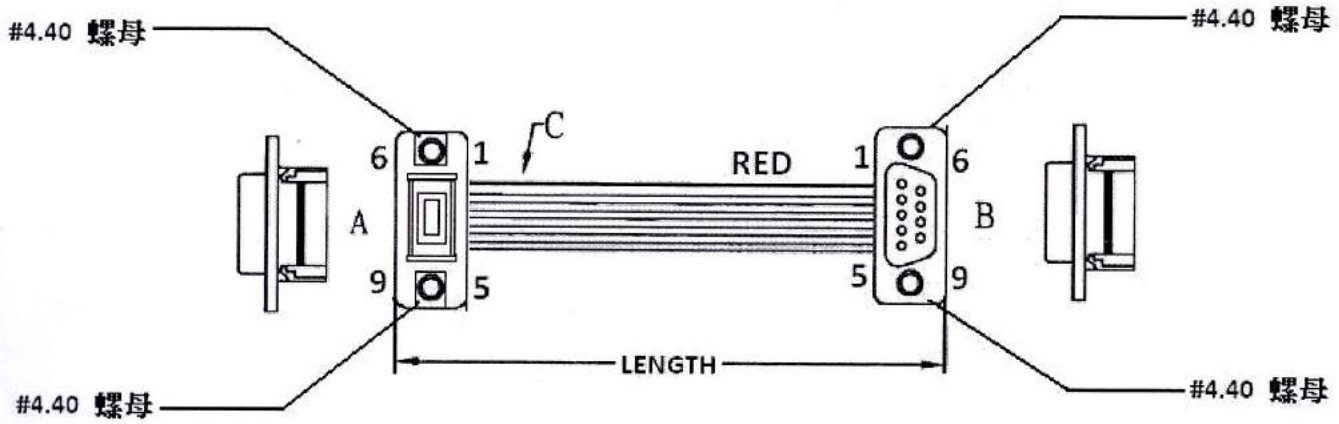

PIN TO PIN

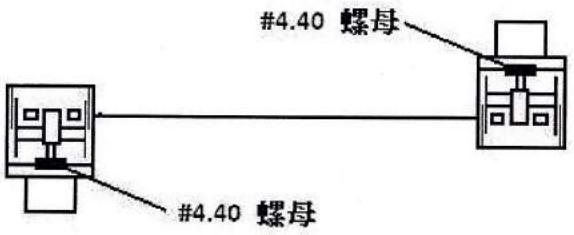


ORDERING INFORMATION:

P/N $\frac{KA}{1}\frac{xx}{2}\frac{GA}{3}-\frac{xx}{4}CM\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GA" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (5)

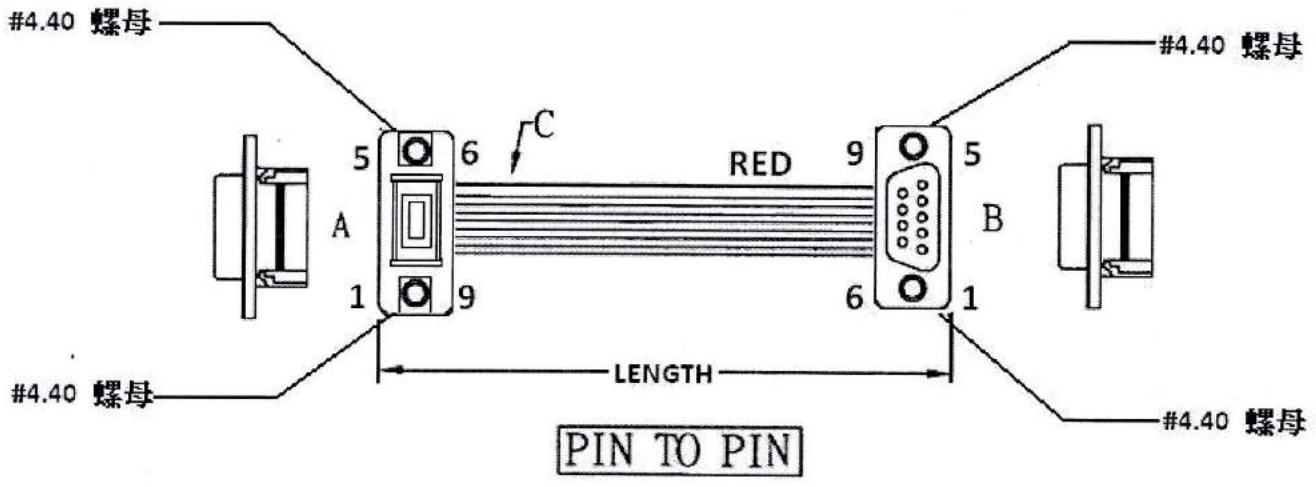

PIN TO PIN

第1pin對灰色

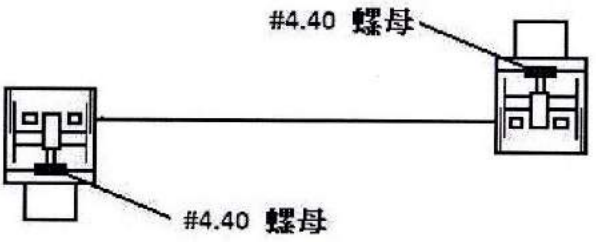


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GC}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GA" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (6)

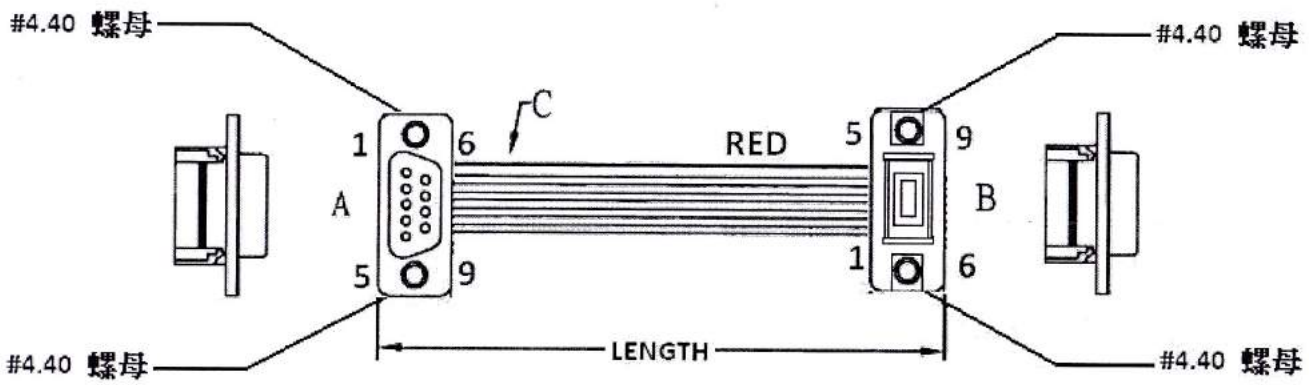

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1

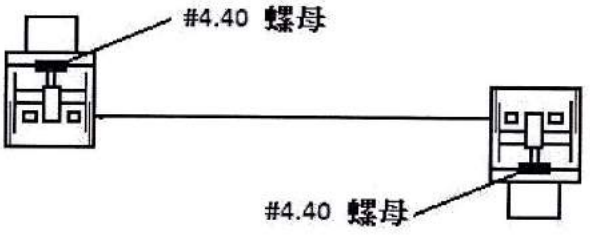


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GG}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GG" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO FEMALE CONNECTORS (7)

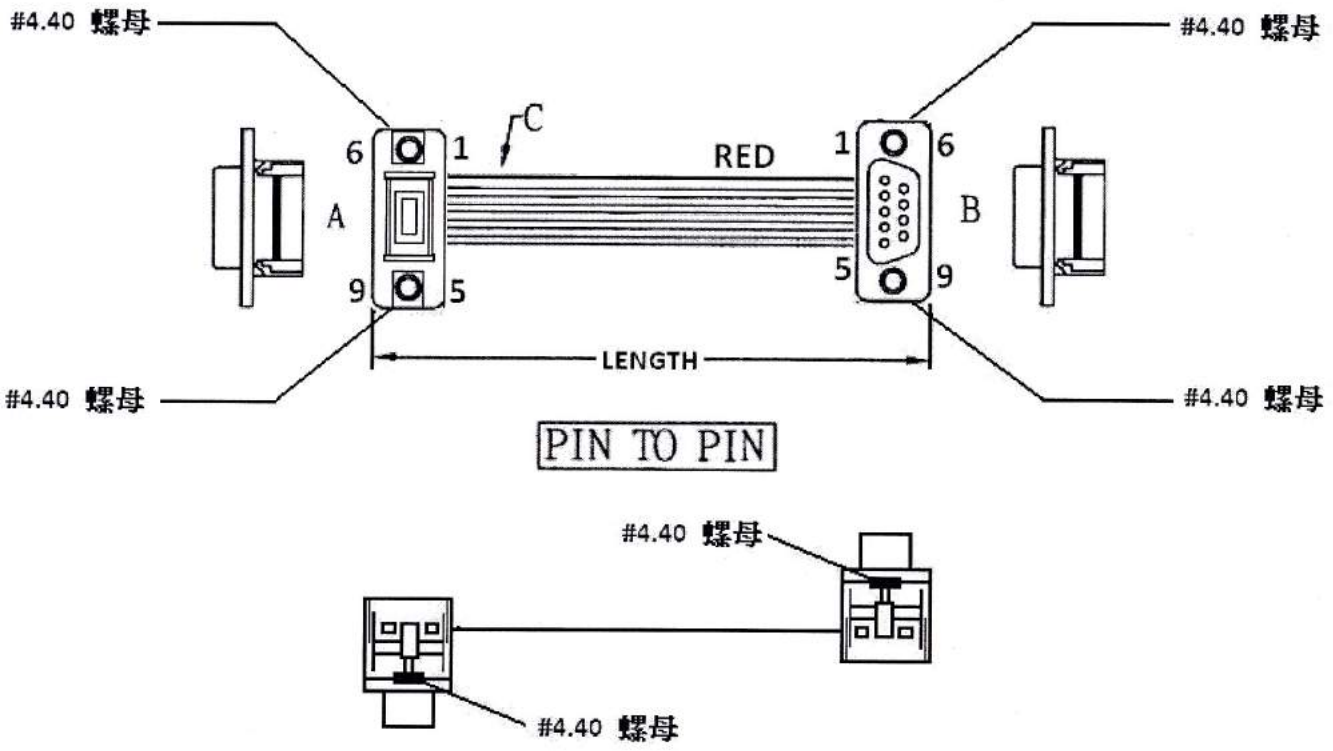


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GH}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GH" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (1)

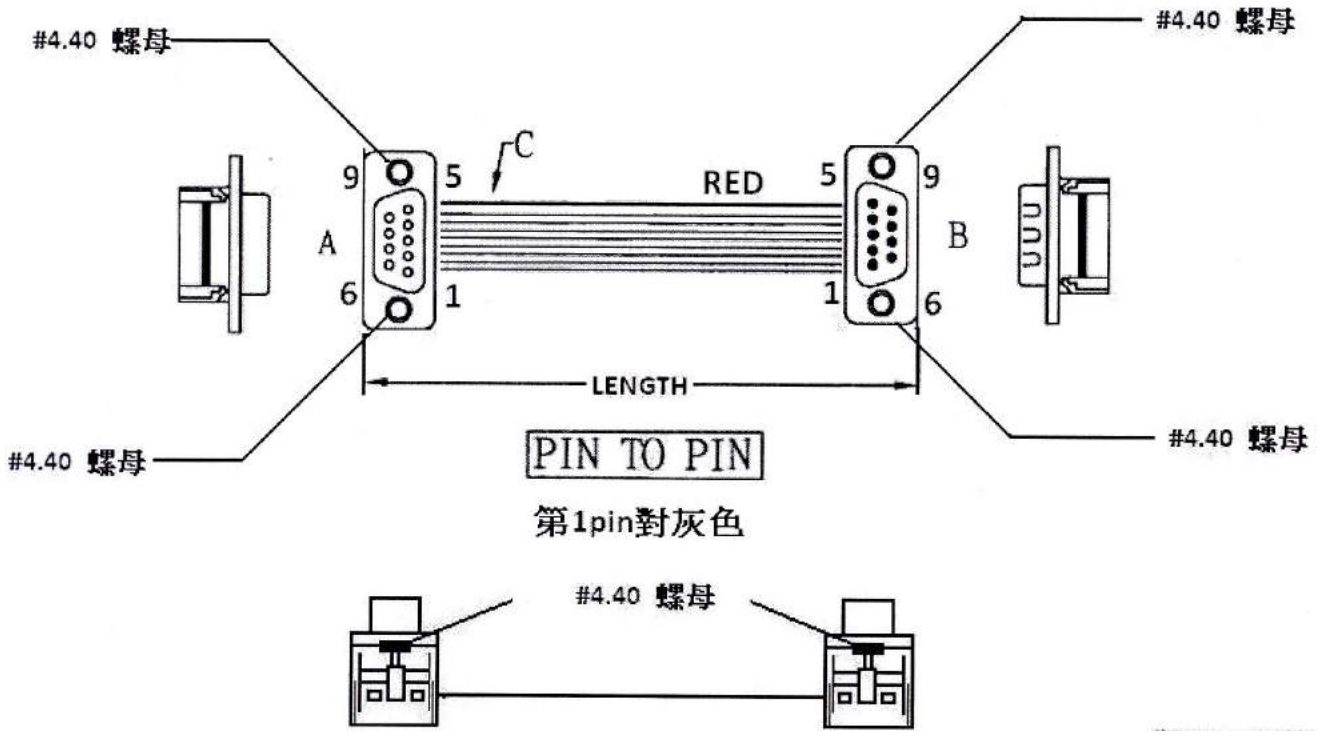


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FB}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FB" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (2)

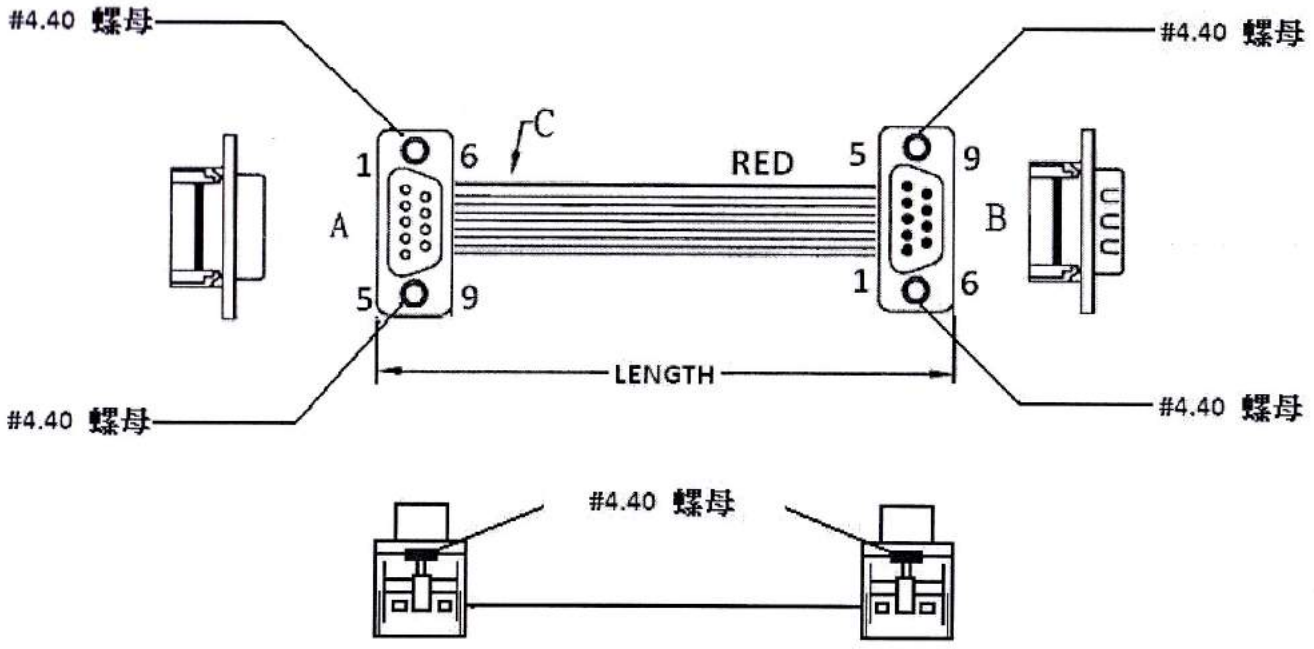

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FE}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FE" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (3)

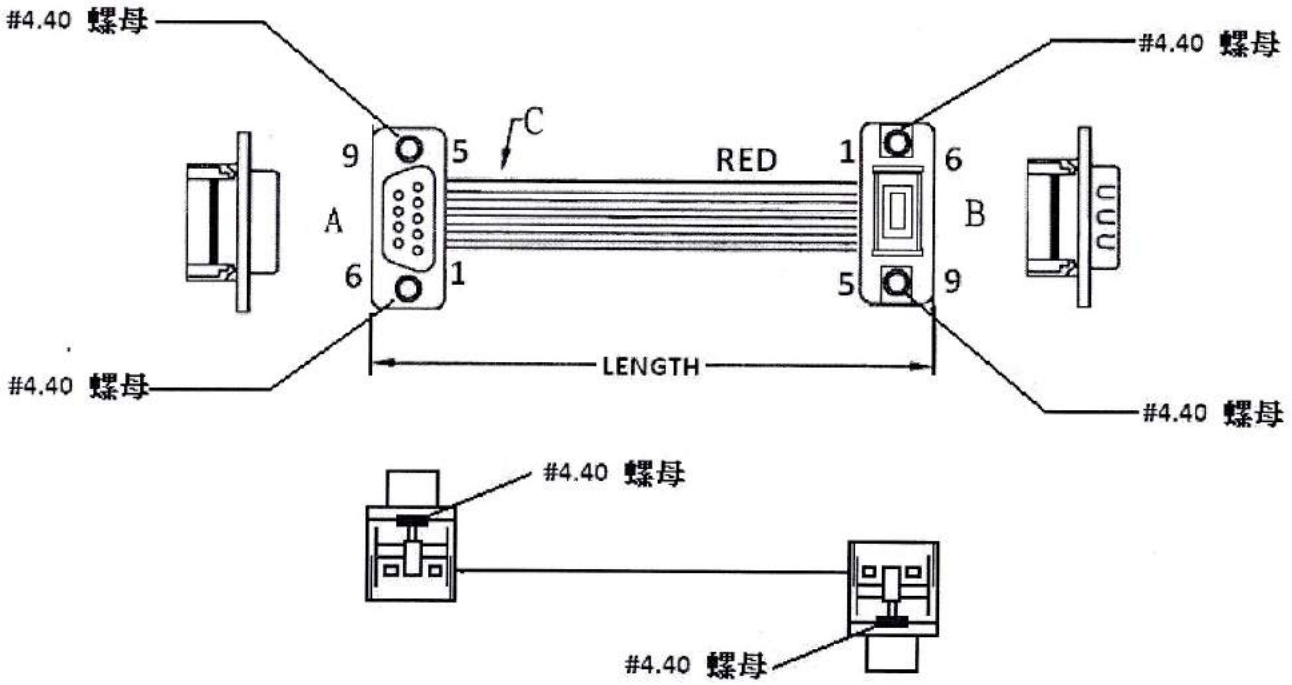

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:


P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GB}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GB" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (4)

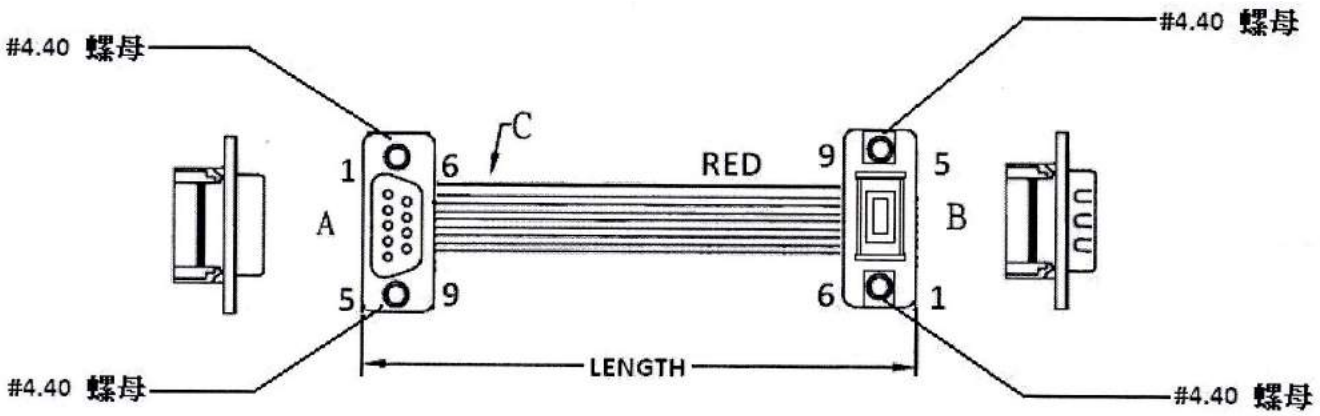

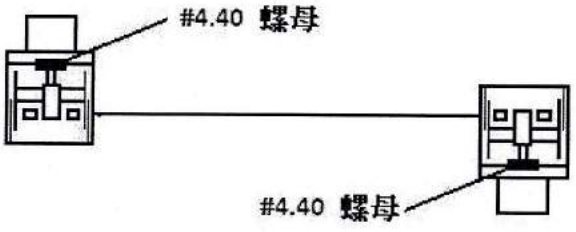

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GD}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GD" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (5)

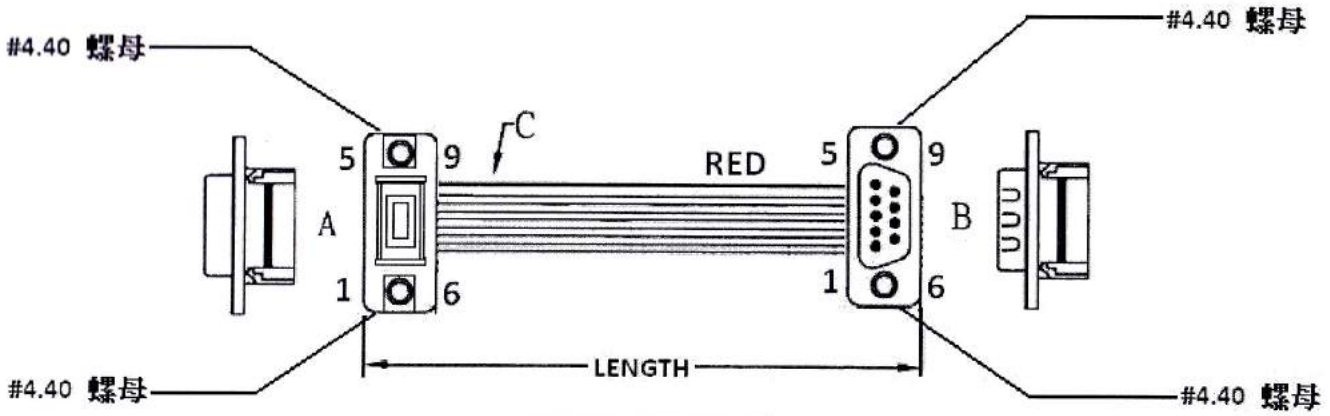

PIN TO PIN

第1pin對灰色

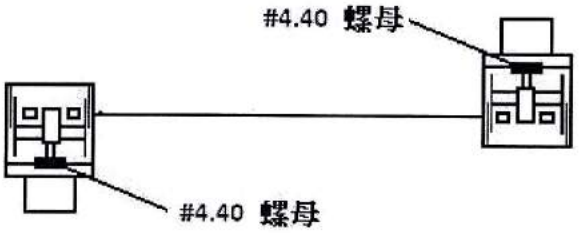


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GE}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GE" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (6)

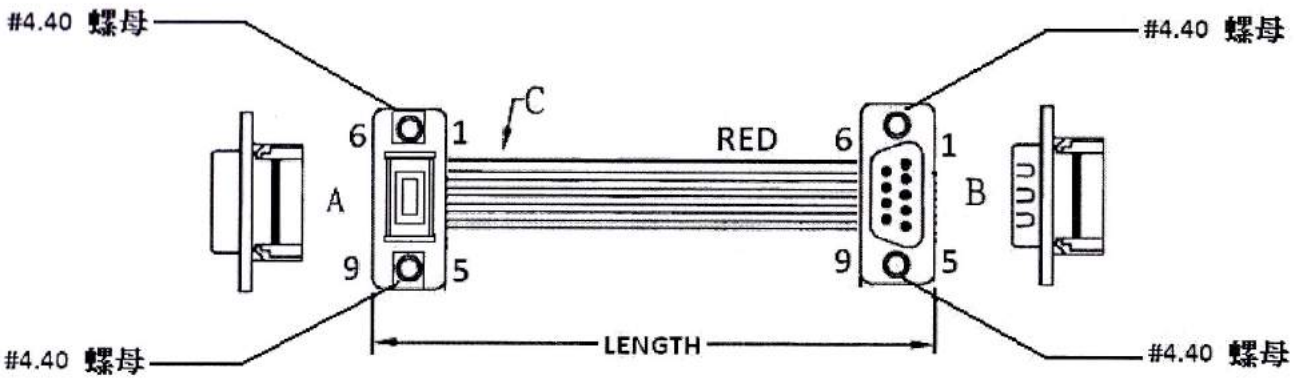

PIN TO PIN

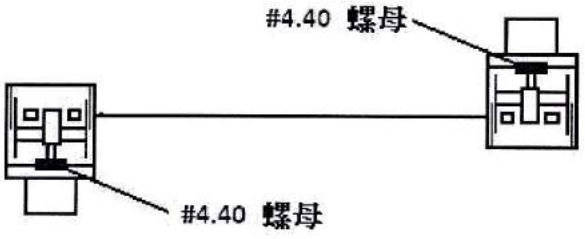


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GF}{3}$ - $\frac{xx}{4}$ **C M** $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GF" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO MALE CONNECTORS (7)

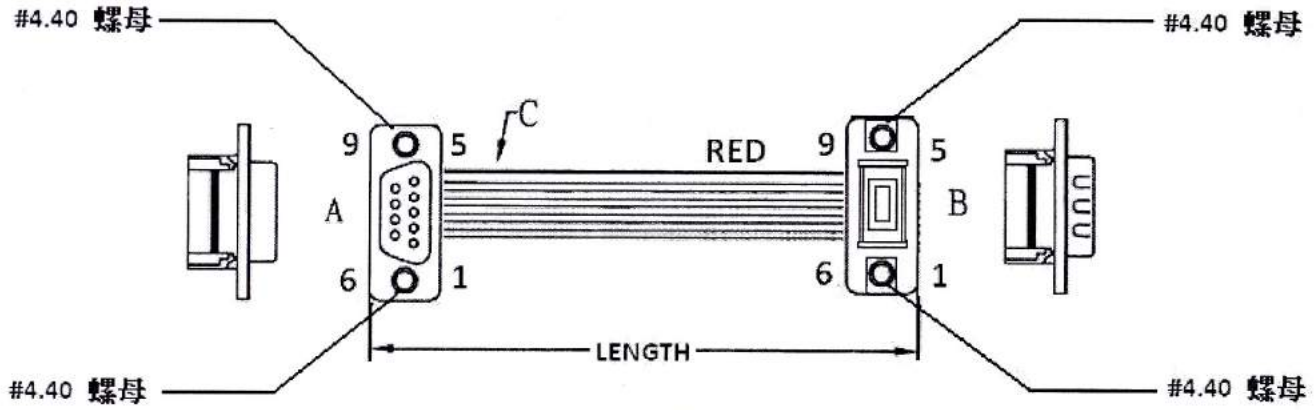

PIN TO PIN

第1pin對灰色

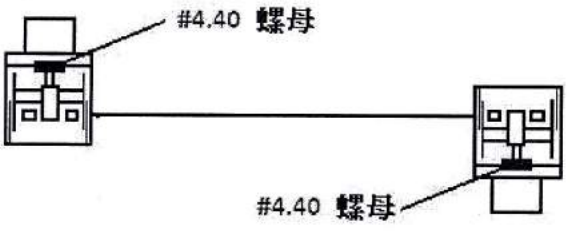


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{GJ}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "GJ" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO D-SUB. MALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. MALE TO FEMALE CONNECTORS (1)

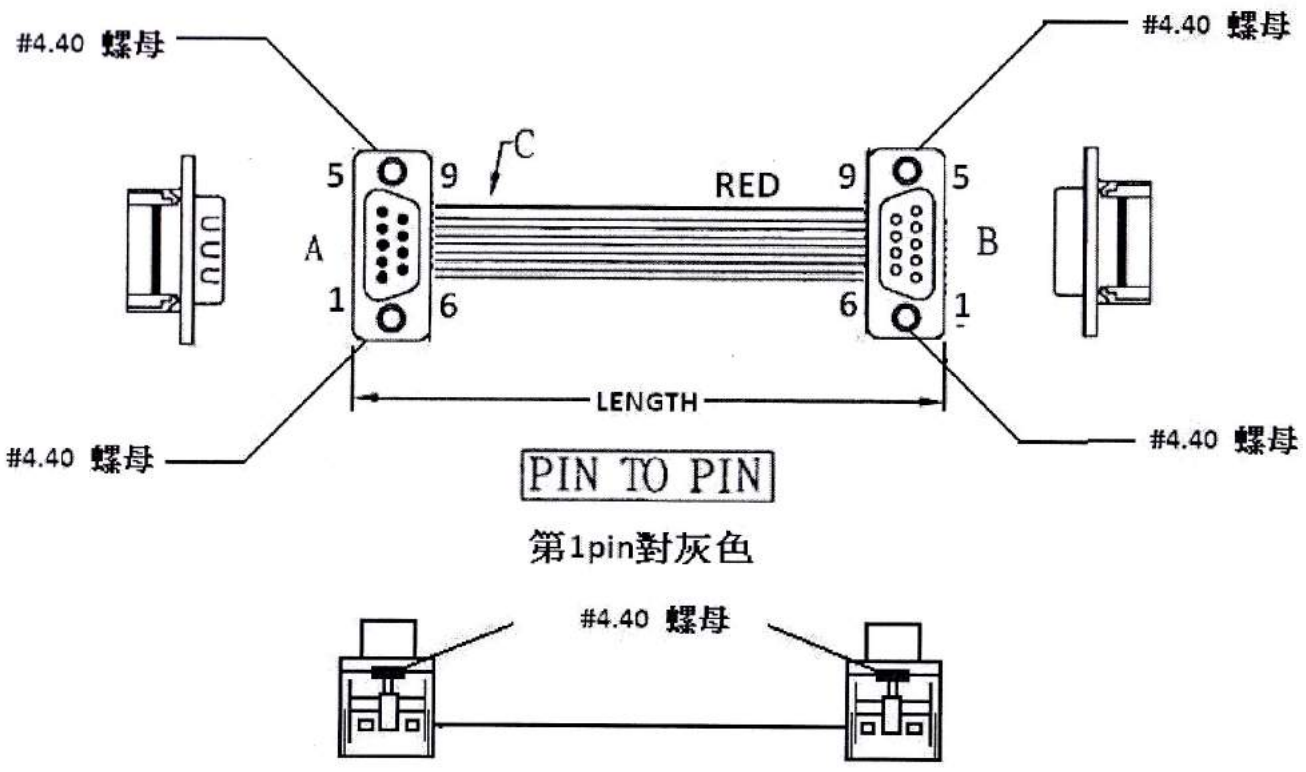


ORDERING INFORMATION:


P/N KA xx FD - xx C M x
(1) (2) (3) (4) (5)

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FD" D-SUB. MALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB.
MALE TO FEMALE CONNECTORS (2)

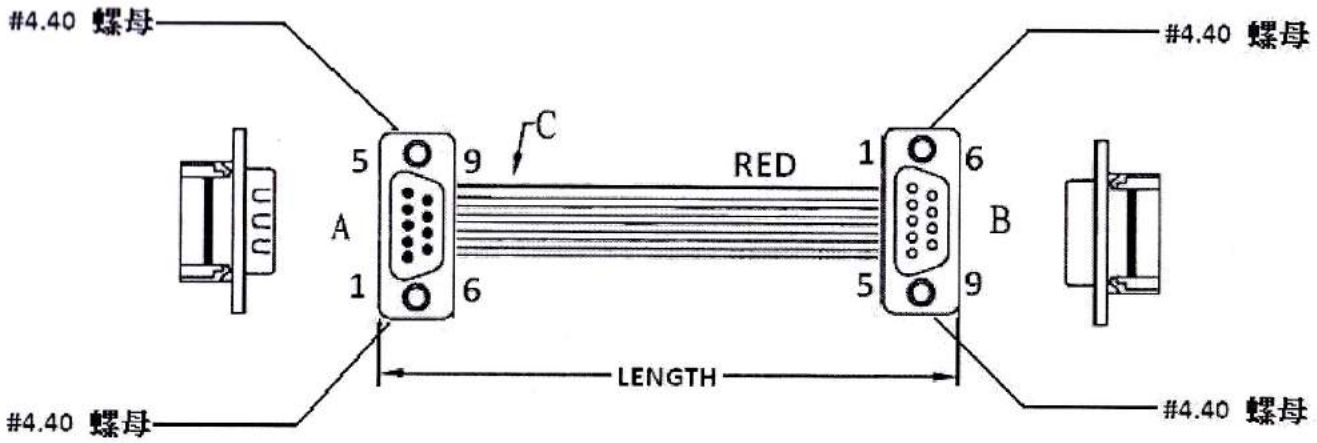

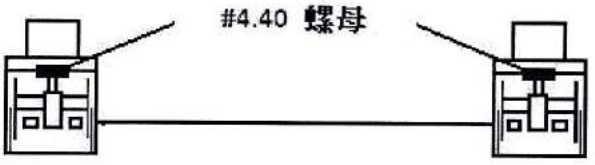

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:


P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FF}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FF" D-SUB. MALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB.
MALE TO FEMALE CONNECTORS (3)

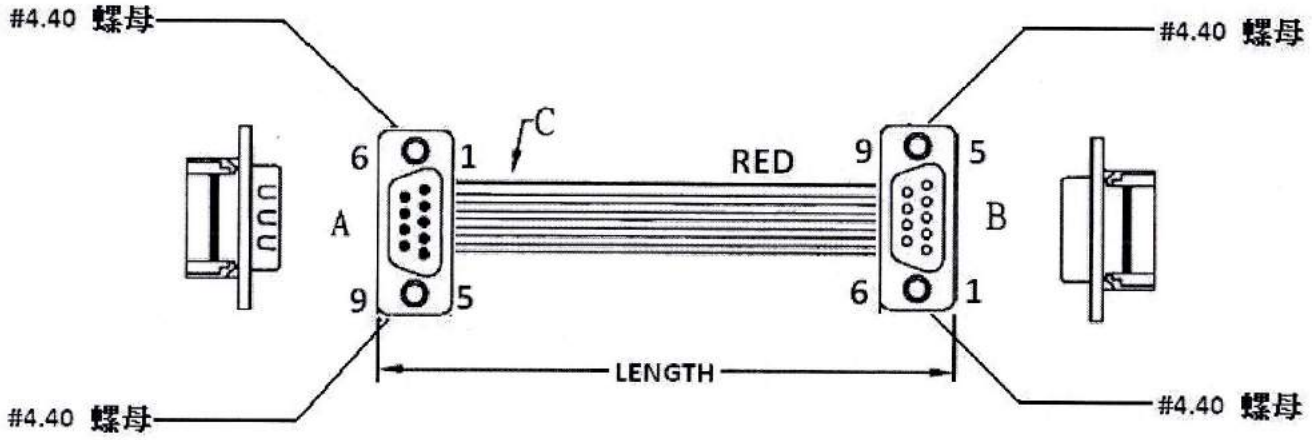

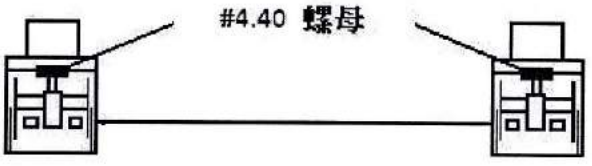

A	B
1	5
6	9
2	4
7	8
3	3
8	7
4	2
9	6
5	1


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{FJ}{3}$ - $\frac{xx}{4}$ C M $\frac{x}{5}$


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   09, 15, 25, 37
3. CONNECTORS AT TWO ENDS:
   "FJ" D-SUB. MALE IDC TYPE CONNECTOR
   TO D-SUB. FEMALE IDC TYPE CONNECTOR
4. LENGTH IN CM (CENTIMETERS)
5. NUT OPTION AT TWO CONNECTORS:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH D-SUB. CONNECTOR (1)

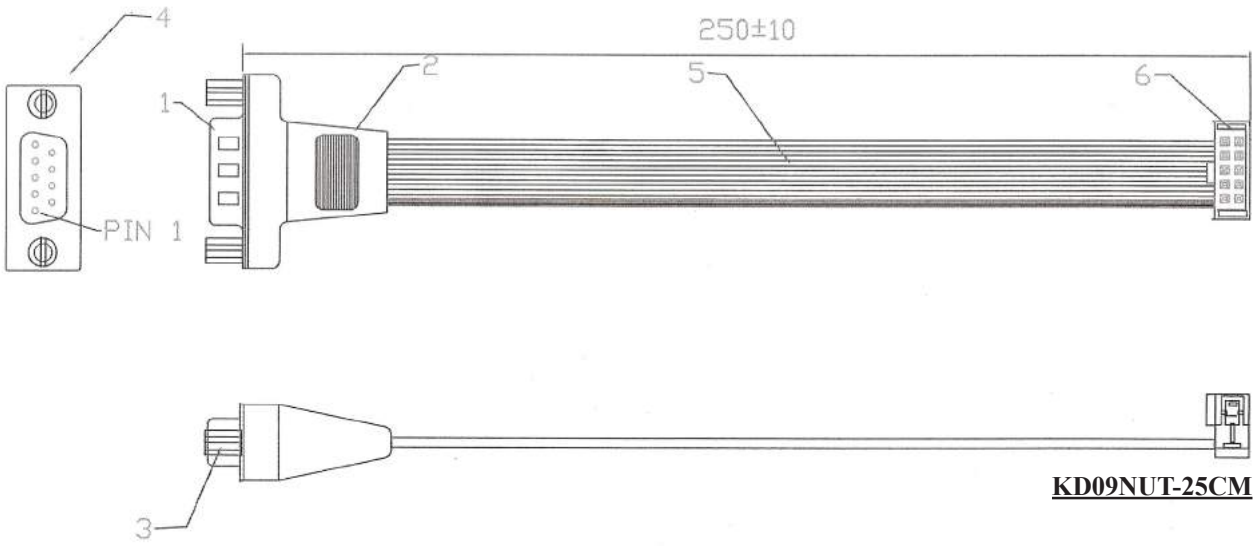

KD09NUT-25CM

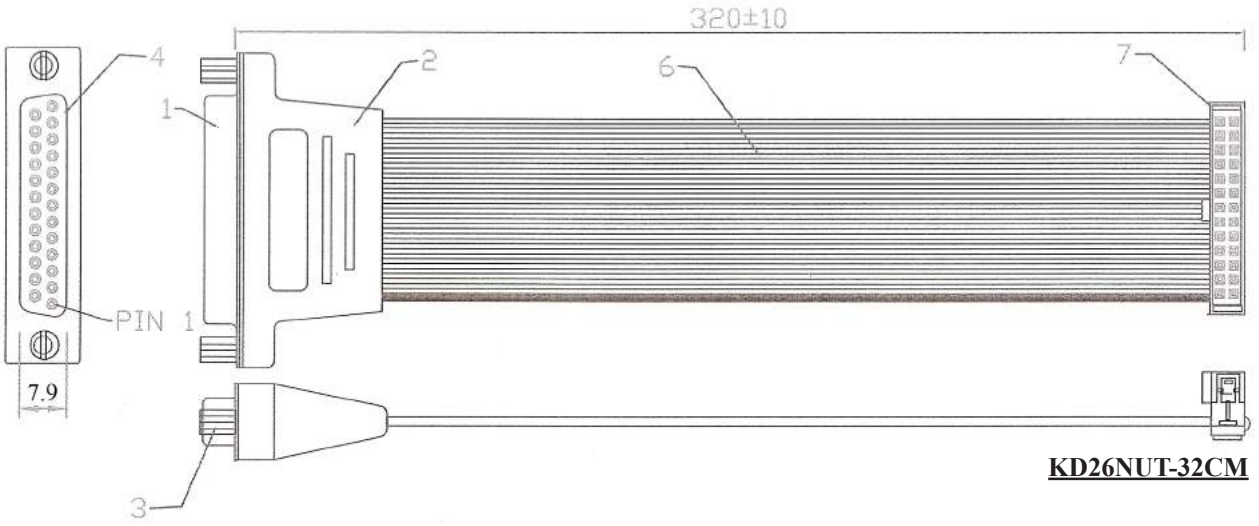

KD26NUT-32CM

ORDERING INFORMATION:

P/N K D 0 9 N U T - L E N G T H

FLAT CABLE DB9M(MALE) WITH UNC4-40 NUTS & HOOD TO IDC SOCKET 10P, LENGTH IN CM

P/N K D 1 0 N U T - L E N G T H

FLAT CABLE DB9F(FEMALE) WITH UNC4-40 NUTS & HOOD TO IDC SOCKET 10P, LENGTH IN CM

P/N K D 2 5 N U T - L E N G T H

FLAT CABLE DB25M(MALE) WITH UNC4-40 NUTS & HOOD TO IDC SOCKET 26P, LENGTH IN CM


P/N K D 2 6 N U T - L E N G T H

FLAT CABLE DB25F(FEMALE) WITH UNC4-40 NUTS & HOOD TO IDC SOCKET 26P, LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH D-SUB. CONNECTOR (2)

MATERIALS
Housing: PVC, UL94V-0
Terminal: Copper Alloy
All materials must be RoHS compliant.

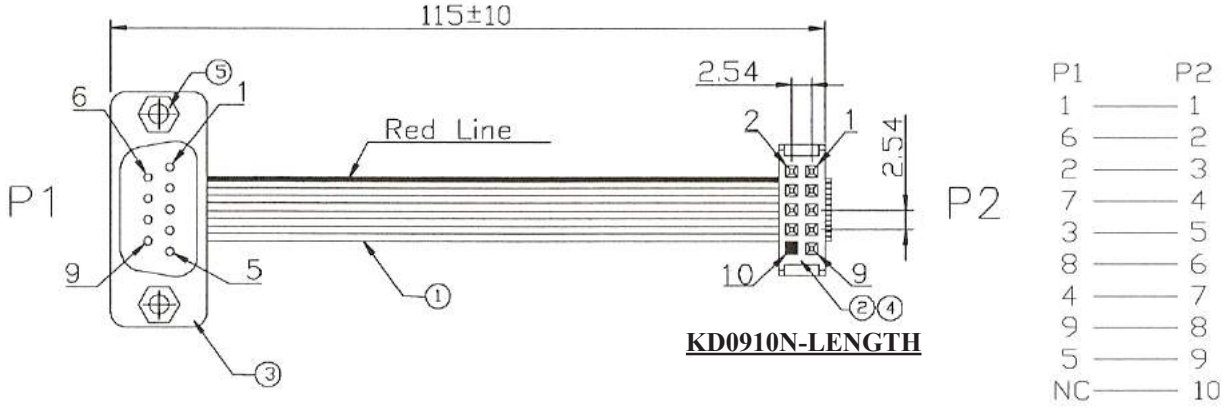

ORDERING INFORMATION:

P/N K D 0 9 1 0 M - L E N G T H

FLAT CABLE DB9M(MALE) WITH UNC4-40 NUTS TO IDC SOCKET 10P, LENGTH IN CM

P/N K D 0 9 1 0 N - L E N G T H

FLAT CABLE DB9F(FEMALE) WITH UNC4-40 NUTS TO IDC SOCKET 10P, LENGTH IN CM

P/N K D 0 9 1 0 S - L E N G T H


FLAT CABLE DB9M(MALE) W/O UNC4-40 NUTS TO IDC SOCKET 10P, LENGTH IN CM

P/N K D 0 9 1 0 T - L E N G T H

FLAT CABLE DB9F(FEMALE) W/O UNC4-40 NUTS TO IDC SOCKET 10P, LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH D-SUB. CONNECTOR (3)

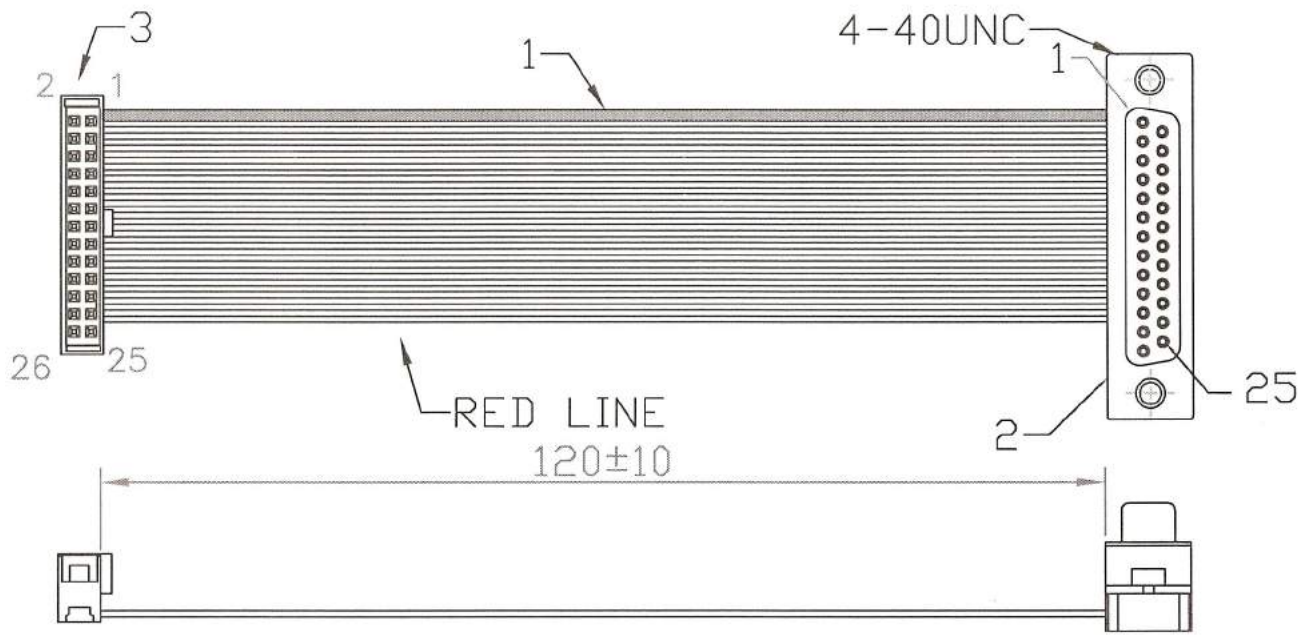

KD2526N-12CM

PIN ASSINGMENT

DB25	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	NC
IDE26	1	3	5	7	9	11	13	15	17	19	21	23	25	2	4	6	8	10	12	14	16	18	20	22	24	26

ORDERING INFORMATION:

P/N K D 2 5 2 6 S - L E N G T H

FLAT CABLE DB25M(MALE) WITH THROUGH HOLES TO IDC SOCKET 26P, LENGTH IN CM

P/N K D 2 5 2 6 T - L E N G T H

FLAT CABLE DB25F(FEMALE) WITH THROUGH HOLES TO IDC SOCKET 26P, LENGTH IN CM

P/N K D 2 5 2 6 M - L E N G T H


FLAT CABLE DB25M(MALE) WITH RIVETED UNC4-40 NUTS TO IDC SOCKET 26P, LENGTH IN CM

P/N K D 2 5 2 6 N - L E N G T H

FLAT CABLE DB25F(FEMALE) WITH RIVETED UNC4-40 NUTS TO IDC SOCKET 26P, LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE ASSEMBLY WITH METAL BRACKET

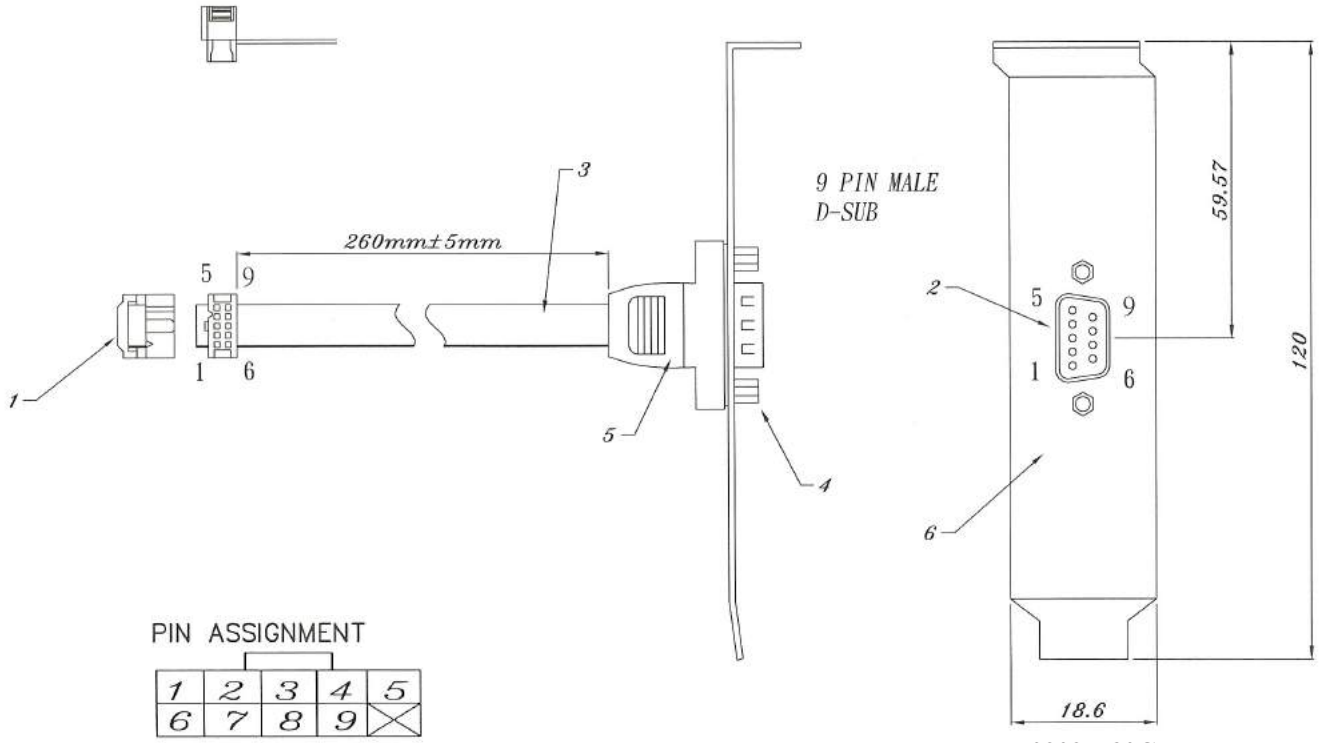

KD0909B-30CM

ORDERING INFORMATION:

P/N K D 0 9 0 9 B - 3 0 C M


FLAT CABLE DB9M TO 2.54MM IDC SOCKET 10P WITH STANDARD PROFILE(120MM)
METAL SLOT BRACKET 30CM

P/N K D 0 9 1 0 B - 3 0 C M

DITTO, BUT WITH LOW PROFILE(90MM) METAL SLOT BRACKET

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE ASSEMBLY WITH METAL BRACKET

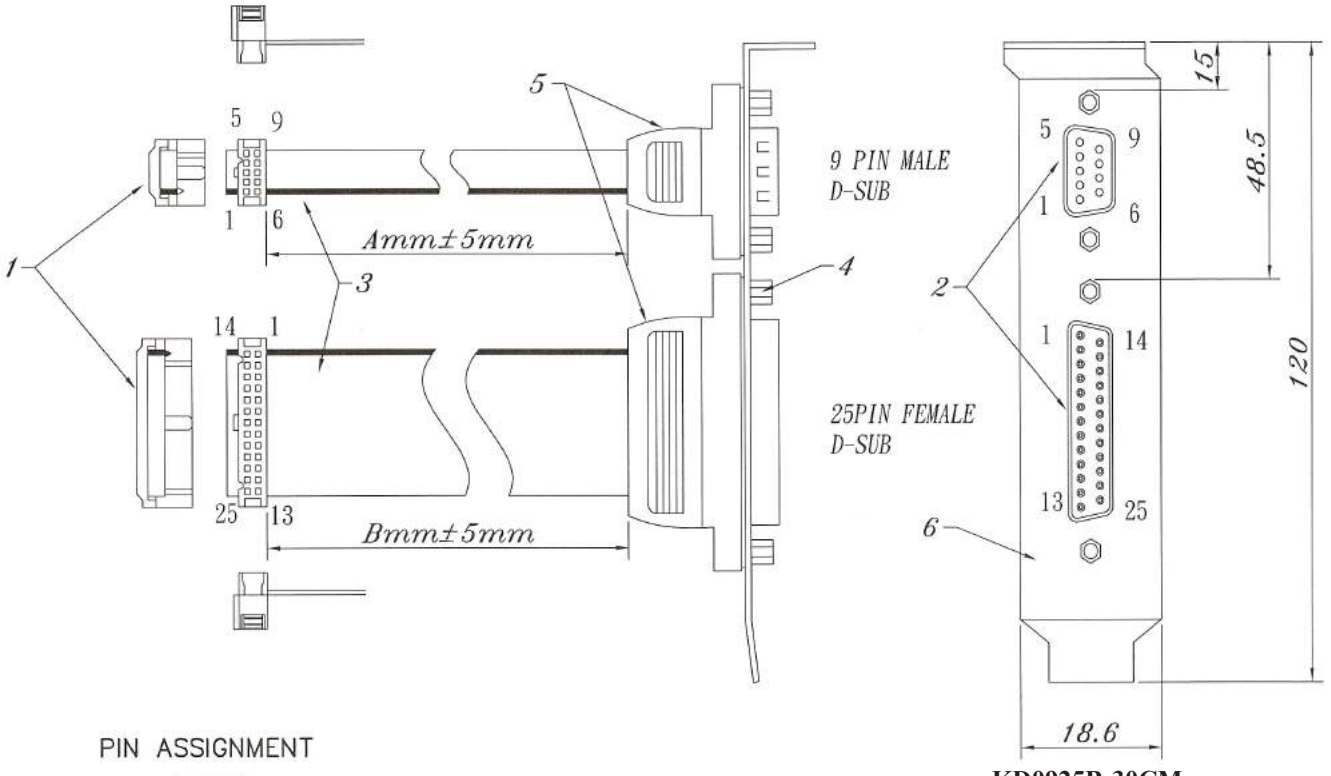

KD0925B-30CM

PIN ASSIGNMENT

1	2	3	4	5
6	7	8	9	

1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	

ORDERING INFORMATION:

P/N K D 0 9 2 5 B - 3 0 C M


FLAT CABLE DB9M + DB25F TO 2.54MM IDC SOCKETS 10P + 26P WITH STANDARD PROFILE(120MM) METAL SLOT BRACKET

P/N K D 0 9 2 6 B - 3 0 C M

DITTO, BUT WITH LOW PROFILE(90MM) METAL SLOT BRACKET

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT SPLITTER CABLE

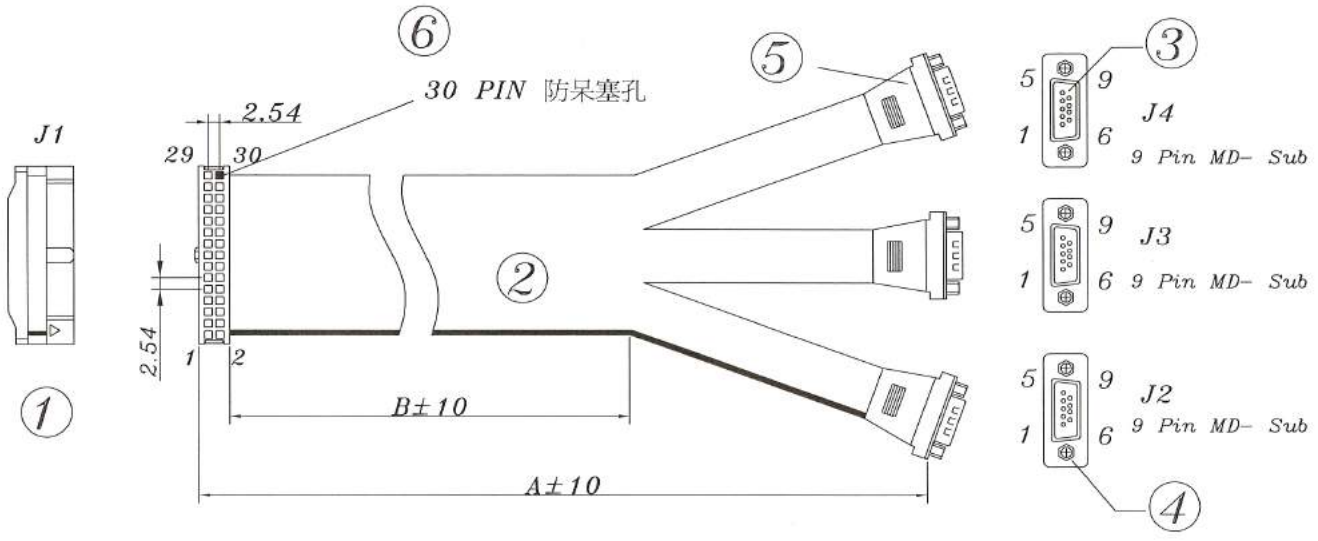

KD09X3-31CM


ORDERING INFORMATION:

P/N K D 0 9 X 3 - A / B

FLAT CABLE 2.54MM IDC SOCKET 30 PIN WITH S.R. TO
3*DB9M WITH UNC4-40 NUTS, A&B= LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH 9, 15, 25, 37 PIN D-SUB. FEMALE TO 2.54MM 10, 16, 26, 40 PIN IDC SOCKET W/O S.R.

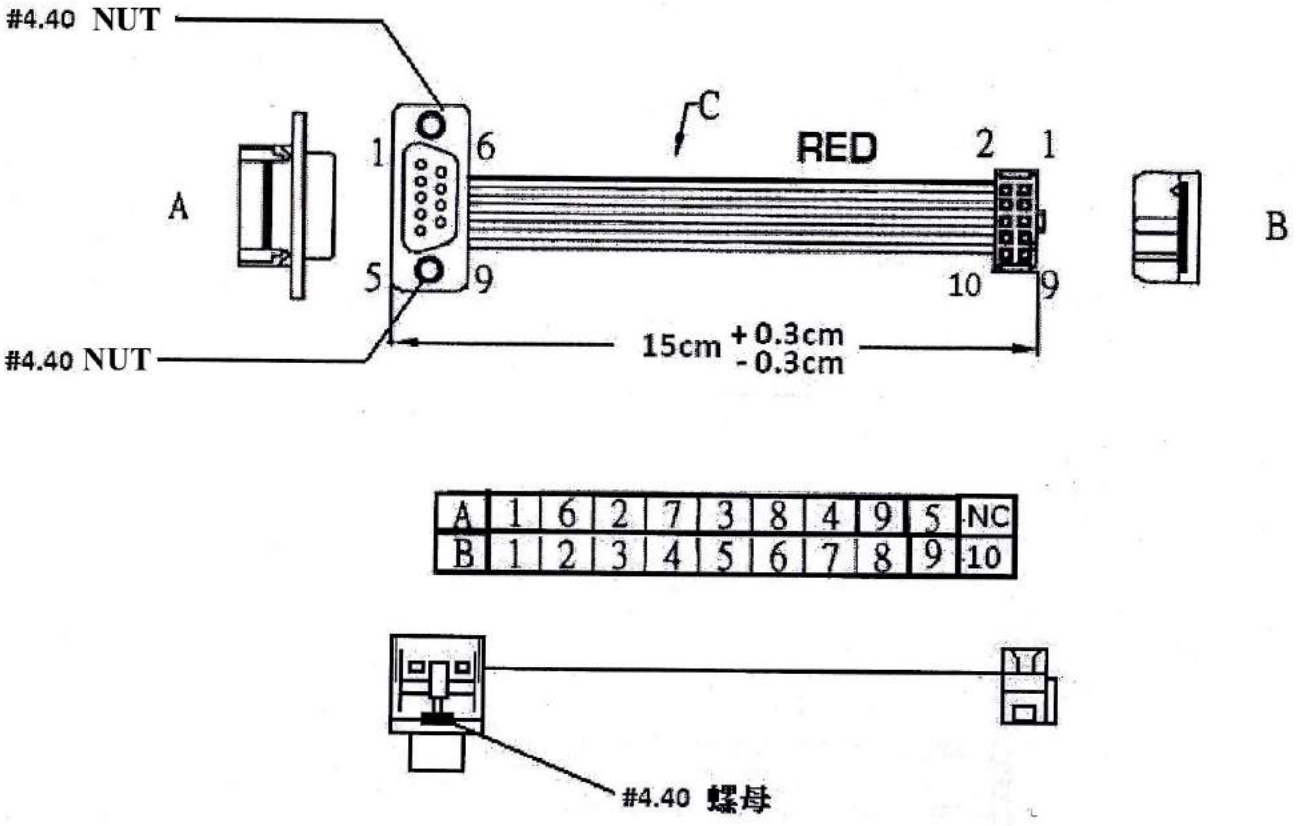

A	1	6	2	7	3	8	4	9	5	NC
B	1	2	3	4	5	6	7	8	9	10


ORDERING INFORMATION:

P/N $\frac{KA}{1}\ \frac{xx}{2}\ \frac{LF}{3}$ - $\frac{xx}{4}$ C M $\frac{B}{5}\ \frac{x}{6}$

1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   10, 16, 26, 40 (IDC SOCKET)
3. CONNECTORS AT TWO ENDS:
   "LF" D-SUB. FEMALE IDC TYPE CONNECTOR
   TO 2.54MM PITCH IDC SOCKET W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF IDC SOCKET:
   "B" BLACK
6. NUT OPTION AT END OF D-SUB. CONNECTOR:
   "N" WITH UNC4-40 NUTS
   "W" WITHOUT NUTS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

FLAT CABLE WITH 2*44 PIN IDC SOCKETS

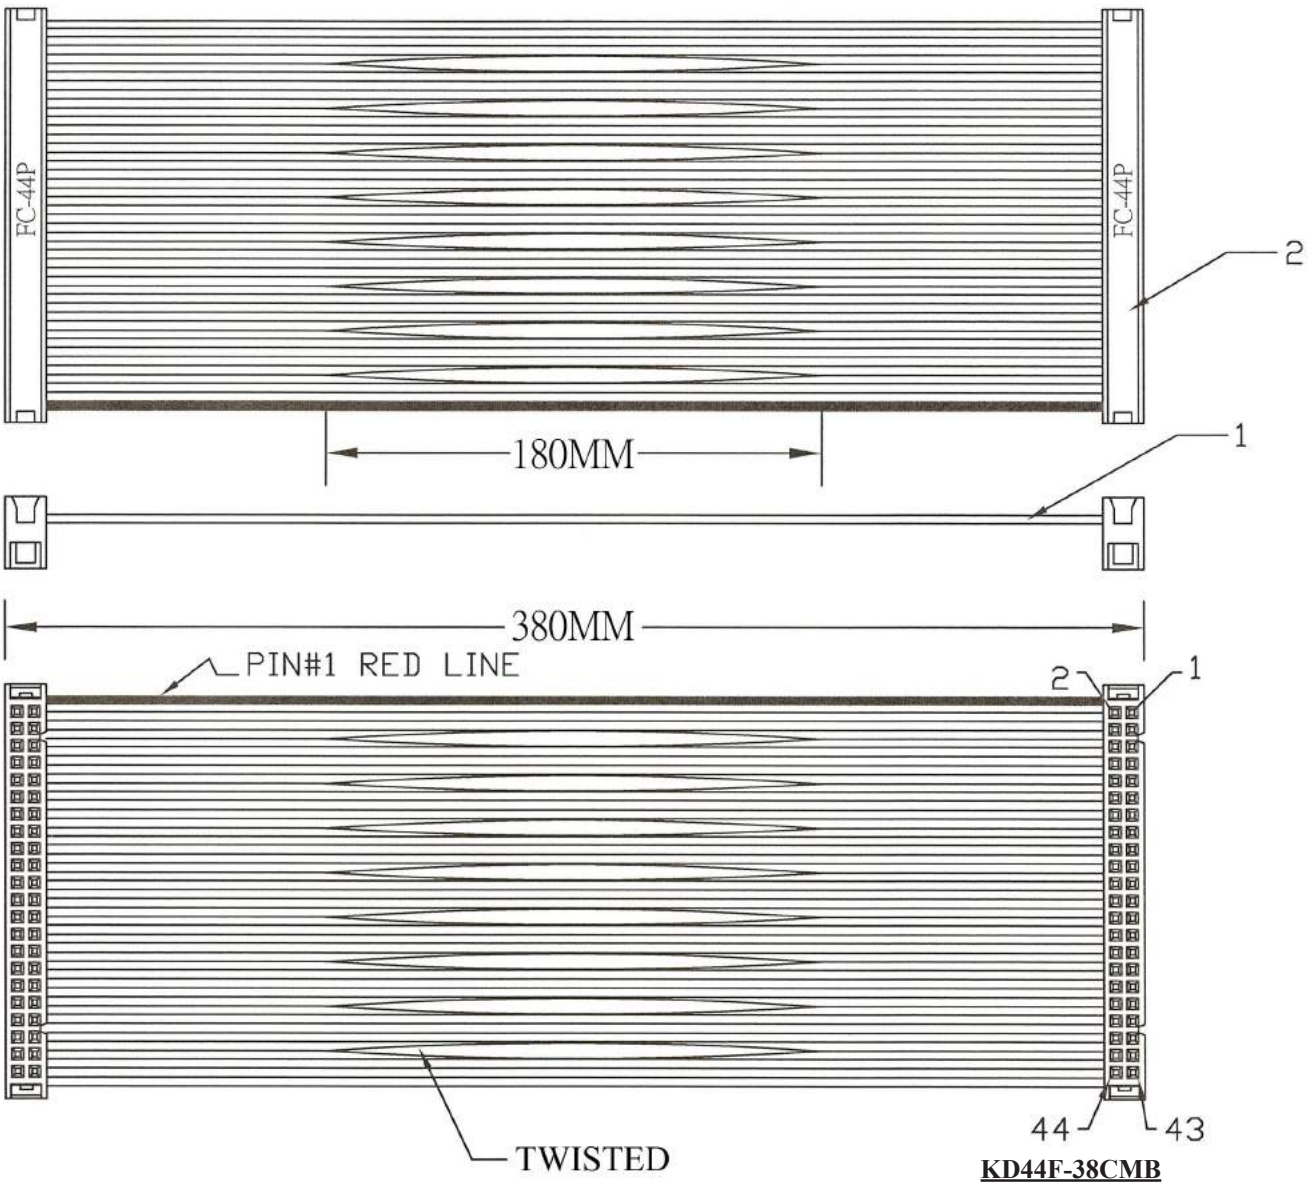

KD44F-38CMB

ORDERING INFORMATION:

P/N K D 4 4 F - L E N G T H


1.27MM PITCH FLAT CABLE WITH 2*2.54MM 44 PIN IDC SOCKETS LENGTH IN CM

P/N K D 4 4 G - L E N G T H

1.00MM PITCH FLAT CABLE WITH 2*2.00MM 44 PIN IDC SOCKETS LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE FOR HARD DISK DRIVER

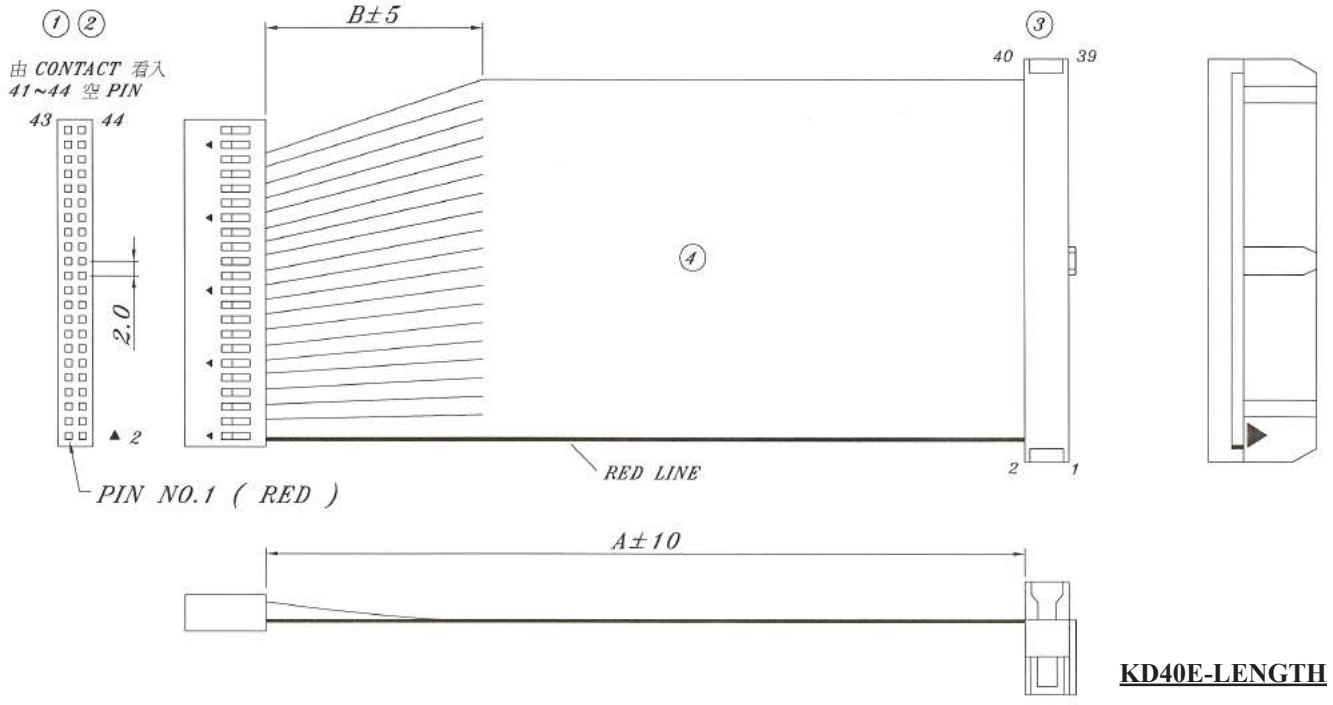

KD40E-LENGTH

ORDERING INFORMATION:

P/N K D 4 0 E - L E N G T H


2.54MM IDC SOCKET 40 PINS TO 2.00MM IDC SOCKET 44 PINS FOR
2.5" - 3.5" HARD DISK DRIVER

P/N K D 4 0 E - 2 3 C M

DITTO, A= 230CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE WITH N*2.54MM PITCH IDC SOCKETS W/O S.R.

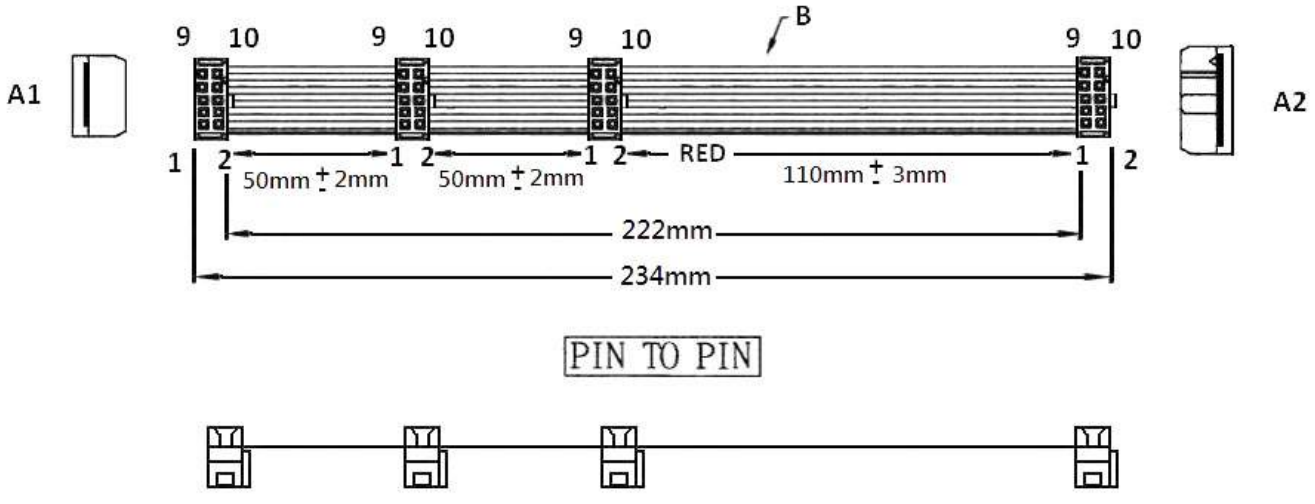

P/N KA10KL-23.4CM04


ORDERING INFORMATION:

P/N KA(1) xx(2) KL(3) - xx(4) C M B(5) xx(6)


1. FLAT CABLE TYPE:
   "KA" 1.27MM AWG28 UL2651 VW-1
   PVC INSULATION GRAY
2. NO. OF CONTACTS:
   06~64
3. CONNECTORS AT TWO ENDS:
   "KL" 2.54MM IDC SOCKET W/O S.R.
   TO (N-1) 2.54MM IDC SOCKETS W/O S.R.
4. LENGTH IN CM (CENTIMETERS)
5. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
6. NO. OF IDC SOCKETS:
   03~20

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH I/O FLAT CABLE WITH 2*DB9M TO 2.54MM 20 PIN IDC SOCKET

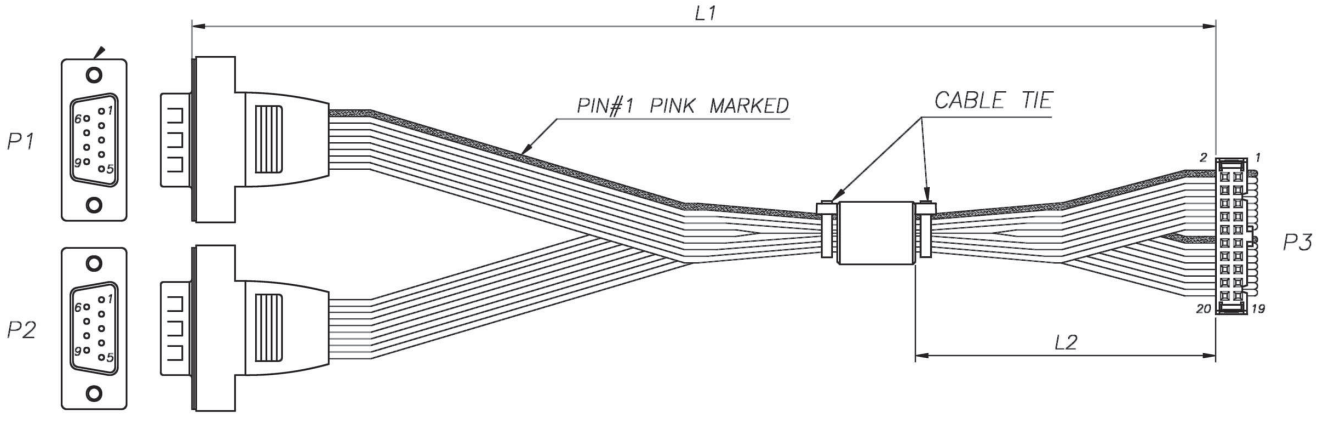

WIRE DIAGRAM

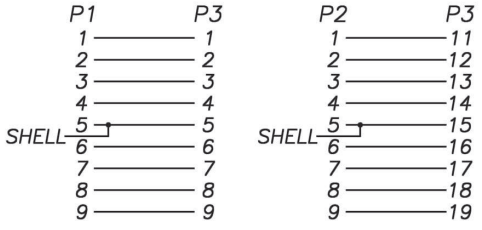


ORDERING INFORMATION:


P/N K D 0 9 X 2 - L1 / L2 C M

1. LENGTH L1 IN CM
2. LENGTH L2 IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH IDE FLAT CABLE WITH 2.54MM 40 PIN IDC SOCKET TO 2.00MM 44 PIN DUAL ROW HOUSING & 4 PIN POWER HOUSING

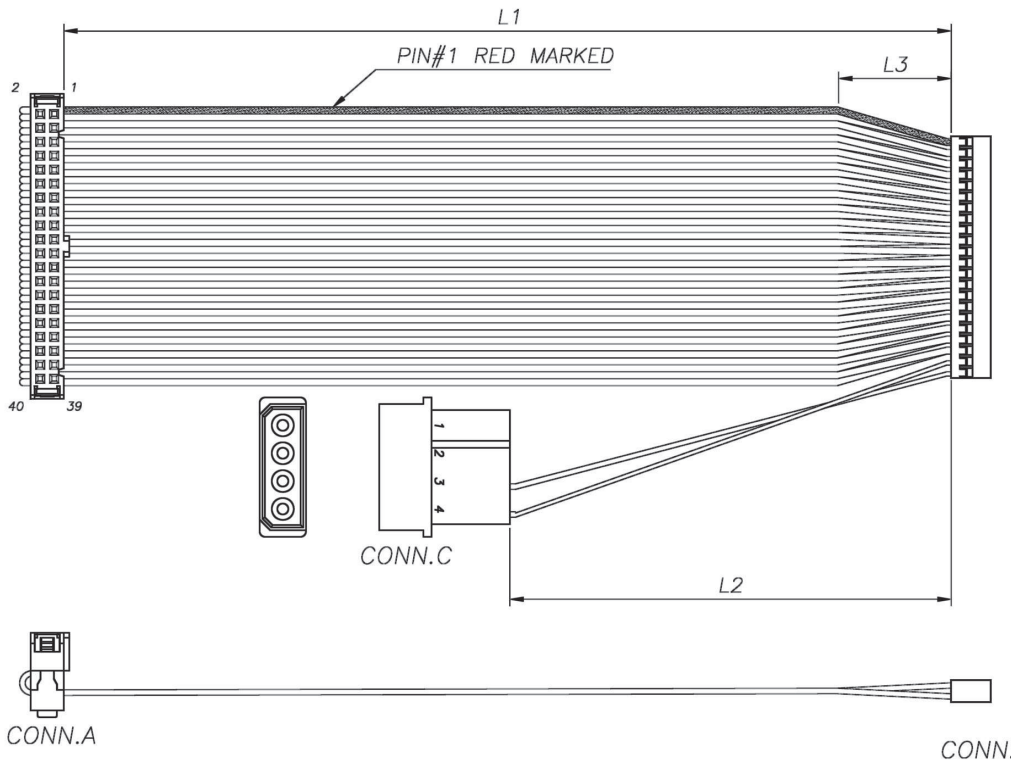

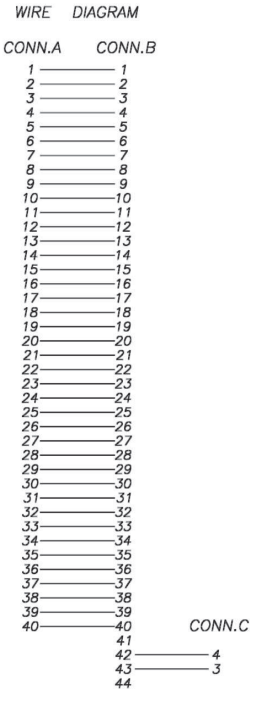


ORDERING INFORMATION:

P/N K D 4 0 4 4 - $\frac{L1}{1}$ / $\frac{L2}{2}$ C M


1. LENGTH L1 IN CM
2. LENGTH L2 IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH FLAT CABLE
WITH 2*2.54MM SINGLE ROW IDC SOCKETS (H=13.9MM)

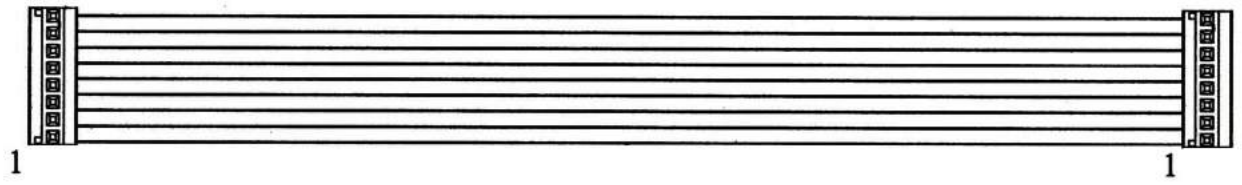

P/N K4AG008-20CMB

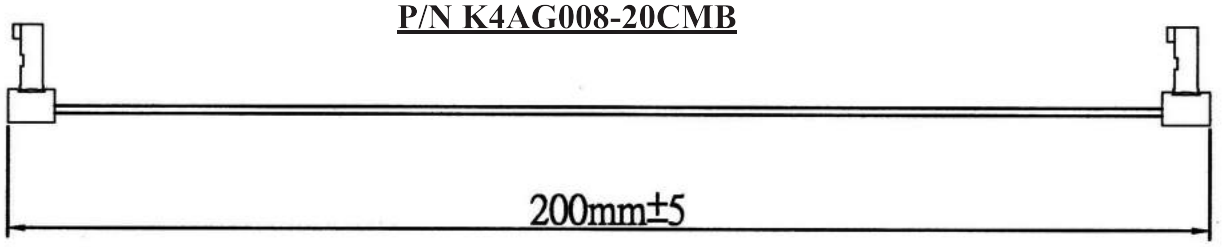

2.54MM PITCH IDC SOCKET SINGLE ROW NARROW TYPE

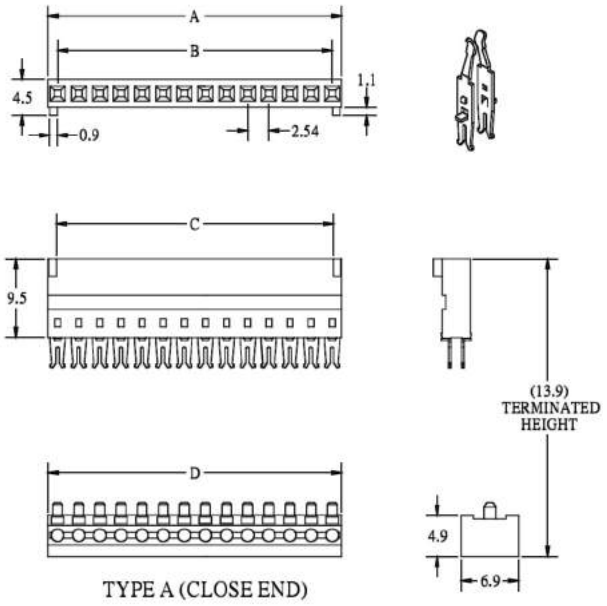

A=B+2.18
B=2.54*POSITIONS-2.54
C=B-0.02
D=B+2.48

NO. OF CONTACTS:
002, 003, 004, 005, 006,
007, 008, 009, 010, 011,
012, 013, 014, 015, 016,
017, 018, 019, 020, 021,
022, 023, 024

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$


1. CONSTRUCTION TYPE:
   4AG
2. NO. OF CONTACTS:
   002~024
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH COLORED FLAT CABLE
WITH 2*2.54MM SINGLE ROW IDC SOCKETS (H=9.4MM)

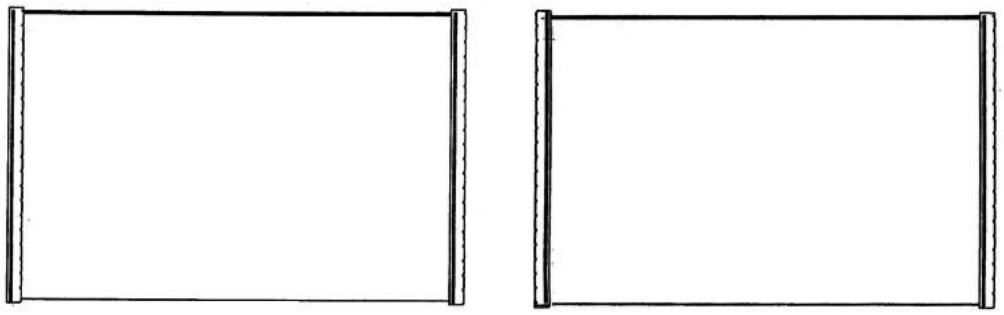


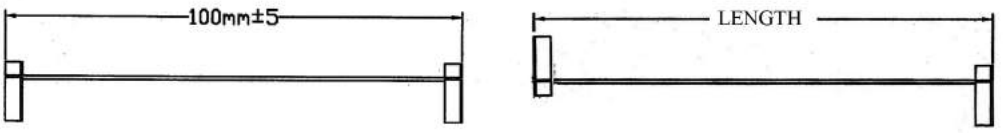

P/N K4AA020-10CMB

P/N K4AD020-xxCMB

2.54MM PITCH IDC SOCKET SINGLE ROW SLIM TYPE

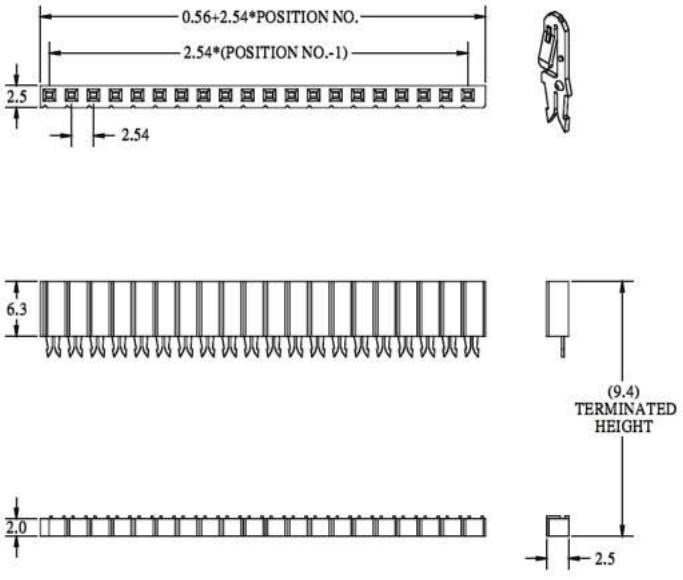

NO. OF CONTACTS:
002, 003, 004, 005, 006, 007,
008, 009, 010, 011, 012, 013,
014, 015, 016, 017, 018, 019,
020, 021, 022, 023, 024, 025,
026, 027, 028, 029, 030, 031
032, 033, 034, 035, 036

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ B

1. CONSTRUCTION TYPE:
   4AA, 4AD
2. NO. OF CONTACTS:
   002~036
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK


NOTE: IDC SOCKET CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH FLAT CABLE WITH 2.54MM SINGLE ROW IDC SOCKET (H=9.5MM) TO SINGLE ROW DIP PLUG (H=7.85MM)

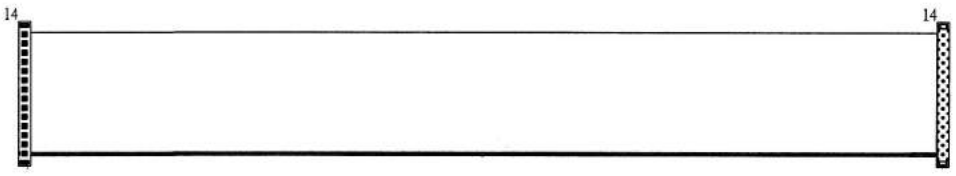

P/N K4AE014-30CMB

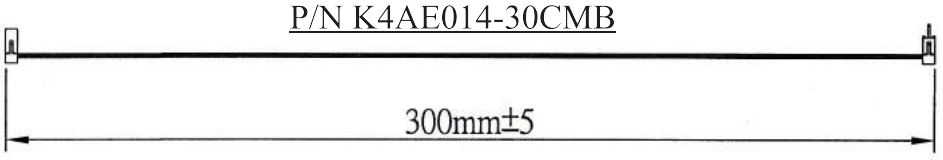


2.54MM SINGLE ROW IDC SOCKET

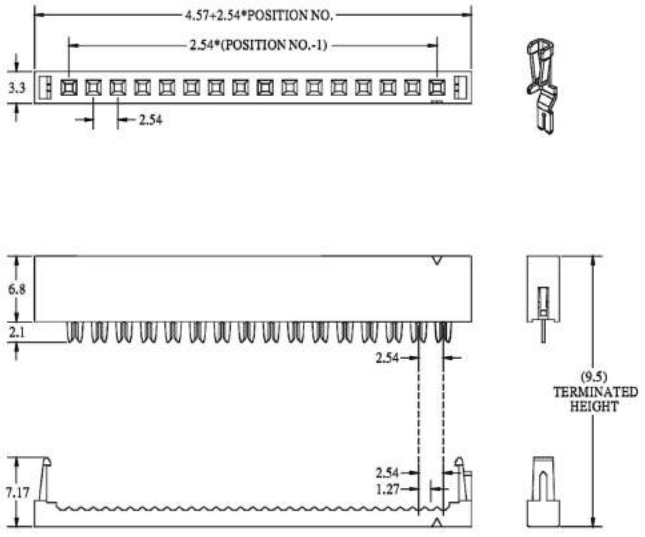

NO. OF CONTACTS:
003, 004, 005, 006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 019, 020, 021, 022, 023, 024, 025, 026, 027, 028, 029, 030, 031, 032, 033, 034, 035, 036

2.54MM SINGLE ROW DIP PLUG

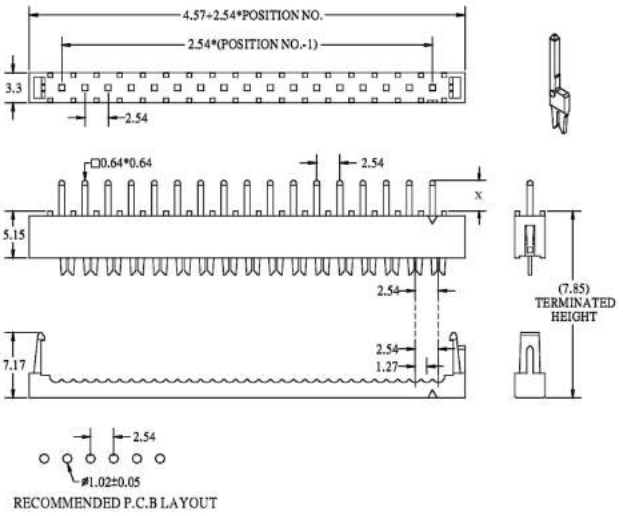

X= PIN LENGTH

NO. OF CONTACTS:
003, 004, 005, 006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 019, 020, 021, 022, 023, 024, 025, 026, 027, 028, 029, 030, 031, 032, 033, 034, 035, 036

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$ $\frac{B}{5}$ $\frac{x}{}$

1. CONSTRUCTION TYPE:
   4AE
2. NO. OF CONTACTS:
   003~036
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK
5. PIN LENGTH OF DIP PLUG:
   "3" X=3.10MM(STANDARD)
   "6" X=5.95MM


NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH COLORED FLAT CABLE WITH 2.54MM SINGLE ROW IDC SOCKET (H=9.4MM) TO SINGLE ROW DIP PLUG (H=6.1MM)

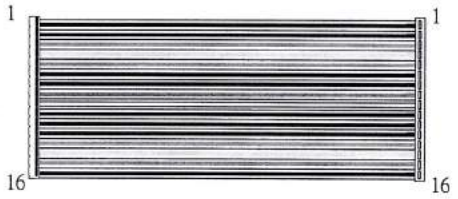


P/N K4AB016-11CMB

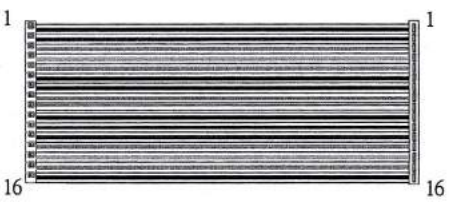


P/N K4AC016-05CMB

2.54MM SINGLE ROW IDC SOCKET SLIM TYPE

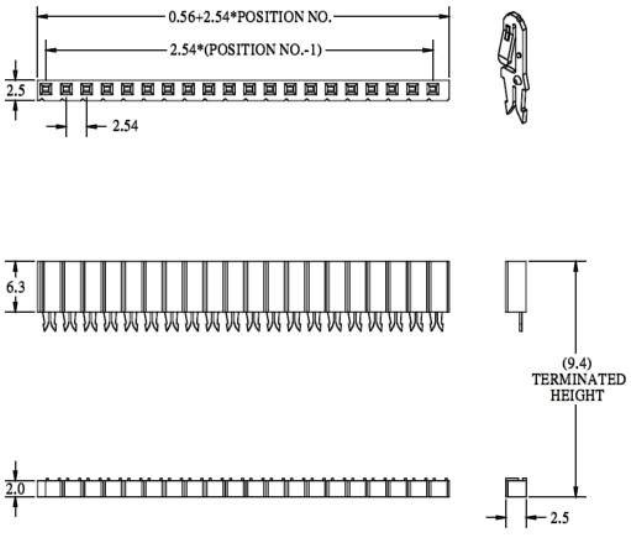

NO. OF CONTACTS:
002, 003, 004, 005, 006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 019, 020, 021, 022, 023, 024, 025, 026, 027, 028, 029, 030, 031, 032, 033, 034, 035, 036

2.54MM SINGLE ROW DIP PLUGS SLIM TYPE

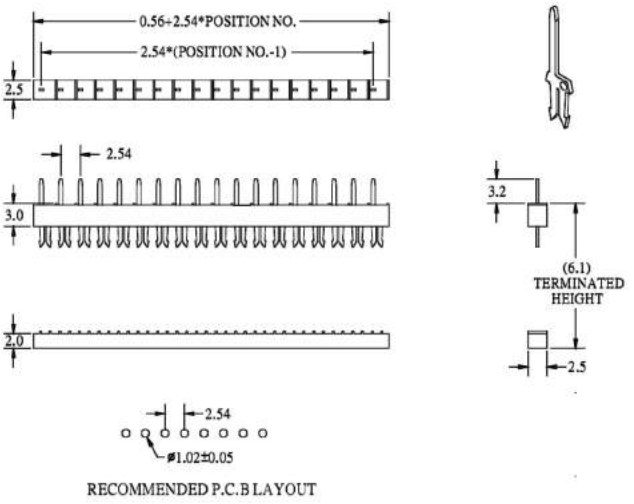

X= PIN LENGTH

NO. OF CONTACTS:
002, 003, 004, 005, 006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 019, 020, 021, 022, 023, 024, 025, 026, 027, 028, 029, 030, 031, 032, 033, 034, 035, 036

ORDERING INFORMATION:


P/N K $\frac{xxx}{1}$ $\frac{xxx}{2}$ - $\frac{xx}{3}$ $\frac{CM}{4}$

1. CONSTRUCTION TYPE:
   4AB, 4AC
2. NO. OF CONTACTS:
   002~036
3. LENGTH IN CM (CENTIMETERS)
4. COLOR OF TWO IDC CONNECTORS:
   "B" BLACK

NOTE: IDC SOCKET & DIP PLUG CAN'T BE SUPPLIED ALONE.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

FLEXIBLE FLAT CABLE UL APPROVED

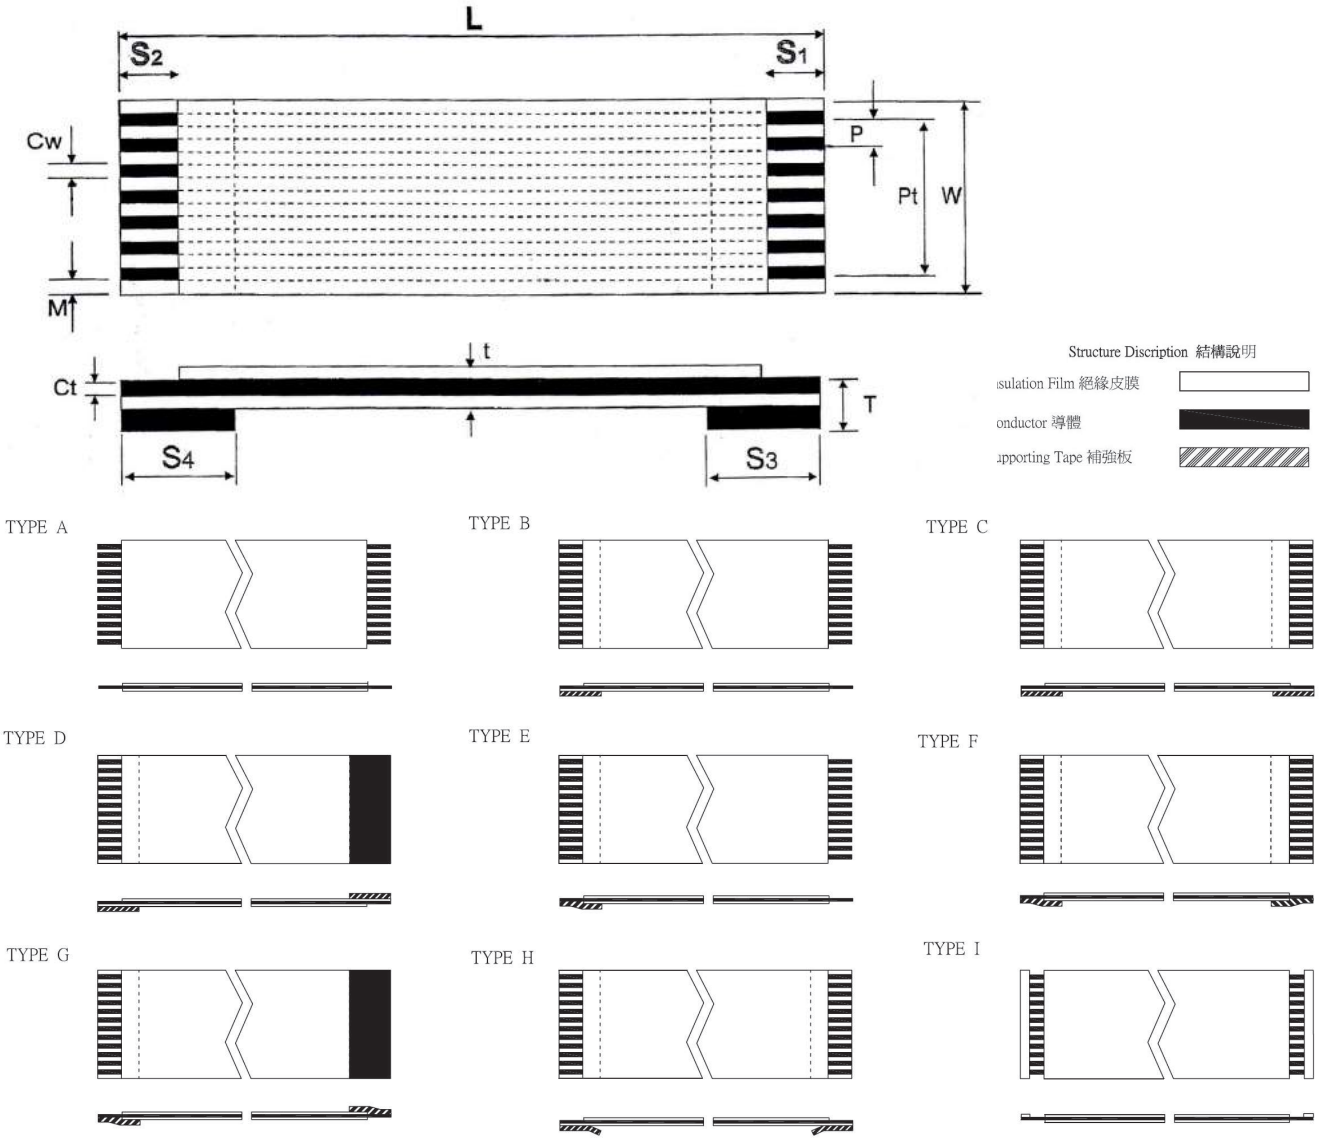

ORDERING INFORMATION:

CODE: F F C $\frac{1\,0\,0}{1}$ $\frac{C}{2}$ $\frac{1\,6}{3}$ - $\frac{1\,0\,0}{4}$ ($\frac{S1/S2}{5}$ / $\frac{S3/S4}{6}$) $\frac{x\,x\,x}{7}$

PLEASE GIVE US A CODE, THEN WE WILL GIVE YOU


P/N K $\frac{x\,x}{YY}$ $\frac{x\,x}{MM}$ $\frac{x\,x}{DD}$ x - $\frac{x\,x\,x}{4}$ M M

1. CABLE PITCH:
   "050" 0.50MM (Cw = 0.3MM)
   "100" 1.00MM (Cw = 0.6MM)
   "125" 1.25MM (Cw = 0.7MM)
   "254" 2.54MM (Cw = 1.27MM)
2. CONTRUCTION TYPE:
   A, B, C, D, E, F, G, H, I
3. NO. OF CONDUCTORS:
   03~80
4. TOTAL CABLE LENGTH L (UNIT: mm)
   050, 100, 200, ...etc.
5. STRIP LENGTH S1/S2 (UNIT: mm)
   3, 4, 5, 6, 8
6. SUPPORT TAPE LENGTH S3/S4 (UNIT: mm)
   6, 8, 10, 12, 16
7. CONDUCTOR THICKNESS (UNIT: mm)
   "050" FLEXIBLE Ct = 0.05MM
   "035" SUPER FLEXIBLE Ct = 0.035MM
   "100" LOW FLEXIBLE Ct = 0.10MM


NOTE: S3/S4 are usually longer than S1/S2.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM PITCH BOX HEADER STRAIGHT SMT TYPE WITH UNDERCUT H=6.7MM

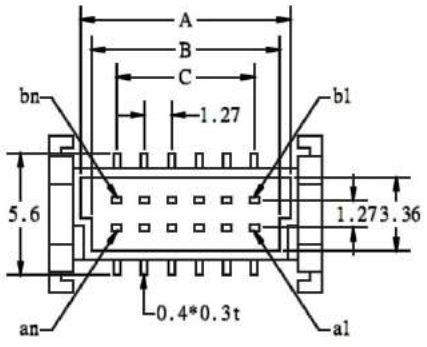

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	8.79	6.59	7.00
8	7.14	6.16	3.81	10.06	7.86	8.27
10	8.41	7.43	5.08	11.33	9.13	9.54
12	9.68	8.70	6.35	12.60	10.40	10.81
14	10.95	9.97	7.62	13.87	11.67	12.08
16	12.22	11.24	8.89	15.14	12.94	13.35
20	14.76	13.78	11.43	17.68	15.48	15.89
22	16.03	15.05	12.70	18.95	16.75	17.16
26	18.57	17.59	15.24	21.49	19.29	19.70
30	21.11	20.13	17.78	24.03	21.83	22.24
34	23.65	22.67	20.32	26.57	24.37	24.78
40	27.46	26.48	24.13	30.38	28.18	25.59
44	30.00	29.02	26.67	32.92	30.72	31.13
50	33.81	32.83	30.48	36.73	34.53	34.96
60	40.16	39.18	36.83	43.08	40.88	41.29
68	45.24	44.26	41.91	48.16	45.96	46.37
80	52.86	51.88	49.53	55.78	53.58	53.99





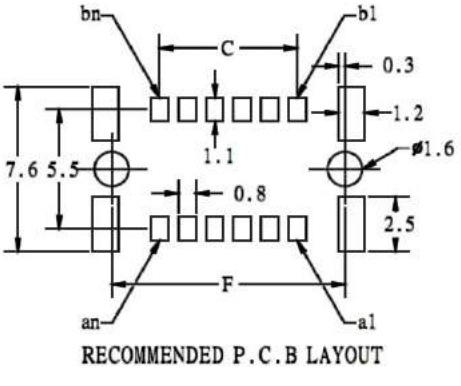

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 3 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "13" STRAIGHT SMT TYPE H=6.7MM
2. NO. OF CONTACTS:
   006~080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1AE


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM PITCH BOX HEADER STRAIGHT SMT TYPE WITH UNDERCUT H=8.2MM

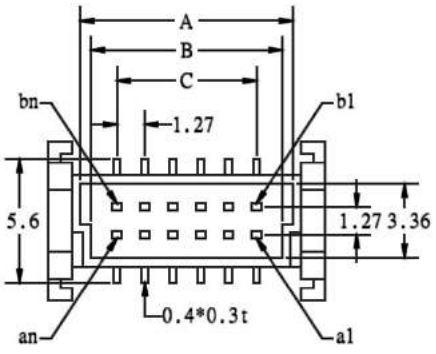

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	8.79	6.59	7.00
8	7.14	6.16	3.81	10.06	7.86	8.27
10	8.41	7.43	5.08	11.33	9.13	9.54
12	9.68	8.70	6.35	12.60	10.40	10.81
14	10.95	9.97	7.62	13.87	11.67	12.08
16	12.22	11.24	8.89	15.14	12.94	13.35
20	14.76	13.78	11.43	17.68	15.48	15.89
22	16.03	15.05	12.70	18.95	16.75	17.16
26	18.57	17.59	15.24	21.49	19.29	19.70
30	21.11	20.13	17.78	24.03	21.83	22.24
34	23.65	22.67	20.32	26.57	24.37	24.78
40	27.46	26.48	24.13	30.38	28.18	25.59
44	30.00	29.02	26.67	32.92	30.72	31.13
50	33.81	32.83	30.48	36.73	34.53	34.96
60	40.16	39.18	36.83	43.08	40.88	41.29
68	45.24	44.26	41.91	48.16	45.96	46.37
80	52.86	51.88	49.53	55.78	53.58	53.99

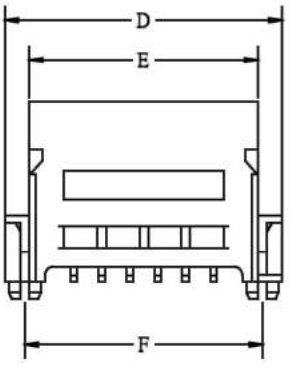



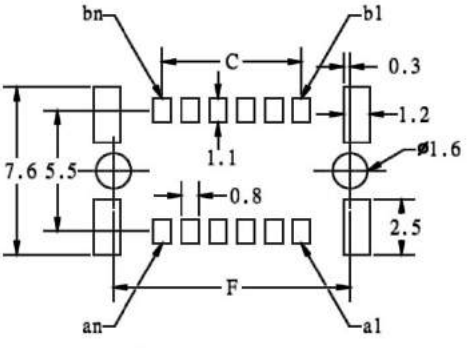

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 4 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "14" STRAIGHT SMT TYPE H=8.2MM
2. NO. OF CONTACTS:
   006~080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1AE


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM PITCH BOX HEADER RIGHT ANGLE SMT TYPE WITH UNDERCUT

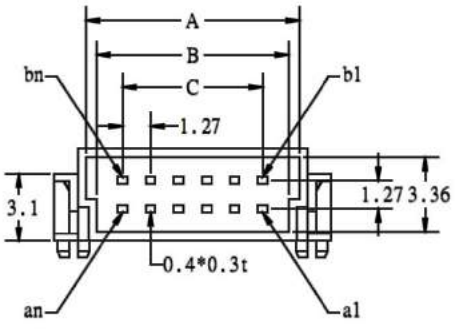

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	8.79	6.59	7.00
8	7.14	6.16	3.81	10.06	7.86	8.27
10	8.41	7.43	5.08	11.33	9.13	9.54
12	9.68	8.70	6.35	12.60	10.40	10.81
14	10.95	9.97	7.62	13.87	11.67	12.08
16	12.22	11.24	8.89	15.14	12.94	13.35
20	14.76	13.78	11.43	17.68	15.48	15.89
22	16.03	15.05	12.70	18.95	16.75	17.16
26	18.57	17.59	15.24	21.49	19.29	19.70
30	21.11	20.13	17.78	24.03	21.83	22.24
34	23.65	22.67	20.32	26.57	24.37	24.78
40	27.46	26.48	24.13	30.38	28.18	25.59
44	30.00	29.02	26.67	32.92	30.72	31.13
50	33.81	32.83	30.48	36.73	34.53	34.96
60	40.16	39.18	36.83	43.08	40.88	41.29
68	45.24	44.26	41.91	48.16	45.96	46.37
80	52.86	51.88	49.53	55.78	53.58	53.99

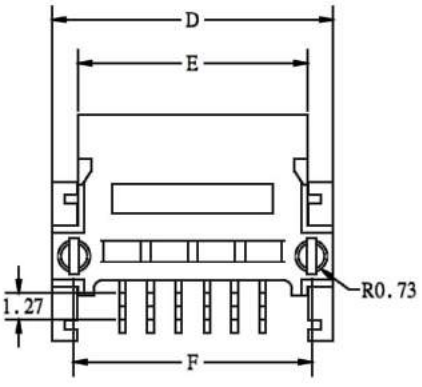



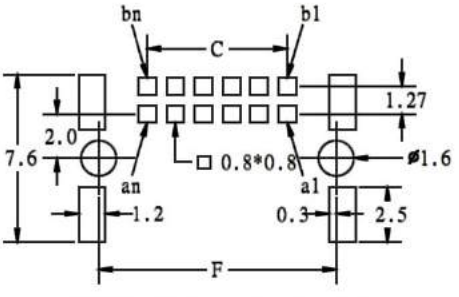

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 5 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "15" R/A SMT TYPE
2. NO. OF CONTACTS:
   006~080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "R" WITHOUT PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1AE


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM PITCH SHRUNK SHROUDED HEADER DIP TYPE

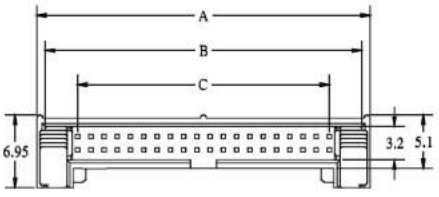



POSITION	A	B	C
6	10.37	8.77	2.54
8	11.64	10.04	3.81
10	12.91	11.31	5.08
12	14.18	12.58	6.35
14	15.45	13.85	7.62
16	16.72	15.12	8.89
20	19.26	17.66	11.43
22	20.53	18.93	12.70
26	23.07	21.47	15.24
30	25.61	24.01	17.78
34	28.15	26.55	20.32
40	31.96	30.36	24.13
44	34.50	32.90	26.67
50	38.31	36.71	30.48
60	44.66	43.06	36.83
68	49.74	48.14	41.91
80	57.36	55.76	49.53

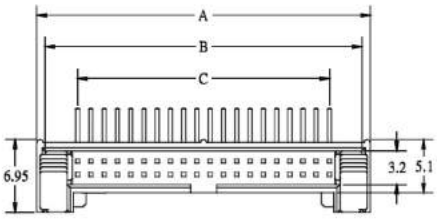

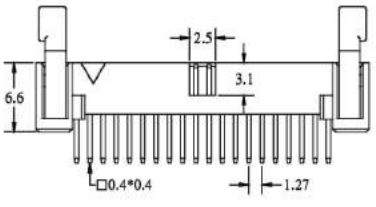






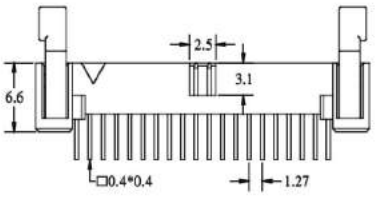

P/N 12721-xxxSB

P/N 12722-xxxSB



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "21" STRAIGHT DIP TYPE
   "22" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1DG/CY/DE/DF/DC/DH, K1DB/CV/CW/DA, K1AF/AG/AH/AJ/AK/AL, K1CD/CE/CF/CG,
K1BE/BF/BG/BH, K1CD/CE/CF/CG, K1BN/BP (SEE PAGE


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM PITCH SHRUNK SHROUDED HEADER SMT TYPE

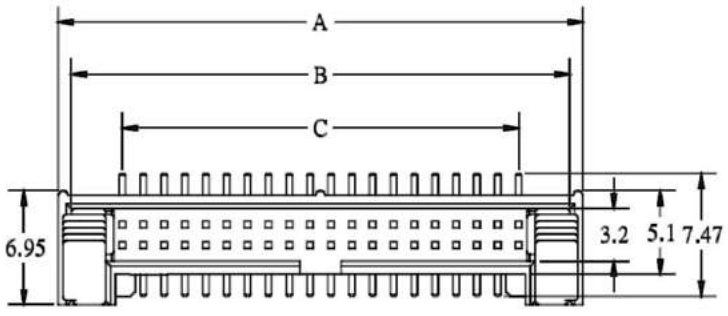

POSITION	A	B	C
6	10.37	8.77	2.54
8	11.64	10.04	3.81
10	12.91	11.31	5.08
12	14.18	12.58	6.35
14	15.45	13.85	7.62
16	16.72	15.12	8.89
20	19.26	17.66	11.43
22	20.53	18.93	12.70
26	23.07	21.47	15.24
30	25.61	24.01	17.78
34	28.15	26.55	20.32
40	31.96	30.36	24.13
44	34.50	32.90	26.67
50	38.31	36.71	30.48
60	44.66	43.06	36.83
68	49.74	48.14	41.91
80	57.36	55.76	49.53

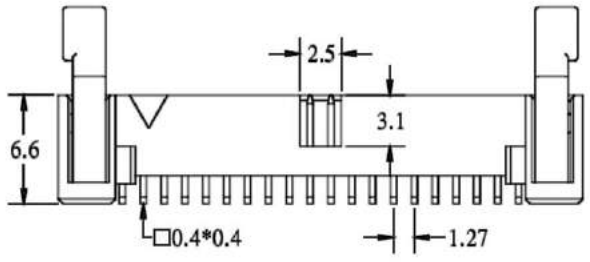





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 2 3 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "23" SMT TYPE
2. NO. OF CONTACTS:
   006~080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1DG/CY/DE/DF/DC/DH, K1DB/CV/CW/DA, K1AF/AG/AH/AJ/AK/AL, K1CD/CE/CF/CG,
K1BE/BF/BG/BH, K1CD/CE/CF/CG, K1BN/BP


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHRUNK BOX HEADER DIP TYPE

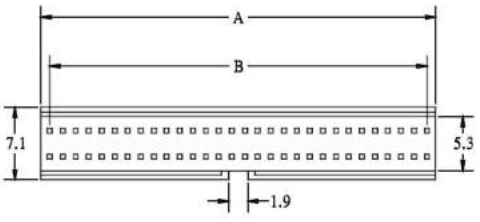


POSITION	A	B
10	6.77	5.08
20	13.12	11.43
26	16.93	15.24
30	19.47	17.78
34	22.01	20.32
40	25.82	24.13
50	32.17	30.48
60	38.52	36.83
68	43.60	41.91
80	51.22	49.53
100	63.92	62.23

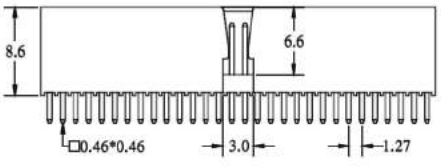




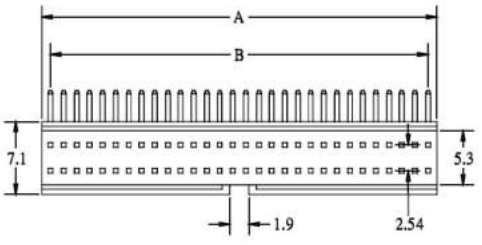


P/N 12751-xxxSB



RECOMMENDED P.C.B LAYOUT



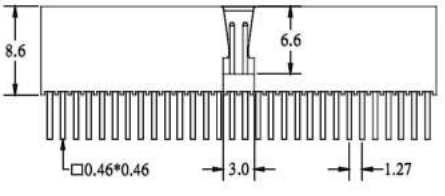

P/N 12752-xxxSB

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "51" STRAIGHT DIP TYPE
   "52" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1GA/GB/GC/GD/GE/GF, K1FV/FW/FY/FZ


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHRUNK BOX HEADER SMT TYPE

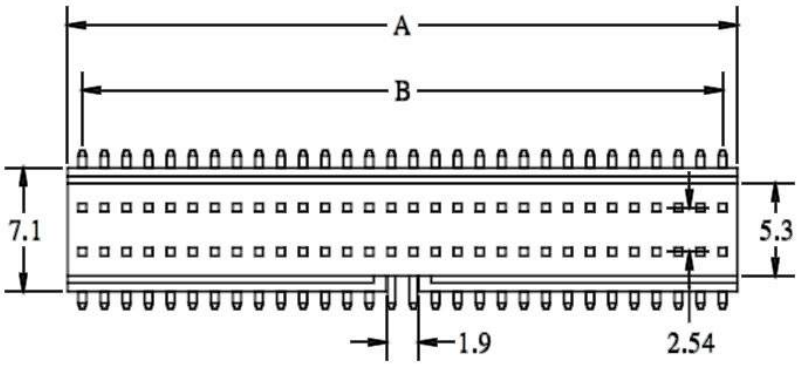

POSITION	A	B
10	6.77	5.08
20	13.12	11.43
26	16.93	15.24
30	19.47	17.78
34	22.01	20.32
40	25.82	24.13
50	32.17	30.48
60	38.52	36.83
68	43.60	41.91
80	51.22	49.53
100	63.92	62.23

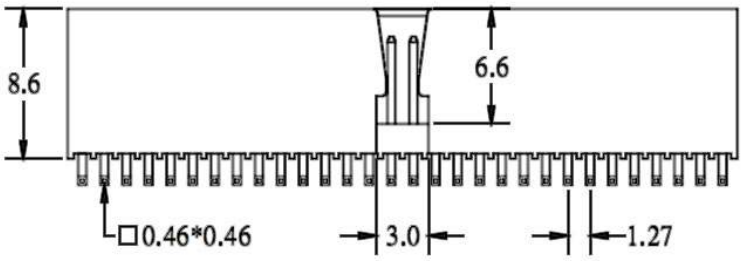





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 5 3 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "53" SMT TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1GA/GB/GC/GD/GE/GF, K1FV/FW/FY/FZ


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER STRAIGHT DIP TYPE

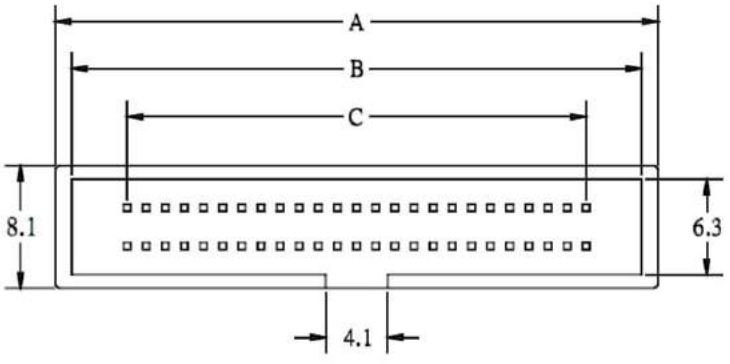

POSITION	A	B	C
10	14.60	12.40	5.08
20	20.95	18.75	11.43
26	24.76	22.56	15.24
30	27.30	25.10	17.78
34	29.84	27.64	20.32
40	33.65	31.45	24.13
50	40.00	36.86	30.48
60	46.35	44.15	36.83
68	51.43	49.23	41.91
80	59.05	56.85	49.53
100	71.75	69.55	62.23

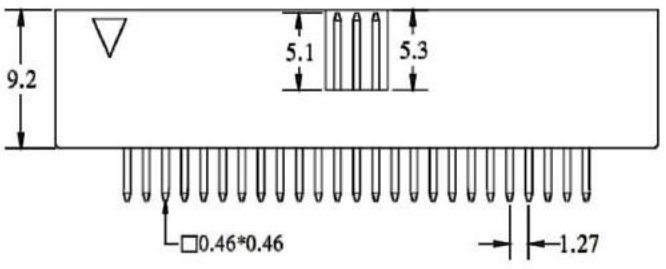





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 5 4 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "54" STRAIGHT DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER STRAIGHT DIP TYPE

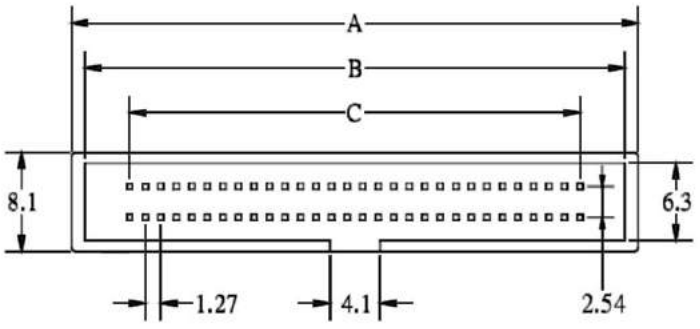


POSITION	A	B	C
10	14.60	12.40	5.08
20	20.95	18.75	11.43
26	24.76	22.56	15.24
30	27.30	25.10	17.78
34	29.84	27.64	20.32
40	33.65	31.45	24.13
50	40.00	36.86	30.48
60	46.35	44.15	36.83
68	51.43	49.23	41.91
80	59.05	56.85	49.53
100	71.75	69.55	62.23

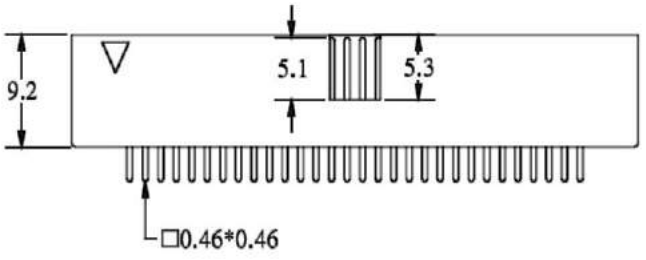



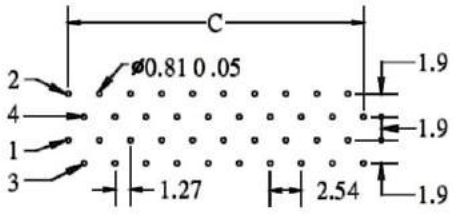

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

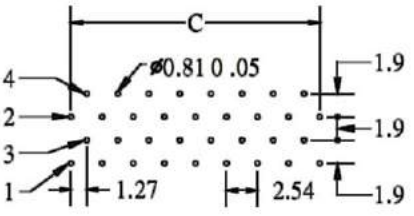

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 5 5 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "55" STRAIGHT DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER RIGHT ANGLE DIP TYPE

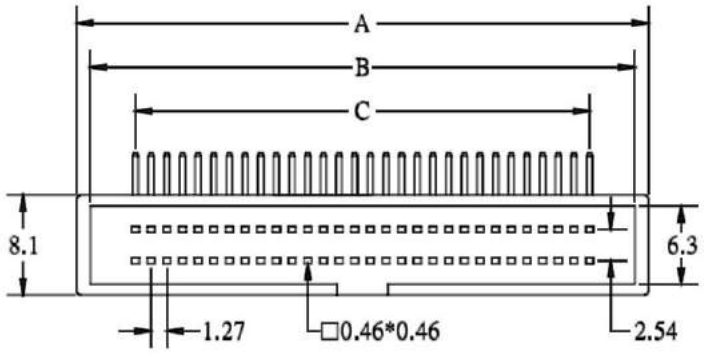


POSITION	A	B	C
10	14.60	12.40	5.08
20	20.95	18.75	11.43
26	24.76	22.56	15.24
30	27.30	25.10	17.78
34	29.84	27.64	20.32
40	33.65	31.45	24.13
50	40.00	36.86	30.48
60	46.35	44.15	36.83
68	51.43	49.23	41.91
80	59.05	56.85	49.53
100	71.75	69.55	62.23

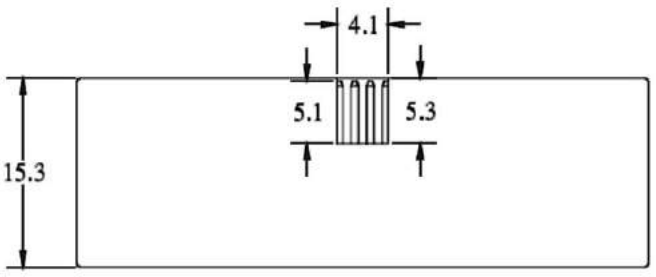



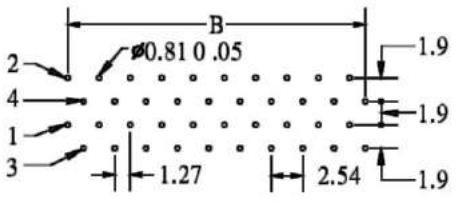

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

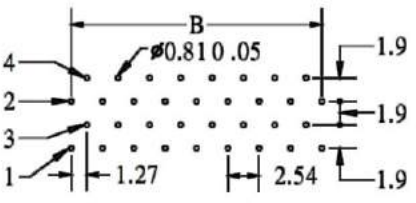

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 5 6 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "56" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER STRAIGHT DIP TYPE WITH MOUNTING EARS

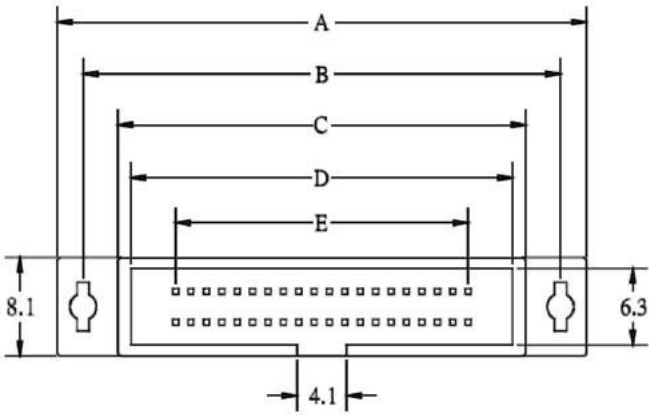

POSITION	A	B	C	D	E
10	24.60	20.32	14.60	12.40	5.08
20	30.95	26.67	20.95	18.75	11.43
26	34.76	30.48	24.76	22.56	15.24
30	37.30	33.02	27.30	25.10	17.78
34	39.84	35.56	29.84	27.64	20.32
40	43.65	39.37	33.65	31.45	24.13
50	50.00	45.72	40.00	36.86	30.48
60	56.35	52.07	46.35	44.15	36.83
68	61.43	57.15	51.43	49.23	41.91
80	69.05	64.77	59.05	56.85	49.53
100	81.75	77.47	71.75	69.55	62.23

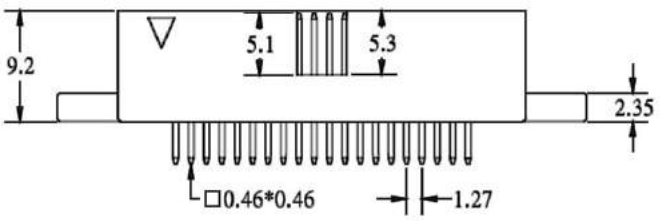



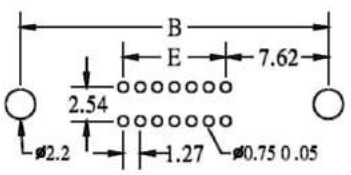

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 5 7 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "57" STRAIGHT TYPE WITH MOUNTING EARS
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER STRAIGHT DIP TYPE WITH MOUNTING EARS

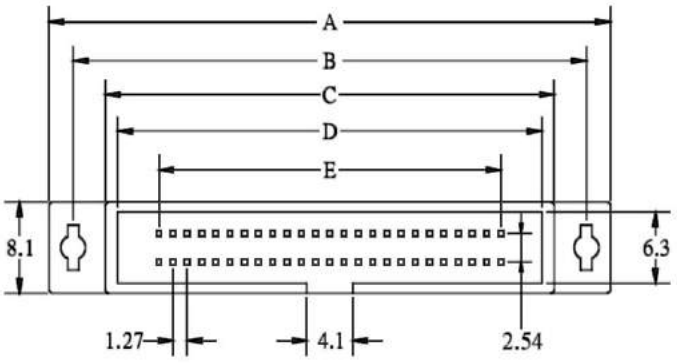


POSITION	A	B	C	D	E
10	24.60	20.32	14.60	12.40	5.08
20	30.95	26.67	20.95	18.75	11.43
26	34.76	30.48	24.76	22.56	15.24
30	37.30	33.02	27.30	25.10	17.78
34	39.84	35.56	29.84	27.64	20.32
40	43.65	39.37	33.65	31.45	24.13
50	50.00	45.72	40.00	36.86	30.48
60	56.35	52.07	46.35	44.15	36.83
68	61.43	57.15	51.43	49.23	41.91
80	69.05	64.77	59.05	56.85	49.53
100	81.75	77.47	71.75	69.55	62.23

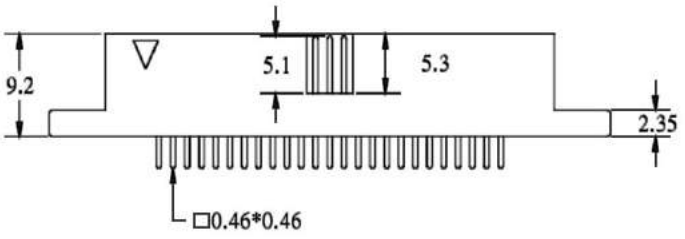



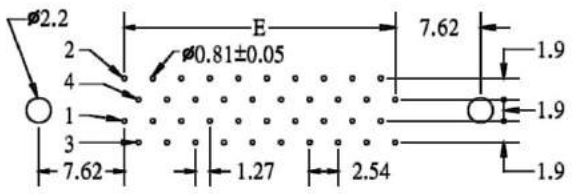

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

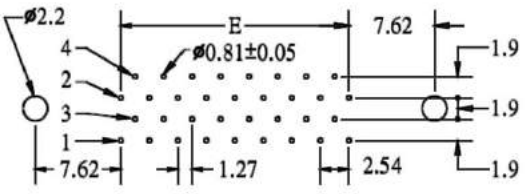

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 5 8 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "58" STRAIGHT TYPE WITH MOUNTING EARS
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER DIP TYPE

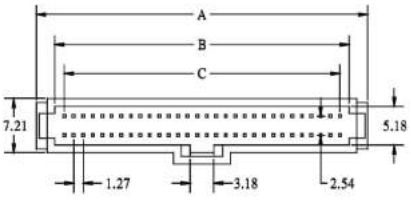



POSITION	A	B	C	D
10	12.54	7.59	5.08	9.64
14	15.08	10.13	7.62	12.18
16	16.35	11.40	8.89	13.45
20	18.89	13.94	11.43	15.99
24	21.43	16.48	13.97	18.53
26	22.70	17.75	15.24	19.80
30	25.24	20.29	17.78	22.34
34	27.78	22.83	20.32	24.88
40	31.59	26.64	24.13	28.69
44	34.13	29.18	26.67	31.23
50	37.94	32.99	30.48	35.04
60	44.29	39.34	36.83	41.39
64	46.83	41.88	39.37	43.93
68	49.37	44.42	41.91	46.47
72	51.91	46.96	44.45	49.01
80	56.99	52.04	49.53	54.09
100	69.69	64.74	62.23	66.79

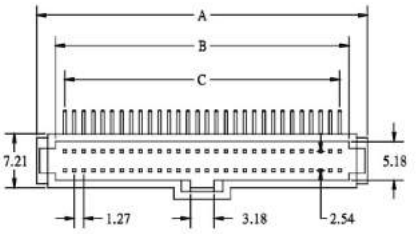

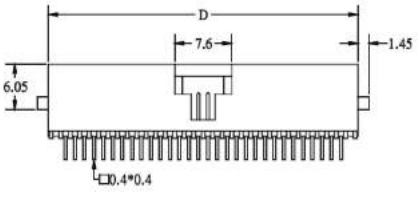






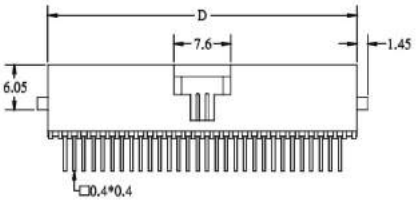

P/N 12759-xxxSB

P/N 12760-xxxSB



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "59" STRAIGHT DIP TYPE
   "60" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1DY, K1GT/GU


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER SMT TYPE

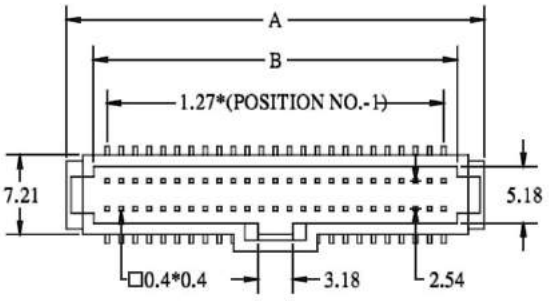

POSITION	A	B	C	D	E	F
10	12.54	7.59	9.64	0.635	--	--
14	15.08	10.13	12.18	1.905	--	--
16	16.35	11.40	13.45	2.54	2.54	--
20	18.89	13.94	15.99	3.81	3.81	--
24	21.43	16.48	18.53	5.08	5.08	--
26	22.70	17.75	19.80	5.715	5.715	--
30	25.24	20.29	22.34	6.985	6.985	--
34	27.78	22.83	24.88	8.255	8.255	--
40	31.59	26.64	28.89	10.16	10.16	--
44	34.13	29.18	31.23	11.43	11.43	--
50	37.94	32.99	35.04	13.335	13.335	--
60	44.29	39.34	41.39	16.51	16.51	0.00
64	46.83	41.88	43.93	17.78	17.78	0.00
68	49.37	44.42	46.47	19.05	19.05	0.00
72	51.91	46.96	49.01	20.32	20.32	0.00
80	56.99	52.04	54.09	22.86	22.86	0.00
100	69.96	65.01	66.79	29.21	29.21	0.00

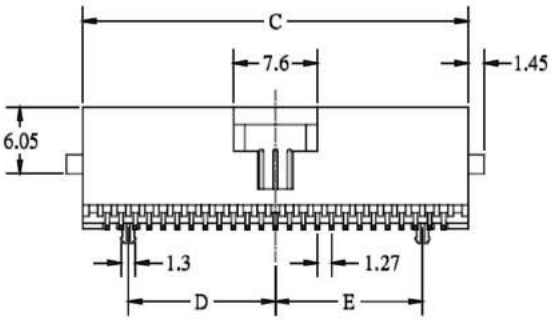



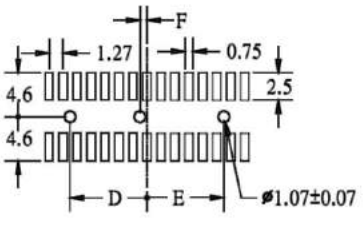

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 6 1 - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "61" SMT TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1DY, K1GT/GU


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH BOX HEADER RIGHT ANGLE DIP TYPE

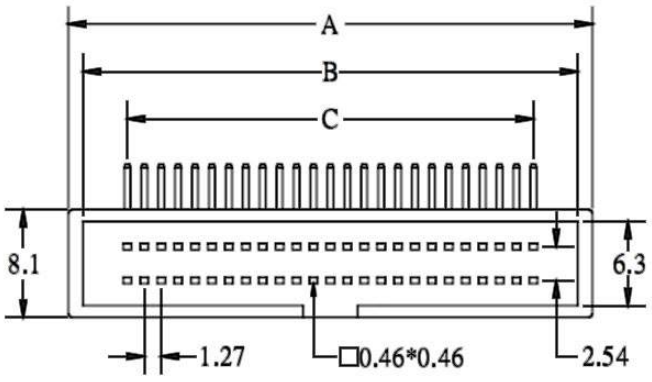


POSITION	A	B	C
10	13.95	11.75	5.08
20	20.30	18.10	11.43
26	24.11	21.91	15.24
30	26.65	24.45	17.78
34	29.19	26.99	20.32
40	33.00	30.80	24.13
50	39.35	37.15	30.48
60	45.70	43.50	36.83
68	50.78	48.58	41.91
70	52.05	49.85	43.18
80	58.40	56.20	49.53
90	64.75	62.55	55.88
100	71.10	68.90	62.23

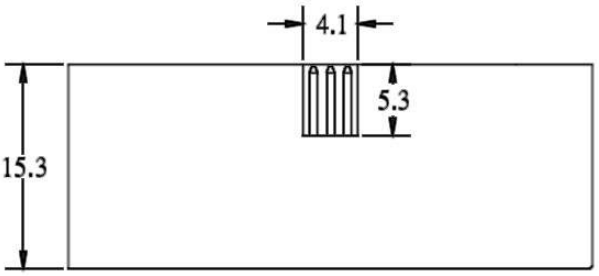



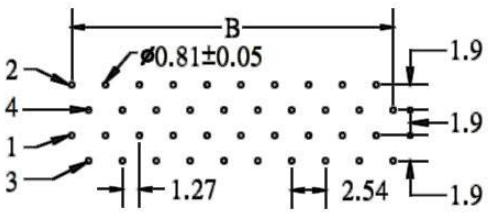

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

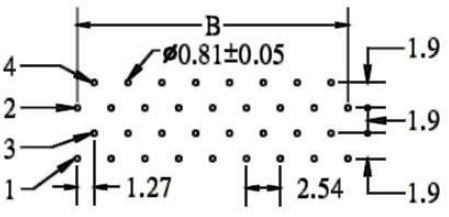

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 6 2 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "62" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ, K1FR/FS/FT/FU,
K1FN/FP, K1DK/DL/DM/DN,
K1GG/GH/GJ/GK


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER STRAIGHT DIP TYPE

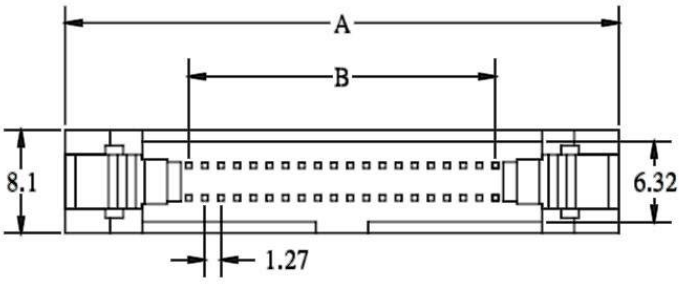

POSITION	A	B	C
10	24.50	5.08	12.40
20	30.85	11.43	18.75
26	34.66	15.24	22.56
30	37.20	17.78	25.10
34	39.74	20.32	27.64
40	43.55	24.13	31.45
50	49.90	30.48	36.86
60	56.25	36.83	44.15
68	61.33	41.91	49.23
80	68.95	49.53	56.85
100	81.65	62.23	69.55

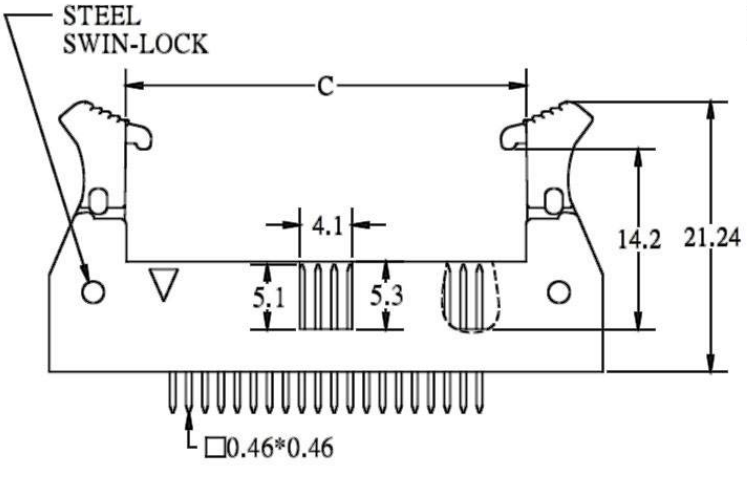

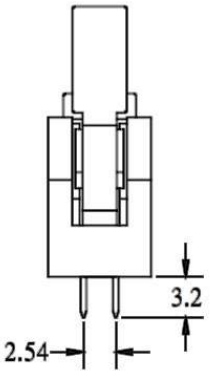

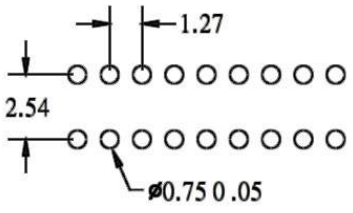

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 7 1 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "71" WITH LONG LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER STRAIGHT DIP TYPE

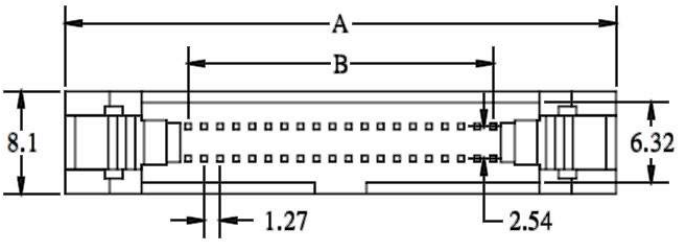


POSITION	A	B	C
10	24.50	5.08	12.40
20	30.85	11.43	18.75
26	34.66	15.24	22.56
30	37.20	17.78	25.10
34	39.74	20.32	27.64
40	43.55	24.13	31.45
50	49.90	30.48	36.86
60	56.25	36.83	44.15
68	61.33	41.91	49.23
80	68.95	49.53	56.85
100	81.65	62.23	69.55

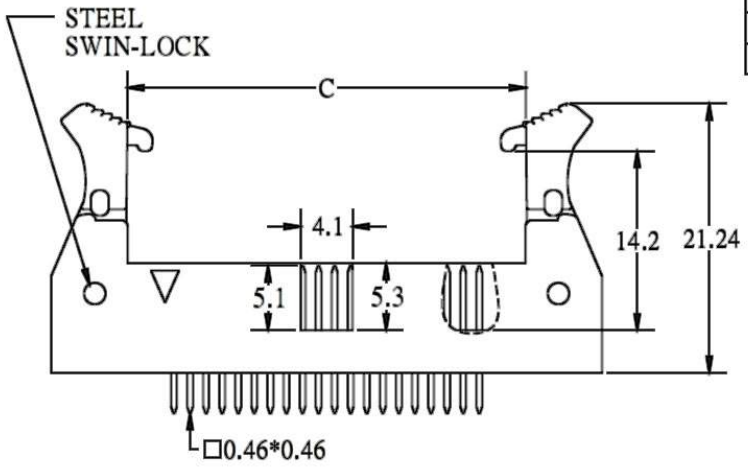

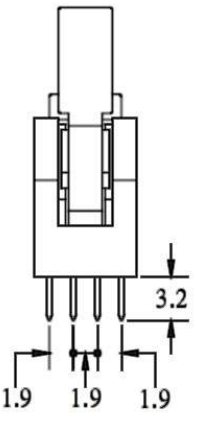

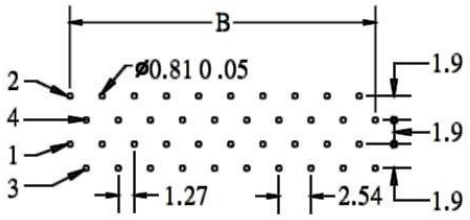

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

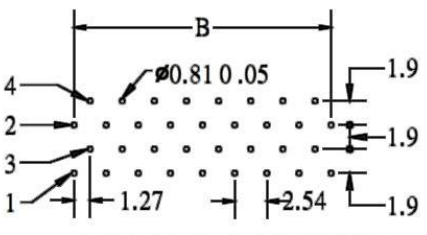

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 7 2 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "72" WITH LONG LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER RIGHT ANGLE DIP TYPE

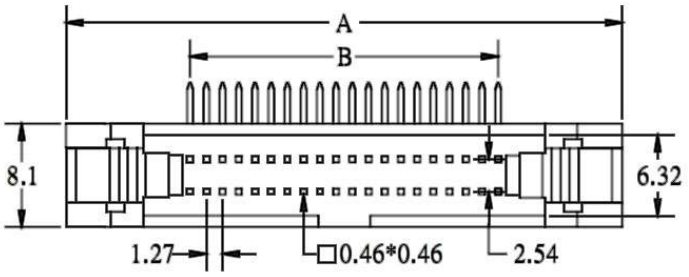


POSITION	A	B	C
10	24.50	5.08	12.40
20	30.85	11.43	18.75
26	34.66	15.24	22.56
30	37.20	17.78	25.10
34	39.74	20.32	27.64
40	43.55	24.13	31.45
50	49.90	30.48	36.86
60	56.25	36.83	44.15
68	61.33	41.91	49.23
80	68.95	49.53	56.85
100	81.65	62.23	69.55

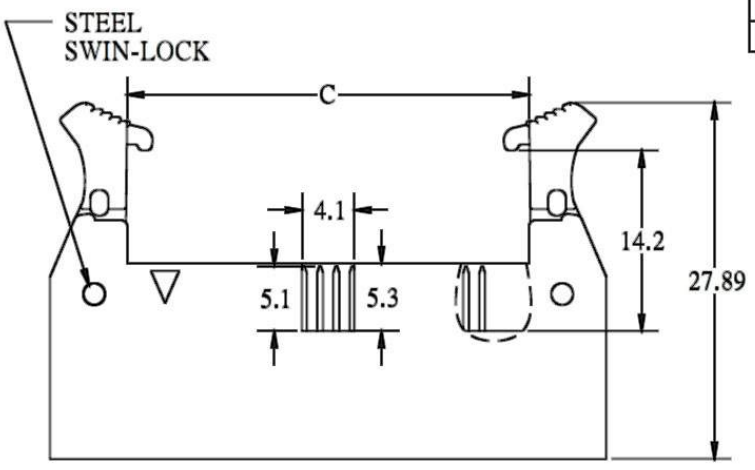

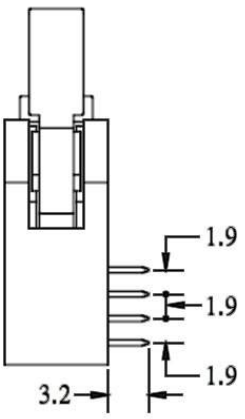

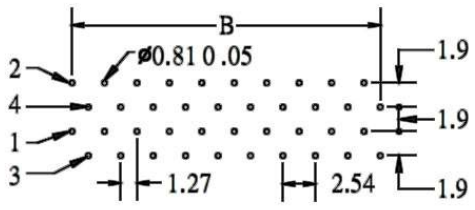

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

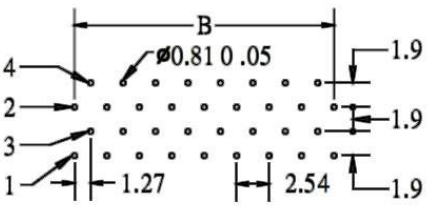

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 7 3 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "73" WITH LONG LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1HA/HB/HC/HD


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHRUNK SHROUDED HEADER STRAIGHT DIP TYPE

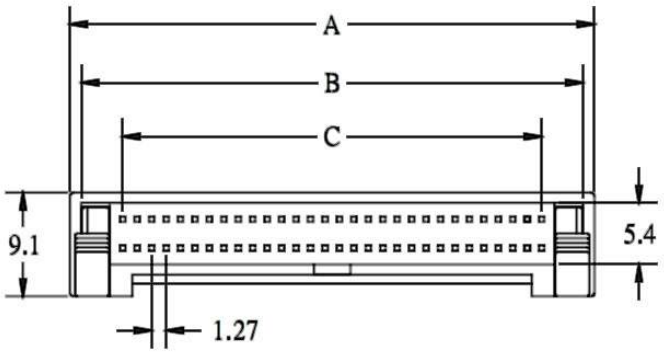

POSITION	A	B	C
10	14.36	12.36	5.08
20	20.71	18.71	11.43
26	24.52	22.52	15.24
30	27.06	25.06	17.78
34	29.60	27.60	20.32
40	33.41	31.41	24.13
50	39.76	37.76	30.48
60	46.11	44.11	36.83
68	51.19	49.19	41.91
80	58.81	56.81	49.53
100	71.51	69.51	62.23

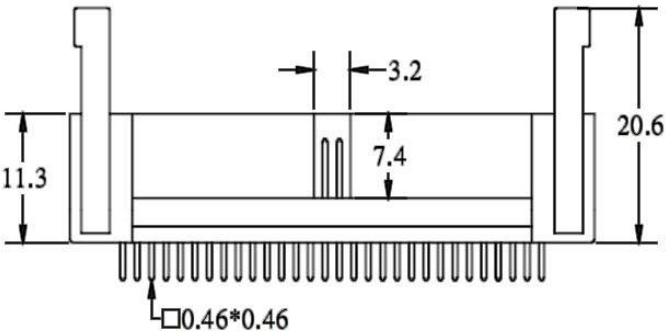

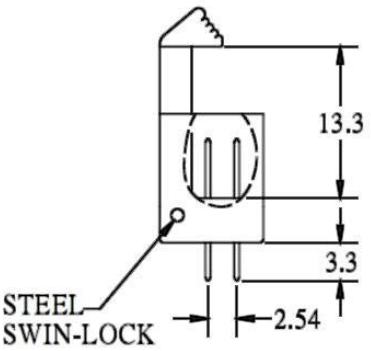



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 7 4 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "74" STRAIGHT DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FF/FG/FH/FJ/FK/FL, K1DU/DV/DW/DX, K1GV/GW


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHRUNK SHROUDED HEADER STRAIGHT DIP TYPE

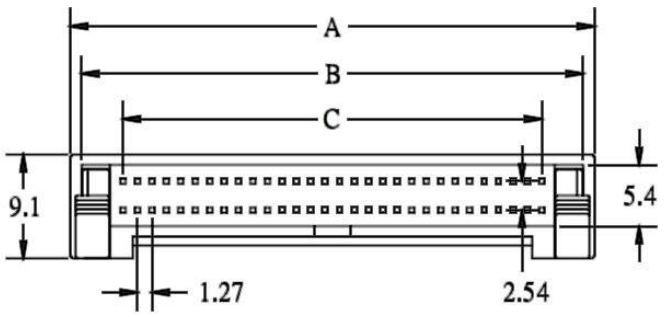


POSITION	A	B	C
10	14.36	12.36	5.08
20	20.71	18.71	11.43
26	24.52	22.52	15.24
30	27.06	25.06	17.78
34	29.60	27.60	20.32
40	33.41	31.41	24.13
50	39.76	37.76	30.48
60	46.11	44.11	36.83
68	51.19	49.19	41.91
80	58.81	56.81	49.53
100	71.51	69.51	62.23

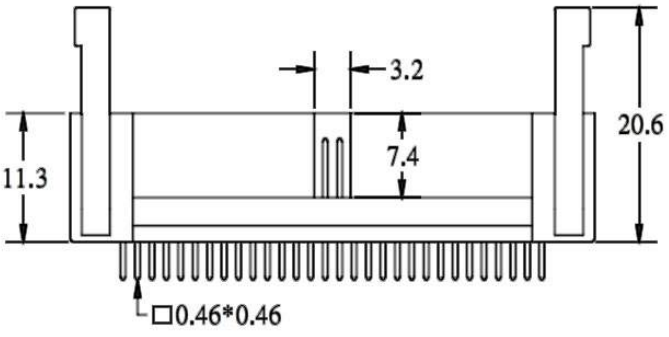

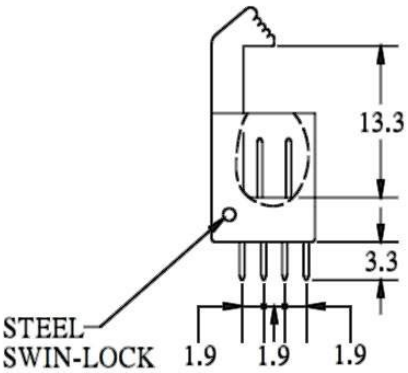

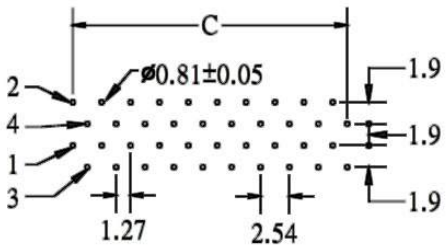

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

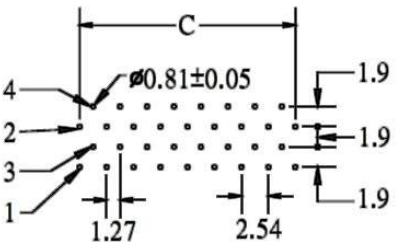

P.C.BOARD LAYOUT FOR
10,26,30,34,50

ORDERING INFORMATION:


P/N 1 2 7 7 5 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "75" STRAIGHT DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FF/FG/FH/FJ/FK/FL, K1DU/DV/DW/DX, K1GV/GW


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHRUNK SHROUDED HEADER RIGHT ANGLE DIP TYPE

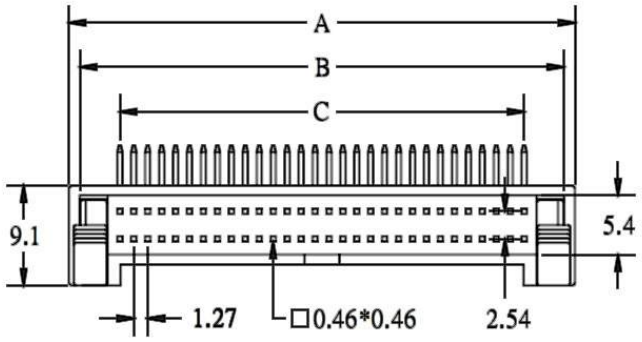


POSITION	A	B	C
10	14.36	12.36	5.08
20	20.71	18.71	11.43
26	24.52	22.52	15.24
30	27.06	25.06	17.78
34	29.60	27.60	20.32
40	33.41	31.41	24.13
50	39.76	37.76	30.48
60	46.11	44.11	36.83
68	51.19	49.19	41.91
80	58.81	56.81	49.53
100	71.51	69.51	62.23

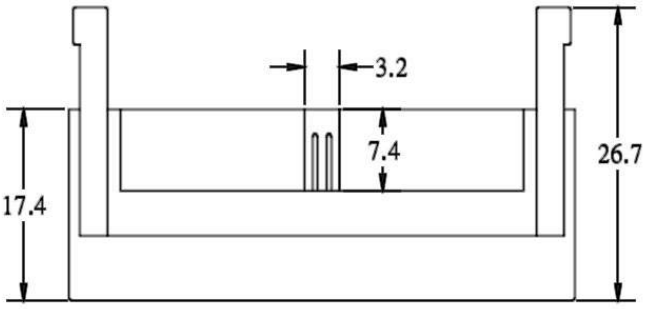

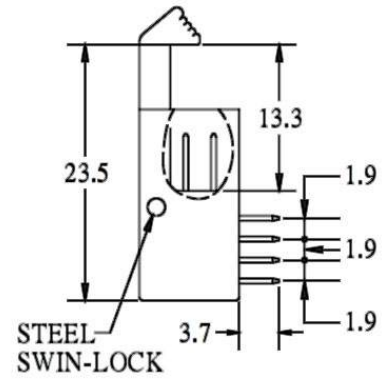

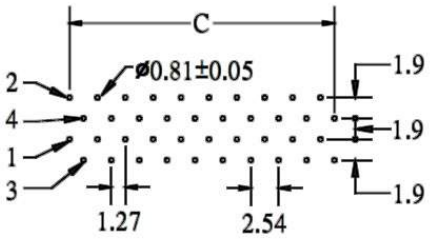

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

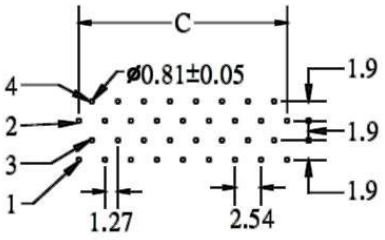

P.C.BOARD LAYOUT FOR
10,26,30,34,50

ORDERING INFORMATION:


P/N 1 2 7 7 6 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "76" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FF/FG/FH/FJ/FK/FL, K1DU/DV/DW/DX, K1GV/GW


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER STRAIGHT DIP TYPE

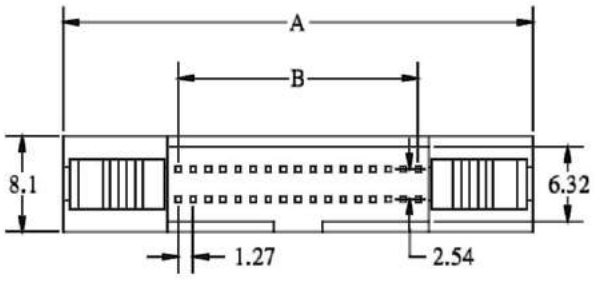


POSITION	A	B	C
10	24.50	5.08	11.46
20	30.85	11.43	17.81
26	34.66	15.24	21.62
30	37.20	17.78	24.16
34	39.74	20.32	26.70
40	43.55	24.13	30.51
50	49.90	30.48	36.86
60	56.25	36.83	43.21
68	61.33	41.91	48.29
70	62.60	43.18	49.56
80	68.95	49.53	55.91
90	75.30	55.88	62.26
100	81.65	62.23	68.61

ACCESSORIES	X	Y
LONG LATCH	18.5	10.65
SHORT LATCH	17.0	8.0

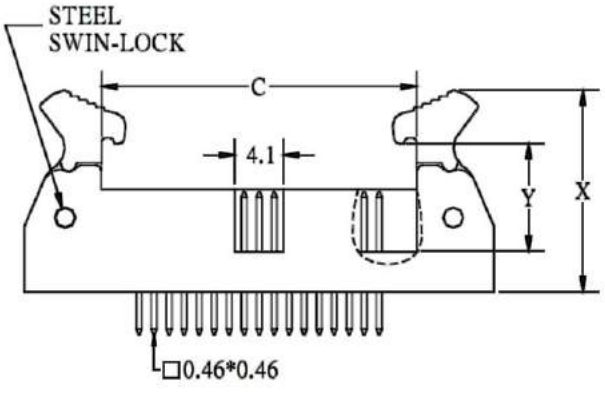





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "77" WITH LONG LATCHES
   "78" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ(12778), K1FR/FS/FT/FU(12777), K1DK/DL/DM/DN(12778),
K1GG/GH/GJ/GK(12777), K1FN/FP(12778)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM*2.54MM PITCH SHROUDED HEADER STRAIGHT DIP TYPE

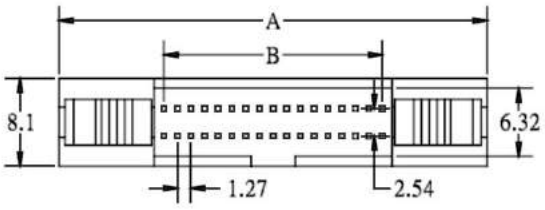


POSITION	A	B	C
10	24.50	5.08	11.46
20	30.85	11.43	17.81
26	34.66	15.24	21.62
30	37.20	17.78	24.16
34	39.74	20.32	26.70
40	43.55	24.13	30.51
50	49.90	30.48	36.86
60	56.25	36.83	43.21
68	61.33	41.91	48.29
70	62.60	43.18	49.56
80	68.95	49.53	55.91
90	75.30	55.88	62.26
100	81.65	62.23	68.61

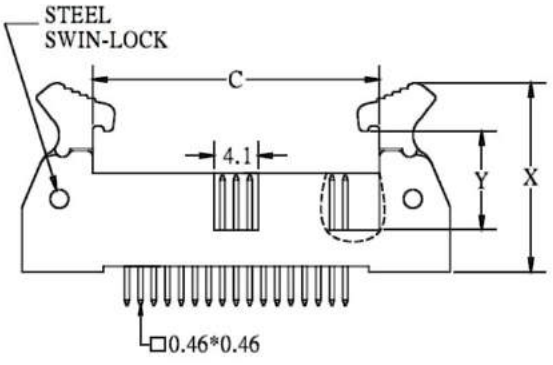




ACCESSORIES	X	Y
LONG LATCH	19.0	10.65
SHORT LATCH	17.5	8.0

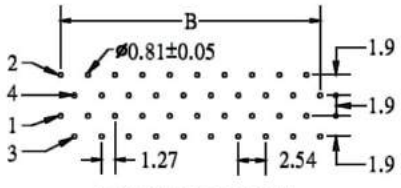

P.C.BOARD LAYOUT
FOR 20,40,60,68,80,100

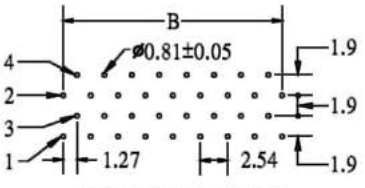

P.C.BOARD LAYOUT
FOR 10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "79" WITH LONG LATCHES
   "80" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ(12780), K1FR/FS/FT/FU(12779), K1DK/DL/DM/DN(12780),
K1GG/GH/GJ/GK(12779), K1FN/FP(12780)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER RIGHT ANGLE DIP TYPE

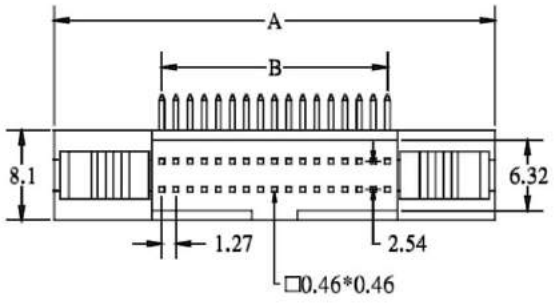


POSITION	A	B	C
10	24.50	5.08	11.46
20	30.85	11.43	17.81
26	34.66	15.24	21.62
30	37.20	17.78	24.16
34	39.74	20.32	26.70
40	43.55	24.13	30.51
50	49.90	30.48	36.86
60	56.25	36.83	43.21
68	61.33	41.91	48.29
70	62.60	43.18	49.56
80	68.95	49.53	55.91
90	75.30	55.88	62.26
100	81.65	62.23	68.61

ACCESSORIES	X	Y
LONG LATCH	20.0	10.65
SHORT LATCH	18.5	8.0

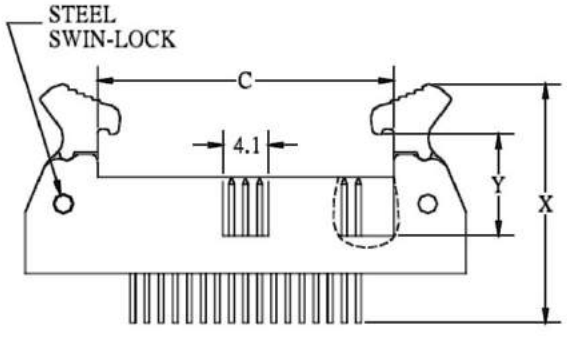





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "81" WITH LONG LATCHES
   "82" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ(12782), K1FR/FS/FT/FU(12781), K1DK/DL/DM/DN(12781),
K1GG/GH/GJ/GK(12781), K1FN/FP(12782)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM*2.54MM PITCH SHROUDED HEADER RIGHT ANGLE DIP TYPE

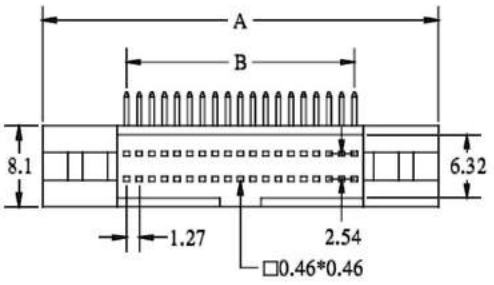


POSITION	A	B	C
10	24.50	5.08	11.46
20	30.85	11.43	17.81
26	34.66	15.24	21.62
30	37.20	17.78	24.16
34	39.74	20.32	26.70
40	43.55	24.13	30.51
50	49.90	30.48	36.86
60	56.25	36.83	43.21
68	61.33	41.91	48.29
70	62.60	43.18	49.56
80	68.95	49.53	55.91
90	75.30	55.88	62.26
100	81.65	62.23	68.61

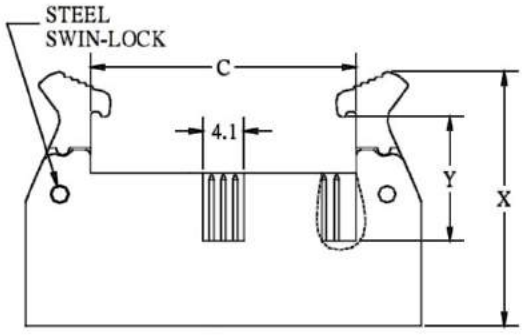




ACCESSORIES	X	Y
LONG LATCH	25.2	10.6
SHORT LATCH	23.7	8.0

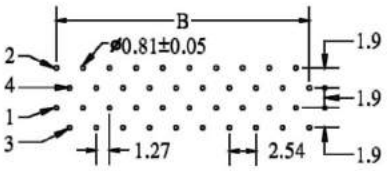

P.C.BOARD LAYOUT FOR
20,40,60,68,80,100

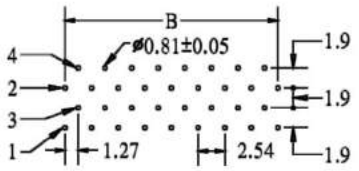

P.C.BOARD LAYOUT FOR
10,26,30,34,50,70,90

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "83" WITH LONG LATCHES
   "84" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ(12784), K1FR/FS/FT/FU(12783), K1DK/DL/DM/DN(12784),
K1GG/GH/GJ/GK(12783), K1FN/FP(12784)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER SMT TYPE

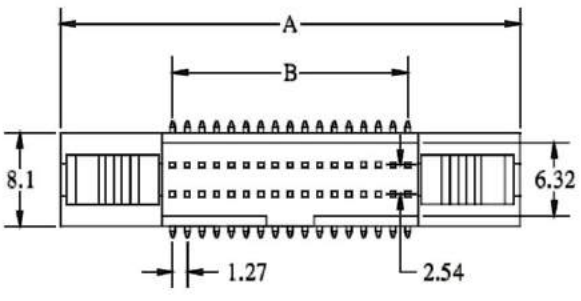


POSITION	A	B	C
10	24.50	5.08	11.46
20	30.85	11.43	17.81
26	34.66	15.24	21.62
30	37.20	17.78	24.16
34	39.74	20.32	26.70
40	43.55	24.13	30.51
50	49.90	30.48	36.86
60	56.25	36.83	43.21
68	61.33	41.91	48.29
70	62.60	43.18	49.56
80	68.95	49.53	55.91
90	75.30	55.88	62.26
100	81.65	62.23	68.61

ACCESSORIES	X	Y
LONG LATCH	20.0	10.65
SHORT LATCH	18.5	8.0

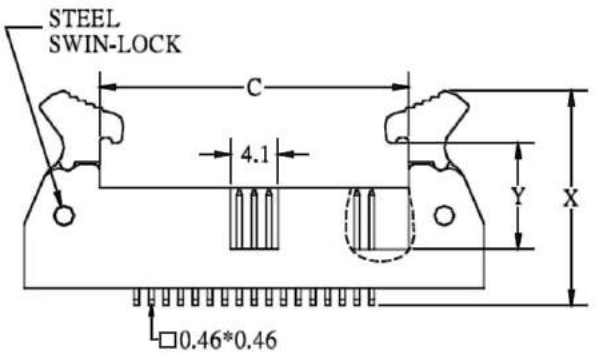





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "85" WITH LONG LATCHES
   "86" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1FA/FB/FC/FD/FE/FQ(12786), K1FR/FS/FT/FU(12785), K1DK/DL/DM/DN(12786),
K1GG/GH/GJ/GK(12785), K1FN/FP(12786)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER STRAIGHT DIP TYPE

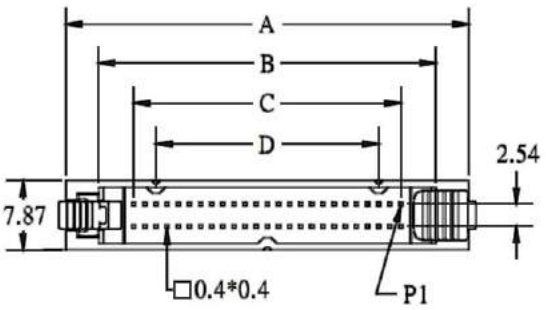


POSITION	A	B	C	D	E
10	20.57	13.08	5.08	— —	15.50
20	26.92	19.43	11.43	6.35	21.85
26	30.73	23.24	15.24	10.16	25.66
30	33.27	25.78	17.78	12.70	28.20
34	35.81	28.32	20.32	15.24	30.74
36	37.08	29.59	21.59	16.51	32.01
40	39.62	32.13	24.13	19.05	34.55
50	45.97	38.48	30.48	25.40	40.90
60	52.32	44.83	36.83	31.75	47.25
68	57.40	49.91	41.91	36.83	52.33
80	65.02	57.53	49.53	44.45	59.95
100	77.72	70.23	62.23	57.15	72.65

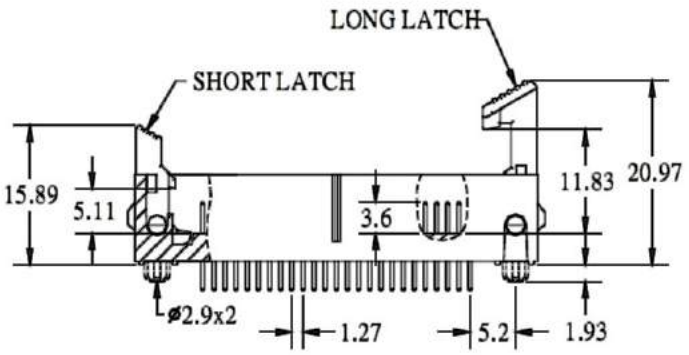



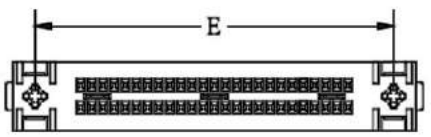

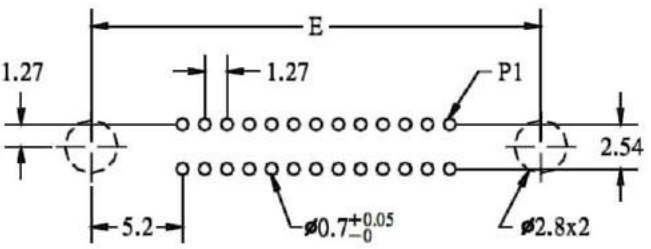

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S V - x
1 2 3 4 5

1. CONNECT TYPE:
   "87" WITH LONG LATCHES
   "88" WITH SHORT LATCHES
   "89" W/O ANY LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "V" IVORY
5. LOCATING PEG OPTION:
   "0" W/O LOCATING PEG (STANDARD)
   "1" WITH LOCATING PEG


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1GL/GM/GN, K1GP/GQ/GR/GS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER RIGHT ANGLE TYPE

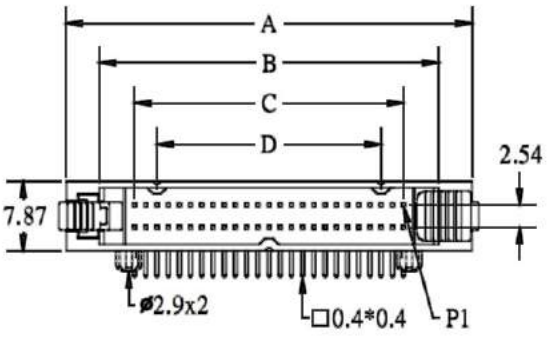


POSITION	A	B	C	D	E
10	20.57	13.08	5.08	— —	— —
20	26.92	19.43	11.43	6.35	12.71
26	30.73	23.24	15.24	10.16	16.52
30	33.27	25.78	17.78	12.70	19.06
34	35.81	28.32	20.32	15.24	21.60
36	37.08	29.59	21.59	16.51	22.87
40	39.62	32.13	24.13	19.05	25.41
50	45.97	38.48	30.48	25.40	31.76
60	52.32	44.83	36.83	31.75	38.11
68	57.40	49.91	41.91	36.83	43.19
80	65.02	57.53	49.53	44.45	50.81
100	77.72	70.23	62.23	57.15	63.51

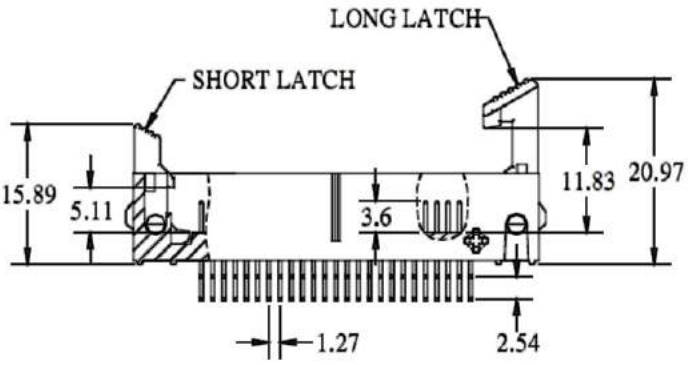



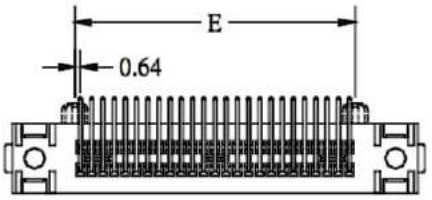

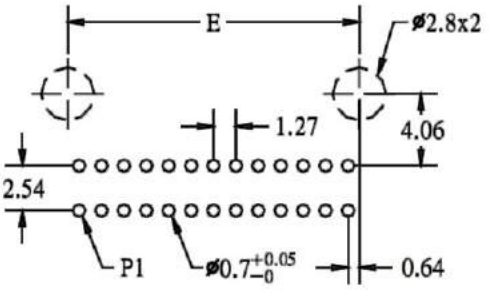

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S V - x
1 2 3 4 5

1. CONNECT TYPE:
   "90" WITH LONG LATCHES
   "91" WITH SHORT LATCHES
   "92" W/O ANY LATCHES
2. NO. OF CONTACTS:
   010~100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "V" IVORY
5. LOCATING PEG OPTION:
   "0" W/O LOCATING PEG (STANDARD)
   "1" WITH LOCATING PEG


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1GL/GM/GN, K1GP/GQ/GR/GS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM PITCH SHROUDED HEADER SMT TYPE

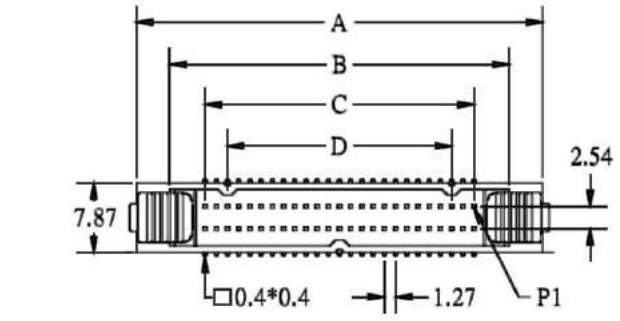


POSITION	A	B	C	D	E	F
10	20.57	13.08	5.08	— —	15.50	O
20	26.92	19.43	11.43	6.35	21.85	X
26	30.73	23.24	15.24	10.16	25.66	O
30	33.27	25.78	17.78	12.70	28.20	O
34	35.81	28.32	20.32	15.24	30.74	O
36	37.08	29.59	21.59	16.51	32.01	O
40	39.62	32.13	24.13	19.05	34.55	O
50	45.97	38.48	30.48	25.40	40.90	O
60	52.32	44.83	36.83	31.75	47.25	O
68	57.40	49.91	41.91	36.83	52.33	O
80	65.02	57.53	49.53	44.45	59.95	O
100	77.72	70.23	62.23	57.15	72.65	O

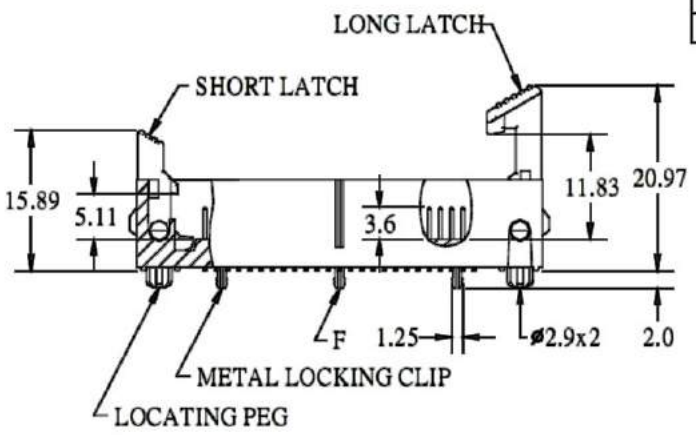



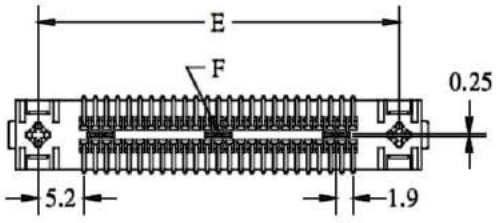

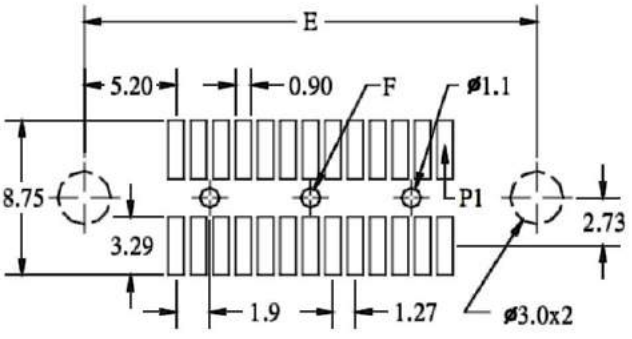

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 x x - x x x S V - x x x
1 2 3 4 5 6

1. CONNECT TYPE:
   "93" WITH LONG LATCHES
   "94" WITH SHORT LATCHES
   "95" W/O ANY LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "V" IVORY
5. LOCATING PEG OPTION:
   "00" W/O PEG & W/O CLIP
   "01" W/O PEG & WITH CLIP
   "10" WITH PEG & W/O CLIP
   "11" WITH PEG & WITH CLIP
6. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K1GL/GM/GN, K1GP/GQ/GR/GS


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM PITCH BOX HEADER DIP TYPE WITH UNDERCUT

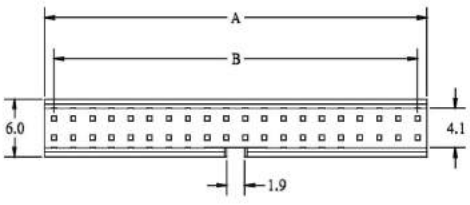



POSITION	A	B
6	6.0	4.0
8	8.0	6.0
10	10.0	8.0
12	12.0	10.0
14	14.0	12.0
16	16.0	14.0
20	20.0	18.0
22	22.0	20.0
24	24.0	22.0
26	26.0	24.0
30	30.0	28.0
34	34.0	32.0
40	40.0	38.0
44	44.0	42.0
50	50.0	48.0
68	68.0	66.0

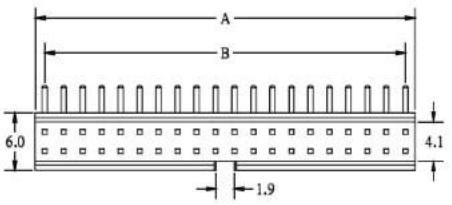

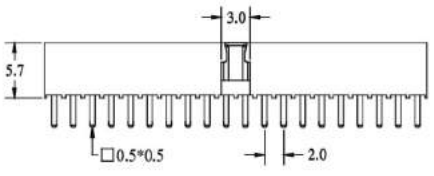


P/N 20001-xxxSB





RECOMMENDED P.C.B LAYOUT

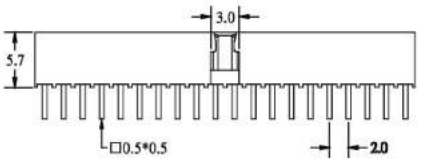

P/N 20002-xxxSB

ORDERING INFORMATION:


P/N 200 xx - xxx S B
1 2 3 4

1. CONNECT TYPE:
   "01" STRAIGHT DIP TYPE
   "02" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FD/FE/FF/FG/FH/FJ, K2HA/HB/HC/HD, K2PJ/PK/PL/PM


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH BOX HEADER SMT TYPE WITH UNDERCUT

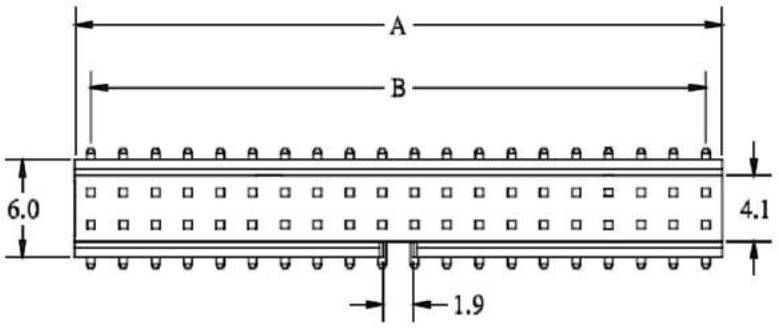

POSITION	A	B
6	6.0	4.0
8	8.0	6.0
10	10.0	8.0
12	12.0	10.0
14	14.0	12.0
16	16.0	14.0
20	20.0	18.0
22	22.0	20.0
24	24.0	22.0
26	26.0	24.0
30	30.0	28.0
34	34.0	32.0
40	40.0	38.0
44	44.0	42.0
50	50.0	48.0
68	68.0	66.0

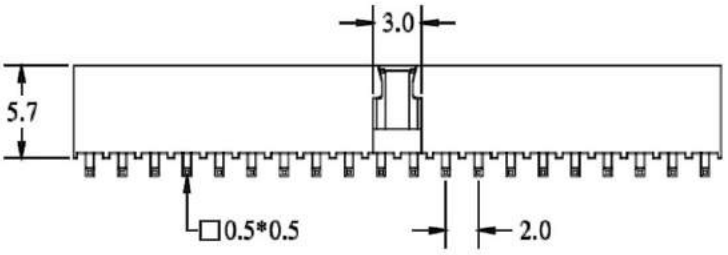





ORDERING INFORMATION:


P/N 2 0 0 $\frac{0\ 3}{1}$ - $\frac{x\ x\ x}{2}$ $\frac{S}{3}$ $\frac{B}{4}$ - $\frac{x}{5}$

1. CONNECT TYPE:
   "03" SMT TYPE
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FD/FE/FF/FG/FH/FJ, K2HA/HB/HC/HD, K2PJ/PK/PL/PM


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM PITCH LOW PROFILE BOX HEADER DIP TYPE

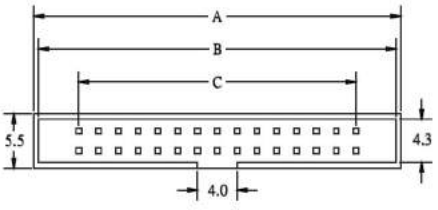



POSITION	A	B	C
6	12.00	10.60	4.00
8	14.00	12.60	6.00
10	16.00	14.60	8.00
12	18.00	16.60	10.00
14	20.00	18.60	12.00
16	22.00	20.60	14.00
20	26.00	24.60	18.00
22	28.00	26.60	20.00
24	30.00	28.60	22.00
26	32.00	30.60	24.00
30	36.00	34.60	28.00
34	40.00	38.60	32.00
36	42.00	40.60	34.00
40	46.00	44.60	38.00
44	50.00	48.60	42.00
50	56.00	54.60	48.00

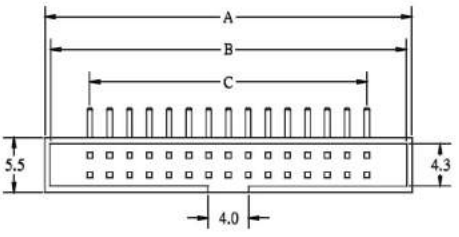

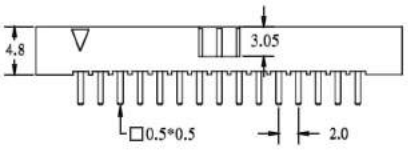


P/N 20004-xxxSB





RECOMMENDED P.C.B LAYOUT

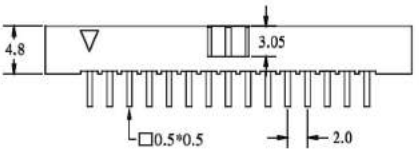

P/N 20005-xxxSB

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "04" STRAIGHT DIP TYPE
   "05" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~050
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DT/DU/DV/DW/DR/DS, K2FV/FW/FX/FY, K2GT/GU/GV/GW, K2DX/DY/DP/DQ,
K2ME/MF/MG/MH, K2MJ/MK/ML/MM, K2MN/MP/MQ/MR, K2MS/MT/MU/MV,
K2NJ/NK/NS/NT, K2NL/NM/NU/NV, K2PE/PF/PG/PH, K2NW/NX/NY/NZ,
K2PW/PX


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH LOW PROFILE BOX HEADER SMT TYPE

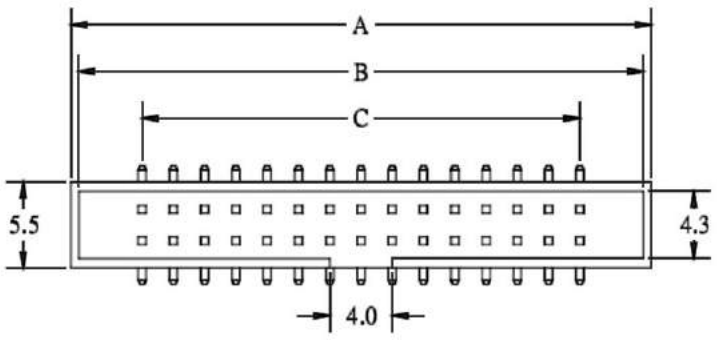

POSITION	A	B	C
6	12.00	10.60	4.00
8	14.00	12.60	6.00
10	16.00	14.60	8.00
12	18.00	16.60	10.00
14	20.00	18.60	12.00
16	22.00	20.60	14.00
20	26.00	24.60	18.00
22	28.00	26.60	20.00
24	30.00	28.60	22.00
26	32.00	30.60	24.00
30	36.00	34.60	28.00
34	40.00	38.60	32.00
36	42.00	40.60	34.00
40	46.00	44.60	38.00
44	50.00	48.60	42.00
50	56.00	54.60	48.00

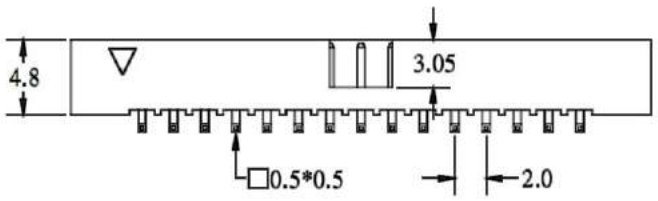





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 $\frac{0\ 6}{1}$ - $\frac{x\ x\ x}{2}$ $\frac{S}{3}$ $\frac{B}{4}$ - $\frac{x}{5}$

1. CONNECT TYPE:
   "06" LOW PROFILE SMT TYPE
2. NO. OF CONTACTS:
   006~050
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DT/DU/DV/DW/DR/DS, K2FV/FW/FX/FY, K2GT/GU/GV/GW, K2DX/DY/DP/DQ,
K2ME/MF/MG/MH, K2MJ/MK/ML/MM, K2MN/MP/MQ/MR, K2MS/MT/MU/MV,
K2NJ/NK/NS/NT, K2NL/NM/NU/NV, K2PE/PF/PG/PH, K2NW/NX/NY/NZ,
K2PW/PX

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH BOX HEADER STRAIGHT DIP TYPE
WITH POLARIZATION LATCHING




RECOMMENDED P.C.B LAYOUT

POSITION	A	B	C	D
6	5.9	4.0	8.0	7.4
8	7.9	6.0	10.0	9.4
10	9.9	8.0	12.0	11.4
12	11.9	10.0	14.0	13.4
14	13.9	12.0	16.0	15.4
16	15.9	14.0	18.0	17.4
18	17.9	16.0	20.0	19.4
20	19.9	18.0	22.0	21.4
22	21.9	20.0	24.0	23.4
24	23.9	22.0	26.0	25.4
26	25.9	24.0	28.0	27.4
28	27.9	26.0	30.0	29.4
30	29.9	28.0	32.0	31.4
34	33.9	32.0	36.0	35.4
36	35.9	34.0	38.0	37.4
40	39.9	38.0	42.0	41.4
44	43.9	42.0	46.0	45.4
48	47.9	46.0	50.0	49.4
50	49.9	48.0	52.0	51.4
60	59.9	58.0	62.0	61.4
64	63.9	62.0	66.0	65.4
68	67.9	66.0	70.0	69.4


RECOMMENDED P.C.B LAYOUT

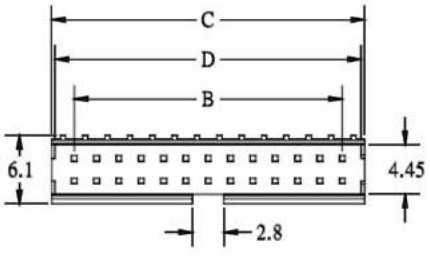

(TYPE A)

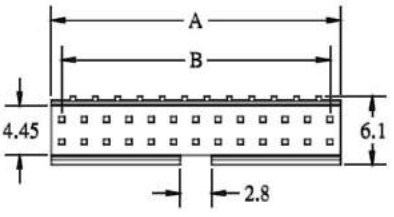

(TYPE B)

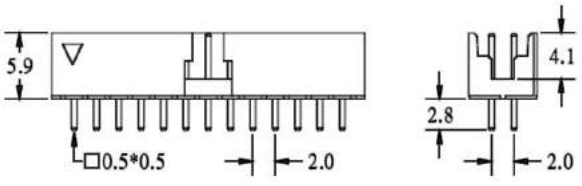

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "07" TYPE A
   "08" TYPE B
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DG/DH/DJ/DK/DL/DM, K2HE/HF/HG/HH

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH BOX HEADER RIGHT ANGLE DIP TYPE WITH POLARIZATION LATCHING




RECOMMENDED P.C.B LAYOUT

POSITION	A	B	C	D
6	5.9	4.0	8.0	7.4
8	7.9	6.0	10.0	9.4
10	9.9	8.0	12.0	11.4
12	11.9	10.0	14.0	13.4
14	13.9	12.0	16.0	15.4
16	15.9	14.0	18.0	17.4
18	17.9	16.0	20.0	19.4
20	19.9	18.0	22.0	21.4
22	21.9	20.0	24.0	23.4
24	23.9	22.0	26.0	25.4
26	25.9	24.0	28.0	27.4
28	27.9	26.0	30.0	29.4
30	29.9	28.0	32.0	31.4
34	33.9	32.0	36.0	35.4
36	35.9	34.0	38.0	37.4
40	39.9	38.0	42.0	41.4
44	43.9	42.0	46.0	45.4
48	47.9	46.0	50.0	49.4
50	49.9	48.0	52.0	51.4
60	59.9	58.0	62.0	61.4
64	63.9	62.0	66.0	65.4
68	67.9	66.0	70.0	69.4


RECOMMENDED P.C.B LAYOUT

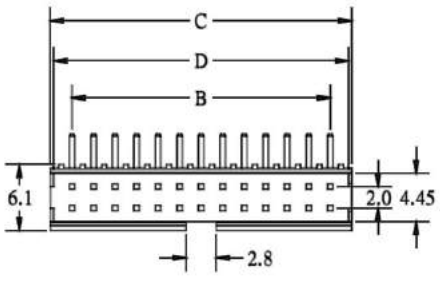



(TYPE A)

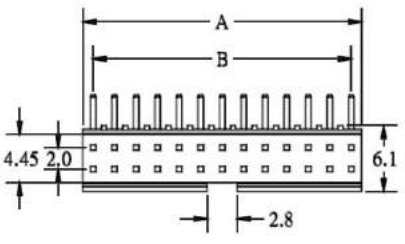


(TYPE B)

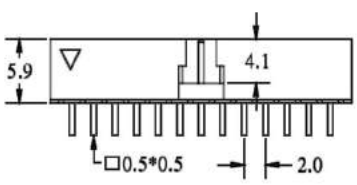







ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "09" TYPE A
   "10" TYPE B
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DG/DH/DJ/DK/DL/DM, K2HE/HF/HG/HH

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH BOX HEADER SMT TYPE WITH POLARIZATION LATCHING




RECOMMENDED P.C.B LAYOUT

POSITION	A	B	C	D
6	5.9	4.0	8.0	7.4
8	7.9	6.0	10.0	9.4
10	9.9	8.0	12.0	11.4
12	11.9	10.0	14.0	13.4
14	13.9	12.0	16.0	15.4
16	15.9	14.0	18.0	17.4
18	17.9	16.0	20.0	19.4
20	19.9	18.0	22.0	21.4
22	21.9	20.0	24.0	23.4
24	23.9	22.0	26.0	25.4
26	25.9	24.0	28.0	27.4
28	27.9	26.0	30.0	29.4
30	29.9	28.0	32.0	31.4
34	33.9	32.0	36.0	35.4
36	35.9	34.0	38.0	37.4
40	39.9	38.0	42.0	41.4
44	43.9	42.0	46.0	45.4
48	47.9	46.0	50.0	49.4
50	49.9	48.0	52.0	51.4
60	59.9	58.0	62.0	61.4
64	63.9	62.0	66.0	65.4
68	67.9	66.0	70.0	69.4


RECOMMENDED P.C.B LAYOUT

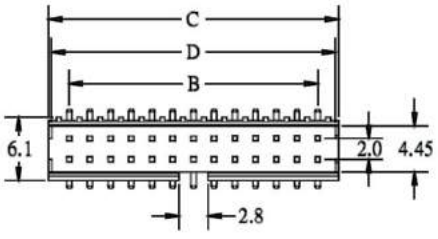

(TYPE A)

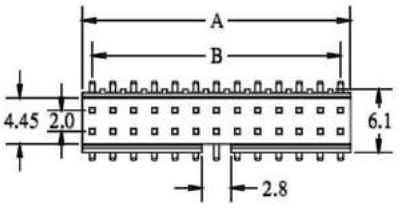

(TYPE B)

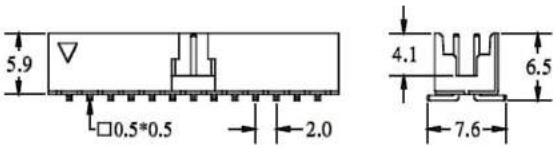

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B - x
1 2 3 4 5

1. CONNECT TYPE:
   "11" TYPE A
   "12" TYPE B
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DG/DH/DJ/DK/DL/DM, K2HE/HF/HG/HH


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH BOX HEADER PRESS-FIT TYPE

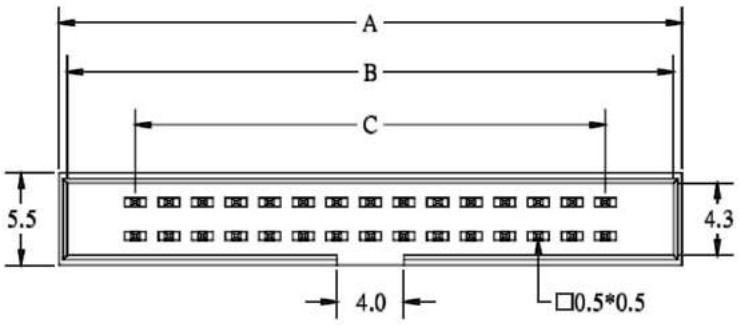

POSITION	A	B	C
6	13.10	12.10	4.00
8	15.10	14.10	6.00
10	17.10	16.10	8.00
12	19.10	18.10	10.00
14	21.10	20.10	12.00
16	23.10	22.10	14.00
20	27.10	26.10	18.00
22	29.10	28.10	20.00
24	31.10	30.10	22.00
26	33.10	32.10	24.00
30	37.10	36.10	28.00
34	41.10	40.10	32.00
36	43.10	42.10	34.00
40	47.10	46.10	38.00
44	51.10	50.10	42.00
50	57.10	56.10	48.00
68	85.10	84.10	66.00

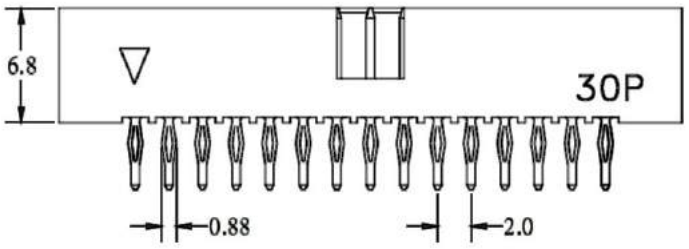





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

P/N 2 0 0 1 3 - x x x S B
1 2 3 4


1. CONNECT TYPE:
   "13" PRESS FIT TYPE
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DE/DF/DA/DB/DC/DD, K2FR/FS/FT/FU, K2KA/KB/KC/KD, K2KE/KF/KG/KH,
K2KN/KP/KQ/KR, K2KS/KT/KU/KV, K2KW/KX/KY/KZ, K2MA/MB/MC/MD,
K2NE/NF/NN/NP, K2NG/NH/NQ/NR, K2PA/PB/PC/PD, K2PU/PV


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM PITCH BOX HEADER WITH LOCKING


POSITION	A	B	C
6	13.1	12.1	4.0
8	15.1	14.1	6.0
10	17.1	16.1	8.0
12	19.1	18.1	10.0
14	21.1	20.1	12.0
16	23.1	22.1	14.0
20	27.1	26.1	18.0
22	29.1	28.1	20.0
24	31.1	30.1	22.0
26	33.1	32.1	24.0
30	37.1	36.1	28.0
34	41.1	40.1	32.0
40	47.1	46.1	38.0
44	51.1	50.1	42.0
50	57.1	56.1	48.0

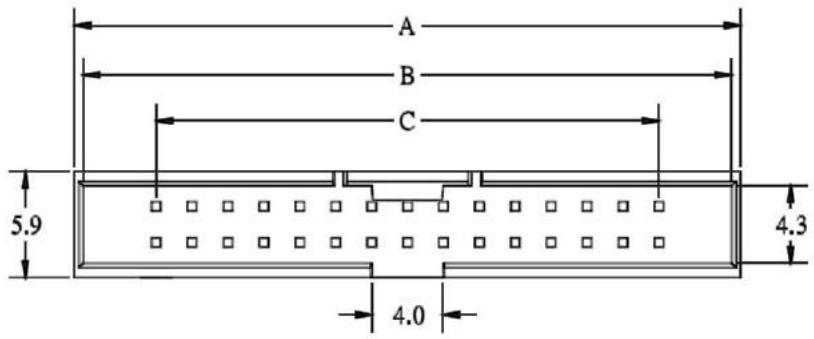

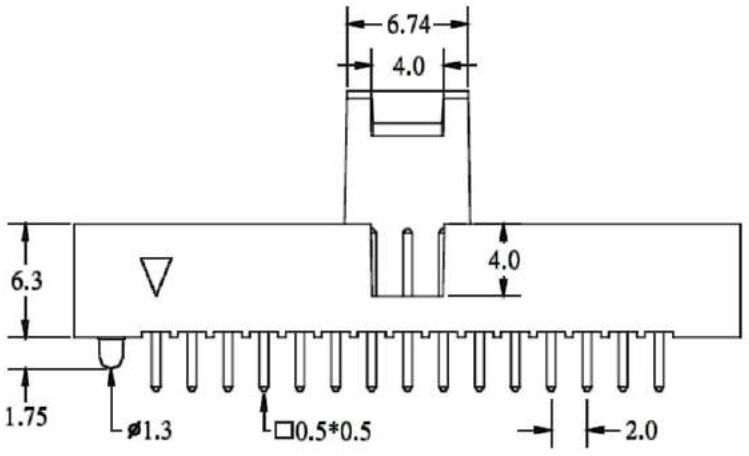

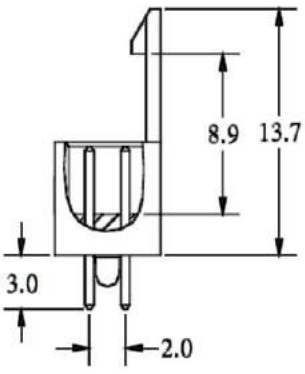





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 1 4 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "14" STRAIGHT DIP TYPE WITH LOCKING
2. NO. OF CONTACTS:
   006~050
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DE/DF/DA/DB/DC/DD, K2FR/FS/FT/FU, K2KA/KB/KC/KD, K2KE/KF/KG/KH,
K2KN/KP/KQ/KR, K2KS/KT/KU/KV, K2KW/KX/KY/KZ, K2MA/MB/MC/MD,
K2NE/NF/NN/NP, K2NG/NH/NQ/NR, K2PA/PB/PC/PD, K2PU/PV


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH LOW PROFILE SHROUDED HEADER DIP TYPE





POSITION	A	B	C
10	8.0	14.6	23.8
12	10.0	16.6	25.8
14	12.0	18.6	27.8
16	14.0	20.6	29.8
20	18.0	24.6	33.8
22	20.0	26.6	35.8
24	22.0	28.6	37.8
26	24.0	30.6	39.8
30	28.0	34.6	43.8
34	32.0	38.6	47.8
40	38.0	44.6	53.8
44	42.0	48.6	57.8
50	48.0	54.6	63.8

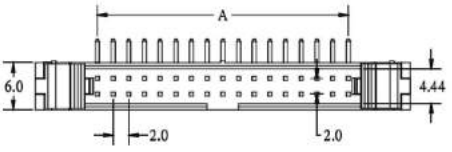


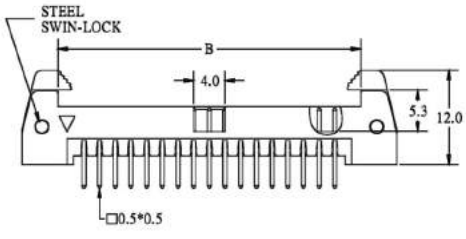




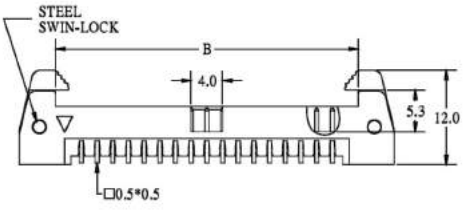







P/N 20015-xxxSB

P/N 20016-xxxSB

ORDERING INFORMATION:


P/N 200 xx - xxx S B
1 2 3 4

1. CONNECT TYPE:
   "15" LOW PROFILE STRAIGHT DIP TYPE
   "16" LOW PROFILE RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   010~050
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DT/DU/DV/DW/DR/DS, K2FV/FW/FX/FY, K2GT/GU/GV/GW, K2DX/DY/DP/DQ,
K2ME/MF/MG/MH, K2MJ/MK/ML/MM, K2MN/MP/MQ/MR, K2MS/MT/MU/MV,
K2NJ/NK/NS/NT, K2NL/NM/NU/NV, K2PE/PF/PG/PH, K2NW/NX/NY/NZ,
K2PW/PX


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH LOW PROFILE SHROUDED HEADER SMT TYPE

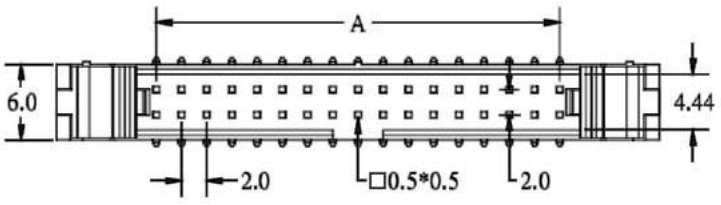


POSITION	A	B	C
10	8.0	14.6	23.8
12	10.0	16.6	25.8
14	12.0	18.6	27.8
16	14.0	20.6	29.8
20	18.0	24.6	33.8
22	20.0	26.6	35.8
24	22.0	28.6	37.8
26	24.0	30.6	39.8
30	28.0	34.6	43.8
34	32.0	38.6	47.8
40	38.0	44.6	53.8
44	42.0	48.6	57.8
50	48.0	54.6	63.8

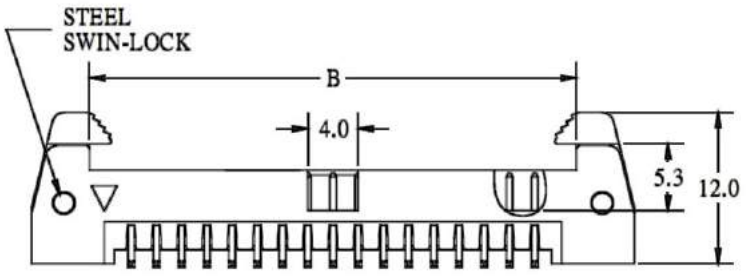



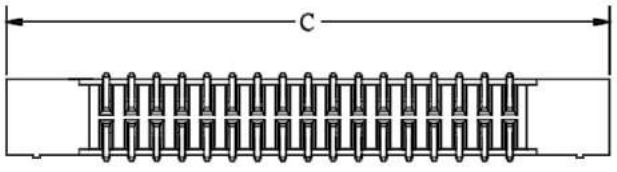



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 1 7 - x x x S B - x
1 2 3 4 5


1. CONNECT TYPE:
   "17" LOW PROFILE SMT TYPE
2. NO. OF CONTACTS:
   010~050
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2DT/DU/DV/DW/DR/DS, K2FV/FW/FX/FY, K2GT/GU/GV/GW, K2DX/DY/DP/DQ,
K2ME/MF/MG/MH, K2MJ/MK/ML/MM, K2MN/MP/MQ/MR, K2MS/MT/MU/MV,
K2NJ/NK/NS/NT, K2NL/NM/NU/NV, K2PE/PF/PG/PH, K2NW/NX/NY/NZ,
K2PW/PX


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM PITCH SHROUDED HEADER PRESS-FIT TYPE

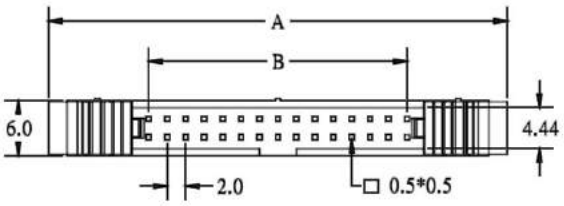

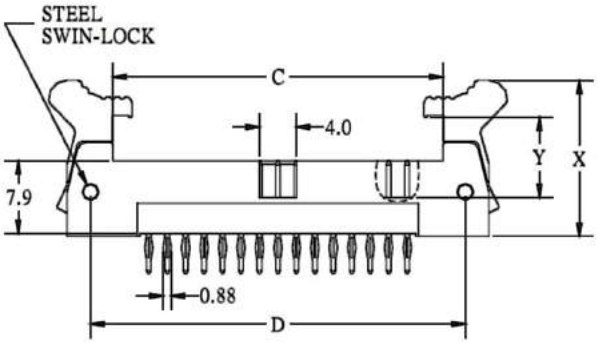






POSITION	A	B	C	D
8	27.70	6.00	13.76	18.60
10	29.70	8.00	15.76	20.60
12	31.70	10.00	17.76	22.60
14	33.70	12.00	19.76	24.60
16	35.70	14.00	21.76	26.60
20	39.70	18.00	25.76	30.60
22	41.70	20.00	27.76	32.60
24	43.70	22.00	29.76	34.60
26	45.70	24.00	31.76	36.60
30	49.70	28.00	35.76	40.60
34	53.70	32.00	39.76	44.60
40	59.70	38.00	45.76	50.60
44	63.70	42.00	49.76	54.60
50	69.70	48.00	55.76	60.60
68	87.70	66.00	73.76	78.60

ACCESSORIES	X	Y
LONG LATCH	19.9	11.4
SHORT LATCH	16.9	8.7



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4


1. CONNECT TYPE:
   "19" WITH LONG LATCHES
   "20" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20019) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20020)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM PITCH DUAL PORT SHROUDED HEADER RIGHT ANGLE TYPE

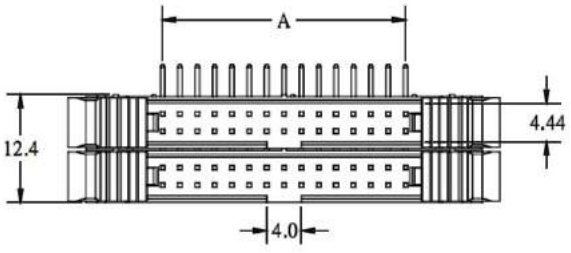

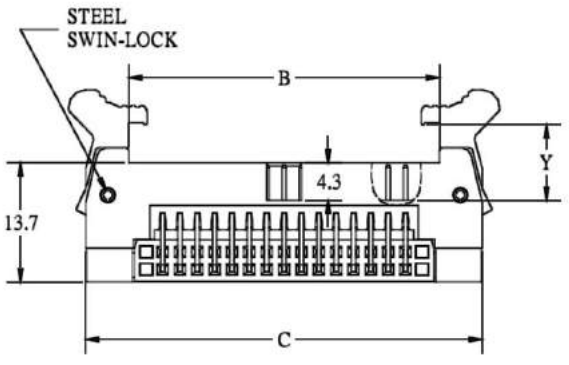




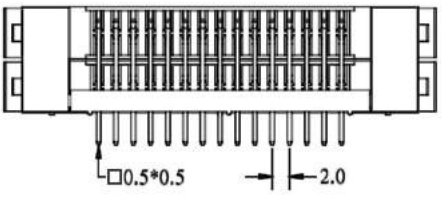

POSITION	A	B	C
8	6.0	13.8	23.7
10	8.0	15.8	25.7
12	10.0	17.8	27.7
14	12.0	19.8	29.7
16	14.0	21.8	31.7
20	18.0	25.8	35.7
22	20.0	27.8	37.7
24	22.0	29.8	39.7
26	24.0	31.8	41.7
30	28.0	35.8	45.7
34	32.0	39.8	49.7
40	38.0	45.8	55.7
44	42.0	49.8	59.7
50	48.0	55.8	65.7
68	66.0	73.8	83.7

ACCESSORIES	X	Y
LONG LATCH	25.1	11.4
SHORT LATCH	22.1	8.7



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "21" WITH LONG LATCHES
   "22" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~068 (PER PORT)
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20021) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20022)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH SHRUNK SHROUDED HEADER STRAIGHT DIP TYPE

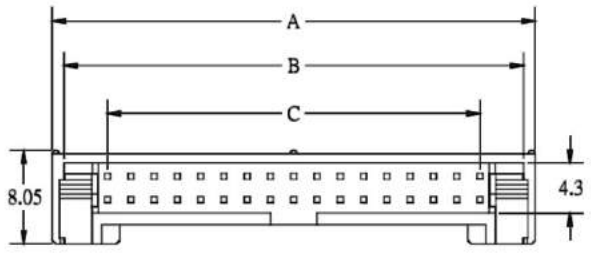


POSITION	A	B	C
8	15.5	13.5	6.0
10	17.5	15.5	8.0
12	19.5	17.5	10.0
14	21.5	19.5	12.0
16	23.5	21.5	14.0
20	27.5	25.5	18.0
22	29.5	27.5	20.0
24	31.5	29.5	22.0
26	33.5	31.5	24.0
30	37.5	35.5	28.0
34	41.5	39.5	32.0
40	47.5	45.5	38.0
44	51.5	49.5	42.0
50	57.5	55.5	48.0
68	75.5	73.5	66.0

ACCESSORIES	X	Y
LONG LATCH	19.0	11.57
SHORT LATCH	16.2	8.75

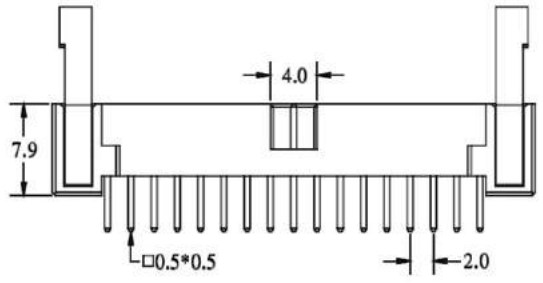





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "23" WITH LONG LATCHES
   "24" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~034
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20023) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20024)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH SHRUNK SHROUDED HEADER PRESS-FIT TYPE

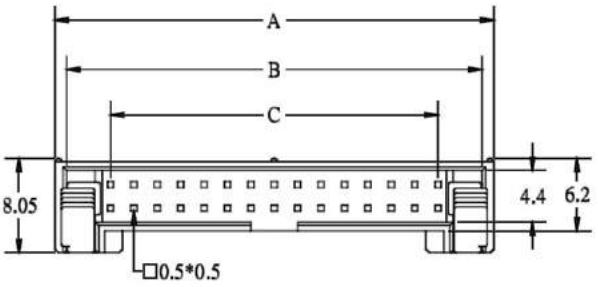


POSITION	A	B	C
8	15.5	13.5	6.0
10	17.5	15.5	8.0
12	19.5	17.5	10.0
14	21.5	19.5	12.0
16	23.5	21.5	14.0
20	27.5	25.5	18.0
22	29.5	27.5	20.0
24	31.5	29.5	22.0
26	33.5	31.5	24.0
30	37.5	35.5	28.0
34	41.5	39.5	32.0
40	47.5	45.5	38.0
44	51.5	49.5	42.0
50	57.5	55.5	48.0
68	75.5	73.5	66.0

ACCESSORIES	X	Y
LONG LATCH	19.0	11.57
SHORT LATCH	16.2	8.75

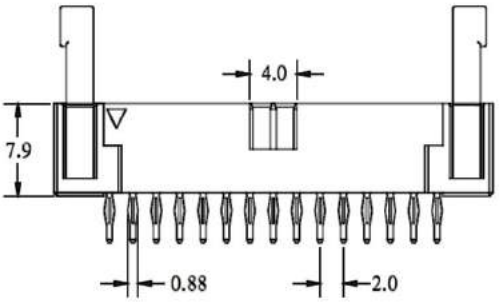





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "25" WITH LONG LATCHES
   "26" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20025) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20026)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH SHRUNK SHROUDED HEADER RIGHT ANGLE DIP TYPE

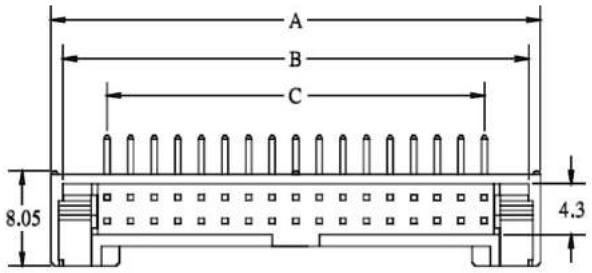


POSITION	A	B	C
8	15.5	13.5	6.0
10	17.5	15.5	8.0
12	19.5	17.5	10.0
14	21.5	19.5	12.0
16	23.5	21.5	14.0
20	27.5	25.5	18.0
22	29.5	27.5	20.0
24	31.5	29.5	22.0
26	33.5	31.5	24.0
30	37.5	35.5	28.0
34	41.5	39.5	32.0
40	47.5	45.5	38.0
44	51.5	49.5	42.0
50	57.5	55.5	48.0
68	75.5	73.5	66.0

ACCESSORIES	X	Y
LONG LATCH	22.5	11.57
SHORT LATCH	19.7	8.75

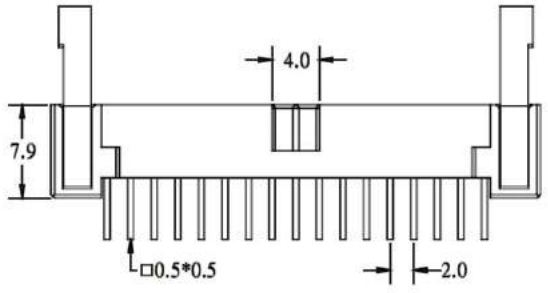





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "27" WITH LONG LATCHES
   "28" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20027) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20028)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.00MM PITCH SHRUNK SHROUDED HEADER SMT TYPE

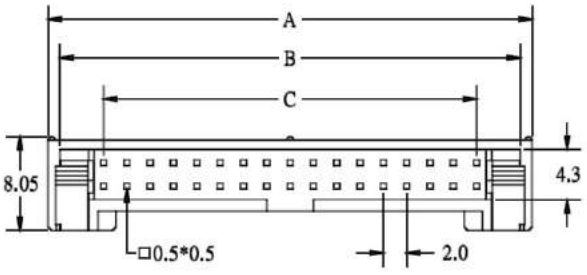


POSITION	A	B	C
8	15.5	13.5	6.0
10	17.5	15.5	8.0
12	19.5	17.5	10.0
14	21.5	19.5	12.0
16	23.5	21.5	14.0
20	27.5	25.5	18.0
22	29.5	27.5	20.0
24	31.5	29.5	22.0
26	33.5	31.5	24.0
30	37.5	35.5	28.0
34	41.5	39.5	32.0
40	47.5	45.5	38.0
44	51.5	49.5	42.0
50	57.5	55.5	48.0
68	75.5	73.5	66.0

ACCESSORIES	X	Y
LONG LATCH	19.0	11.57
SHORT LATCH	16.2	8.75

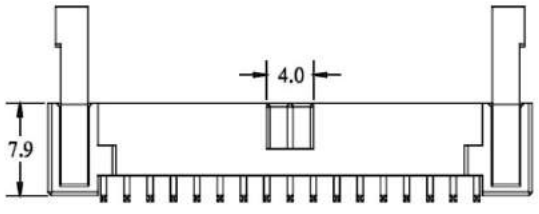





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

P/N 200 xx - xxx S B - x
1 2 3 4 5


1. CONNECT TYPE:
   "29" WITH LONG LATCHES
   "30" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   008~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K2FR/FS/FT/FU, K2KE/KF/KG/KH (FOR 20029) &
K2DE/DF/DA/DB/DC/DD, K2KA/KB/KC/KD (FOR 20030)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SINGLE ROW BOX HEADER DUAL WALL TYPE

POSITION	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42

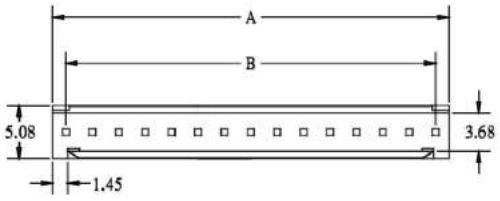



P/N 25401-xxxxB

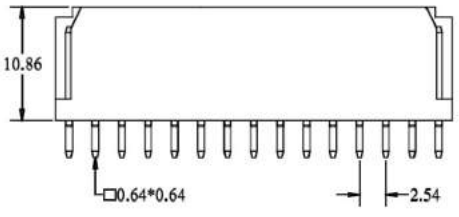





RECOMMENDED P.C.B LAYOUT



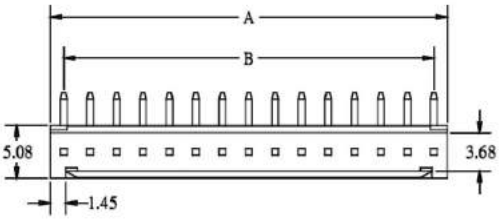



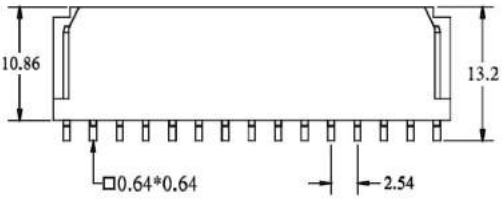

P/N 25402-xxxxB

ORDERING INFORMATION:

P/N 2 5 4 x x - x x x x B
1 2 3 4


1. CONNECT TYPE:
   "01" STRAIGHT DIP TYPE
   "02" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   002~024
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4AG, K4AH


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH DOUBLE ROW BOX HEADER DUAL WALL TYPE


POSITION	A	B
4	5.08	2.54
6	7.62	5.08
8	10.16	7.62
10	12.70	10.16
12	15.24	12.70
14	17.78	15.24
16	20.32	17.78
18	22.86	20.32
20	25.40	22.86
22	27.94	25.40
24	30.48	27.94
26	33.02	30.48
28	35.56	33.02
30	38.10	35.56
32	40.64	38.10
34	43.18	40.64
36	45.72	43.18
38	48.26	45.72
40	50.80	48.26

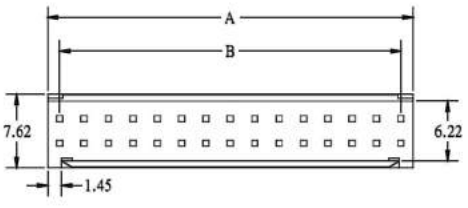


P/N 25403-xxxxB

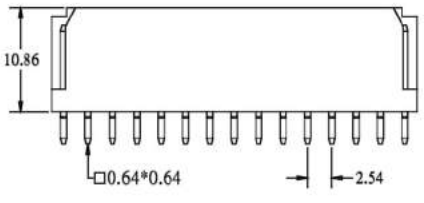





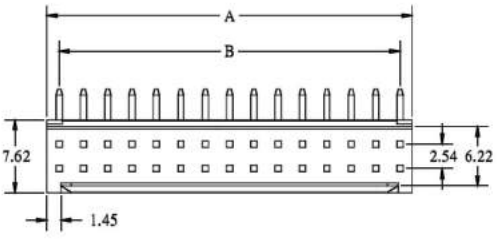



RECOMMENDED P.C.B LAYOUT



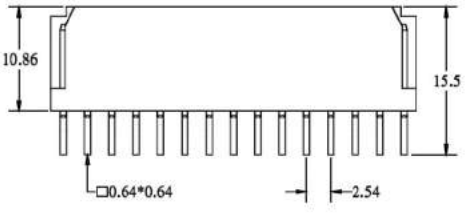

P/N 25404-xxxxB

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "03" STRAIGHT DIP TYPE
   "04" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   004~040
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4AM


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH BOX HEADER DUAL WALL TYPE

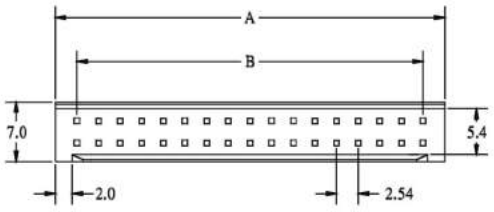



POSITION	A	C
6	10.16	5.08
8	12.70	7.62
10	15.24	10.16
12	17.78	12.70
14	20.32	15.24
16	22.86	17.78
20	27.94	22.86
24	33.02	27.94
26	35.56	30.48
30	40.64	35.56
34	45.72	40.64
40	53.34	48.26
44	58.42	53.34
50	66.04	60.96
60	78.74	73.66
64	83.82	78.74

P/N 25405-xxxSB

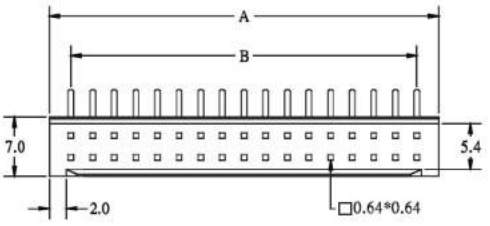


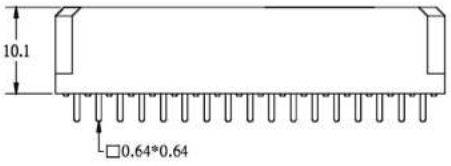






RECOMMENDED P.C.B LAYOUT



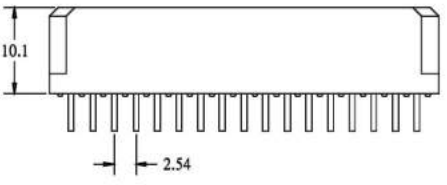

P/N 25406-xxxSB

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "05" STRAIGHT DIP TYPE
   "06" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4QA/QB/QC/QD/QE/QF, K4MN/MP/NQ/MR


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH BOX HEADER STRAIGHT & R/A DIP TYPE H=13.5MM

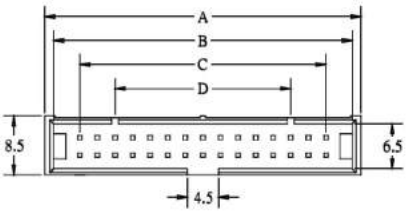



POSITION	A	B	C	D
6	15.14	12.68	5.08	— —
8	17.68	15.22	7.62	— —
10	20.22	17.76	10.16	— —
12	22.76	20.30	12.70	— —
14	25.30	22.84	15.24	— —
16	27.84	25.38	17.78	— —
20	32.92	30.46	22.86	— —
24	38.00	35.54	27.94	— —
26	40.54	38.08	30.48	— —
30	45.62	43.16	35.56	25.40
34	50.70	48.24	40.64	30.48
36	53.24	50.78	43.18	33.02
40	58.32	55.86	48.26	38.10
44	63.40	60.94	53.34	43.18
50	71.02	68.56	60.96	50.80
60	83.72	81.26	73.66	63.50
64	88.80	86.34	78.74	68.58

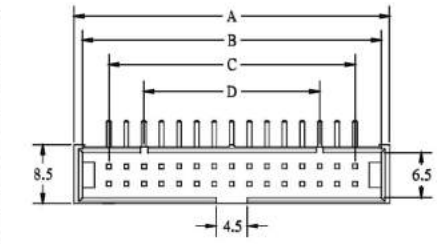


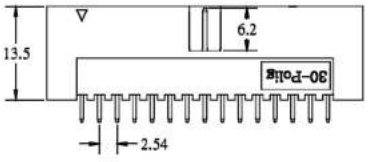


P/N 25407-xxxSB







RECOMMENDED P.C.B LAYOUT

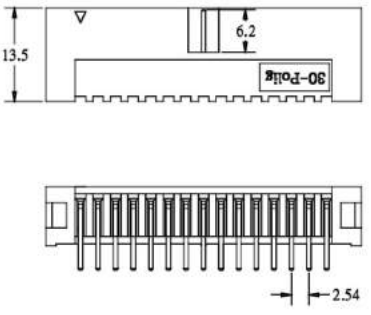

P/N 25408-xxxSB

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x S x
1 2 3 4

1. CONNECT TYPE:
   "07" STRAIGHT DIP TYPE
   "08" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
   "A" GRAY


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4DP/DQ/DR/DS, K4GE/GF/GG/GH, K4DK/DL/DM/DN, K4GW/GX/GY/GZ,
K4EG/EH/EJ/EK, K4EL/EM/EN/EP, K4GJ/GK/GL/GM, K4EQ/ER/ES/ET,
K4HA/HB/HC/HD, K4AN/AP/AQ/AR/AS/AT, K4AU/AV/AW/AX, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH BOX HEADER PRESS-FIT TYPE

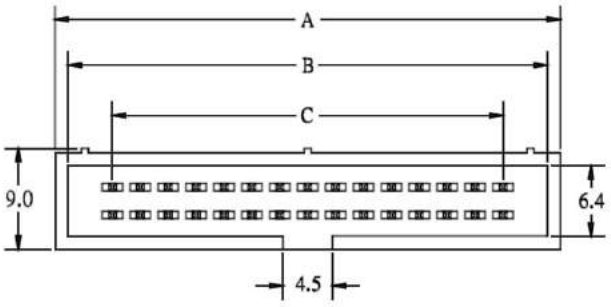

POSITION	A	B	C
6	15.22	13.02	5.08
8	17.76	15.56	7.62
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
44	63.48	61.28	53.34
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.88	78.74

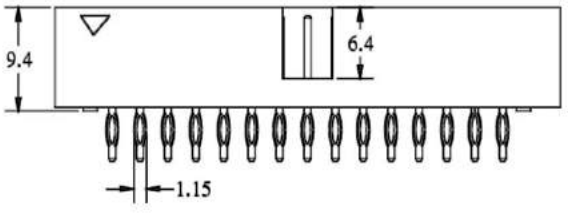





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 1 1 - x x x x x
1 2 3 4

1. CONNECT TYPE:
   "11" STRAIGHT PRESS-FIT TYPE
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
   "A" GRAY


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4DP/DQ/DR/DS, K4GE/GF/GG/GH, K4DK/DL/DM/DN, K4GW/GX/GY/GZ,
K4SW/SX/SY/SZ, K4BY, K4TS/TT/TU/TV/YW/TX, K4QG/QH/QJ/QK,
K4QL/QM/QN/QP, K4QQ/QR/QS/QT, K4QU/QV/QW/QX, K4SA/SB/SC/SD, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH BOX HEADER STRAIGHT DIP TYPE WITH LOCKING

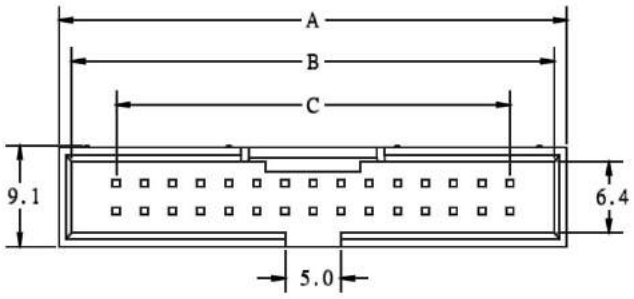


POSITION	A	B	C	D
10	20.45	18.19	10.16	7.80
14	25.53	23.27	15.24	7.80
16	28.07	25.81	17.78	9.80
20	33.15	30.89	22.86	9.80
26	40.77	38.51	30.48	11.80
30	45.85	43.59	35.56	11.80
34	50.93	48.67	40.64	11.80
40	58.55	56.29	48.26	11.80
50	71.25	68.99	60.96	11.80

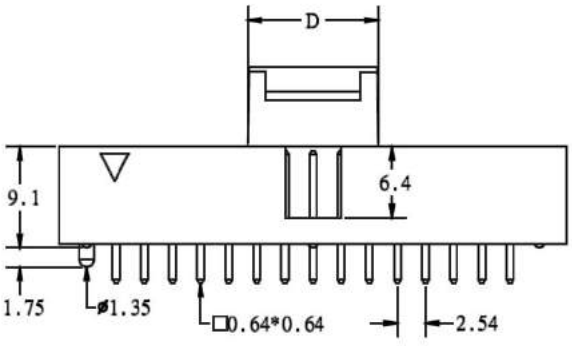



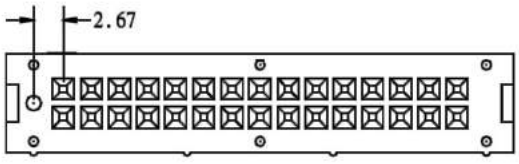



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 1 3 - x x x G B
1 2 3 4

1. CONNECT TYPE:
   "13" STRAIGHT DIP TYPE WITH LOCKING
2. NO. OF CONTACTS:
   010~050
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4DP/DQ/DR/DS, K4GE/GF/GG/GH, K4DK/DL/DM/DN, K4GW/GX/GY/GZ,
K4SW/SX/SY/SZ, K4BY, K4TS/TT/TU/TV/YW/TX, K4QG/QH/QJ/QK,
K4QL/QM/QN/QP, K4QQ/QR/QS/QT, K4QU/QV/QW/QX, K4SA/SB/SC/SD, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH BOX HEADER WITH SIMPLIFIED LATCH

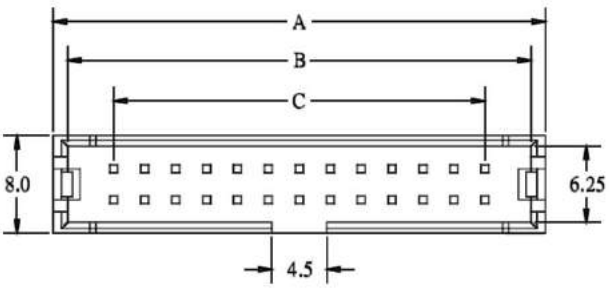

POSITION	A	B	C
6	15.04	12.66	5.08
8	17.58	15.20	7.62
10	20.12	17.74	10.16
12	22.66	20.28	12.70
14	25.20	22.82	15.24
16	27.74	25.36	17.78
20	32.82	30.44	22.86
24	37.90	35.52	27.94
26	40.44	38.06	30.48
30	45.52	43.14	35.56
34	50.60	48.22	40.64
40	58.22	55.84	48.26
44	63.30	60.92	53.34
50	70.92	68.54	60.96
60	83.62	81.24	73.66
64	88.70	86.32	78.74

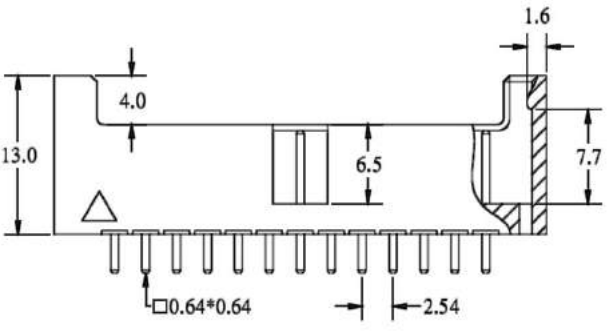





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 1 4 - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "14" STRAIGHT DIP TYPE
   WITH SIMPLIFIED LATCH
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4DP/DQ/DR/DS, K4GE/GF/GG/GH, K4DK/DL/DM/DN, K4GW/GX/GY/GZ,
K4SW/SX/SY/SZ, K4BY, K4TS/TT/TU/TV/YW/TX, K4QG/QH/QJ/QK,
K4QL/QM/QN/QP, K4QQ/QR/QS/QT, K4QU/QV/QW/QX, K4SA/SB/SC/SD, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH SHRUNK SHROUDED HEADER STRAIGHT DIP TYPE

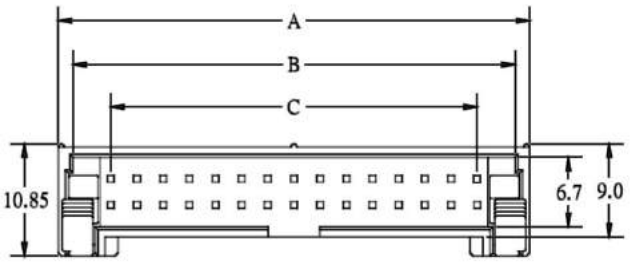


POSITION	A	B	C	D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	5.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

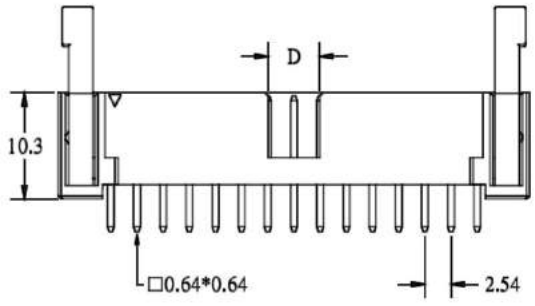



ACCESSORIES	X	Y
LONG LATCH	22.1	14.6
SHORT LATCH	18.7	10.6



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "31" WITH LONG LATCHES
   "32" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH SHRUNK SHROUDED HEADER RIGHT ANGLE DIP TYPE

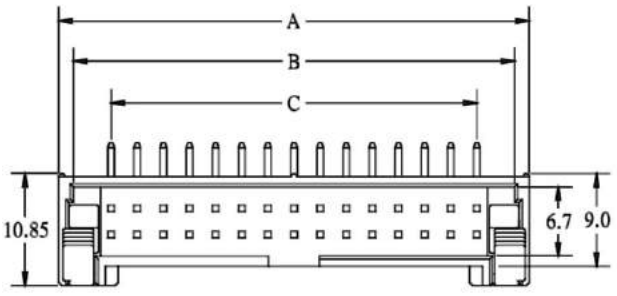


POSITION	A	B	C	D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	5.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

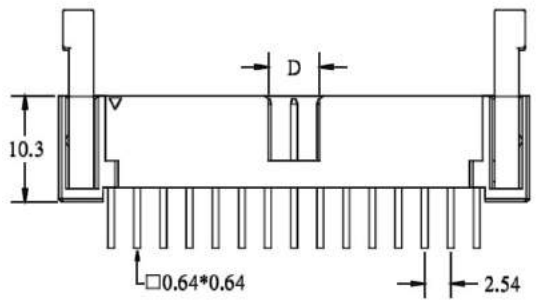



ACCESSORIES	X	Y
LONG LATCH	26.6	14.6
SHORT LATCH	23.2	10.6



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "33" WITH LONG LATCHES
   "34" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "G" FULL GOLD PLATED
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


ELITALIA
tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SHRUNK SHROUDED HEADER SMT TYPE

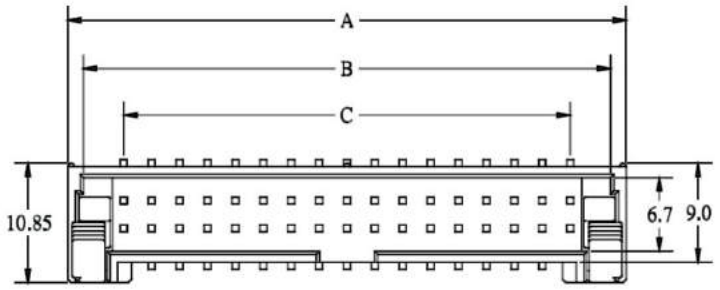


POSITION	A	B	C	D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	5.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

ACCESSORIES	X	Y
LONG LATCH	22.1	14.6
SHORT LATCH	18.7	10.6

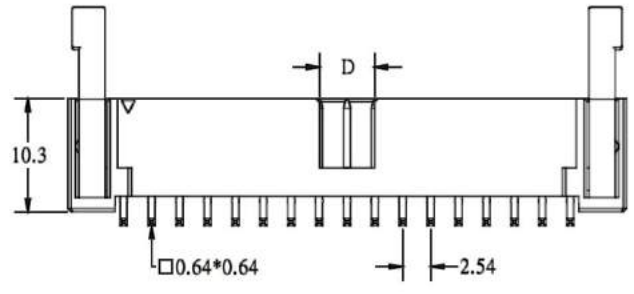





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B - x
1 2 3 4 5

1. CONNECT TYPE:
   "35" WITH LONG LATCHES
   "36" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SHRUNK SHROUDED HEADER PRESS-FIT TYPE

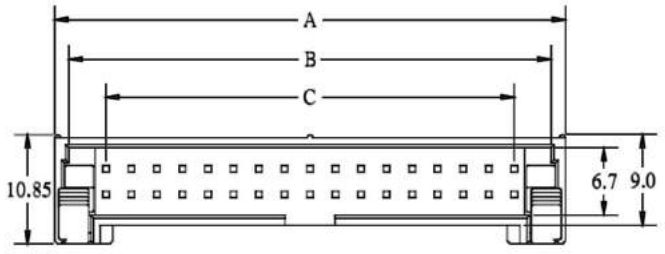


POSITION	A	B	C	D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	5.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

ACCESSORIES	X	Y
LONG LATCH	22.1	14.6
SHORT LATCH	18.7	10.6

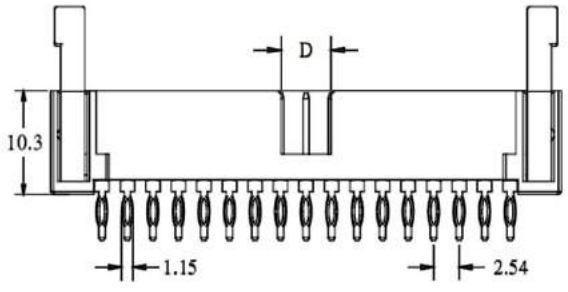





RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "37" WITH LONG LATCHES
   "38" WITH SHORT LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.54MM PITCH SHROUDED HEADER DIP TYPE

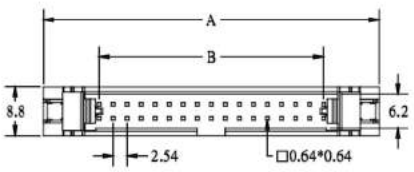



POSITION	A	B	C
6	25.25	5.08	10.26
8	27.79	7.62	12.80
10	30.33	10.16	15.34
12	32.87	12.70	17.88
14	35.41	15.24	20.42
16	37.95	17.78	22.96
20	43.03	22.86	28.04
24	48.11	27.94	33.12
26	50.65	30.48	35.66
30	55.73	35.56	40.74
34	60.81	40.64	45.82
40	68.43	48.26	53.44
50	81.13	60.96	66.14
60	93.83	73.66	78.84
64	98.91	78.74	83.92

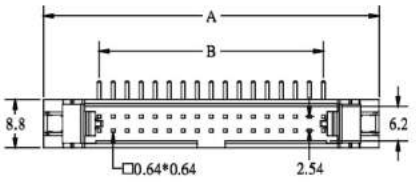

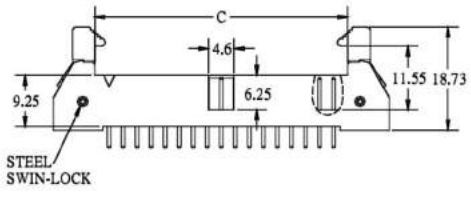


P/N 25439-xxxSB



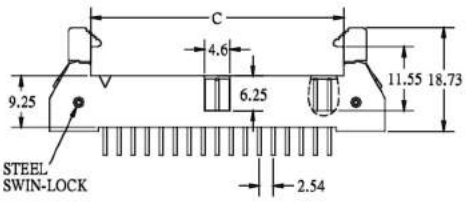

P/N 25440-xxxSB



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x S B
1 2 3 4

1. CONNECT TYPE:
   "39" STRAIGHT DIP TYPE
   "40" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4QA/QB/QC/QD/QE/QF, K4MN/MP/MQ/MR


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SHROUDED HEADER SMT TYPE

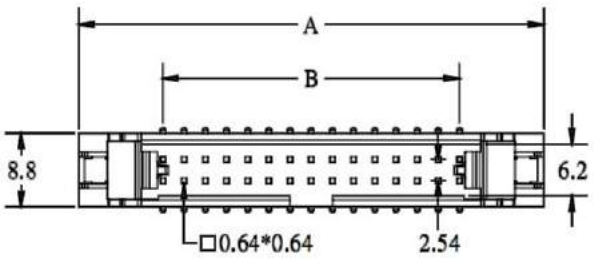

POSITION	A	B	C	D
6	25.25	5.08	10.26	17.78
8	27.79	7.62	12.80	20.32
10	30.33	10.16	15.34	22.86
12	32.87	12.70	17.88	25.40
14	35.41	15.24	20.42	27.94
16	37.95	17.78	22.96	30.48
20	43.03	22.86	28.04	35.56
24	48.11	27.94	33.12	40.64
26	50.65	30.48	35.66	43.18
30	55.73	35.56	40.74	48.26
34	60.81	40.64	45.82	53.34
40	68.43	48.26	53.44	60.96
50	81.13	60.96	66.14	73.66
60	93.83	73.66	78.84	86.36
64	98.91	78.74	83.92	91.44

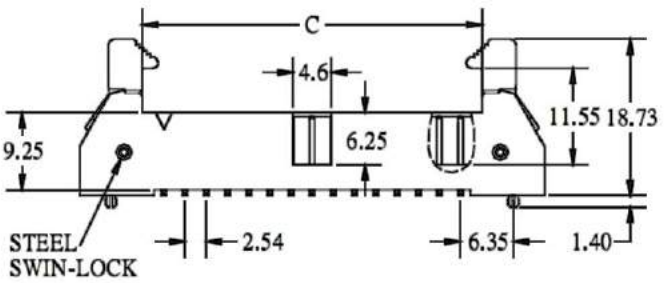

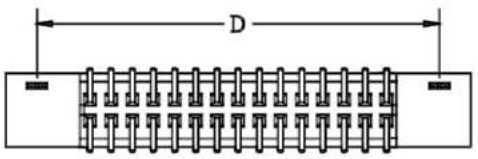

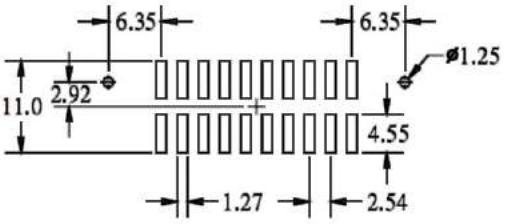

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B - x
1 2 3 4 5

1. CONNECT TYPE:
   "41" WITH LOCKING CLIP
   "42" WITHOUT LOCKING CLIP
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4QA/QB/QC/QD/QE/QF, K4MN/MP/MQ/MR


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SHROUDED HEADER DIP TYPE

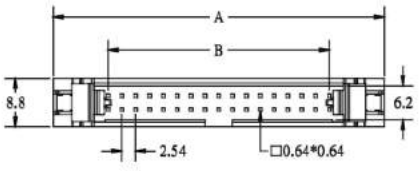


POSITION	A	B	C
6	25.25	5.08	10.26
8	27.79	7.62	12.80
10	30.33	10.16	15.34
12	32.87	12.70	17.88
14	35.41	15.24	20.42
16	37.95	17.78	22.96
20	43.03	22.86	28.04
24	48.11	27.94	33.12
26	50.65	30.48	35.66
30	55.73	35.56	40.74
34	60.81	40.64	45.82
40	68.43	48.26	53.44
50	81.13	60.96	66.14
60	93.83	73.66	78.84
64	98.91	78.74	83.92

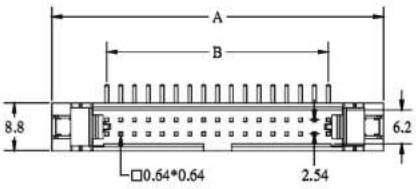

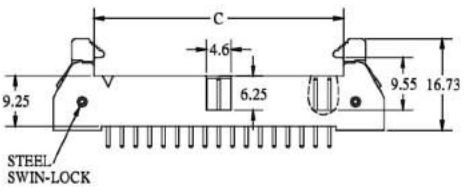




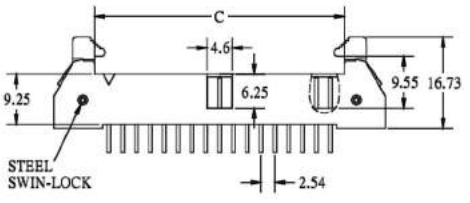

P/N 25443-xxxSB

P/N 25444-xxxSB



RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

P/N 2 5 4 x x - x x x x B
1 2 3 4


1. CONNECT TYPE:
   "43" STRAIGHT DIP TYPE
   "44" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4BD/BE/BF


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH SHROUDED HEADER SMT TYPE


POSITION	A	B	C	D
6	25.25	5.08	10.26	17.78
8	27.79	7.62	12.80	20.32
10	30.33	10.16	15.34	22.86
12	32.87	12.70	17.88	25.40
14	35.41	15.24	20.42	27.94
16	37.95	17.78	22.96	30.48
20	43.03	22.86	28.04	35.56
24	48.11	27.94	33.12	40.64
26	50.65	30.48	35.66	43.18
30	55.73	35.56	40.74	48.26
34	60.81	40.64	45.82	53.34
40	68.43	48.26	53.44	60.96
50	81.13	60.96	66.14	73.66
60	93.83	73.66	78.84	86.36
64	98.91	78.74	83.92	91.44

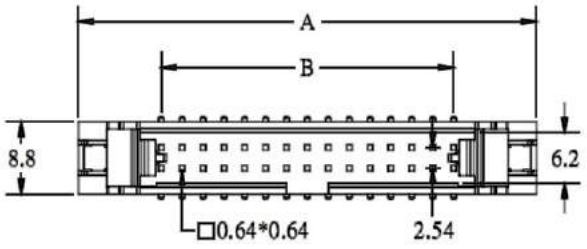

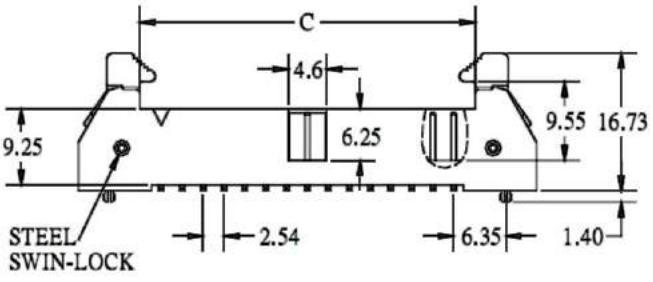



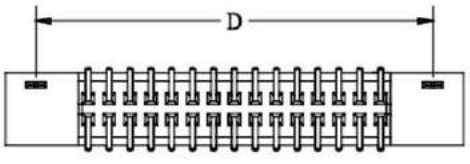

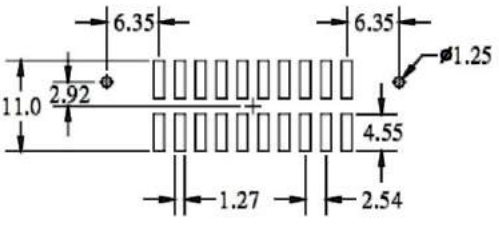

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B - x
1 2 3 4 5

1. CONNECT TYPE:
   "45" WITH LOCATING PEGS
   "46" WITHOUT LOCATING PEGS
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK
5. PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4BD/BE/BF


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH DUAL PORT SHROUDED HEADER RIGHT ANGLE DIP TYPE

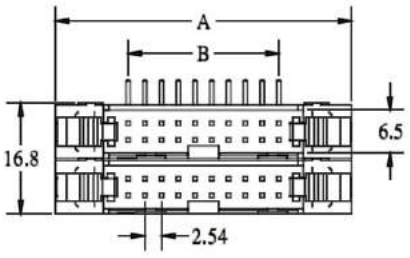



ACCESSORIES	X	Y
LONG LATCH	32.0	14.8
SHORT LATCH	30.5	11.1

POSITION	A	B	C	D
6	27.16	5.08	12.52	16.49
8	29.70	7.62	15.06	19.03
10	32.24	10.16	17.60	21.57
14	37.32	15.24	22.68	26.65
16	39.86	17.78	25.22	29.19
20	44.94	22.86	30.30	34.27
24	50.02	27.94	35.38	39.35
26	52.56	30.48	37.92	41.89
30	57.64	35.56	43.00	46.97
34	62.72	40.64	48.08	52.05
40	70.34	48.26	55.70	59.67
44	75.42	53.34	60.78	64.75
50	83.04	60.96	68.40	72.37
60	95.74	73.66	81.10	85.07
64	100.82	78.74	86.18	90.15

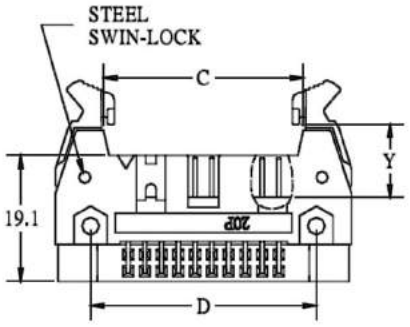








RECOMMENDED P.C.B LAYOUT

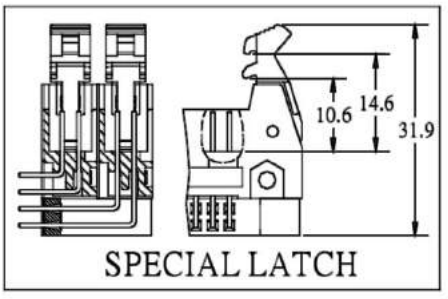

SPECIAL LATCH

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "47" WITH LONG LATCHES
   "48" WITH SHORT LATCHES
   "49" WITH SPECIAL LATCHES
2. NO. OF CONTACTS PER PORT:
   006~064 (FOR ONE PORT)
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH LOW PROFILE SHROUDED HEADER STRAIGHT DIP TYPE

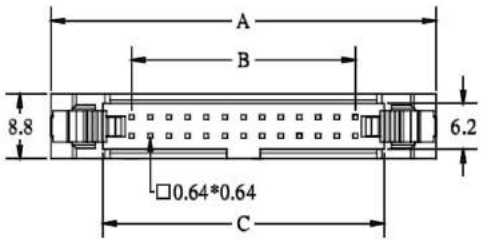



ACCESSORIES	X	Y
LONG LATCH	22.7	14.3
SHORT LATCH	21.2	10.6

POSITION	A	B	C
6	27.07	5.08	12.92
8	29.61	7.62	15.46
10	32.15	10.16	18.00
12	34.69	12.70	20.54
14	37.23	15.24	23.05
16	39.77	17.78	25.62
20	44.85	22.86	30.70
24	49.93	27.94	35.78
26	52.47	30.48	38.32
30	57.55	35.56	43.40
34	62.63	40.64	48.48
40	70.25	48.26	56.10
44	75.33	53.34	61.18
50	82.95	60.96	68.80
60	95.65	73.66	81.50
64	100.73	78.74	86.58

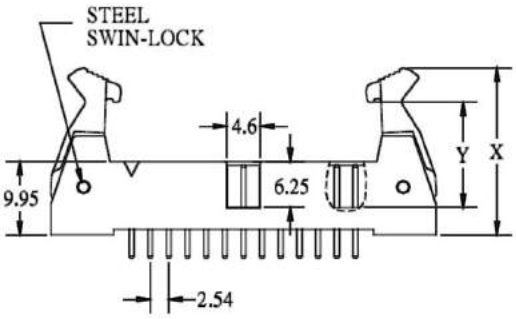








RECOMMENDED P.C.B LAYOUT

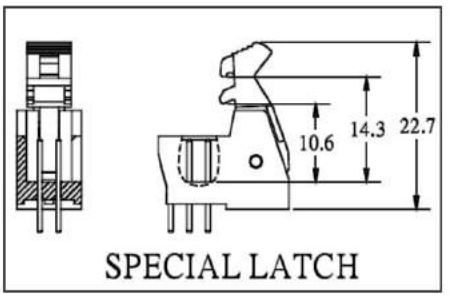

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "50" WITH LONG LATCHES
   "51" WITH SHORT LATCHES
   "52" WITH SPECIAL LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


2.54MM PITCH LOW PROFILE SHROUDED HEADER RIGHT ANGLE DIP TYPE

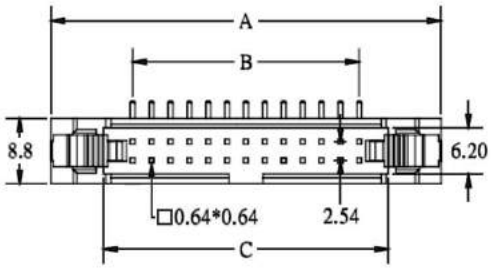



ACCESSORIES	X	Y
LONG LATCH	22.7	14.3
SHORT LATCH	21.2	10.6

POSITION	A	B	C
6	27.07	5.08	12.92
8	29.61	7.62	15.46
10	32.15	10.16	18.00
12	34.69	12.70	20.54
14	37.23	15.24	23.05
16	39.77	17.78	25.62
20	44.85	22.86	30.70
24	49.93	27.94	35.78
26	52.47	30.48	38.32
30	57.55	35.56	43.40
34	62.63	40.64	48.48
40	70.25	48.26	56.10
44	75.33	53.34	61.18
50	82.95	60.96	68.80
60	95.65	73.66	81.50
64	100.73	78.74	86.58

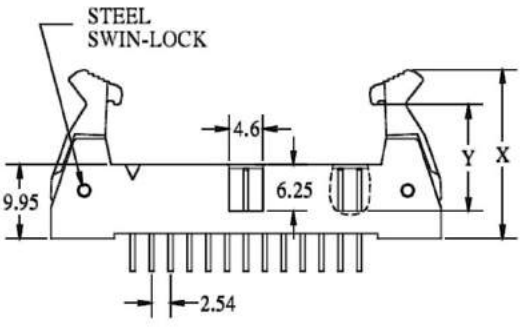








RECOMMENDED P.C.B LAYOUT

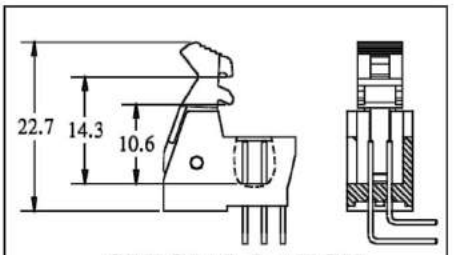

SPECIAL LATCH

ORDERING INFORMATION:


P/N 2 5 4 x x - x x x x B
1 2 3 4

1. CONNECT TYPE:
   "53" WITH LONG LATCHES
   "54" WITH SHORT LATCHES
   "55" WITH SPECIAL LATCHES
2. NO. OF CONTACTS:
   006~064
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. INSULATOR COLOR:
   "B" BLACK


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED FLAT CABLE ASSEMBLIES
K4TS/TT/TU/TV/TW/TX, K4QG/QH/QJ/QK, K4QL/QM/QN/QP, K4QQ/QR/QS/QT,
K4QU/QV/QW/QX, K4SA/SB/SC/SD, K4SE/SF/SG/SH, K4SJ/SK/SL/SM,
K4SN/SP/SQ/SR, K4SS/ST/SU/SV, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM FEMALE HEADER DOUBLE ROW SMT TYPE PROFILE= 6.2MM

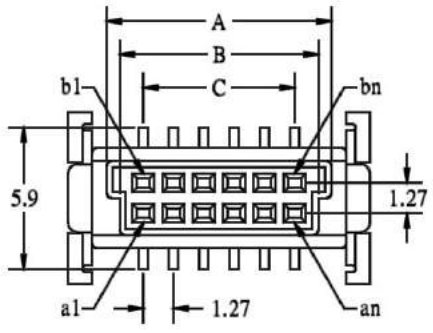

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	6.59	6.96	7.00
8	7.14	6.16	3.81	7.86	8.23	8.27
10	8.41	7.43	5.08	9.13	9.50	9.54
12	9.68	8.70	6.35	10.40	10.77	10.81
14	10.95	9.97	7.62	11.67	12.04	12.08
16	12.22	11.24	8.89	12.94	13.31	13.35
20	14.76	13.78	11.43	15.48	15.85	15.89
22	16.03	15.05	12.70	16.75	17.12	17.16
26	18.57	17.59	15.24	19.29	19.66	19.70
30	21.11	20.13	17.78	21.83	22.20	22.24
34	23.65	22.67	20.32	24.37	24.74	24.78
40	27.46	26.48	24.13	28.18	28.55	25.59
44	30.00	29.02	26.67	30.72	31.09	31.13
50	33.81	32.83	30.48	34.53	34.90	34.96
60	40.16	39.18	36.83	40.88	41.25	41.29
68	45.24	44.26	41.91	45.96	46.33	46.37
80	52.86	51.88	49.53	53.58	53.95	53.99





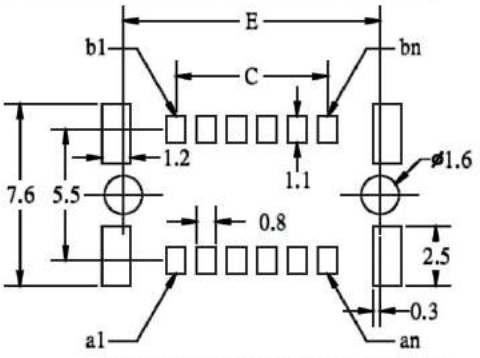

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 6 - x x x x B - x
1 2 3 4

1. LOCATING PEG OPTION:
   "16" WITH LOCATING PEGS
2. NO. OF CONTACTS:
   006, 008, 010, 012, 014, 016, 020, 022, 026,
   030, 034, 040, 044, 050, 060, 068, 080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. PAD, FILM & PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
12713, 12714 OR 12715


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM FEMALE HEADER DOUBLE ROW SMT TYPE PROFILE= 9.0MM

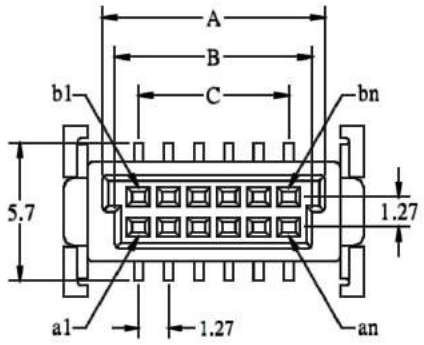

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	6.59	6.96	7.00
8	7.14	6.16	3.81	7.86	8.23	8.27
10	8.41	7.43	5.08	9.13	9.50	9.54
12	9.68	8.70	6.35	10.40	10.77	10.81
14	10.95	9.97	7.62	11.67	12.04	12.08
16	12.22	11.24	8.89	12.94	13.31	13.35
20	14.76	13.78	11.43	15.48	15.85	15.89
22	16.03	15.05	12.70	16.75	17.12	17.16
26	18.57	17.59	15.24	19.29	19.66	19.70
30	21.11	20.13	17.78	21.83	22.20	22.24
34	23.65	22.67	20.32	24.37	24.74	24.78
40	27.46	26.48	24.13	28.18	28.55	25.59
44	30.00	29.02	26.67	30.72	31.09	31.13
50	33.81	32.83	30.48	34.53	34.90	34.96
60	40.16	39.18	36.83	40.88	41.25	41.29
68	45.24	44.26	41.91	45.96	46.33	46.37
80	52.86	51.88	49.53	53.58	53.95	53.99

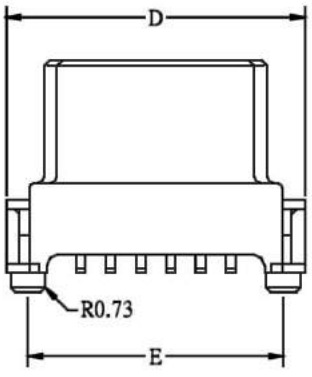

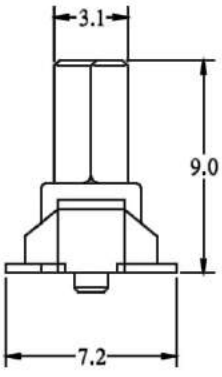

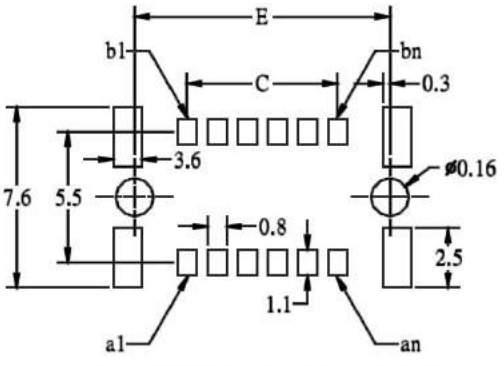

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 7 - x x x x B - x
1 2 3 4

1. LOCATING PEG OPTION:
   "17" WITH LOCATING PEGS
2. NO. OF CONTACTS:
   006, 008, 010, 012, 014, 016, 020, 022, 026, 030, 034, 040, 044, 050, 060, 068, 080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. PAD, FILM & PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS 12713, 12714 OR 12715


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*1.27MM FEMALE HEADER DOUBLE ROW RIGHT ANGLE SMT TYPE

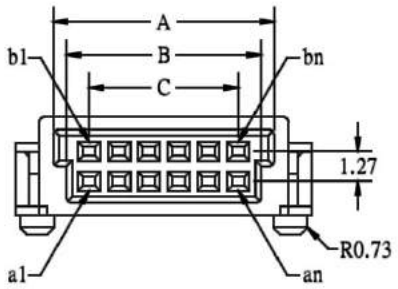

POSITION	A	B	C	D	E	F
6	5.87	4.89	2.54	6.59	6.96	7.00
8	7.14	6.16	3.81	7.86	8.23	8.27
10	8.41	7.43	5.08	9.13	9.50	9.54
12	9.68	8.70	6.35	10.40	10.77	10.81
14	10.95	9.97	7.62	11.67	12.04	12.08
16	12.22	11.24	8.89	12.94	13.31	13.35
20	14.76	13.78	11.43	15.48	15.85	15.89
22	16.03	15.05	12.70	16.75	17.12	17.16
26	18.57	17.59	15.24	19.29	19.66	19.70
30	21.11	20.13	17.78	21.83	22.20	22.24
34	23.65	22.67	20.32	24.37	24.74	24.78
40	27.46	26.48	24.13	28.18	28.55	25.59
44	30.00	29.02	26.67	30.72	31.09	31.13
50	33.81	32.83	30.48	34.53	34.90	34.96
60	40.16	39.18	36.83	40.88	41.25	41.29
68	45.24	44.26	41.91	45.96	46.33	46.37
80	52.86	51.88	49.53	53.58	53.95	53.99

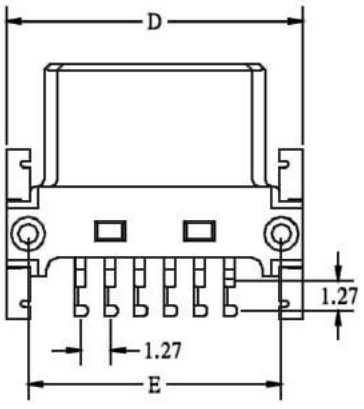



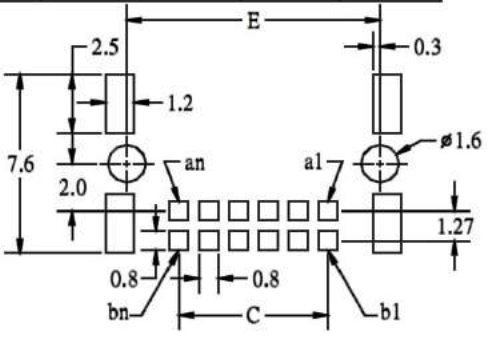

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 1 8 - x x x x B - x
1 2 3 4

1. LOCATING PEG OPTION:
   "18" WITH LOCATING PEGS
2. NO. OF CONTACTS:
   006, 008, 010, 012, 014, 016, 020, 022, 026,
   030, 034, 040, 044, 050, 060, 068, 080
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. PAD, FILM & PACKAGE OPTION:
   "T" W/O PAD IN TUBE
   "R" W/O PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
12713, 12714 OR 12715


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


1.27MM*2.54MM FEMALE HEADER DOUBLE ROW SMT TYPE PROFILE= 9.4MM

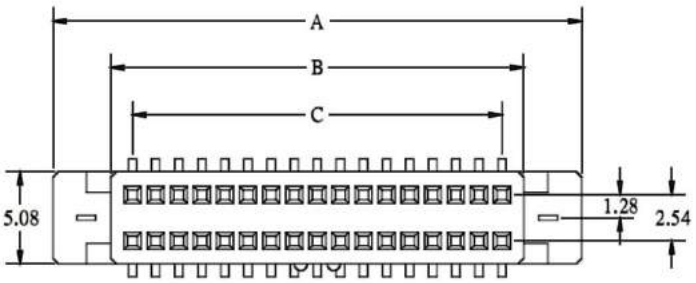




POSITION	A	B	C
10	13.83	7.47	5.08
14	16.37	10.01	7.62
16	17.64	11.28	8.89
20	20.18	13.82	11.43
24	22.72	16.36	13.97
26	23.99	17.63	15.24
30	26.53	20.17	17.78
34	29.07	22.71	20.32
40	32.88	26.52	24.13
44	35.42	29.06	26.67
50	39.23	32.87	30.48
60	45.58	39.22	36.83
64	48.12	41.76	39.37
68	50.66	44.30	41.91
72	53.20	46.84	44.45
80	58.28	51.92	49.53
100	70.98	64.62	62.23

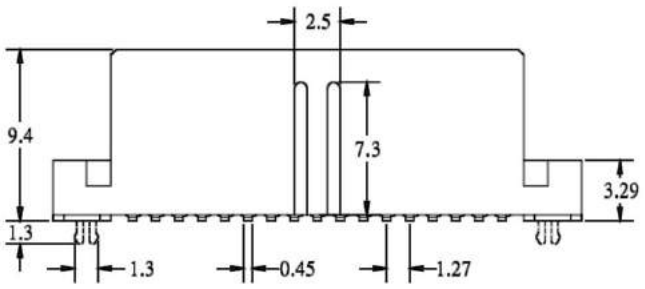



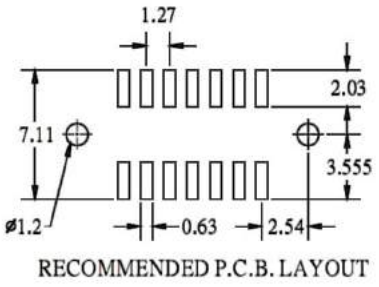

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION:


P/N 1 2 7 $\frac{x\ x}{1}$ - $\frac{x\ x\ x}{2}$ $\frac{x}{3}$ B - $\frac{x}{4}$


1. LOCATING PEG OPTION:
   "63" W/O LOCATING PEGS
   "64" WITH LOCATING PEGS
2. NO. OF CONTACTS:
   010, 014, 016, 020, 024, 026, 030, 034, 040,
   044, 050, 060, 064, 068, 072, 080, 100
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. PAD, FILM & PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
12759, 12760 OR 12761

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM(0.079") FEMALE HEADER DOUBLE ROW STRAIGHT TYPE WITH FRICTION LATCH BUMP PROFILE= 6.35MM

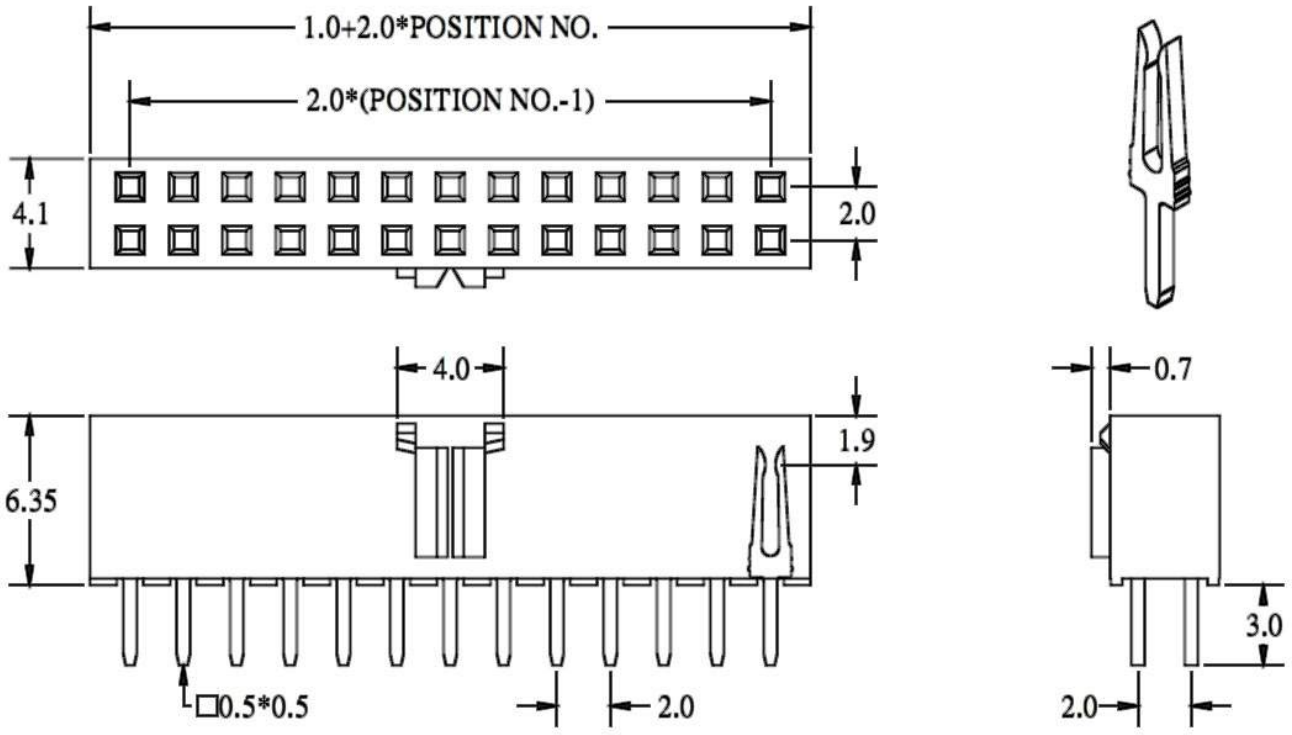

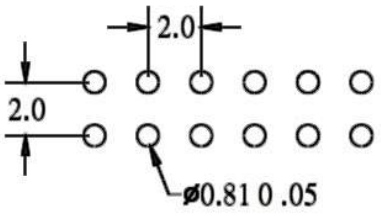

RECOMMENED P.C.B. LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 5 1 - x x x S B
(1) (2) (3)


1. CONNECT TYPE:
   "51" STRAIGHT DIP TYPE
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
20007, 20008, 20009, 20010, 20011, 20012

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM(0.079") FEMALE HEADER DOUBLE ROW RIGHT ANGLE TYPE WITH FRICTION LATCH BUMP PROFILE= 6.35MM

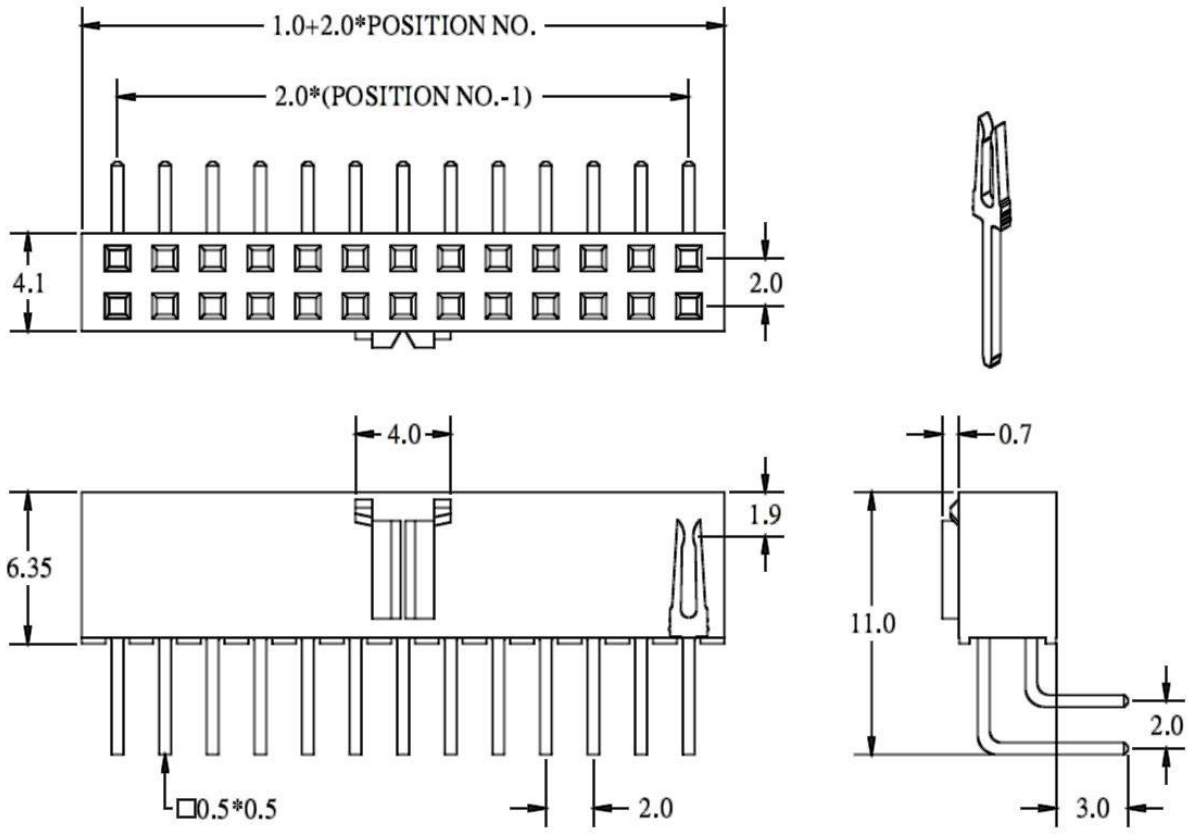



RECOMMENED P.C.B. LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 5 2 - x x x S B
1 2 3


1. CONNECT TYPE:
   "52" RIGHT ANGLE DIP TYPE
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED

NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
20007, 20008, 20009, 20010, 20011, 20012

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

2.00MM(0.079") FEMALE HEADER DOUBLE ROW SMT TYPE
WITH FRICTION LATCH BUMP PROFILE= 6.35MM

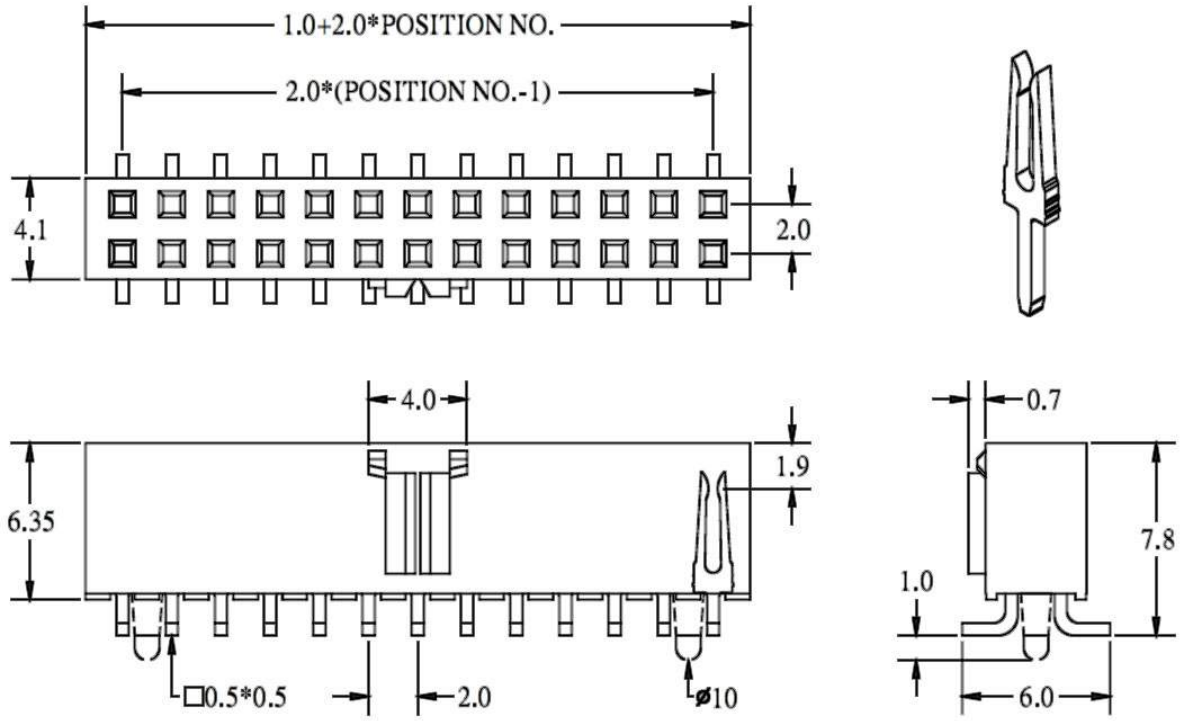

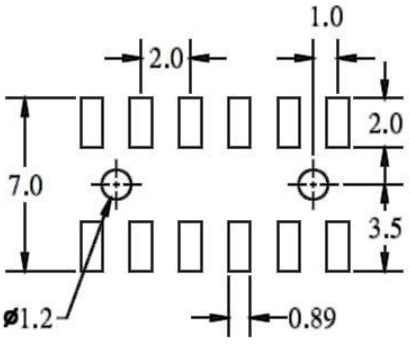

RECOMMENED P.C.B. LAYOUT

ORDERING INFORMATION:


P/N 2 0 0 x x - x x x S B - x
1 2 3 4

1. CONNECT TYPE:
   "53" W/O LOCATING PEGS
   "54" WITH LOCATING PEGS
2. NO. OF CONTACTS:
   006~068
3. CONTACT FINISH:
   "S" SELECTIVE GOLD PLATED
4. PAD & PACKAGE OPTION:
   "T" WITHOUT PAD IN TUBE
   "P" WITH PAD IN TUBE
   "Q" WITH PAD IN TAPE & REEL


NOTE: THEY CAN BE SUPPLIED ONLY TOGETHER WITH THE ORDER OF MATED BOX HEADERS
20007, 20008, 20009, 20010, 20011, 20012

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

0.635MM PITCH HPDB68M SCSI-Ⅲ FLAT CABLE ASSEMBLY

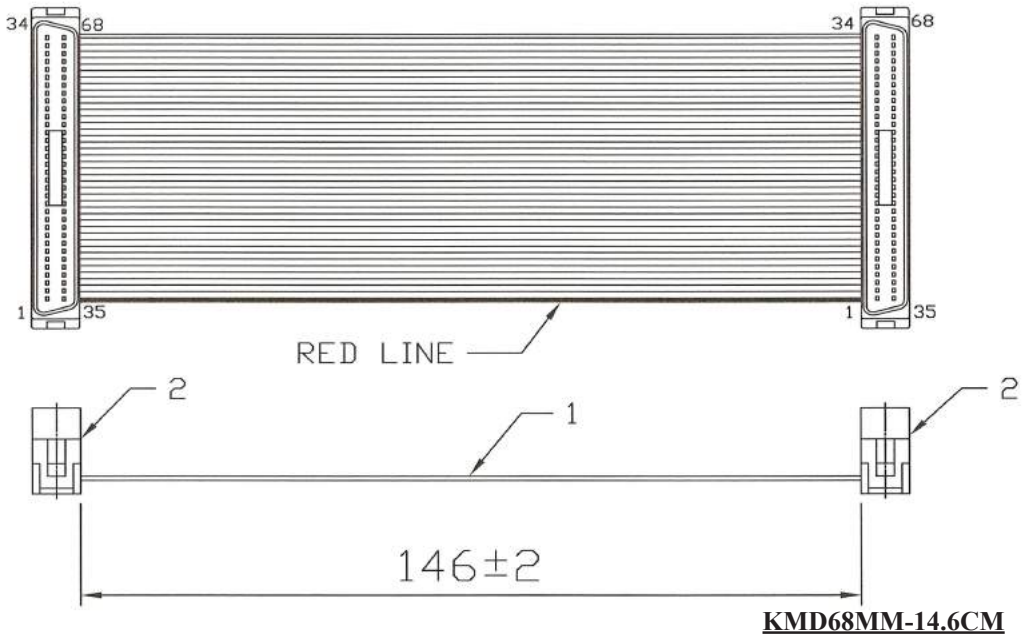

KMD68MM-14.6CM

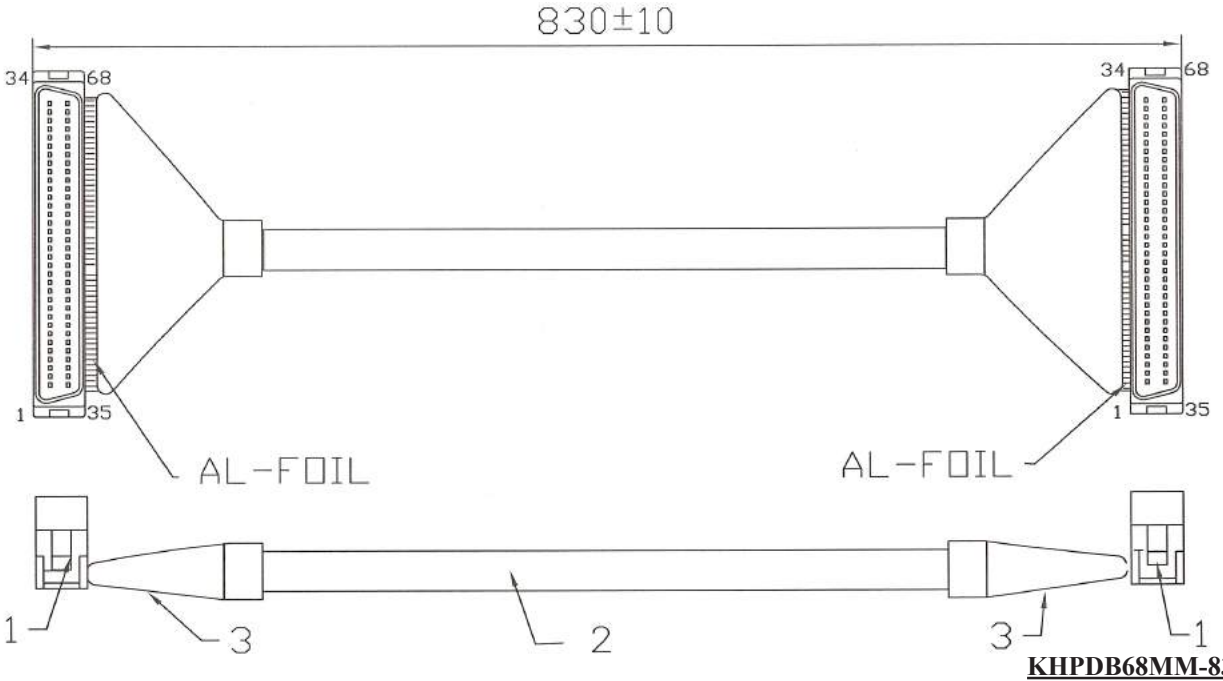

KHPDB68MM-83CM

ORDERING INFORMATION:

P/N K M D 6 8 M M - L E N G T H


HALF PITCH 68 PIN D-SUB. MALE TO MALE CONNECTOR WITH
0.635MM PITCH FLAT CABLE LENGTH IN CM

P/N K H P D B 6 8 M M - L E N G T H


HALF PITCH 68 PIN D-SUB. MALE TO MALE CONNECTOR WITH
ROUND FLAT CABLE LENGTH IN CM

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


ULTRA ATA-66 FLAT CABLE ASSEMBLY WITH 3*40 PIN IDC SOCKETS

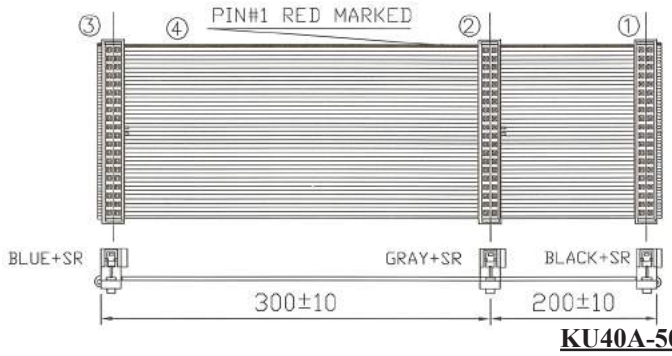

KU40A-50CM

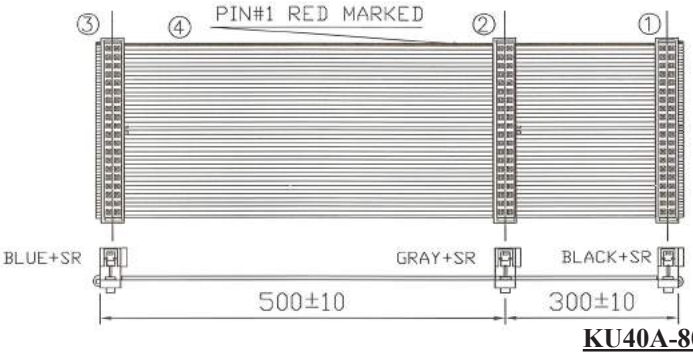

KU40A-80CM

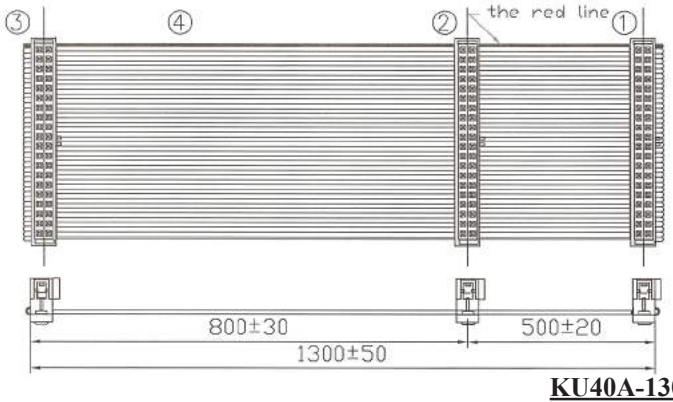

KU40A-130CM

PIN ASSIGNMENT

ATA40F(BLUE)	1	2,19,22,24,26 30,34,40	3	4			18	20	21		28			35			37	38	39
ATA40F(GRAY)	1	2,19,22,24,26 30,40	3	4			18	20	21				34	35			37	38	39
ATA40F(BLACK)	1	2,19,22,24,26 30,40	3	4			18	20	21		28		34	35			37	38	39

ORDERING INFORMATION:

P/N K U 4 0 A - 5 0 C M

ULTRA ATA-66 UL2678 FLAT CABLE 50CM
SYSTEM(BLUE) + 300MM + SLAVE(GRAY) + 200MM + MASTER(BLACK)

P/N K U 4 0 A - 8 0 C M


ULTRA ATA-66 UL2678 FLAT CABLE 80CM
SYSTEM(BLUE) + 500MM + SLAVE(GRAY) + 300MM + MASTER(BLACK)


P/N K U 4 0 A - 1 3 0 C M

ULTRA ATA-66 UL2678 FLAT CABLE 130CM
SYSTEM(BLUE) + 800MM + SLAVE(GRAY) + 500MM + MASTER(BLACK)


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it


ULTRA ATA-100 FLAT CABLE ASSEMBLY WITH 2*IDC CONNECTORS

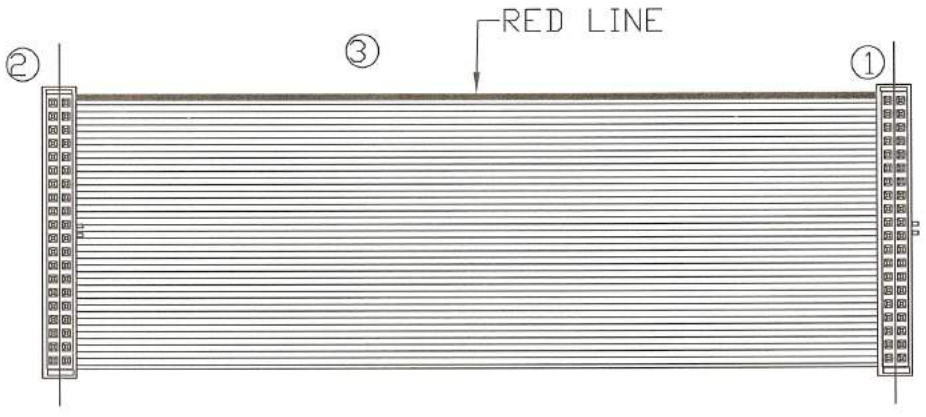

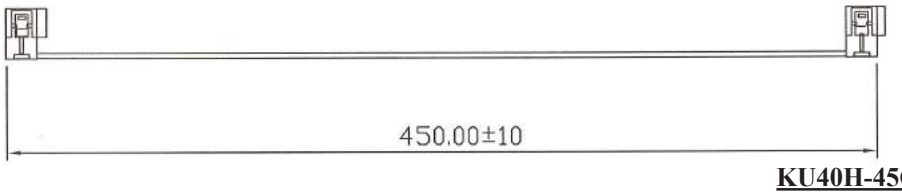

KU40H-45CM

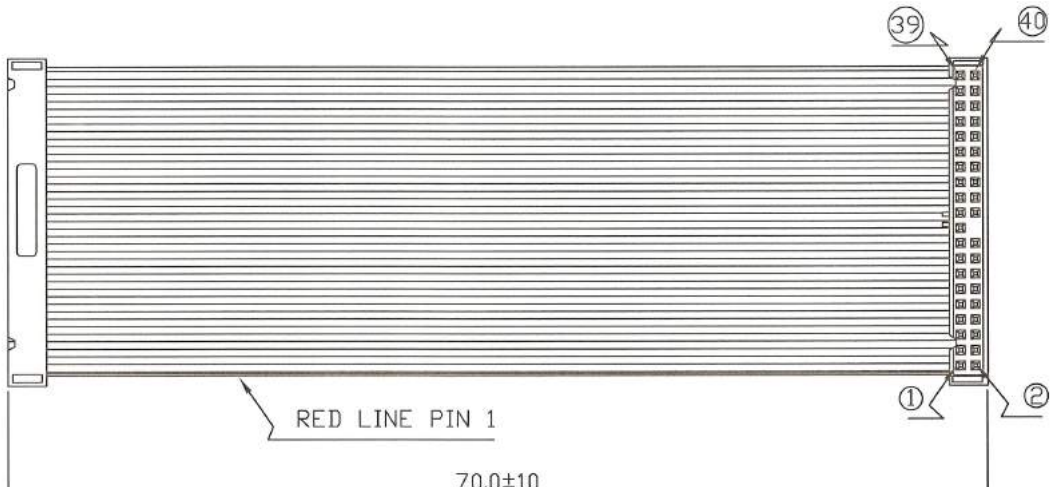

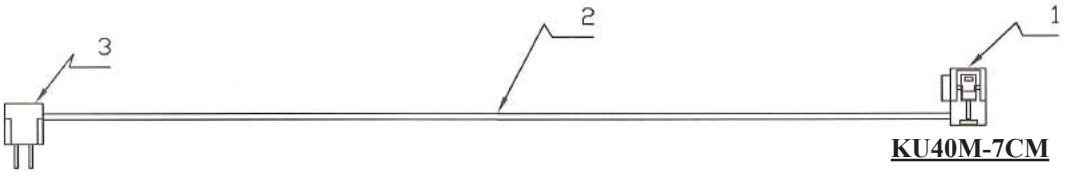

KU40M-7CM

ORDERING INFORMATION:

P/N K U 4 0 H - 4 5 C M


ULTRA ATA-100 UL20674 TPO 80P FLAT CABLE WITH 2*IDC SOCKETS 40P,
SYSTEM(BLUE) + 450MM + MASTER(BLACK)

P/N K U 4 0 M - 7 C M


ULTRA DMA-100 UL20674 TPO 80P FLAT CABLE WITH
DIP PLUG 40P + 7CM + IDC SOCKET 40P

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

ULTRA ATA-133 ROUND FLAT CABLE ASSEMBLY WITH 3*40 PIN IDC SOCKETS (1)

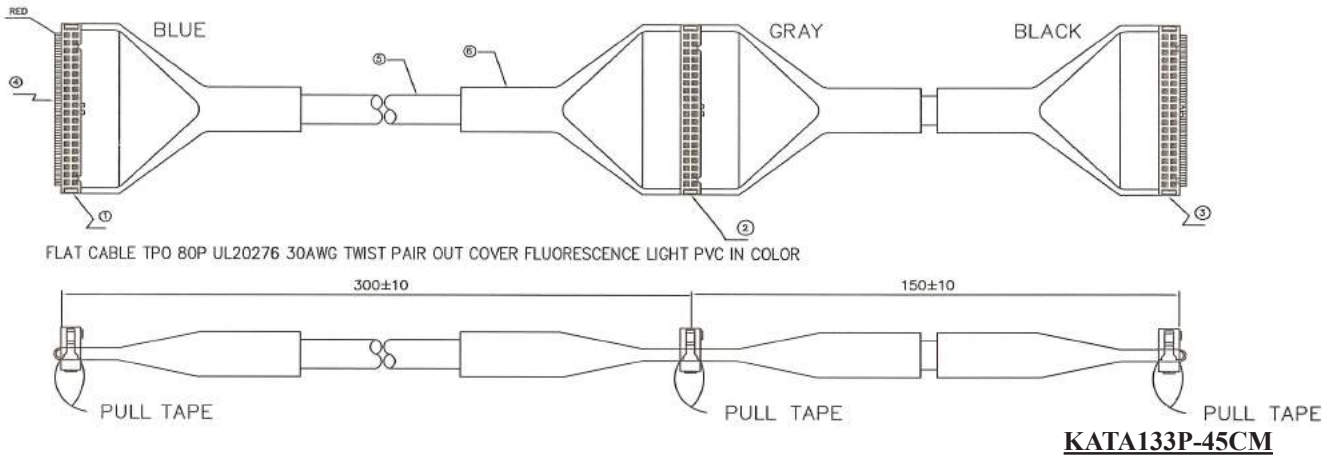

KATA133P-45CM

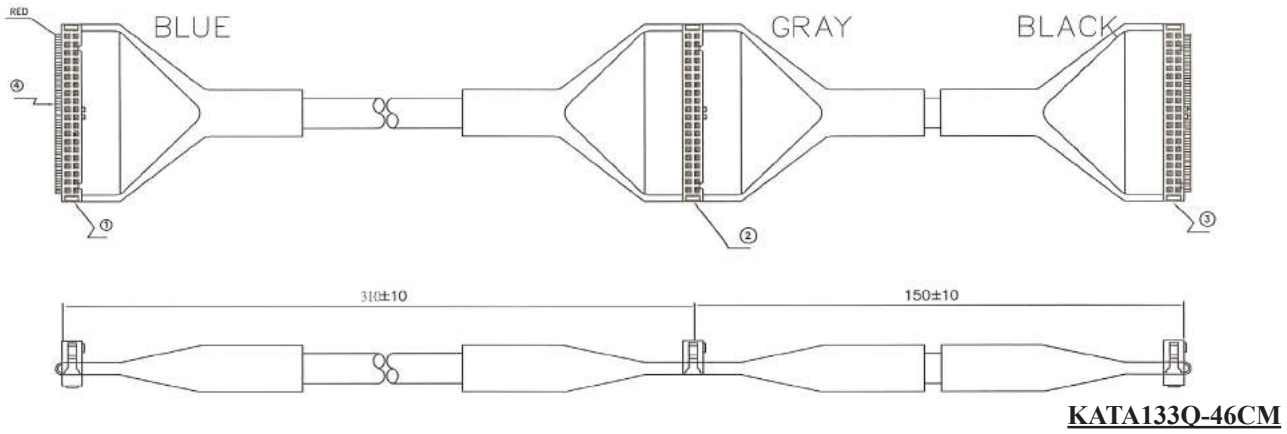

KATA133Q-46CM

PIN ASSIGNMENT

ATA40F(BLUE)	1	2,19,22,24,26 30,34,40			3	4			18	20	21			28			35		37	39
ATA40F(GRAY)	1	2,19,22,24,26 30,40			3	4			18	20	21						34	35	37	39
ATA40F(BLACK)	1	2,19,22,24,26 30,40			3	4			18	20	21			28			34	35	37	39

ORDERING INFORMATION:

P/N K A T A 1 3 3 P - 4 5 C M


ULTRA ATA-133 UL20276 ROUND FLAT CABLE WITH PULL TAPES 45CM
SYSTEM(BLUE) + 300MM + SLAVE(GRAY) + 150MM + MASTER(BLACK)

P/N K A T A 1 3 3 Q - 4 6 C M


ULTRA ATA-133 UL20276 ROUND FLAT CABLE 46CM
SYSTEM(BLUE) + 310MM + SLAVE(GRAY) + 150MM + MASTER(BLACK)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

ULTRA ATA-133 ROUND FLAT CABLE ASSEMBLY WITH 3*40 PIN IDC SOCKETS (2)

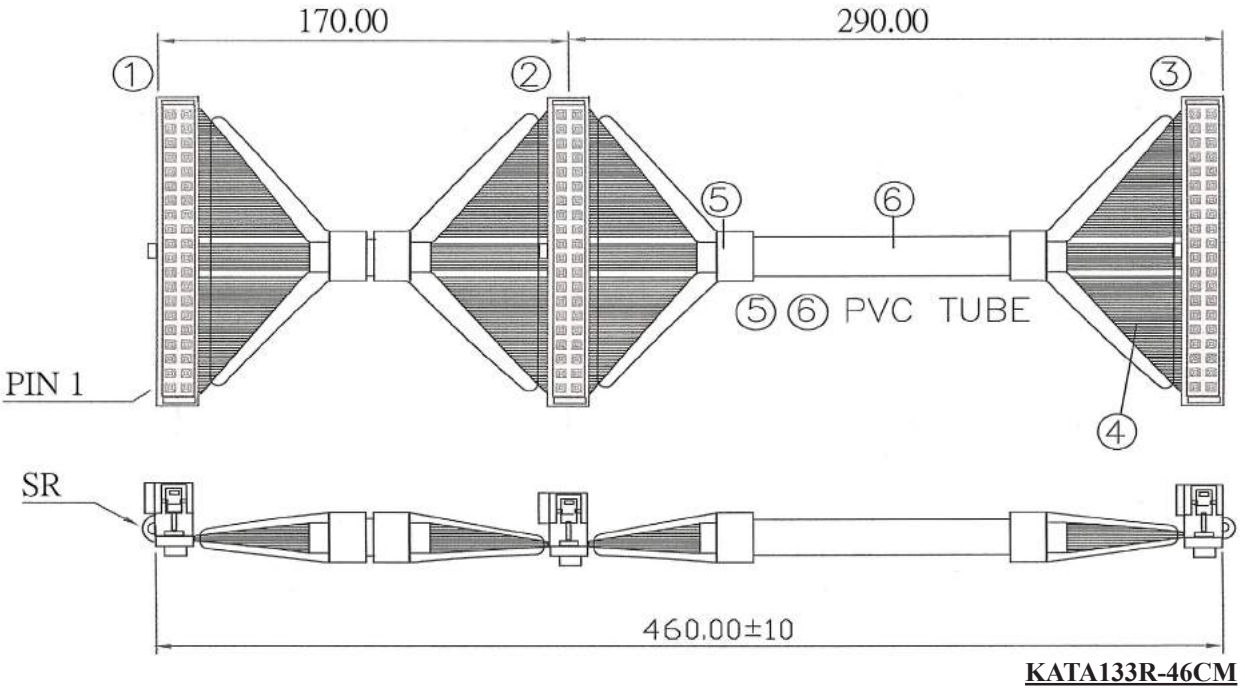

KATA133R-46CM

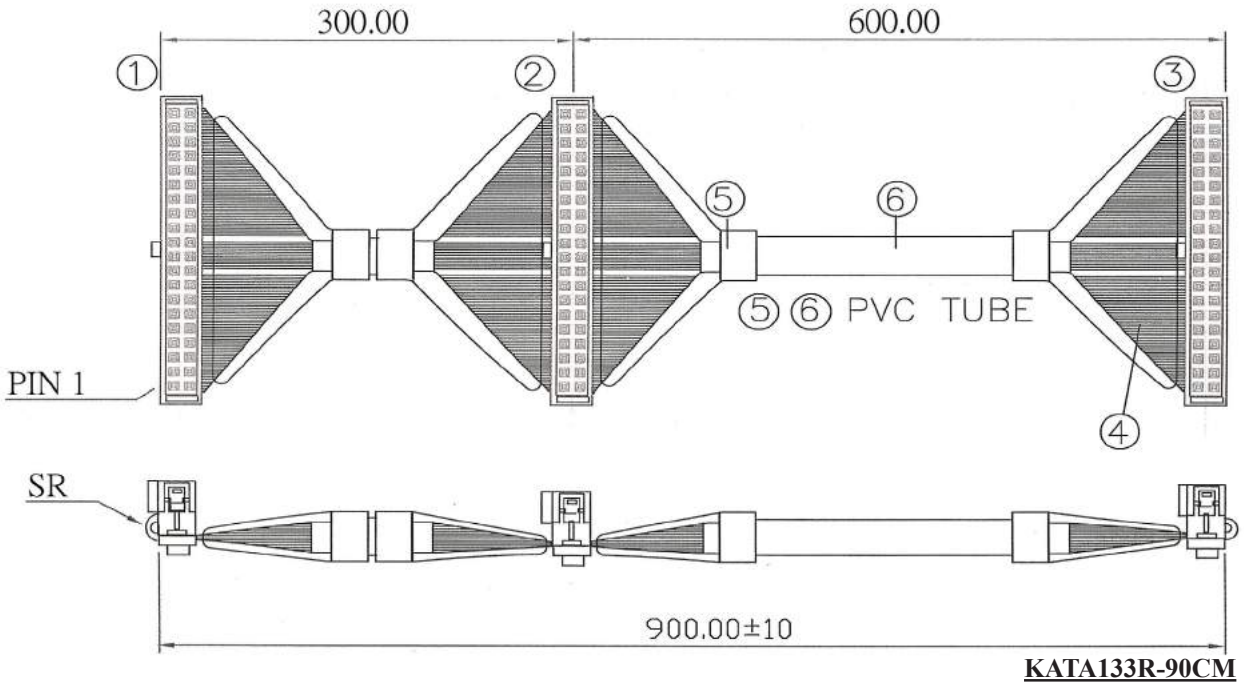

KATA133R-90CM

ORDERING INFORMATION:

P/N K A T A 1 3 3 R - 4 6 C M


ULTRA ATA-133 UL20276 TWIST PAIR 80P ROUND FLAT CABLE 46CM
SYSTEM(BLUE) + 290MM + SLAVE(GRAY) + 170MM + MASTER(BLACK)

P/N K A T A 1 3 3 R - 9 0 C M


DITTO, BUT LENGTH= 90CM
SYSTEM(BLUE) + 600MM + SLAVE(GRAY) + 300MM + MASTER(BLACK)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

ULTRA ATA-133 ROUND FLAT CABLE ASSEMBLY WITH 3*40 PIN IDC SOCKETS (3)

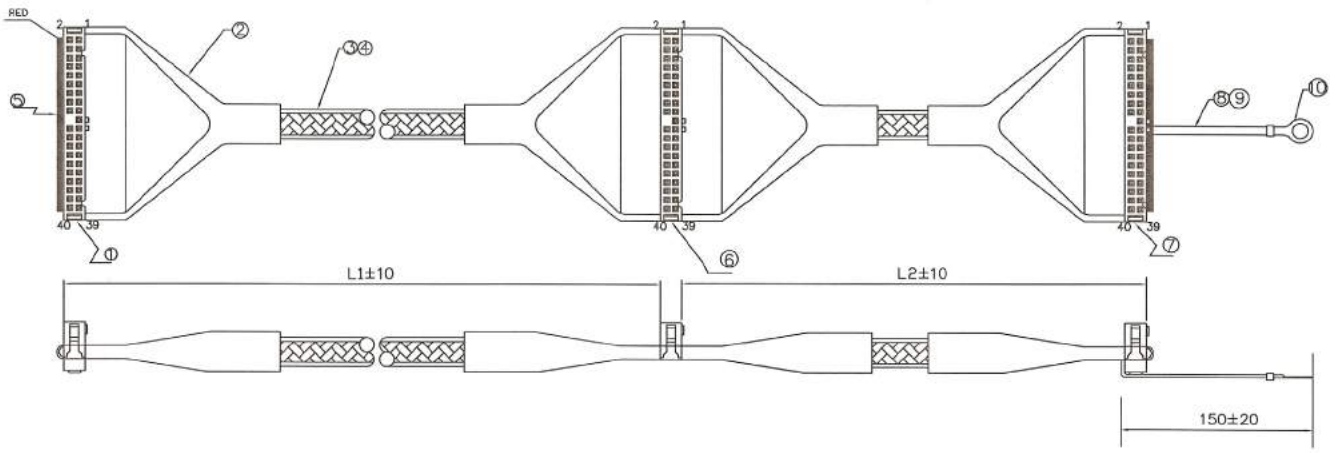

PIN ASSIGNMENT

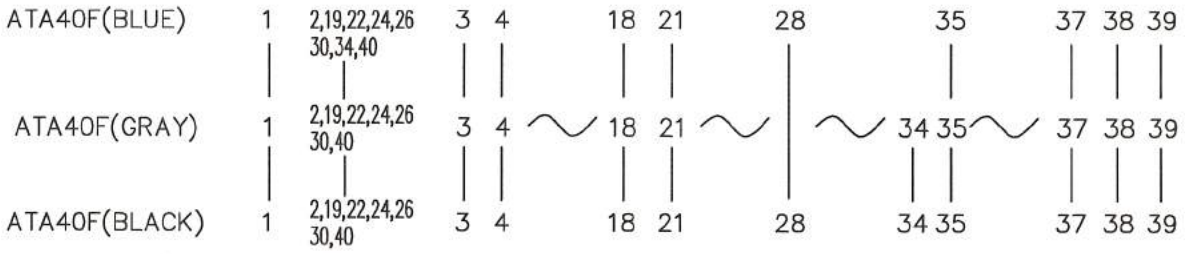

ORDERING INFORMATION:

P/N K A T A 1 3 3 T - 4 5 C M

ULTRA ATA-133 UL20276 ROUND FLAT CABLE IN
TRANSPARENT WITH TERMINAL 45CM (L1= 30CM, L2= 15CM)
SYSTAM(BLUE) + 300MM + SLAVE(GRAY) + 150MM + MASTER(BLACK)

P/N K A T A 1 3 3 T - 6 0 C M


DITTO, BUT LENGTH= 60CM (L1= 40CM, L2= 20CM)
SYSTEM(BLUE) + 400MM + SLAVE(GRAY) + 200MM + MASTER(BLACK)

P/N K A T A 1 3 3 T - 9 0 C M

DITTO, BUT LENGTH= 90CM (L1= 60CM, L2= 30CM)
SYSTEM(BLUE) + 600MM + SLAVE(GRAY) + 300MM + MASTER(BLACK)

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

ULTRA320 TWIST PAIR FLAT CABLE WITH LVD/SE TERMINATOR

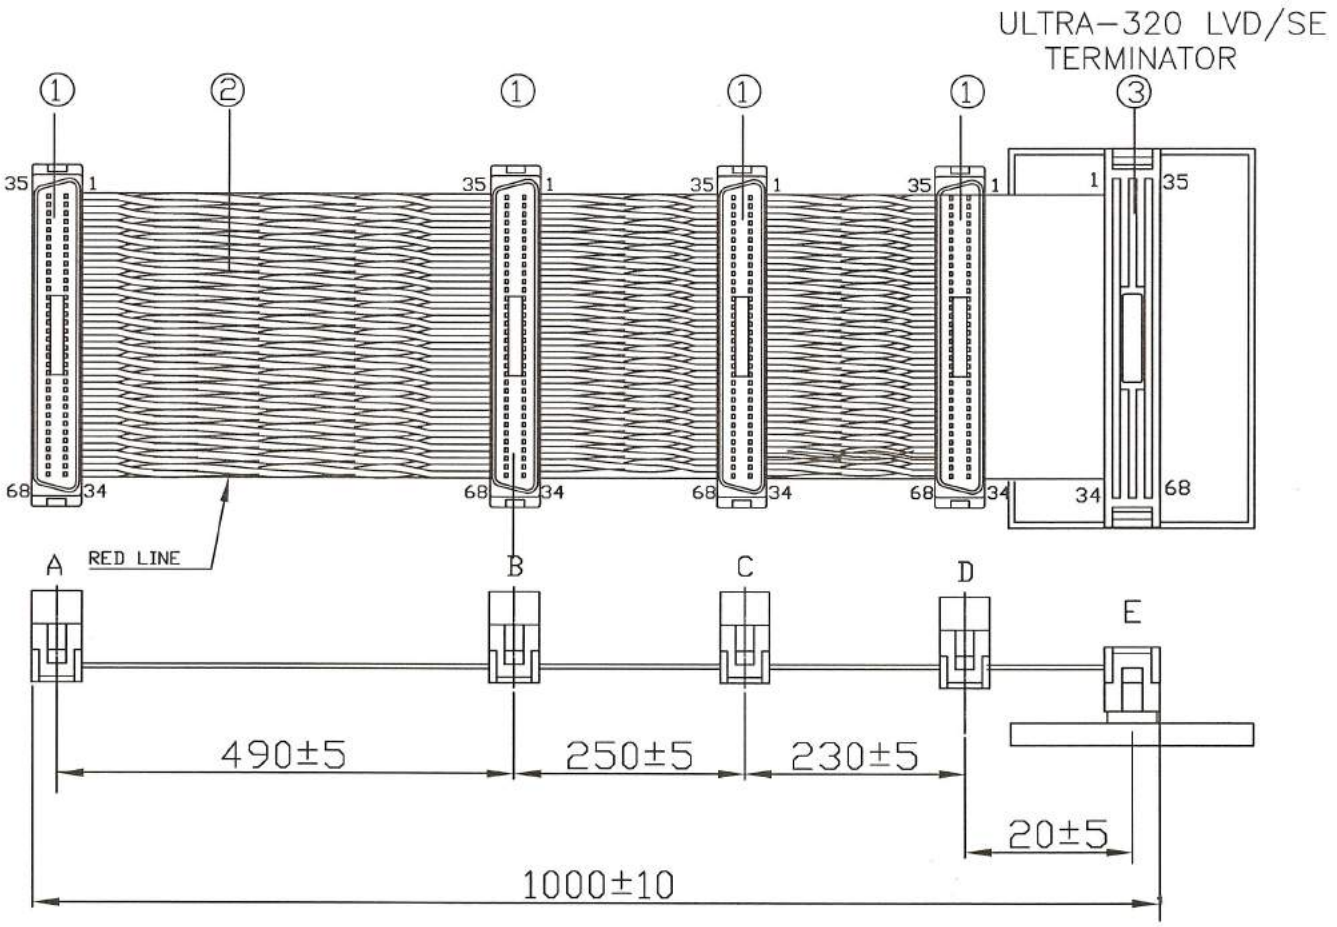

KV6805-1M

ORDERING INFORMATION:

P/N K V 6 8 $\frac{x\ x}{1}$ - $\frac{x\ x\ M}{2}$

1. NO. OF HPDB68M CONNECTORS:
   04, 05, 06, 07, 08, 09, 10, 11, 12,
   13, 14
2. CABLE LENGTH IN METER:
   0.5M, 0.75M, 1M, 1.25M,...etc.

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

1.27MM PITCH FLAT CABLE EMI FERRITE CORES ONE PIECE TYPE

Fig.1





Fig.2





APPLICATIONS

- Internal floppy disk and harddisk ribbon cables
- Internal ribbon cables between circuit boards and date connectors
- Internal ribbon cables with series digital signal busses

Part No.	Fig.	Dimension					Impedance (Ω) Min	
		A	B	C	D	E	25MHz	100MHz
COREF-08A	1	16.0±0.5	12.0±0.4	5.0±0.3	11.5±0.4	0.85±0.2	35	95
COREF-10A	1	19.0±0.8	12.0±0.4	6.5±0.3	13.5±0.6	1.5±0.3	34	98
COREF-14A	1	23.8±0.6	15.0±0.5	6.3±0.3	18.8±0.5	1.1±0.3	40	90
COREF-16A	1	25.0±0.8	12.0±0.5	5.0±0.3	21.5±0.8	1.0±0.3	38	100
COREF-18A	2	28.0±0.8	14.6±0.5	7.7±0.4	23.0±0.8	1.5±0.3	45	90
COREF-20A	1	31.5±0.8	12.0±0.4	3.5±0.3	28.0±0.8	0.8±0.2	25	65
COREF-22C	1	33.0±0.8	11.5±0.4	7.5±0.4	28.0±0.8	2.8±0.3	40	95
COREF-21A	1	33.5±0.8	12.0±0.4	6.5±0.3	29.0±0.8	1.5±0.3	30	75
COREF-26A	1	40.0±1.0	12.0±0.4	6.5±0.3	35.0±1.0	1.3±0.3	35	88
COREF-30A	1	45.2±1.0	12.0±0.4	6.5±0.3	40.0±1.0	1.3±0.3	37	110
COREF-34A	1	49.6±1.2	12.0±0.4	6.5±0.3	44.0±1.0	1.3±0.3	25	70
COREF-40A	1	57.6±1.2	12.0±0.4	6.5±0.3	52.0±1.0	1.3±0.3	30	75

ORDERING INFORMATION:

P/N C O R E F - x x x
1 2


1. NO. OF CONTACTS OF FLAT CABLE:
   08, 10, 14, 16, 18, 20, 21, 22, 26, 30, 34, 40
2. SPECIAL CODE:
   A, B, C, ...etc.


tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

IDC CRIMPING FIXTURE & ATTACHMENT

HT-214	For crimping IDC-type of connectors on to ribbon cable. Crimping from height 6mm distance to 27.5mm (max. 55mm width)
HT-214D	For crimping DIP plug, special attachment with dual slot for the plug distance "D" in 0.1", 0.3" & 0.6". (max. 58mm width)









ORDERING INFORMATION:

P/N H T - 2 1 4

FOR CRIMPING IDC SOCKETS

P/N H T - 2 1 4 D

FOR CRIMPING IDC PLUGS

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (1)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
12713	K3001	12772	K3062	20001	K3101	20025	K3115
12714	K3002	12773	K3063	20002	K3101	20026	K3115
12715	K3003	12774	K3064	20003	K3102	20027	K3116
12716	K3301	12775	K3065	20004	K3103	20028	K3116
12717	K3302	12776	K3066	20005	K3103	20029	K3117
12718	K3303	12777	K3067	20006	K3104	20030	K3117
12721	K3004	12778	K3067	20007	K3105	20051	K3401
12722	K3004	12779	K3068	20008	K3105	20052	K3402
12723	K3005	12780	K3068	20009	K3106	20053	K3403
12751	K3051	12781	K3069	20010	K3106	20054	K3403
12752	K3051	12782	K3069	20011	K3107		
12753	K3052	12783	K3070	20012	K3107		
12754	K3053	12784	K3070	20013	K3108		
12755	K3054	12785	K3071	20014	K3109		
12756	K3055	12786	K3071	20015	K3110		
12757	K3056	12787	K3072	20016	K3110		
12758	K3057	12788	K3072	20017	K3111		
12759	K3058	12789	K3072	20018			
12760	K3058	12790	K3073	20019	K3112		
12761	K3059	12791	K3073	20020	K3112		
12762	K3060	12792	K3073	20021	K3113		
12763	K3351	12793	K3074	20022	K3113		
12764	K3351	12794	K3074	20023	K3114		
12771	K3061	12795	K3074	20024	K3114		

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (2)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
25401	K3151	25443	K3164	K1AA	K0019	K1BP	K0091
25402	K3151	25444	K3164	K1AB	K0019	K1BQ	K0091
25403	K3152	25445	K3165	K1AC	K0019	K1BR	K0091
25404	K3152	25446	K3165	K1AD	K0019	K1CA	K0064
25405	K3153	25447	K3166	K1AE	K0020	K1CB	K0064
25406	K3153	25448	K3166	K1AF	K0018	K1CC	K0064
25407	K3154	25449	K3166	K1AG	K0018	K1CD	K0045
25408	K3154	25450	K3167	K1AH	K0018	K1CE	K0045
25411	K3155	25451	K3167	K1AJ	K0018	K1CF	K0045
25412		25452	K3167	K1AK	K0018	K1CG	K0045
25413	K3156	25453	K3168	K1AL	K0018	K1CR	K0047
25414	K3157	25454	K3168	K1BA	K0081	K1CS	K0047
25431	K3158	25455	K3168	K1BB	K0081	K1CT	K0047
25432	K3158	COREF	K3601	K1BC	K0081	K1CU	K0047
25433	K3159	FC635	K0001	K1BD	K0081	K1CV	K0046
25434	K3159	FFC	K2991	K1BE	K0082	K1CW	K0046
25435	K3160	FK100	K1001	K1BF	K0082	K1CY	K0017
25436	K3160	FK127	K2001	K1BG	K0082	K1DA	K0046
25437	K3161	HT-xxx	K3602	K1BH	K0082	K1DB	K0046
25438	K3161			K1BJ	K0083	K1DC	K0017
25439	K3162			K1BK	K0083	K1DD	
25440	K3162			K1BL	K0083	K1DE	K0017
25441	K3163			K1BM	K0083	K1DF	K0017
25442	K3163			K1BN	K0091	K1DG	K0017
						K1DH	K0017

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (3)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K1DK	K0651	K1FN	K0656	K1GP	K0655	K2DA	K1019
K1DL	K0651	K1FP	K0656	K1GQ	K0655	K2DB	K1019
K1DM	K0651	K1FQ	K0607	K1GR	K0655	K2DC	K1019
K1DN	K0651	K1FR	K0615	K1GS	K0655	K2DD	K1019
K1DR	K0681	K1FS	K0615	K1GT	K0658	K2DE	K1019
K1DS	K0681	K1FT	K0615	K1GU	K0658	K2DF	K1019
K1DT	K0681	K1FU	K0615	K1GV	K0659	K2DG	K1018
K1DU	K0652	K1FV	K0653	K1GW	K0659	K2DH	K1018
K1DV	K0652	K1FW	K0653	K1GX	K0657	K2DJ	K1018
K1DW	K0652	K1FY	K0653	K1GY	K0657	K2DK	K1018
K1DX	K0652	K1FZ	K0653	K1GZ		K2DL	K1018
K1DY	K0617	K1GA	K0609	K1HA	K0831	K2DM	K1018
K1FA	K0607	K1GB	K0609	K1HB	K0831	K2DP	K1105
K1FB	K0607	K1GC	K0609	K1HC	K0831	K2DQ	K1105
K1FC	K0607	K1GD	K0609	K1HD	K0831	K2DR	K1017
K1FD	K0607	K1GE	K0609	K1HE	K0682	K2DS	K1017
K1FE	K0607	K1GF	K0609	K1HF	K0682	K2DT	K1017
K1FF	K0608	K1GG	K0654			K2DU	K1017
K1FG	K0608	K1GH	K0654			K2DV	K1017
K1FH	K0608	K1GJ	K0654			K2DW	K1017
K1FJ	K0608	K1GK	K0654			K2DX	K1105
K1FK	K0608	K1GL	K0616			K2DY	K1105
K1FL	K0608	K1GM	K0616			K2DZ	
		K1GN	K0616				

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (4)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K2FA	K1043	K2GA	K1037	K2HA	K1109	K2KA	K1107
K2FB	K1043	K2GB	K1037	K2HB	K1109	K2KB	K1107
K2FC	K1043	K2GC	K1037	K2HC	K1109	K2KC	K1107
K2FD	K1021	K2GD	K1037	K2HD	K1109	K2KD	K1107
K2FE	K1021	K2GE	K1022	K2HE	K1106	K2KE	K1121
K2FF	K1021	K2GF	K1022	K2HF	K1106	K2KF	K1121
K2FG	K1021	K2GG	K1022	K2HG	K1106	K2KG	K1121
K2FH	K1021	K2GH	K1022	K2HH	K1106	K2KH	K1121
K2FJ	K1021	K2GJ	K1022	K2HJ	K1110	K2KJ	K1115
K2FK	K1020	K2GK	K1022	K2HK	K1110	K2KK	K1115
K2FL	K1020	K2GL	K1039	K2HL	K1110	K2KL	K1115
K2FM	K1020	K2GM	K1039	K2HM	K1110	K2KM	K1115
K2FN	K1020	K2GN	K1039	K2HN	K1123	K2KN	K1203
K2FP	K1020	K2GP	K1039	K2HP	K1123	K2KP	K1203
K2FQ	K1020	K2GQ	K1154	K2HQ	K1123	K2KQ	K1203
K2FR	K1038	K2GR	K1154	K2HR	K1123	K2KR	K1203
K2FS	K1038	K2GS	K1154	K2HS	K1108	K2KS	K1214
K2FT	K1038	K2GT	K1120	K2HT	K1108	K2KT	K1214
K2FU	K1038	K2GU	K1120	K2HU	K1108	K2KU	K1214
K2FV	K1036	K2GV	K1120	K2HV	K1108	K2KV	K1214
K2FW	K1036	K2GW	K1120	K2HW	K1122	K2KW	K1205
K2FX	K1036	K2GX	K1026	K2HX	K1122	K2KX	K1205
K2FY	K1036	K2GY	K1026	K2HY	K1122	K2KY	K1205
		K2GZ	K1026	K2HZ	K1122	K2KZ	K1205

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (5)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K2MA	K1215	K2NA	K1212	K2PA	K1176	K4AA	K2902
K2MB	K1215	K2NB	K1212	K2PB	K1176	K4AB	K2952
K2MC	K1215	K2NC	K1212	K2PC	K1176	K4AC	K2952
K2MD	K1215	K2ND	K1212	K2PD	K1176	K4AD	K2902
K2ME	K1201	K2NE	K1174	K2PE	K1173	K4AE	K2951
K2MF	K1201	K2NF	K1174	K2PF	K1173	K4AF	
K2MG	K1201	K2NG	K1174	K2PG	K1173	K4AG	K2901
K2MH	K1201	K2NH	K1174	K2PH	K1173	K4AH	K7183
K2MJ	K1211	K2NJ	K1171	K2PJ	K1309	K4AJ	
K2MK	K1211	K2NK	K1171	K2PK	K1309	K4AK	
K2ML	K1211	K2NL	K1171	K2PL	K1309	K4AL	
K2MM	K1211	K2NM	K1171	K2PM	K1309	K4AM	K2741
K2MN	K1204	K2NN	K1175	K2PN	K1308	K4AN	K2019
K2MP	K1204	K2NP	K1175	K2PP	K1308	K4AP	K2019
K2MQ	K1204	K2NQ	K1175	K2PQ	K1308	K4AQ	K2019
K2MR	K1204	K2NR	K1175	K2PR	K1308	K4AR	K2019
K2MS	K1213	K2NS	K1172	K2PS	K1191	K4AS	K2019
K2MT	K1213	K2NT	K1172	K2PT	K1192	K4AT	K2019
K2MU	K1213	K2NU	K1172	K2PU	K1177	K4AU	K2037
K2MV	K1213	K2NV	K1172	K2PV	K1178	K4AV	K2037
K2MW	K1202	K2NW	K1307	K2PW	K1179	K4AW	K2037
K2MX	K1202	K2NX	K1307	K2PX	K1180	K4AX	K2037
K2MY	K1202	K2NY	K1307			K4AY	
K2MZ	K1202	K2NZ	K1307			K4AZ	

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (6)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K4BA		K4DA	K2165	K4EA	K2017	K4GA	K2136
K4BB		K4DB	K2165	K4EB	K2017	K4GB	K2136
K4BC		K4DC	K2165	K4EC	K2017	K4GC	K2136
K4BD	K2024	K4DD	K2164	K4ED	K2017	K4GD	K2136
K4BE	K2024	K4DE	K2164	K4EE	K2017	K4GE	K2116
K4BF	K2024	K4DF	K2164	K4EF	K2017	K4GF	K2116
K4BG	K2038	K4DG	K2167	K4EG	K2039	K4GG	K2116
K4BH	K2038	K4DH	K2167	K4EH	K2039	K4GH	K2116
K4BJ	K2038	K4DJ	K2167	K4EJ	K2039	K4GJ	K2143
K4BK	K2038	K4DK	K2108	K4EK	K2039	K4GK	K2143
K4BL	K2040	K4DL	K2108	K4EL	K2142	K4GL	K2143
K4BM	K2040	K4DM	K2108	K4EM	K2142	K4GM	K2143
K4BN	K2040	K4DN	K2108	K4EN	K2142	K4GN	K2141
K4BP	K2040	K4DP	K2111	K4EP	K2142	K4GP	K2141
K4BQ	K2166	K4DQ	K2111	K4EQ	K2137	K4GQ	K2141
K4BR	K2166	K4DR	K2111	K4ER	K2137	K4GR	K2141
K4BS	K2166	K4DS	K2111	K4ES	K2137	K4GS	K2110
K4BT	K2109	K4DT	K2105	K4ET	K2137	K4GT	K2110
K4BU	K2109	K4DU	K2105	K4EU	K2138	K4GU	K2110
K4BV	K2109	K4DV	K2105	K4EV	K2138	K4GV	K2110
K4BW	K2109	K4DW	K2105	K4EW	K2138	K4GW	K2121
K4BX	K2211	K4DX	K2168	K4EX	K2138	K4GX	K2121
K4BY	K2207	K4DY	K2168	K4EY		K4GY	K2121
K4BZ	K2208	K4DZ	K2168	K4EZ		K4GZ	K2121

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (7)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K4HA	K2146	K4KA	K2147	K4MA	K2394	K4PA	K2731
K4HB	K2146	K4KB	K2147	K4MB	K2394	K4PB	K2732
K4HC	K2146	K4KC	K2147	K4MC	K2384	K4PC	
K4HD	K2146	K4KD	K2147	K4MD	K2384	K4PD	
K4HE	K2144	K4KE	K2148	K4ME	K2393	K4PE	K2318
K4HF	K2144	K4KF	K2148	K4MF	K2393	K4PF	K2318
K4HG	K2144	K4KG	K2148	K4MG	K2383	K4PG	K2318
K4HH	K2144	K4KH	K2148	K4MH	K2383	K4PH	K2318
K4HJ	K2118	K4KJ	K2112	K4MJ	K2126	K4PJ	K2368
K4HK	K2118	K4KK	K2112	K4MK	K2126	K4PK	K2368
K4HL	K2118	K4KL	K2112	K4ML	K2126	K4PL	K2368
K4HM	K2118	K4KM	K2112	K4MM	K2126	K4PM	K2368
K4HN	K2169	K4KN	K2115	K4MN	K2117	K4PN	
K4HP	K2169	K4KP	K2115	K4MP	K2117	K4PP	K2314
K4HQ	K2169	K4KQ	K2115	K4MQ	K2117	K4PQ	K2314
K4HR	K2170	K4KR	K2115	K4MR	K2117	K4PR	K2314
K4HS	K2170	K4KS	K2107	K4MS	K2316	K4PS	K2314
K4HT	K2170	K4KT	K2107	K4MT	K2316	K4PT	K2364
K4HU	K2149	K4KU	K2107	K4MU	K2316	K4PU	K2364
K4HV	K2149	K4KV	K2107	K4MV	K2316	K4PV	K2364
K4HW	K2149	K4KW	K2120	K4MW	K2366	K4PW	K2364
K4HX	K2149	K4KX	K2120	K4MX	K2366	K4PX	
K4HY		K4KY	K2120	K4MY	K2366	K4PY	
K4HZ		K4KZ	K2120	K4MZ	K2366	K4PZ	

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (8)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
K4QA	K2020	K4SA	K2119	K4TA	K2315	K4VA	K2509
K4QB	K2020	K4SB	K2119	K4TB	K2315	K4VB	K2509
K4QC	K2020	K4SC	K2119	K4TC	K2315	K4VC	K2509
K4QD	K2020	K4SD	K2119	K4TD	K2315	K4VD	K2509
K4QE	K2020	K4SE	K2139	K4TE	K2365	K4VE	K2508
K4QF	K2020	K4SF	K2139	K4TF	K2365	K4VF	K2508
K4QG	K2036	K4SG	K2139	K4TG	K2365	K4VG	K2508
K4QH	K2036	K4SH	K2139	K4TH	K2365	K4VH	K2508
K4QJ	K2036	K4SJ	K2140	K4TJ	K2317	K4VJ	K2507
K4QK	K2036	K4SK	K2140	K4TK	K2317	K4VK	K2507
K4QL	K2113	K4SL	K2140	K4TL	K2317	K4VL	K2507
K4QM	K2113	K4SM	K2140	K4TM	K2317	K4VM	K2507
K4QN	K2113	K4SN	K2135	K4TN	K2367		
K4QP	K2113	K4SP	K2135	K4TP	K2367		
K4QQ	K2114	K4SQ	K2135	K4TQ	K2367		
K4QR	K2114	K4SR	K2135	K4TR	K2367		
K4QS	K2114	K4SS	K2145	K4TS	K2018		
K4QT	K2114	K4ST	K2145	K4TT	K2018		
K4QU	K2106	K4SU	K2145	K4TU	K2018		
K4QV	K2106	K4SV	K2145	K4TV	K2018		
K4QW	K2106	K4SW	K2206	K4TW	K2018		
K4QX	K2106	K4SX	K2206	K4TX	K2018		
K4QY	K2205	K4SY	K2206	K4TY	K2205		
K4QZ	K2205	K4SZ	K2206	K4TZ	K2205		

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (9)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
KAxxAA	K2021	KAxxFG	K2803	KAxxKT	K2601	KAxxMW	K2362
KAxxAD	K2122	KAxxFH		KAxxKW	K2353	KAxxMZ	K2360
KAxxAO	K2505	KAxxFJ	K2818	KAxxKZ	K2351	KAxxNB	K2204
KAxxAP	K2123	KAxxGA	K2804	KAxxLB	K2202	KAxxND	K2133
KAxxAQ	K2308	KAxxGB	K2811	KAxxLD	K2103	KAxxNI	K2035
KAxxAS	K2306	KAxxGC	K2805	KAxxLF	K2857	KAxxNN	K2033
KAxxAT	K2603	KAxxGD	K2812	KAxxLI	K2016	KAxxNO	K2504
KAxxAV	K2022	KAxxGE	K2813	KAxxLL	K2015	KAxxNP	K2134
KAxxAW	K2356	KAxxGF	K2814	KAxxLO	K2502	KAxxNQ	K2313
KAxxAZ	K2358	KAxxGG	K2806	KAxxLP	K2104	KAxxNS	K2311
KAxxBO	K2541	KAxxGH	K2807	KAxxLQ	K2305	KAxxNT	K2606
KAxxBT	K2641	KAxxGJ	K2815	KAxxLS	K2302	KAxxNW	K2363
KAxxDD	K2161	KAxxIS	K2303	KAxxLT	K2602	KAxxNX	K2034
KAxxDO	K2531	KAxxIZ	K2355	KAxxLW	K2354	KAxxNZ	K2361
KAxxDP	K2162	KAxxK8	K2014	KAxxLZ	K2352	KAxxPO	K2532
KAxxDS	K2381	KAxxKB	K2201	KAxxMB	K2203	KAxxPP	K2163
KAxxDT	K2631	KAxxKD	K2101	KAxxMD	K2131	KAxxPQ	K2382
KAxxDZ	K2391	KAxxKI	K2013	KAxxMM	K2031	KAxxPT	K2632
KAxxFA	K2801	KAxxKK	K2011	KAxxMN	K2032	KAxxPW	K2392
KAxxFB	K2809	KAxxKL	K2012	KAxxMO	K2503	KAxxPY	
KAxxFC	K2802	KAxxKO	K2501	KAxxMP	K2132	KAxxQQ	K2041
KAxxFD	K2816	KAxxKP	K2102	KAxxMQ	K2312	KAxxQR	K2042
KAxxFE	K2810	KAxxKQ	K2304	KAxxMS	K2310	KAxxRR	K2043
KAxxFF	K2817	KAxxKS	K2301	KAxxMT	K2605	KAxxSO	K2551

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (10)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
KAxxST	K2651	KBxxAA	K1023	KBxxMM	K1031	KD0909B	K2854
KAxxVD	K2124	KBxxAD	K1111	KBxxMN	K1032	KD0910B	K2854
KAxxVO	K2506	KBxxAO	K1305	KBxxMO	K1303	KD0910M	K2852
KAxxVP	K2125	KBxxAP	K1112	KBxxMP	K1117	KD0910N	K2852
KAxxVQ	K2309	KBxxAT	K1355	KBxxMT	K1353	KD0910S	K2852
KAxxVS	K2307	KBxxAV	K1024	KBxxND	K1118	KD0910T	K2852
KAxxVT	K2604	KBxxDD	K1151	KBxxNI	K1035	KD09NUT	K2851
KAxxVV	K2023	KBxxDO	K1321	KBxxNN	K1033	KD09X2	K2894
KAxxVW	K2357	KBxxDP	K1152	KBxxNO	K1304	KD09X3	K2856
KAxxVZ	K2359	KBxxDT	K1371	KBxNP	K1119	KD0925B	K2855
KAxxZO	K2552	KBxxK8	K1014	KBxxNT	K1354	KD0926B	K2855
KAxxZT	K2652	KBxxKD	K1101	KBxxNX	K1034	KD10NUT	K2851
KATA100V	K3512	KBxxKI	K1013	KBxxPO	K1322	KD2526M	K2853
KATA100W	K3513	KBxxKK	K1011	KBxxPP	K1153	KD2526N	K2853
KATA133P	K3521	KBxxKL	K1012	KBxxPT	K1372	KD2526S	K2853
KATA133Q	K3521	KBxxKO	K1301	KBxxQQ	K1040	KD2526T	K2853
KATA133R	K3522	KBxxKP	K1102	KBxxQR	K1041	KD25NUT	K2851
KATA133T	K3523	KBxxKT	K1351	KBxxRR	K1042	KD26NUT	K2851
		KBxxLD	K1103	KBxxVD	K1113	KD4044	K2895
		KBxxLI	K1016	KBxxVO	K1306	KD40E	K2892
		KBxxLL	K1015	KBxxVP	K1114	KD44F	K2891
		KBxxLO	K1302	KBxxVT	K1356	KD44G	K2891
		KBxxLP	K1104	KBxxVV	K1025	KD44KT	K0618
		KBxxLT	K1352	KB44KL	K1044	KD44KL	K1044
		KBxxMD	K1116				

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it

QUICK REFERENCE (11)

P/N	PAGE	P/N	PAGE	P/N	PAGE	P/N	PAGE
KExxK8	K0602	KGxxDD	K0061	KMxxFF	K2703		
KExxKD	K0801	KGxxDP	K0062	KMxxFM	K2707		
KExxKI	K0601	KGxxK8	K0014	KMxxGG	K2704		
KExxKK	K0603	KGxxK9		KMxxGN	K2708		
KExxKL	K0604	KGxxKD	K0041	KMxxHH	K2703		
KExxKP	K0802	KGxxKI	K0013	KMxxHP	K2707		
KExxLD	K0803	KGxxKK	K0011	KMxxJJ	K2704		
KExxLI	K0606	KGxxKL	K0012	KMxxJQ	K2708		
KExxLL	K0605	KGxxKO		KMxxMF	K2705		
KExxLP	K0804	KGxxKP	K0042	KMxxMO	K2709		
KExxMD	K0805	KGxxLD	K0043	KMxxMM	K2701		
KExxMM	K0611	KGxxLI	K0015	KMxxNG	K2706		
KExxMN	K0612	KGxxLL	K0016	KMxxNN	K2702		
KExxMP	K0806	KGxxLO		KMxxPH	K2705		
KExxND	K0807	KGxxLP	K0044	KMxxPO	K2709		
KExxNI		KGxxPP	K0063	KMxxPP	K2701		
KExxNN	K0613			KMxxQJ	K2706		
KExxNP	K0808			KMxxQQ	K2702		
KExxNX	K0614			KU40A	K3506		
				KU40H	K3511		
				KU40M	K3511		
				KV68	K3531		

tel. 02.3361.1626 info@elitaliaweb.it
fax 02.2626.1009 www.elitaliaweb.it